Region width

Width patterns treat a polygon as a region and measure its smallest extent

The idea

- D is 1×6 on M1; min_width[M1]=3 → width marker
- GOLDEN width_markers=1


Thin D

SINGLE-LAYER REGION WIDTH

Thin D

Step 1 / 5 · d · module01-05-single-layer-region

D w=1

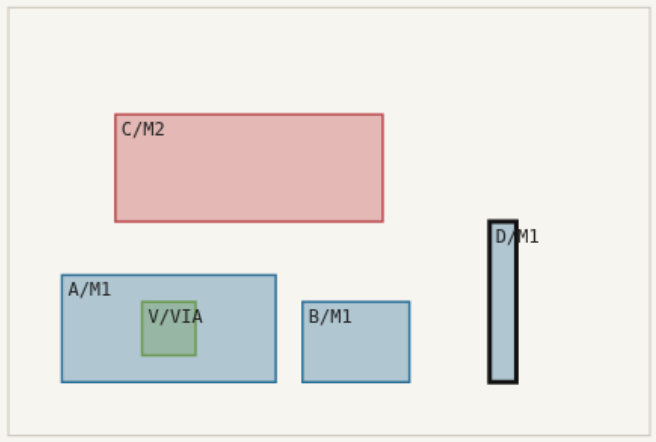

Explanation


D width=1 height=6.

- thin

```
w=1
```

Thin D

Min width

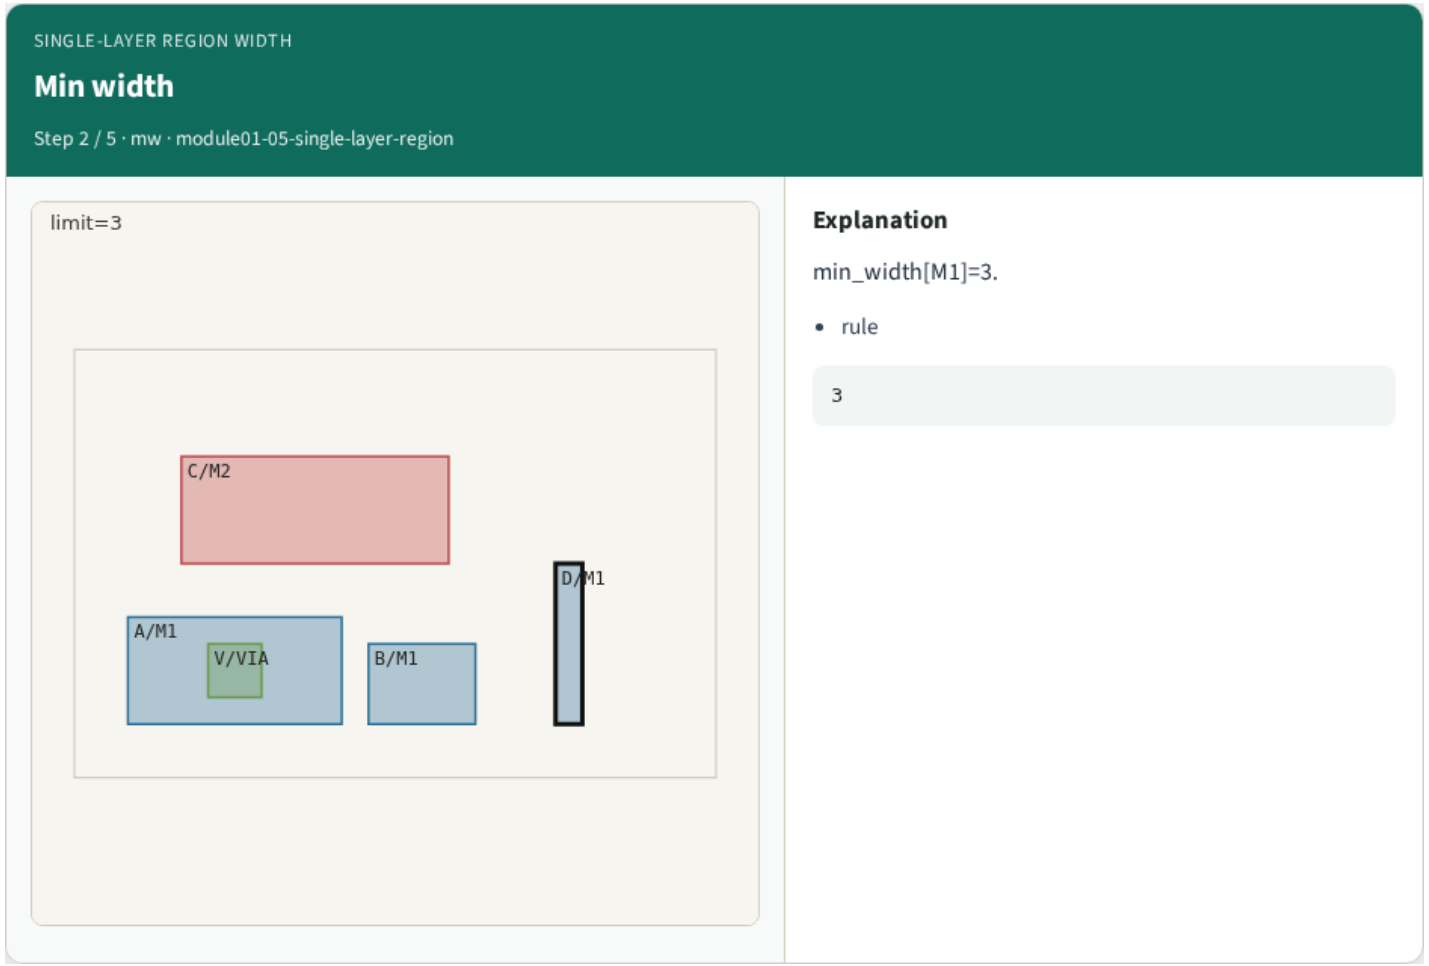


Min width

Measure

SINGLE-LAYER REGION WIDTH

Measure

Step 3 / 5 · min · module01-05-single-layer-region

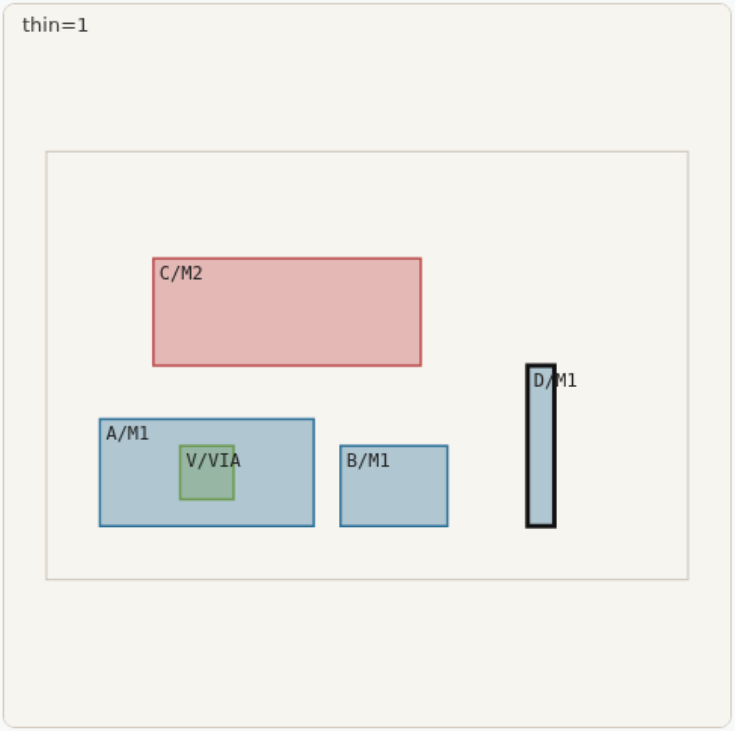

Explanation

thin = min(w,h) = 1.

- min

```
1
```

Measure


Marker

SINGLE-LAYER REGION WIDTH

Marker

Step 4 / 5 · mark · module01-05-single-layer-region

width marker

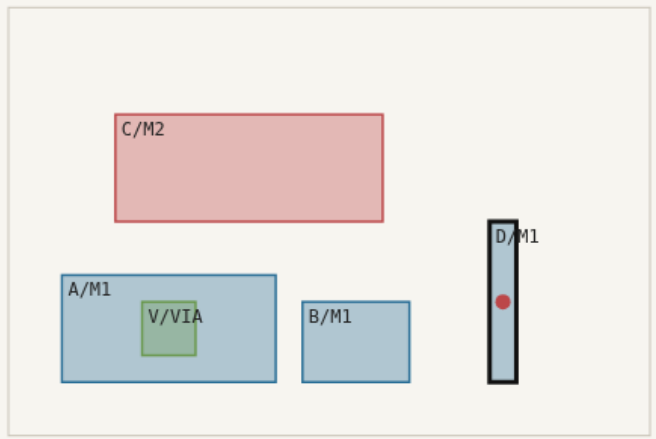

Explanation

Emit width marker on D.

- width

```
D
```


Marker

Others

SINGLE-LAYER REGION WIDTH

Others

Step 5 / 5 · ok · module01-05-single-layer-region

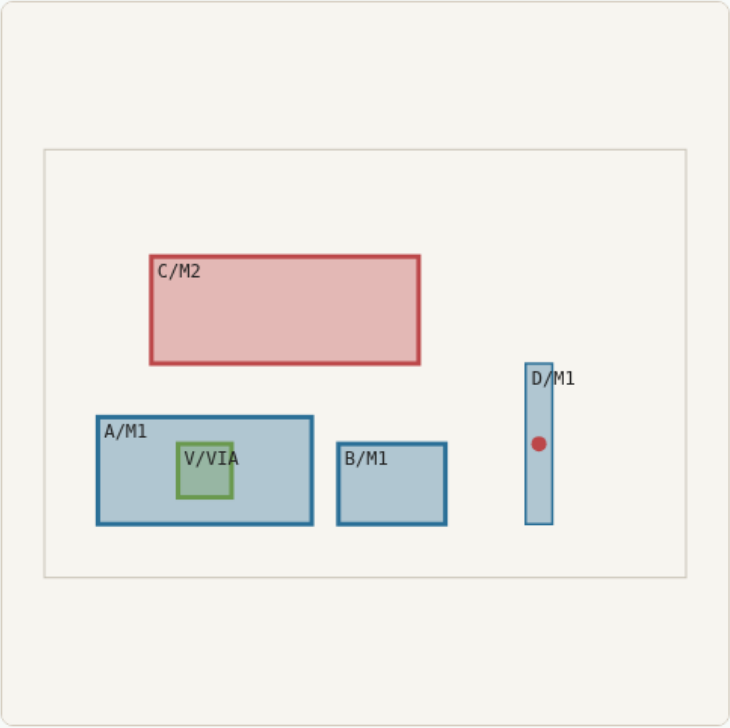

Explanation


A,B,C,V pass their layer min_width.

- pass

```
GOLDEN 1
```

Others

Browser lab track

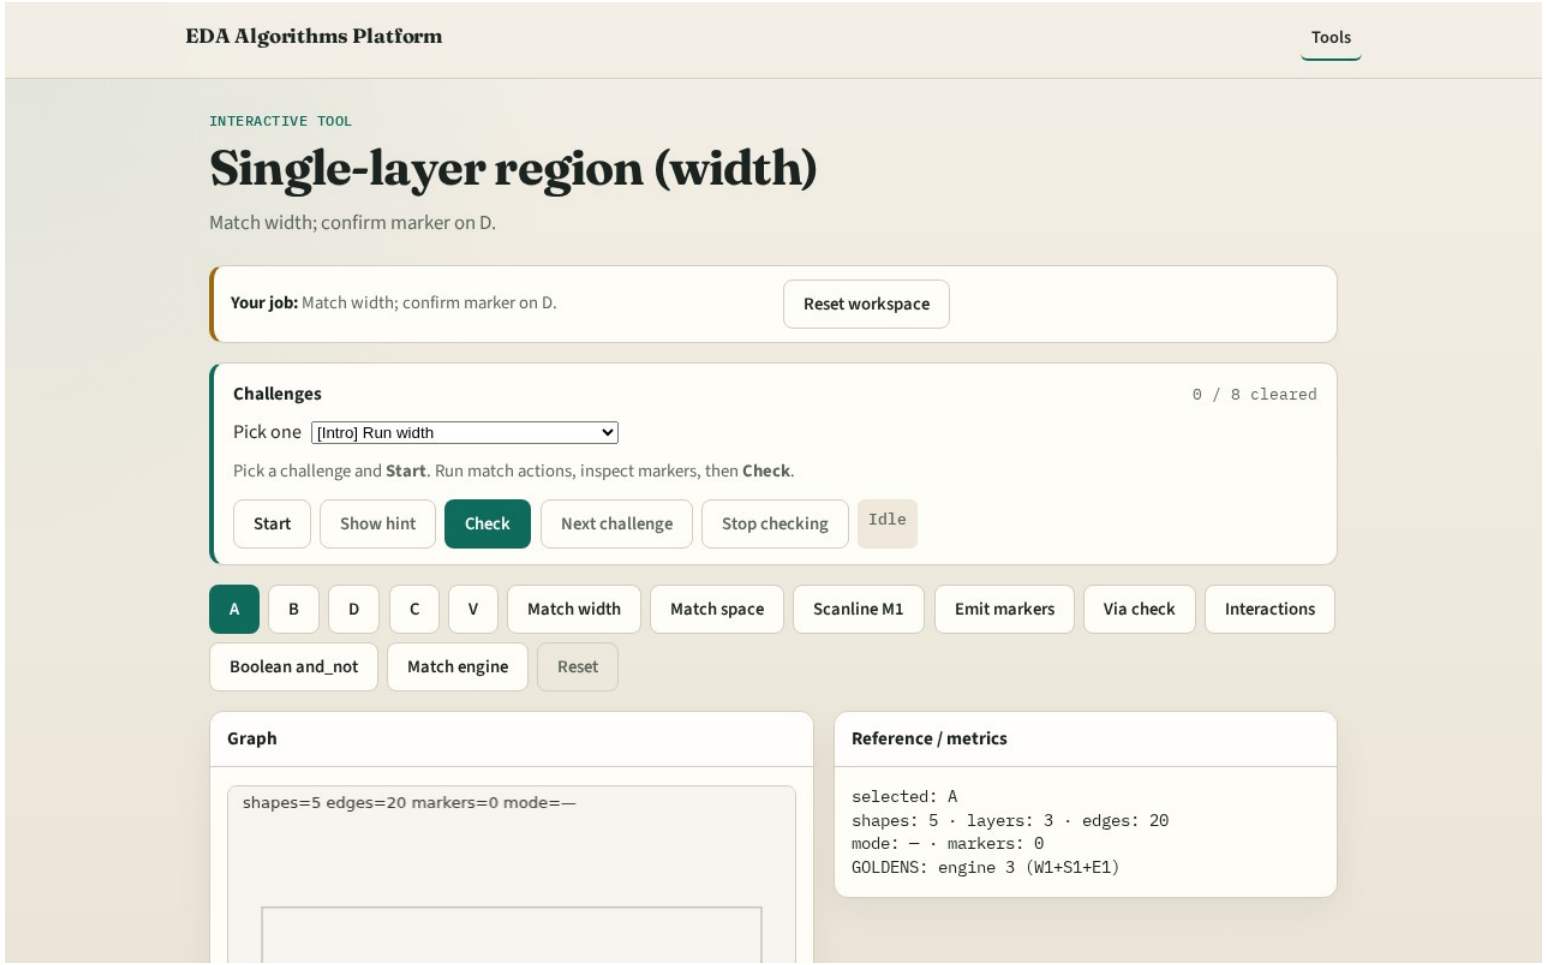

Browser lab starter

Implement track

- Call match_width(); assert one marker on D

Pitfalls

- Using area instead of min(w,h)
- Applying M2 limits to M1

Your turn

- Next: scanline sweep