Markers

A marker is a typed hit (width/space/…) pointing at shapes , DRC later maps markers to violations

The idea


- Emit_markers combines width and space → at least 2 markers (D + A–B)

Types

MARKER EMIT

Types

Step 1 / 5 · types · module02-03-marker-emit

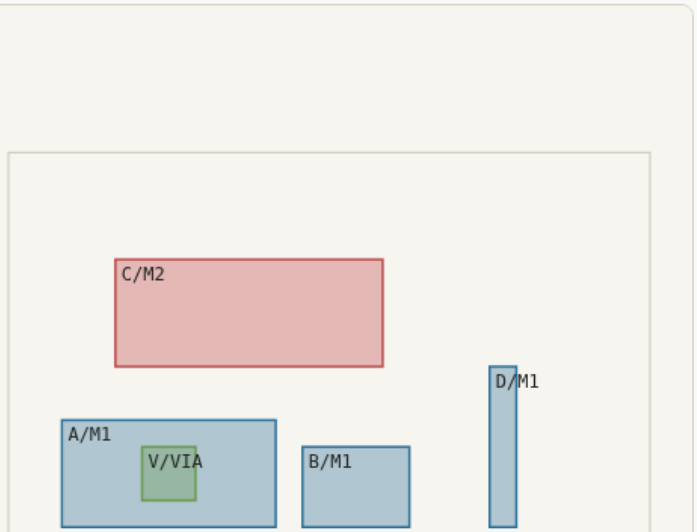

Explanation

Markers carry type, layer, shapes, value, limit.

- schema

```
typed
```


Types

Width hit

MARKER EMIT

Width hit

Step 2 / 5 · w · module02-03-marker-emit

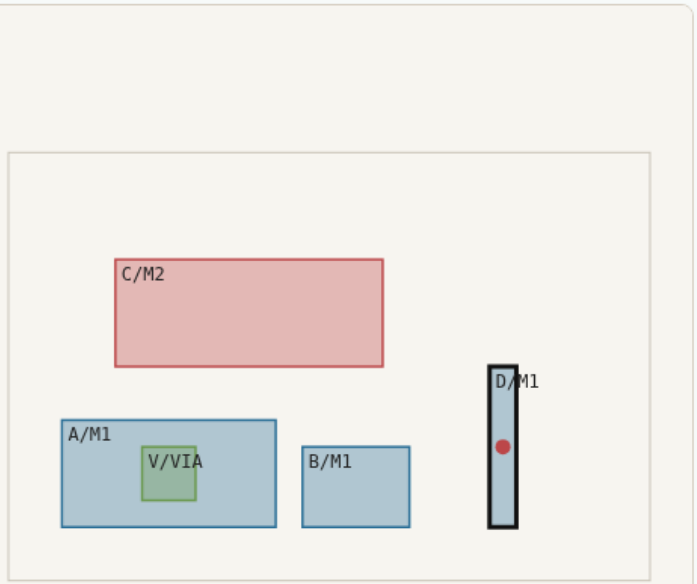

Explanation


Width marker on D.

- width

```
D
```

Width hit

Space hit

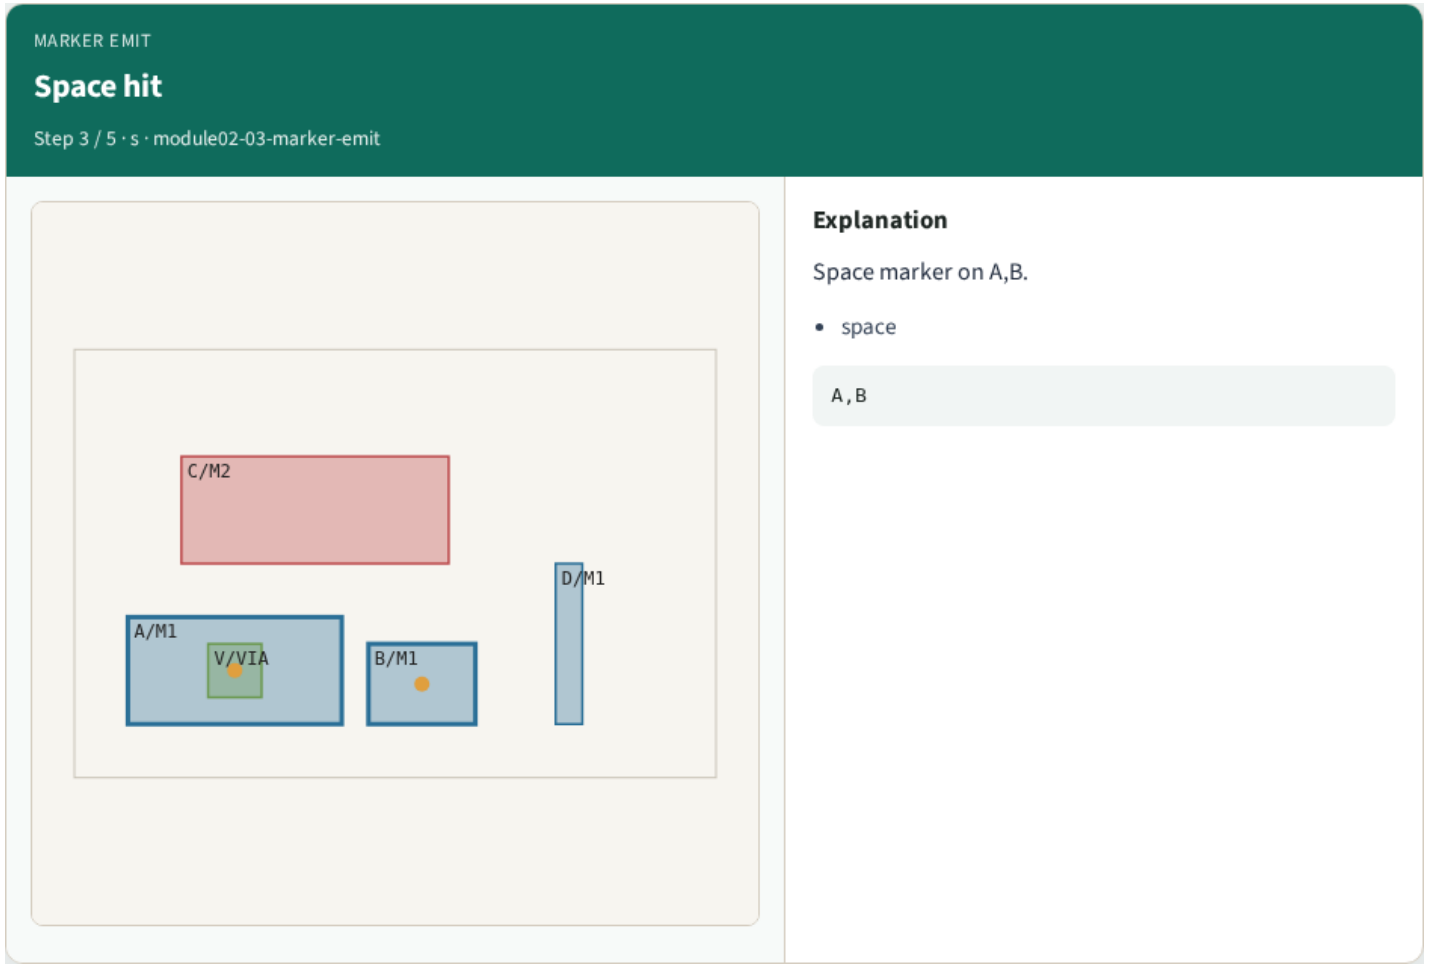

Space hit


List

MARKER EMIT

List

Step 4 / 5 · list · module02-03-marker-emit

n=2

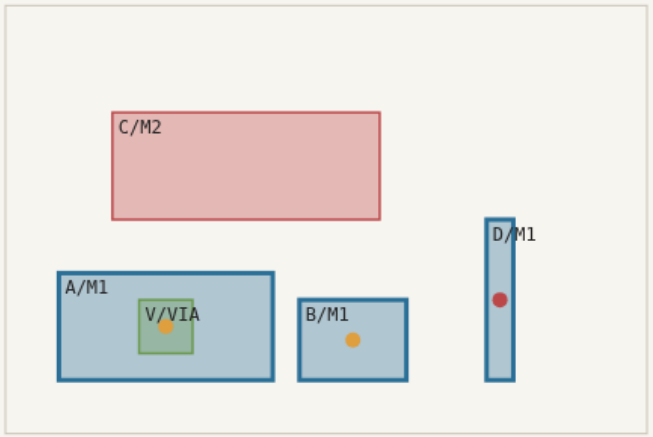

Explanation

emit_markers returns the combined list.

- emit

```
union
```

List


Count

MARKER EMIT

Count

Step 5 / 5 · n · module02-03-marker-emit

n≥2

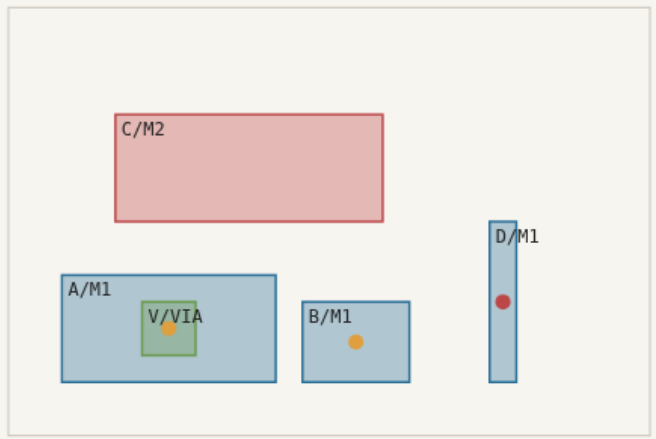

Explanation


At least 2 single-layer markers.

- ≥2

```
GOLDEN
```

Count

Browser lab track

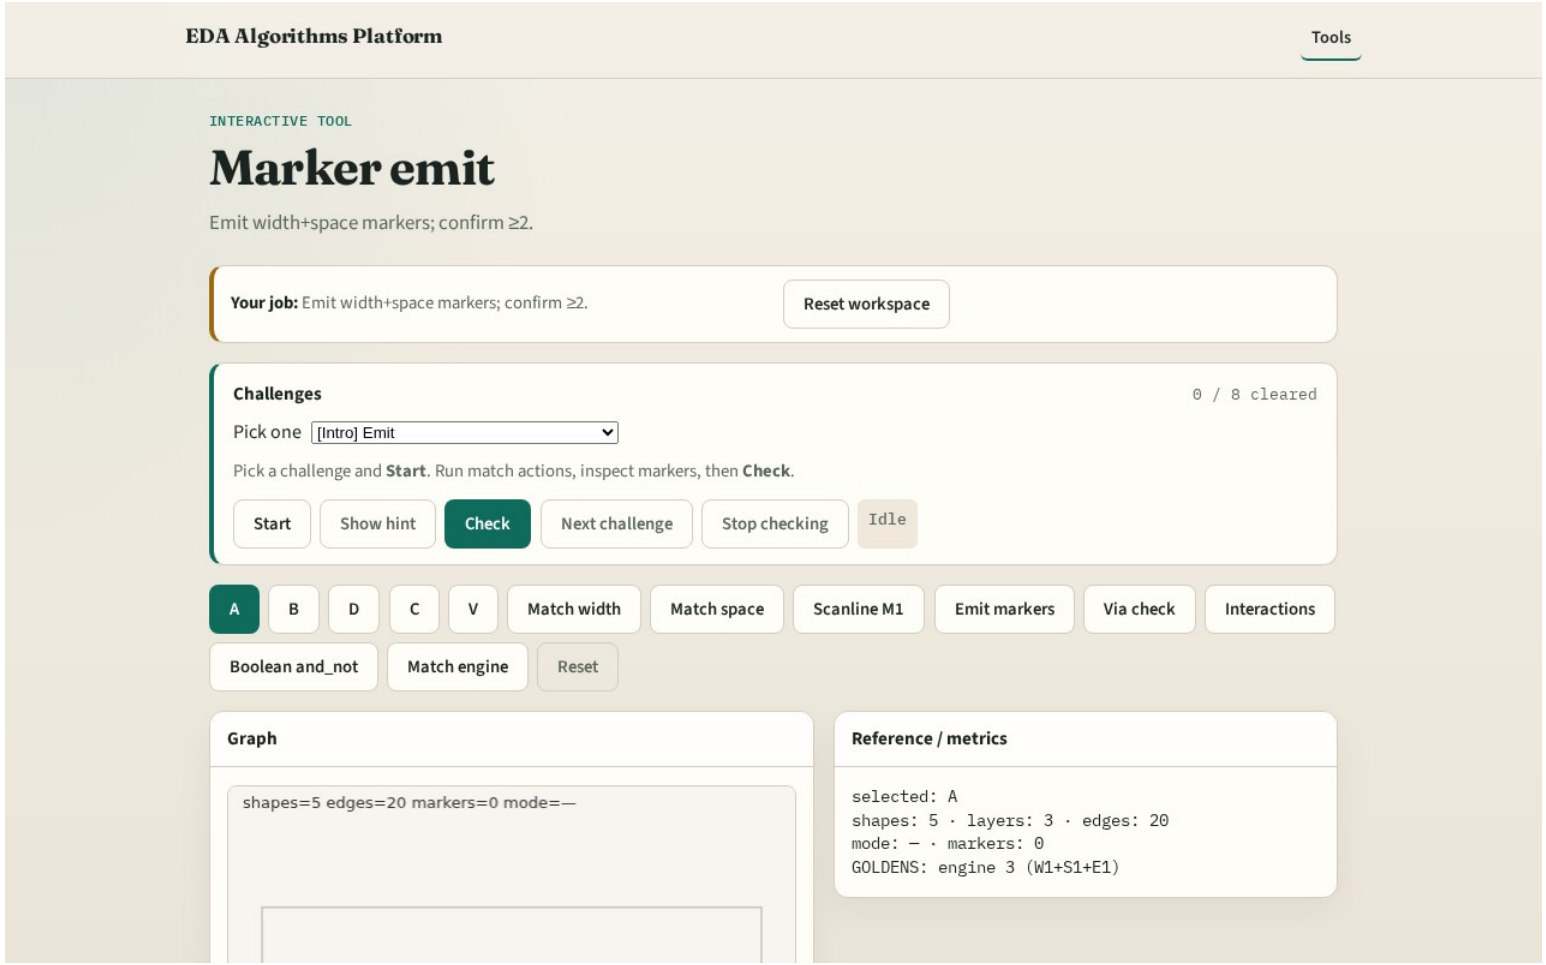

Browser lab starter

Implement track

- Call emit_markers(); assert len >= 2

Pitfalls

- Dropping value/limit fields
- Mixing multi-layer into emit early

Your turn

- Next: multi-layer via enclosure