

JetBrains AppCode Default Keymap



Editing

Space	Basic code completion (the name of any class, method or variable)
Space	Smart code completion (filters the list of methods and variables by expected type)
↵	Complete statement
P	Parameter info (within method call arguments)
J or Mid. button click	Quick documentation lookup
F1	External Doc
+ mouse over code	Brief Info
F1	Show descriptions of error or warning at caret
N , ↵ , N	Generate code... (initWith..., Properties, etc.)
O	Override methods
I	Implement methods
⌘ T	Surround with... (if..else, for, @try..@catch, @synchronized, etc.)
/	Comment/uncomment with line comment
⌘ /	Comment/uncomment with block comment
↑	Select successively increasing code blocks
↓	Decrease current selection to previous state
Q	Context info
⇧	Show intention actions and quick-fixes
⌘ L	Reformat code
⌘ O	Optimize imports
⌘ I	Auto-indent line(s)
⇧, ⇧⇧	Indent/unindent selected lines
X	Cut current line or selected block to clipboard
C	Copy current line or selected block to clipboard
V	Paste from clipboard
⇧ V	Paste from recent buffers...
D	Duplicate current line or selected block
⌘	Delete line at caret
⇧ J	Smart line join
⇧	Smart line split
⇧	Start new line
⇧ U	Toggle case for word at caret or selected block
⇧], ⇧ [Select till code block end/start
⌘	Delete to word end
⌘	Delete to word start
⌘ +, ⌘ -	Expand/collapse code block
⇧ +	Expand all
⇧ -	Collapse all
W	Close active editor tab

Search/Replace

F	Find
G	Find next
⇧ G	Find previous
R	Replace
⇧ F	Find in path
⇧ R	Replace in path

JetBrains AppCode Default Keymap



Usage Search

⌘ F7 / ⌘ F7	Find usages / Find usages in file
⇧ ⌘ F7	Highlight usages in file
⇧ ⌘ F7	Show usages

Compile and Run

⌘ F9	Build Project
⌘ R	Select configuration and run
⌘ D	Select configuration and debug
R	Run
D	Debug
⇧ ⌘ R, ⇧ ⌘ D	Run context configuration from editor

Debugging

F8	Step over
F7	Step into
⇧ F7	Smart step into
⇧ F8	Step out
⌘ F9	Run to cursor
⌘ F8	Evaluate expression
⌘ R	Resume program
F8	Toggle breakpoint
⇧ ⌘ F8	View breakpoints

Navigation

O	Go to class
⇧ O	Go to file
⌘ O	Go to symbol
⇧, ⇧⇧	Go to next/previous editor tab
F12	Go back to previous tool window
⌘	Go to editor (from tool window)
⇧ ⌘	Hide active or last active window
⇧ ⌘ F4	Close active run/messages/find/... tab
L	Go to line
E	Recent files popup
⌘ ⇧, ⌘ ⇧⇧	Navigate back/forward
⇧ ⌘	Navigate to last edit location
⌘ F1	Select current file or symbol in any view
⇧ ↑	Go to related header or source file
B or Click	Go to definition
⌘ B	Go to implementation(s)
⌘ Space, ⌘ Y	Open quick definition lookup
⇧ B	Go to type declaration
U	Go to super-method/super-class
⇧ ↑, ⇧ ↓	Go to previous/next method
⇧], ⇧ [Move to code block end/start
F12	File structure popup
H	Type hierarchy
⇧ H	Method hierarchy
⌘ H	Call hierarchy
F2, ⇧ F2	Next/previous highlighted error
F4 / ⇧ ↓	Edit source / View source
⌘ Home	Show navigation bar
F3	Toggle bookmark
⌘ F3	Toggle bookmark with mnemonic
0 ... 9	Go to numbered bookmark
F3	Show bookmarks

JetBrains AppCode Default Keymap



Refactoring

⌘ T	Refactor This (shows all available refactorings)
F5	Copy
F6	Move
⌘ Delete	Safe Delete
⇧ F6	Rename
⌘ F6	Change Signature
⌘ N	Inline
⌘ M	Extract Method
⌘ V	Introduce Variable
⌘ P	Introduce Parameter
⌘ E	Introduce Property
⌘ C	Introduce Constant
⌘ I	Introduce Instance Variable

VCS/Local History

⌘ K	Commit project to VCS
⌘ T	Update project from VCS
⌘ C	View recent changes
⌘ V	'VCS' quick popup


Live Templates

⌘ J	Surround with Live Template
J	Insert Live Template
each	Iterate elements of a collection
for	Indexed for() loop
log	Insert new NSLog call
loc	Insert NSLocalizedString call

General

⌘ O ... ⌘ 9	Open corresponding tool window
⌘ Y	Synchronize
⇧ F12	Toggle maximizing editor
⌘ F	Add to Favorites
⌘ I	Inspect current file with current profile
⌘ \$ or ⌘ ^	Quick switch current scheme
⇧ ⇧	Switch between tabs and tool window

To find any action inside the IDE use Find Action (⇧ ⌘ A)

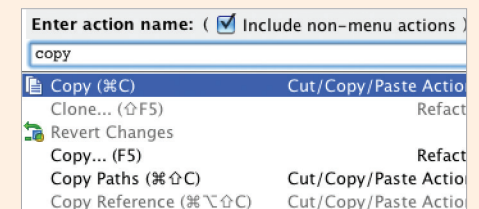

⌘	Command	⌘	Backspace
⌘	Option / Alt	⌘	Delete
⇧	Control	⌘	Escape
⇧	Shift	⇧	Enter / Return
⇧ ↑ ↓	Arrow Keys	⇧ ⇧	Tab