

# **Big Data Analytics Programming**

**Week-10. Slack Notification App**


**Jungwon Seo, 2022-Summer**

지금까지 배운 내용을 이용해서 봇  
(bot)을 만들어 볼 수는 없을까?


# Slack Bot 만들기

오늘의 날씨

오늘의 주가

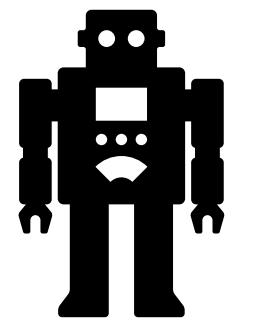


엘론 머스크 트윗

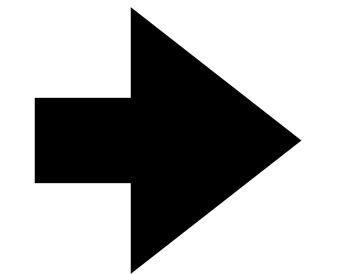

귀여운 강아지 사진


내가 1분마다 보내줄게!

# Github Slack App의 예제

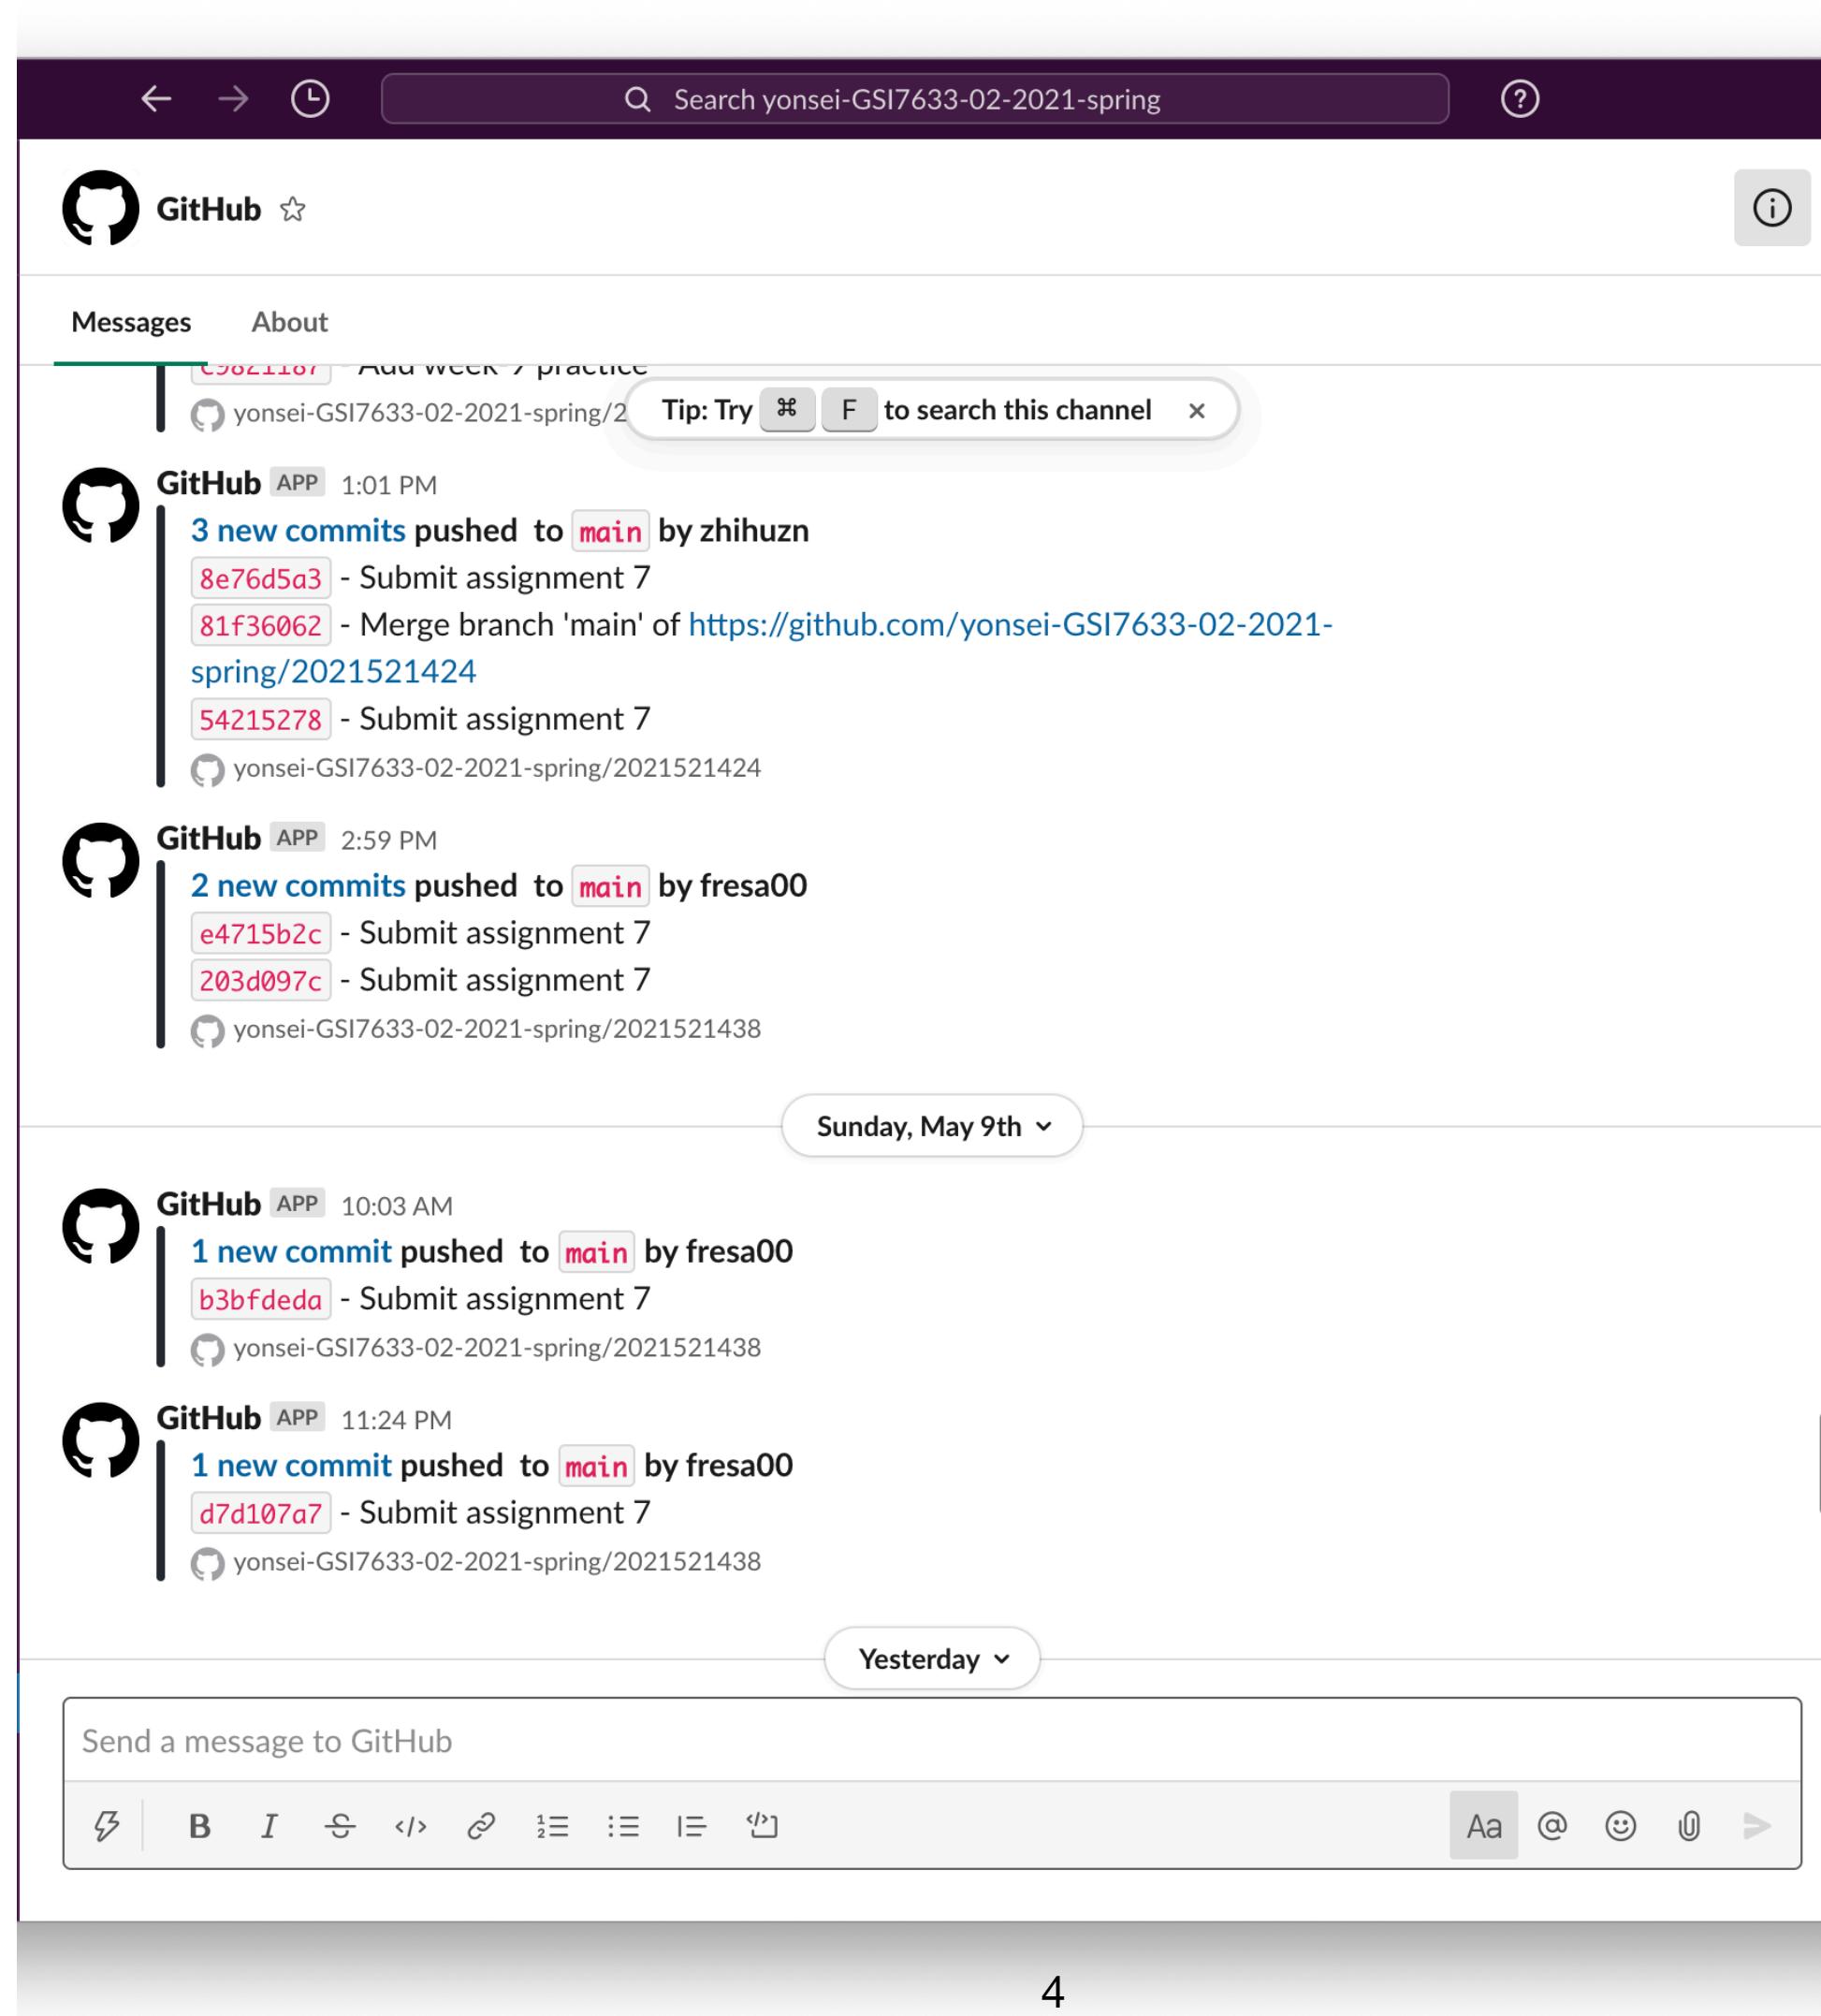

# 나만의 Slack App 만들기

## 다음 주소로 들어가서 앱을 만들어주세요

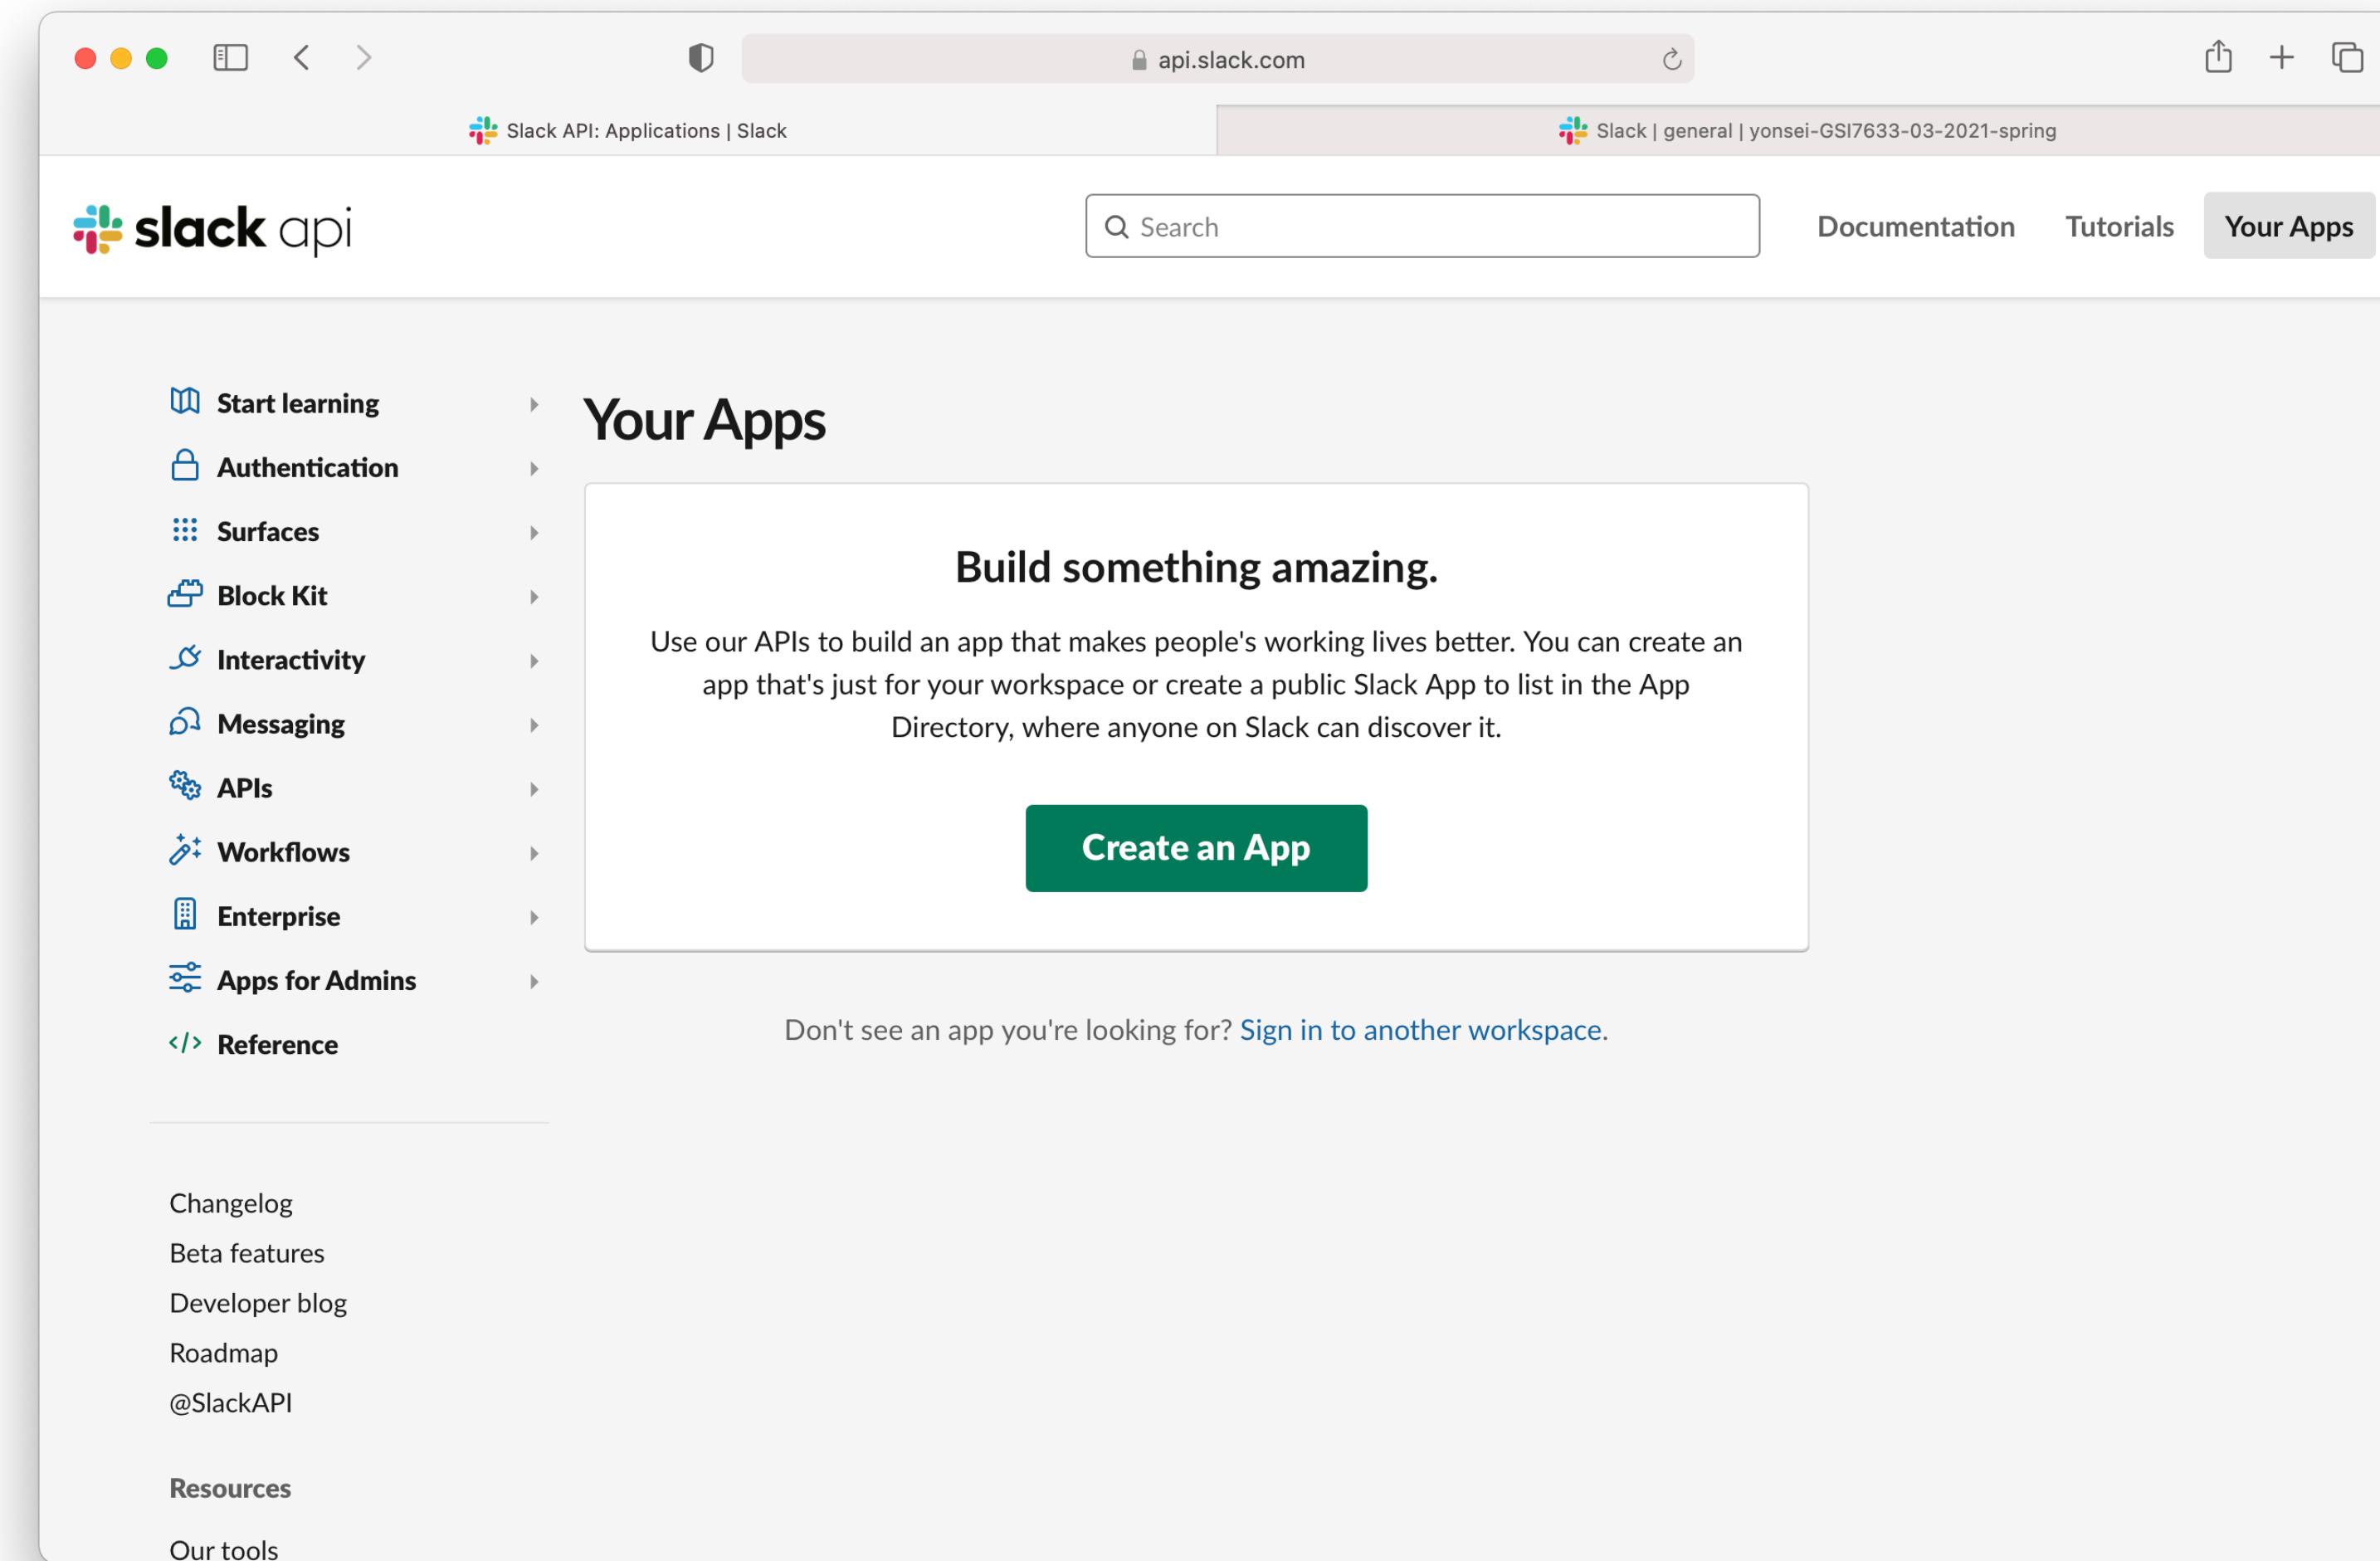

The screenshot shows a web browser window for [api.slack.com](https://api.slack.com). The title bar indicates the page is "Slack API: Applications | Slack". The main content area is titled "Your Apps" and displays a "Create an app" modal. The modal has a red border around its top section. It contains two options: "From scratch" and "From an app manifest (BETA)". Both sections include a brief description and a right-pointing arrow. Below the modal, there is a link to documentation and an example. The background of the page shows a sidebar with various API categories like Start learning, Authentication, Surfaces, etc., and a footer with links for Changelog, Beta features, Developer blog, Roadmap, and @SlackAPI.

slack api

Slack API: Applications | Slack

Search

Documentation Tutorials Your Apps

## Your Apps

Create an app

Choose how you'd like to configure your app's scopes and settings.

**From scratch**

Use our configuration UI to manually add basic info, scopes, settings, & features to your app.

**From an app manifest BETA**

Use a manifest file to add your app's basic info, scopes, settings & features to your app.

Need help? Check our [documentation](#), or see an [example](#)

Changelog

Beta features

Developer blog

Roadmap

@SlackAPI

Resources

Our tools

The screenshot shows a web browser window for [api.slack.com](https://api.slack.com). The title bar indicates the page is "Slack API: Applications | Slack". The main navigation bar includes links for "Documentation", "Tutorials", and "Your Apps". The "Your Apps" tab is selected.

The left sidebar contains a navigation menu with the following items:

- Start learning
- Authentication
- Surfaces
- Block Kit
- Interactivity
- Messaging
- APIs
- Workflows
- Enterprise
- Apps for Admins
- Reference

The main content area displays a modal dialog titled "Name app & choose workspace". The "App Name" field contains "Jungwon\_bot". Below it, a note says "Don't worry - you'll be able to change this later." A red box highlights the "Pick a workspace to develop your app in:" section, which contains a dropdown menu set to "yonsei-GSI7633-03-2021-spring". A note below the dropdown states: "Keep in mind that you can't change this app's workspace later. If you leave the workspace, you won't be able to manage any apps you've built for it." At the bottom of the dialog, there is a link "Sign into a different workspace".

At the very bottom of the dialog are two buttons: "Cancel" and "Create App".

The screenshot shows the Slack API Basic Information page for a bot named 'Jungwon\_bot'. The left sidebar contains navigation links for Settings (Basic Information, Collaborators, Socket Mode, Install App, App Manifest [BETA], Manage Distribution) and Features (App Home, Org Level Apps, Incoming Webhooks, Interactivity & Shortcuts, Slash Commands, Workflow Steps, OAuth & Permissions, Event Subscriptions, User ID Translation, Beta Features). The main content area is titled 'Building Apps for Slack' and includes sections for 'Add features and functionality' (with a note about enabling Socket Mode for internal apps), 'Incoming Webhooks' (highlighted with a red box), and 'Interactive Components'. At the bottom are 'Discard Changes' and 'Save Changes' buttons.

Basic Information

## Building Apps for Slack

Create an app that's just for your workspace (or build one that can be used by any workspace) by following the steps below.

### Add features and functionality

Choose and configure the tools you'll need to create your app (or review all our [documentation](#)).

**Building an internal app locally or behind a firewall?**

To receive your app's payloads over a WebSockets connection, enable [Socket Mode](#) for your app.

**Incoming Webhooks**

Post messages from external sources into Slack.

**Interactive Components**

Add components like buttons and select menus to your app's interface, and create an interactive experience for users.

Discard Changes Save Changes

The screenshot shows a web browser window on a Mac OS X system, displaying the Slack API Applications interface at [api.slack.com](https://api.slack.com). The URL bar also shows the specific application ID: `yonsei-GSI7633-03-2021-spring`.

The main content area is titled "Incoming Webhooks". On the left, there's a sidebar with a dropdown menu set to "Jungwon\_bot" and sections for "Settings" (Basic Information, Collaborators, Socket Mode, Install App, App Manifest [BETA], Manage Distribution) and "Features" (App Home, Org Level Apps, Incoming Webhooks [selected], Interactivity & Shortcuts, Slash Commands, Workflow Steps, OAuth & Permissions, Event Subscriptions, User ID Translation, Beta Features, Where's Bot User [help icon]).

The "Incoming Webhooks" section contains the following content:

- Activate Incoming Webhooks**: A toggle switch is currently set to "Off", which is highlighted with a red rectangular box.
- Information about Incoming Webhooks**:
  - Incoming webhooks are described as a simple way to post messages from external sources into Slack.
  - They use normal HTTP requests with a JSON payload including the message and optional attachments.
- Bot User Requirement**: Adding incoming webhooks requires a bot user. If the app doesn't have one, it will be added automatically.
- Webhook URL Generation**: Each time the app is installed, a new Webhook URL is generated.

The screenshot shows a web browser window for `api.slack.com` with two tabs open: "Slack API: Applications | yonsei-GSI7633-03-2021-spring" and "Slack | general | yonsei-GSI7633-03-2021-spring". The main content is the "Incoming Webhooks" configuration for the "Jungwon\_bot" app. The left sidebar lists "Settings" (Basic Information, Collaborators, Socket Mode, Install App, App Manifest [BETA], Manage Distribution) and "Features" (App Home, Org Level Apps, Incoming Webhooks [selected], Interactivity & Shortcuts, Slash Commands, Workflow Steps, OAuth & Permissions, Event Subscriptions, User ID Translation, Beta Features, Where's Bot User [help]), along with "Submit to App" and "Documentation/Tutorials/Your Apps" buttons. The main area has a heading "Incoming Webhooks" and a "Activate Incoming Webhooks" section with a green "On" toggle switch (which is highlighted with a red box). Below it, text explains what incoming webhooks are and how they work. It also notes that adding them requires a bot user and that new URLs are generated each time the app is installed. A "Webhook URLs for Your Workspace" section provides instructions on how to dispatch messages using a JSON POST request. A sample curl command is shown at the bottom.

## Incoming Webhooks

### Activate Incoming Webhooks

On

Incoming webhooks are a simple way to post messages from external sources into Slack. They make use of normal HTTP requests with a JSON payload, which includes the message and a few other optional details. You can include [message attachments](#) to display richly-formatted messages.

Adding incoming webhooks requires a bot user. If your app doesn't have a [bot user](#), we'll add one for you.

Each time your app is installed, a new Webhook URL will be generated.

If you deactivate incoming webhooks, new Webhook URLs will not be generated when your app is installed to your team. If you'd like to remove access to existing Webhook URLs, you will need to [Revoke All OAuth Tokens](#).

### Webhook URLs for Your Workspace

To dispatch messages with your webhook URL, send your [message](#) in JSON as the body of an [application/json](#) POST request.

Add this webhook to your workspace below to activate this curl example.

Sample curl request to post to a channel:

The screenshot shows a web browser window with two tabs open. The left tab is titled "Slack API: Applications | yonsei-GSI7633-03-2021-spring Slack" and the right tab is titled "Slack | general | yonsei-GSI7633-03-2021-spring". The main content area is titled "Features" and lists various options: App Home, Org Level Apps, **Incoming Webhooks** (which is highlighted with a blue background), Interactivity & Shortcuts, Slash Commands, Workflow Steps, OAuth & Permissions, Event Subscriptions, User ID Translation, Beta Features, and Where's Bot User. A question mark icon is next to the Where's Bot User link. Below this is a section titled "Submit to App Directory" with a "Review & Submit" button. At the bottom left is a "Slack ❤️" link and a list of links: Help, Contact, Policies, and Our Blog. The right side of the screen contains detailed information about Incoming Webhooks, including a note about generating new URLs when the app is installed to a team. It also includes sections for "Webhook URLs for Your Workspace" with a curl example, and a table to add new webhook URLs. A red box highlights the "Add New Webhook to Workspace" button.

add one for you.

Each time your app is installed, a new Webhook URL will be generated.

If you deactivate incoming webhooks, new Webhook URLs will not be generated when your app is installed to your team. If you'd like to remove access to existing Webhook URLs, you will need to [Revoke All OAuth Tokens](#).

## Webhook URLs for Your Workspace

To dispatch messages with your webhook URL, send your [message](#) in JSON as the body of an [application/json](#) POST request.


Add this webhook to your workspace below to activate this curl example.


**Sample curl request to post to a channel:**


```
curl -X POST -H 'Content-type: application/json' --data '{"text":"Hello, World!"}' YOUR_WEBHOOK_URL_HERE
```

Webhook URL	Channel	Added By
No webhooks have been added yet.		

**Add New Webhook to Workspace**

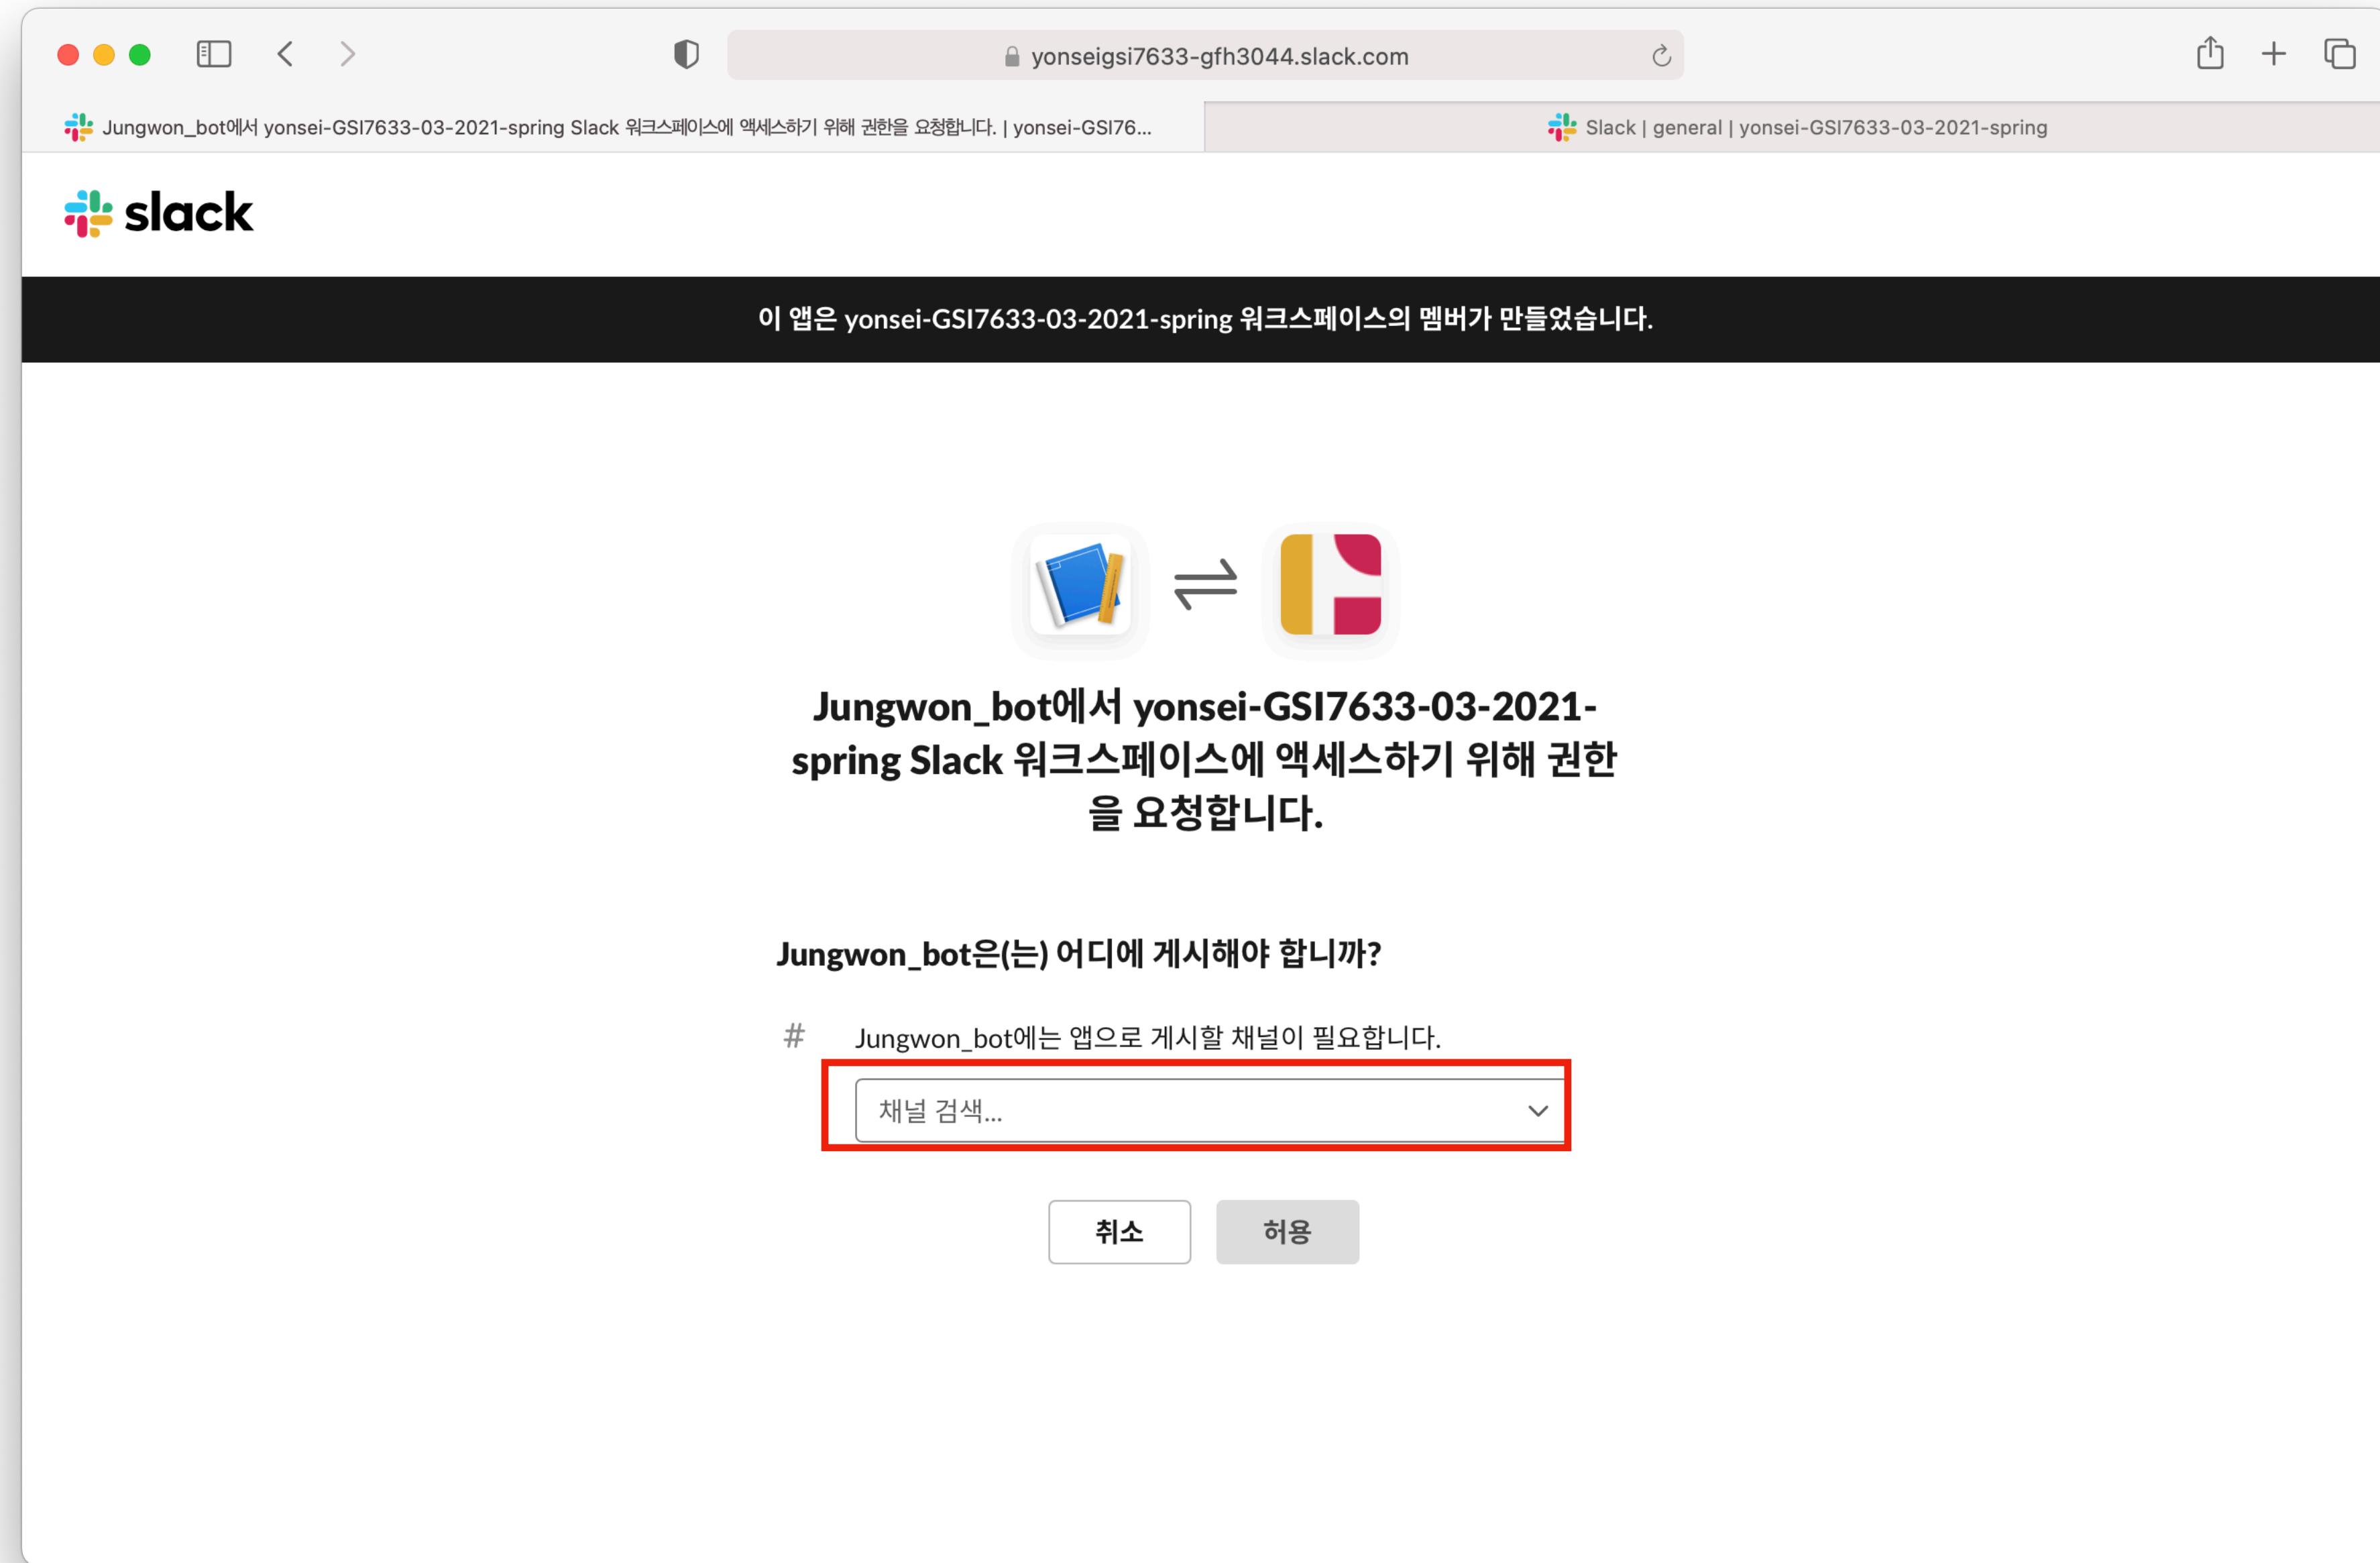

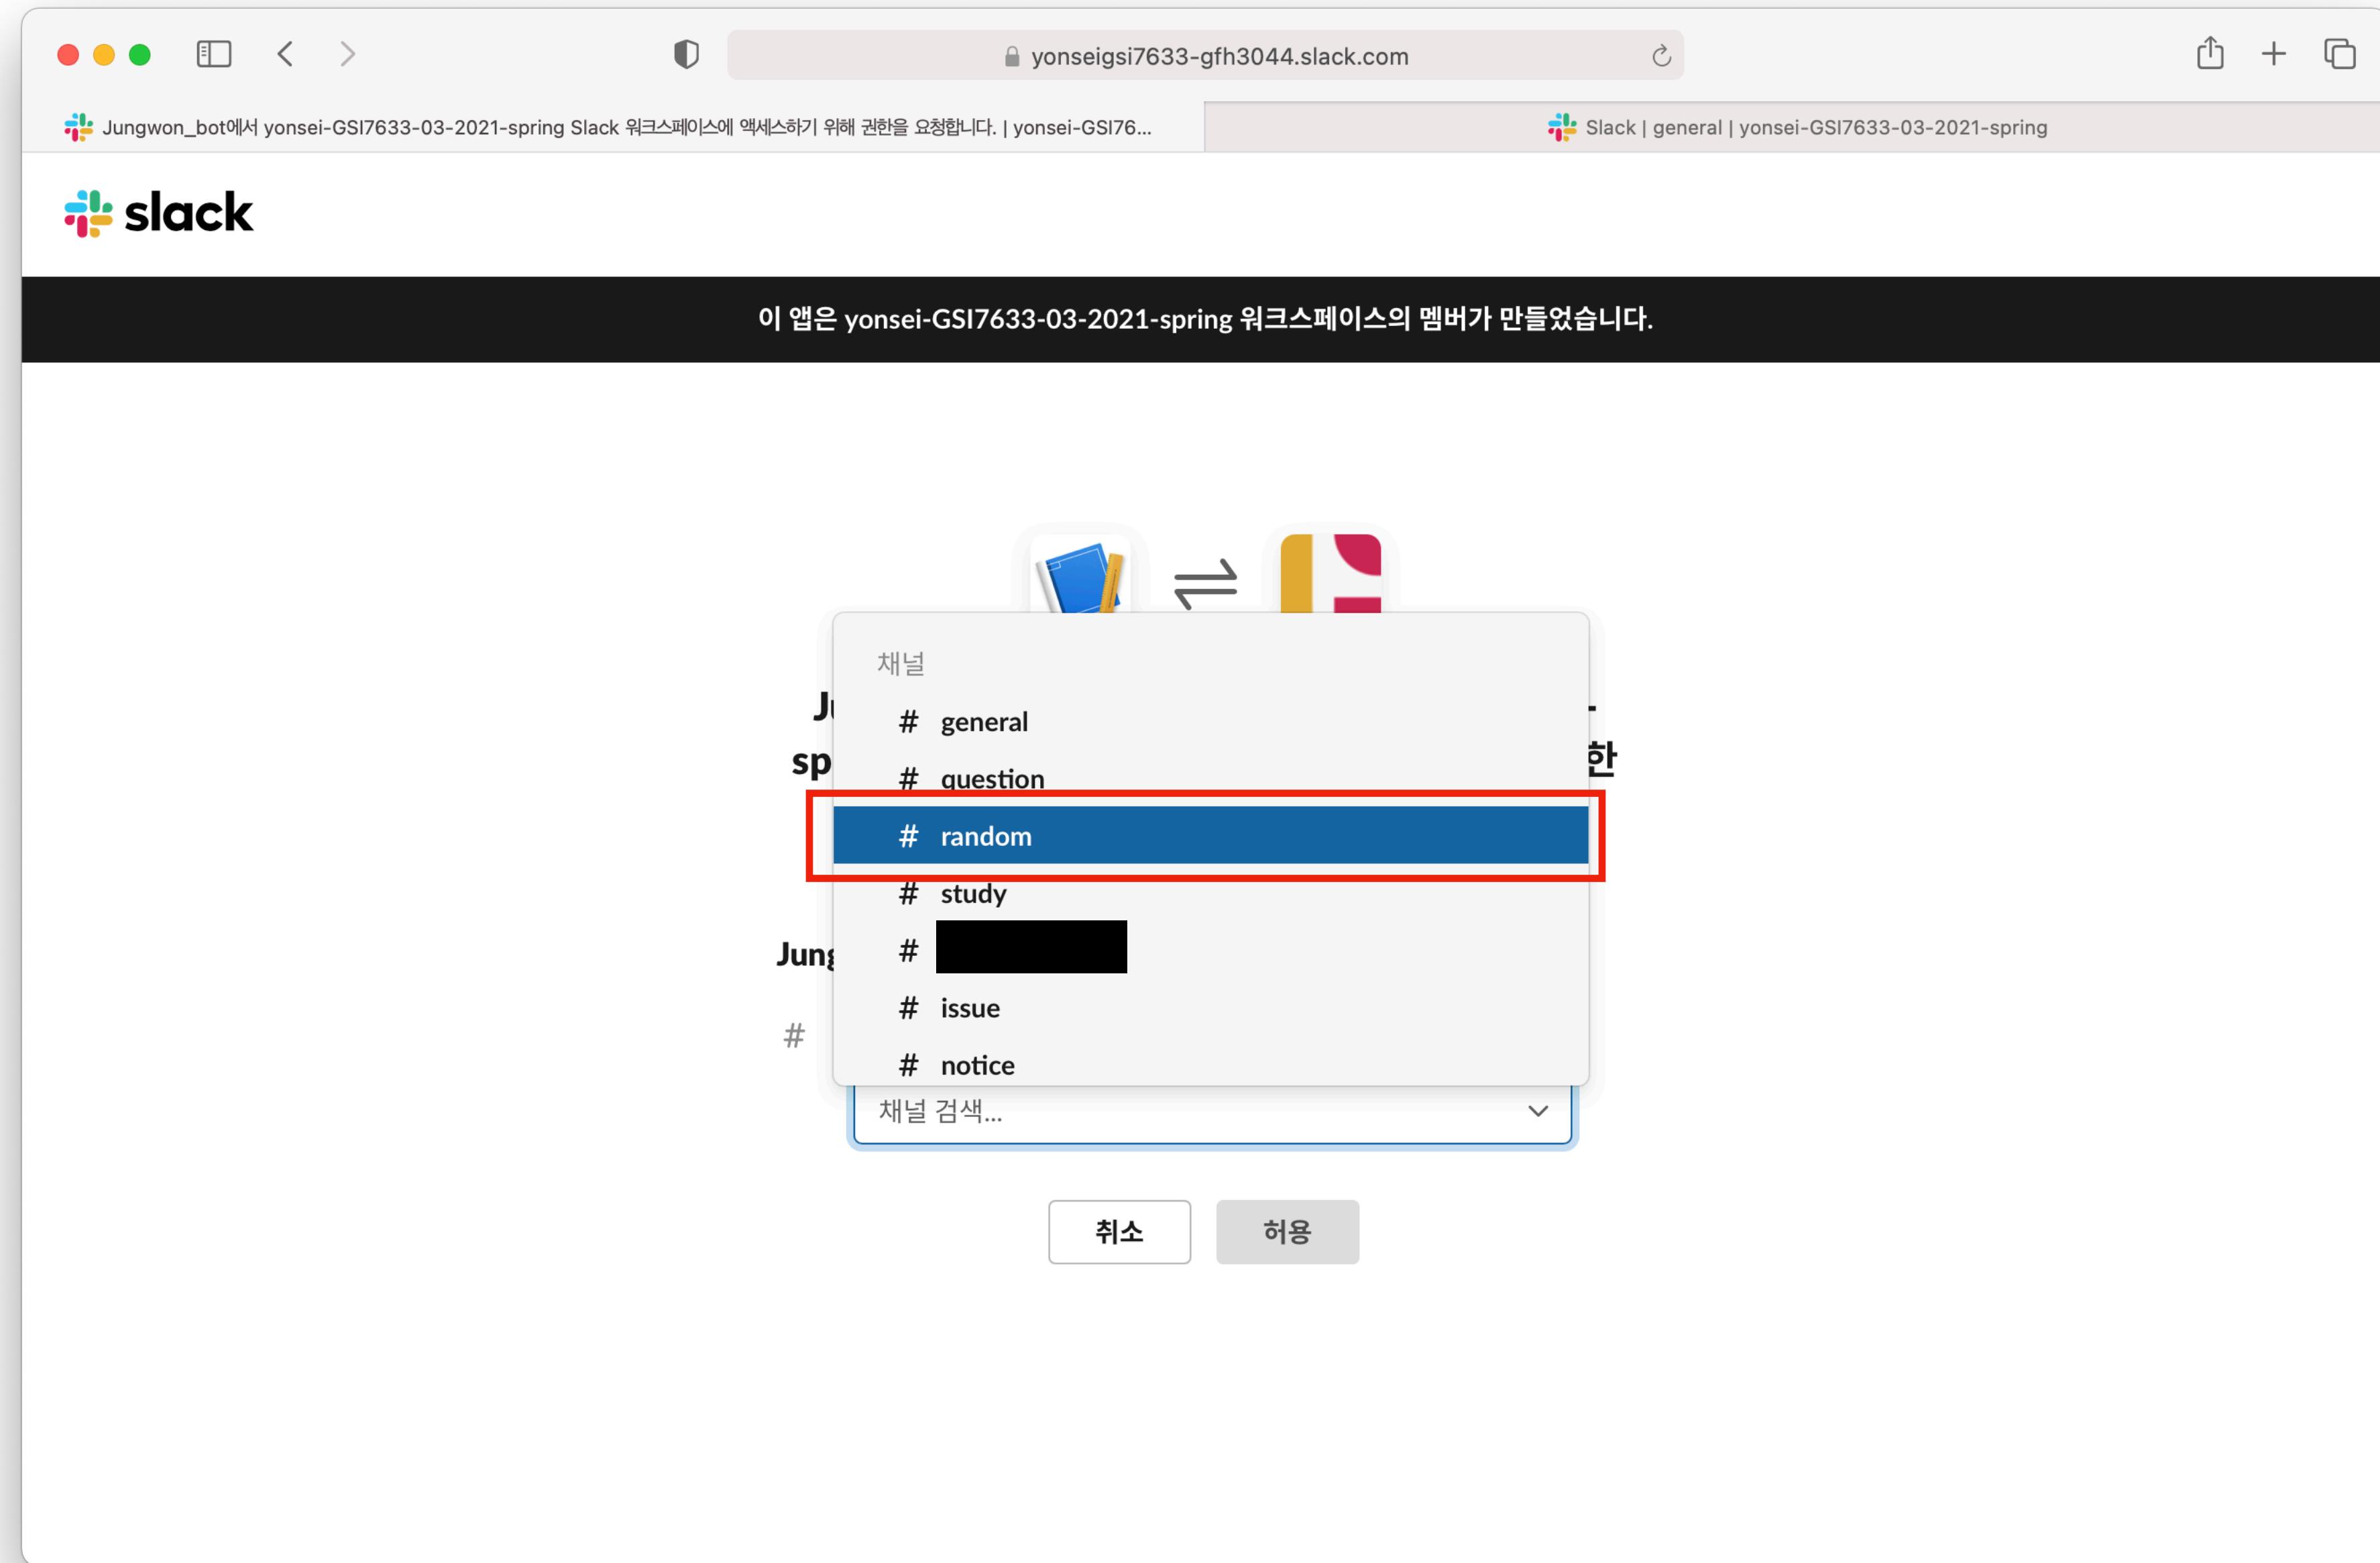

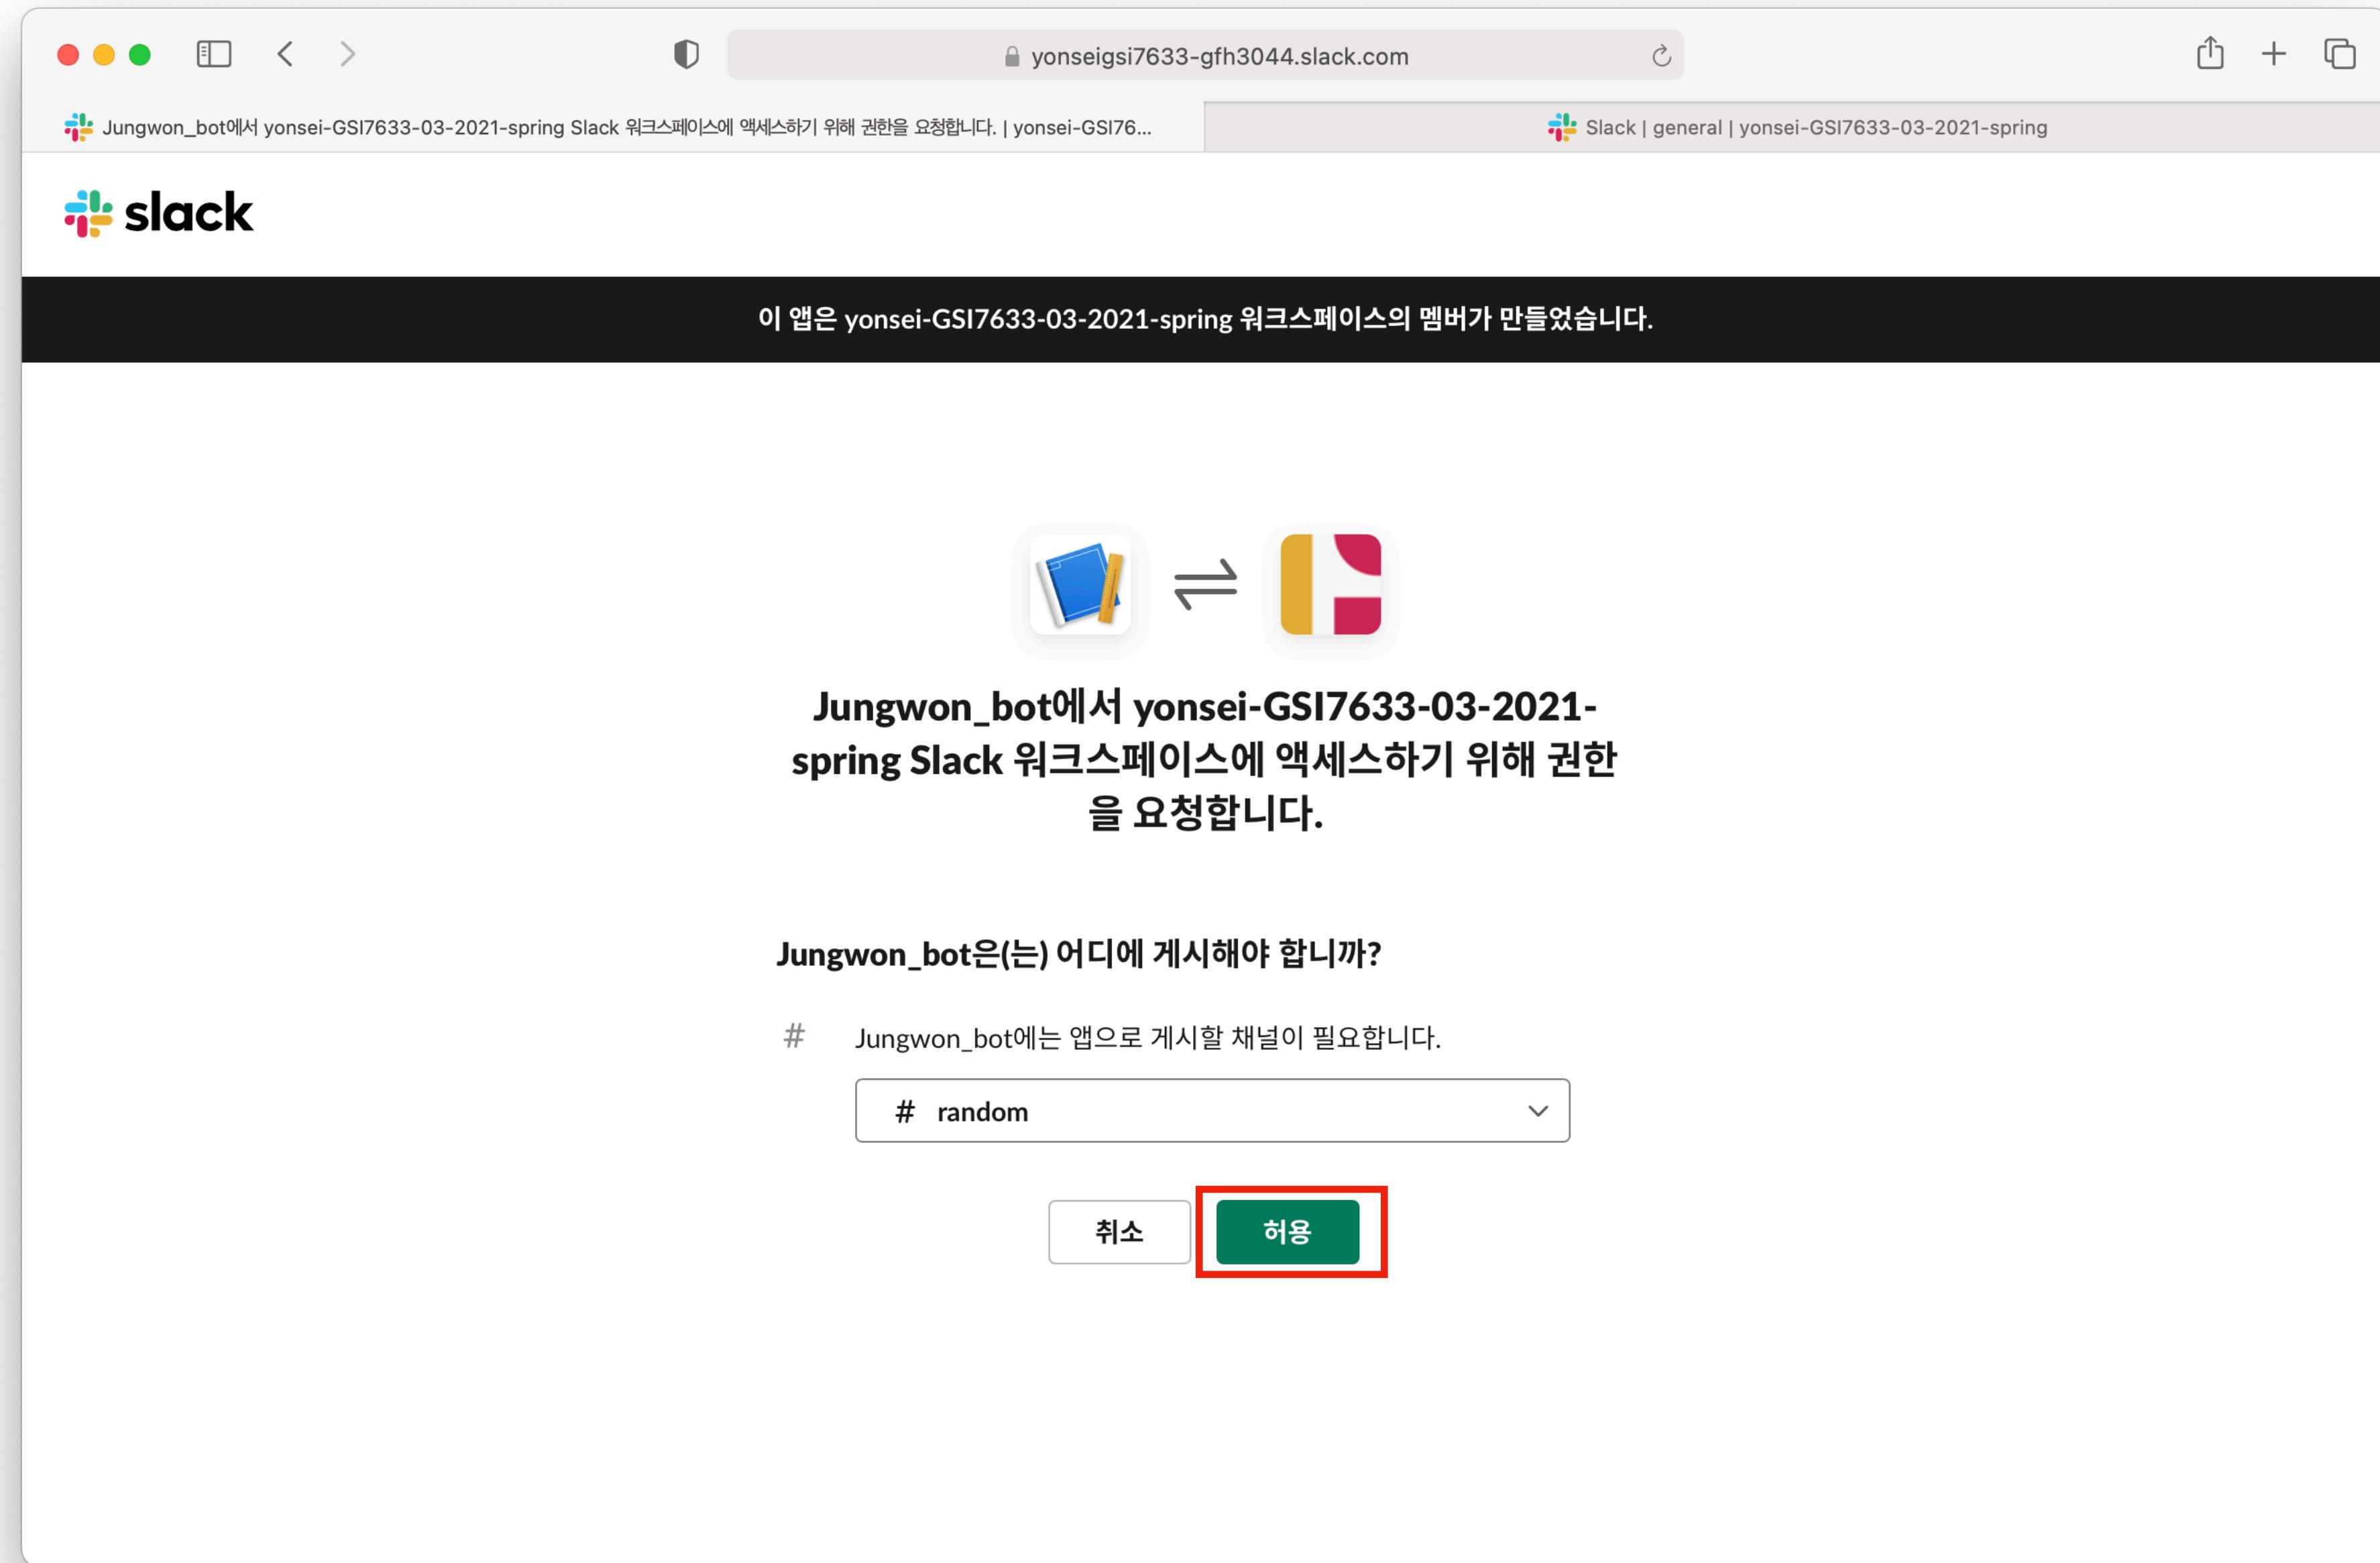

The screenshot shows a web browser window with two tabs open. The left tab is titled "Slack API: Applications | yonsei-GSI7633-03-2021-spring Slack" and the right tab is titled "Slack | general | yonsei-GSI7633-03-2021-spring". The main content area is for "slack api".

**Features**

- App Home
- Org Level Apps
- Incoming Webhooks** (highlighted in blue)
- Interactivity & Shortcuts
- Slash Commands
- Workflow Steps
- OAuth & Permissions
- Event Subscriptions
- User ID Translation
- Beta Features
- Where's Bot User

**Submit to App Directory**

- Review & Submit

**Slack ❤️**

- Help
- Contact
- Policies
- Our Blog

**Search**

**Documentation Tutorials Your Apps**

add one for you.

Each time your app is installed, a new Webhook URL will be generated.

If you deactivate incoming webhooks, new Webhook URLs will not be generated when your app is installed to your team. If you'd like to remove access to existing Webhook URLs, you will need to [Revoke All OAuth Tokens](#).

---

## Webhook URLs for Your Workspace

To dispatch messages with your webhook URL, send your [message](#) in JSON as the body of an [application/json](#) POST request.

Add this webhook to your workspace below to activate this curl example.

**Sample curl request to post to a channel:**

```
curl -X POST -H 'Content-type: application/json' --data '{"text":"Hello, World!"}' https://hooks.slack.com/services/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
```

**Copy**

Webhook URL	Channel	Added By
<a href="https://hooks.slack.com/services/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">https://hooks.slack.com/services/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</a> <b>Copy</b>	#random	중원_보조 May 13, 2021

**Add New Webhook to Workspace**

# 1. Python으로 슬랙에 메시지 보내기

## 2. 싸이월드 캠성을 보내는 봇

### **3. 비트코인 김치프리미엄 알림이**

**E.O.D**