

Teaching Transformers to Solve Combinatorial Problems through Efficient Trial & Error

Panagiotis Giannoulis¹


Yorgos Pantis^{2,3}

Christos Tzamos^{2,3}

¹National Technical University of Athens, Greece



National Technical University of Athens

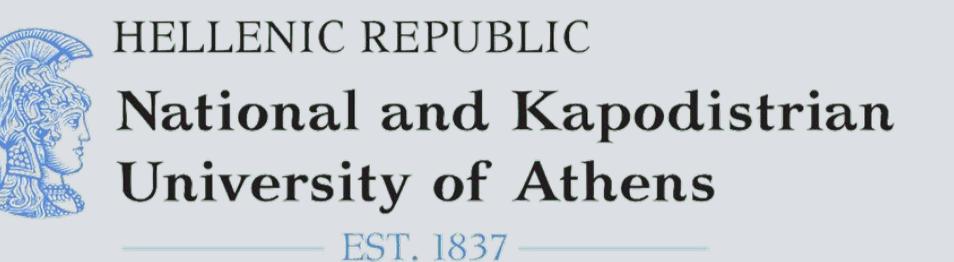


²National and Kapodistrian University of Athens, Greece
Authors listed alphabetically; equal contribution




Presented at NeurIPS 2025 – San Diego, USA

³Archimedes, Athena Research Center, Greece

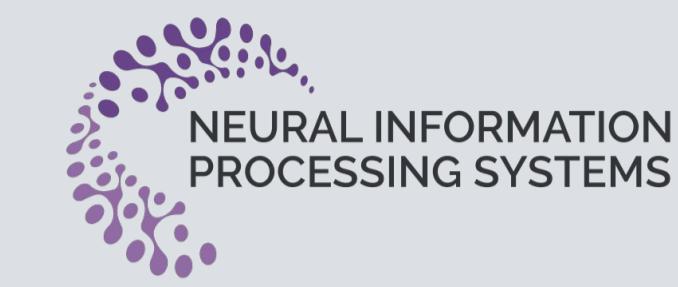

Motivation

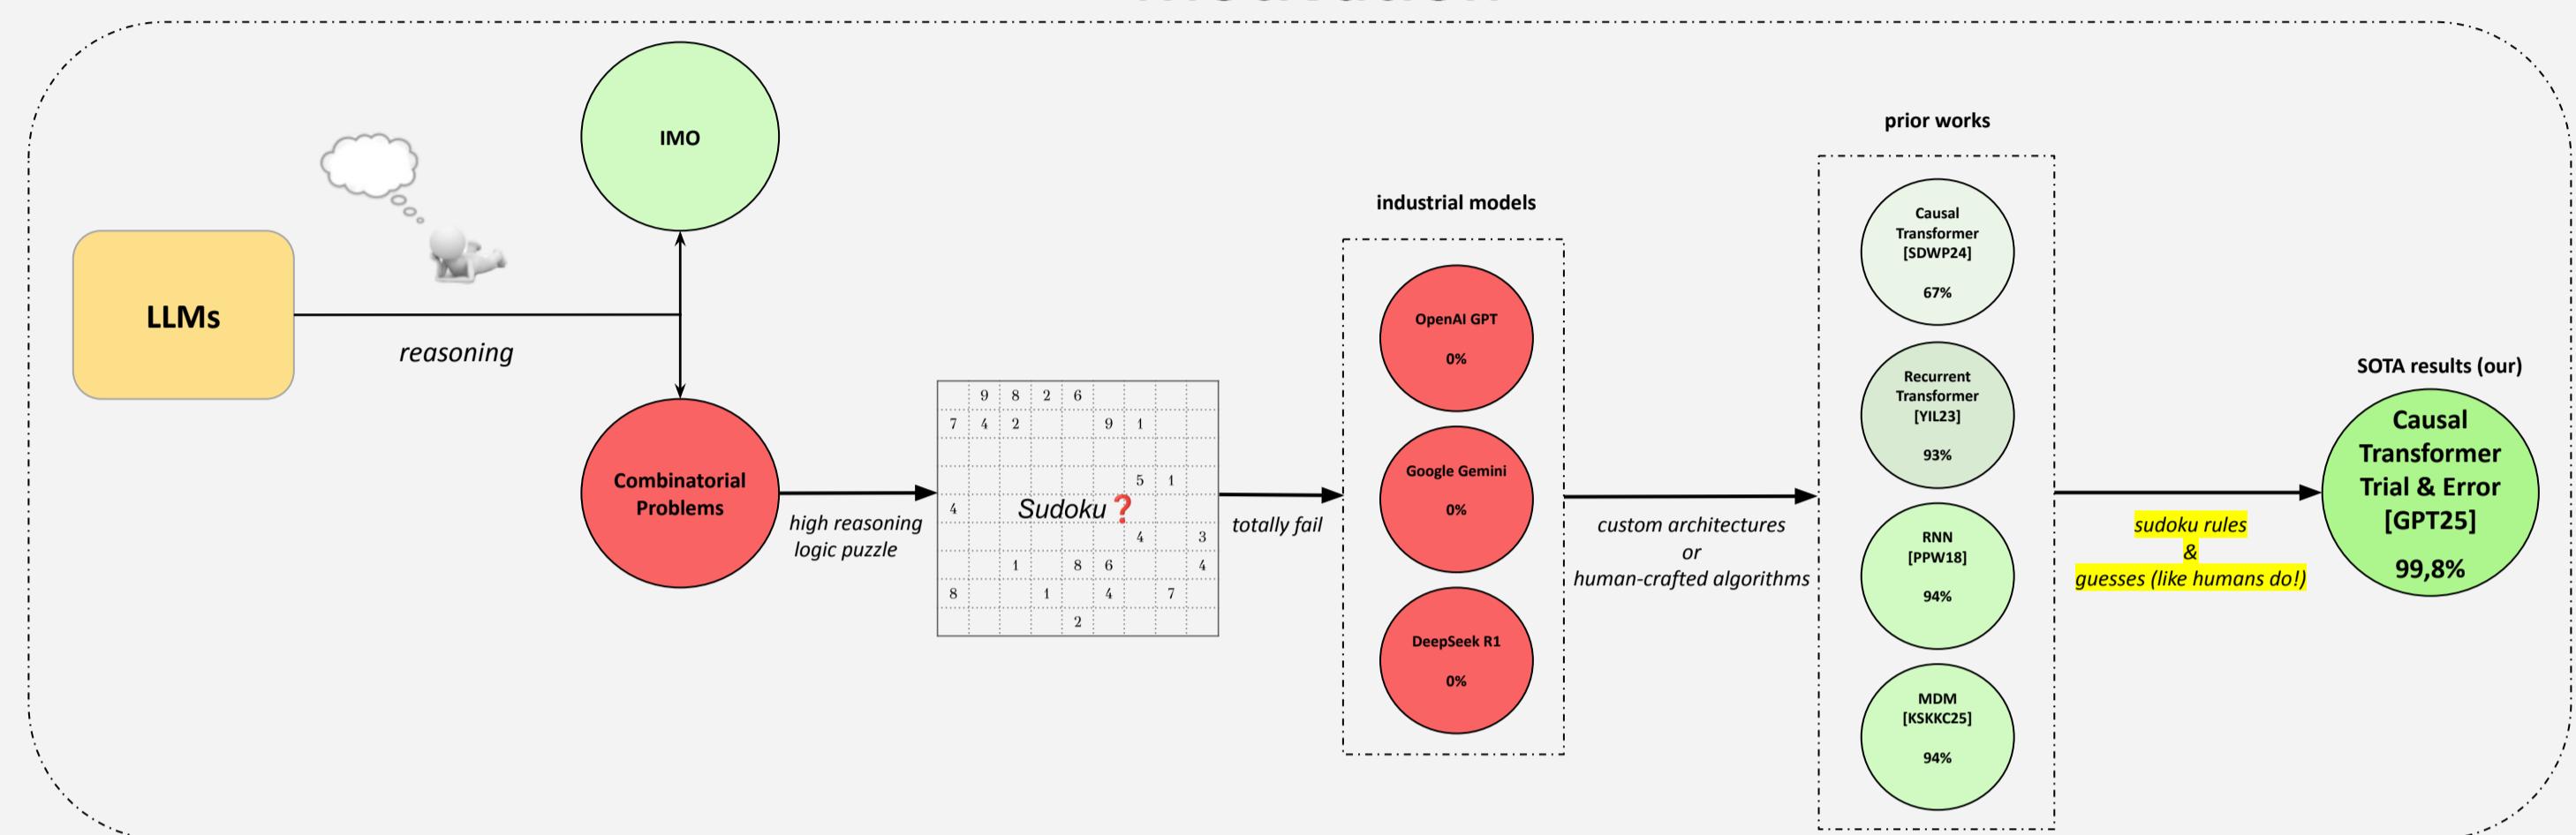



Key Contributions

- A generalized framework for NP-class problems that have an efficient verifier
 - Sudoku is NP-complete problem
- No custom architecture: valina-decoder only GPT-2 with 42M parameters
- Training transcripts solely based on Sudoku rules (DFS method) and guesses
 - An approach that can solve Sudoku puzzles beyond those solvable by human-crafted strategies
 - Close related approach to human nature
- SOTA results; accuracy 99.8% on randomly generated Sudoku
 - Showing that 99.8% of Sudoku can be solved using its rules and a single guess!
- Minimization of guesses via a novel loss inspired by *Min-Sum Set Cover* problem
- SudokuPy: a Python library for generating random Sudoku puzzles
 - Enables live-stream training to avoid overfitting
 - Exposed the model randomly to the full distribution of Sudoku puzzle difficulties

Imitation Learning

Sudoku rules + informed multiple guesses

- Encoding: Each move encoded as a 3-digit number rcv (111 → 999); row_column_value
- Multiple Targets: Combinatorial puzzles allow multiple valid next moves
 - Instead of a single deterministic label, we support multiple next-token predictions
 $\text{Cross Entropy loss: } -\log p_i \rightarrow \text{Multiple target loss: } -\sum \log p_i$ over all valid next tokens
- Results: Accuracy 98.9%; SOTA compared to other prior works
 - Accuracy 99.10% in 1-3 SAT problem (canonical NP-complete problem)

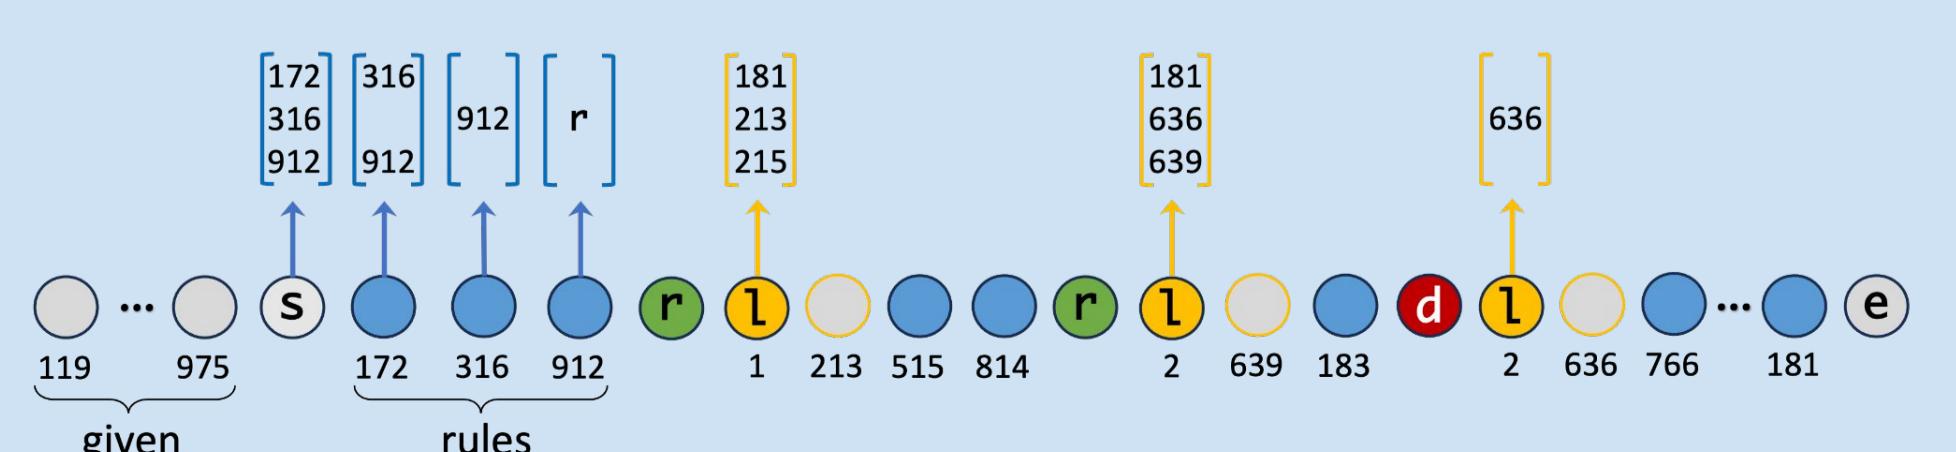



We show that Transformers can reason on NP-combinatorial problems, achieving 99.8% SOTA accuracy in Sudoku using only its rules and minimal guesses, like humans do!

Beyond Imitation Learning

Sudoku rules + a single guess + guess loss inspired by Min-Sum Set Cover problem

- Encoding & Multiple Targets: Same as Imitation Learning
- Guesses: A single guess (backdoor; once identified, applying simple rules leads to the full solution)
- Loss Function: Instead of a single deterministic label, we support multiple next-token predictions
 $\text{Multiple target loss: } -\log p_i \quad \& \quad \text{Guesses loss: } (\sum p_i)^{-1}$ over all valid guesses (see mathematical insights) (1)
- Results: Accuracy 99.8%; new SOTA, outperforming even our previous best results

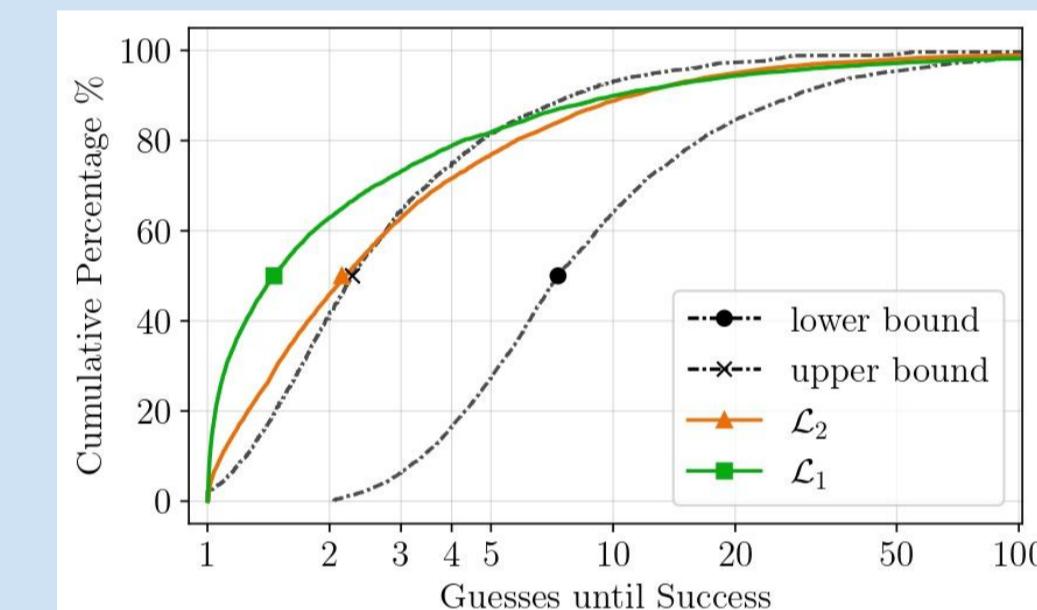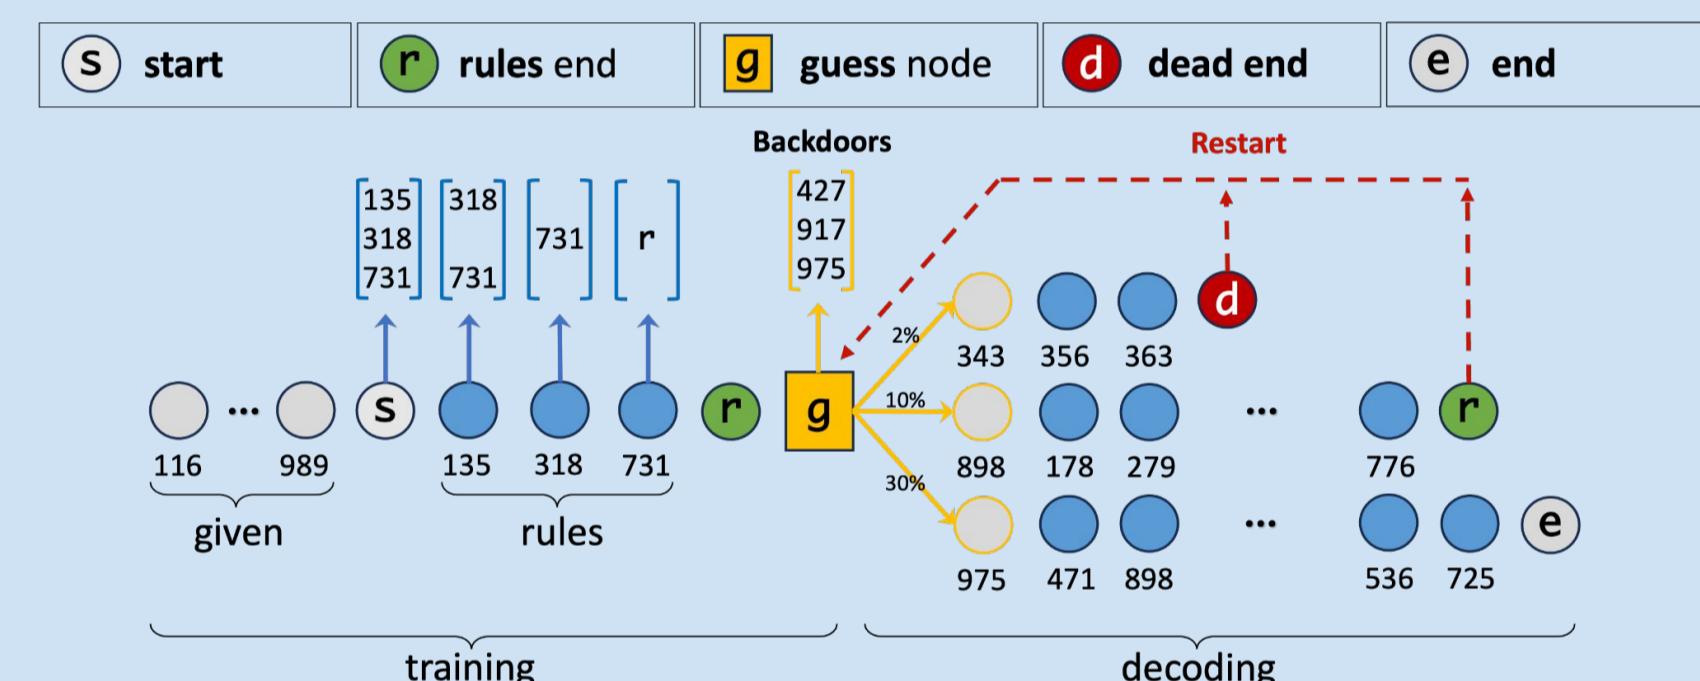

Insights: This approach shows empirically that 99.8% of Sudoku can be solved by using only one guess (backdoor guess)!

Mathematical Insights (Min-Sum Set Cover problem)

- Assumptions: depth-1 of search and non adaptive policy
- Challenge:
 - You face n possible choices, but only a hidden subset S is valid
 - Subset S is drawn from a known distribution D
 - Each test costs 1 time unit and once it is made you only learn if it is valid
- Goal: Find a policy π that minimizes the expected time to discover a valid choice

Theorem. For any distribution D over sets $S \subseteq [n]$, it holds that for any permutation τ :

$$\min_{\pi \in \Delta(n)} \mathbb{E}_{S \sim D} \left[\frac{1}{\sum_{i \in S} \pi_i} \right] \leq H_n \cdot \mathbb{E}_{S \sim D} \left[\arg \min_{i=1}^n \{\tau_i \in S\} \right]$$

where $H_n = 1 + \frac{1}{2} + \frac{1}{3} + \dots + \frac{1}{n} = \Theta(\log n)$ is the n -th harmonic number.

Remark: Loss function (1) yields solutions with a bounded approximation to the optimal policy, whereas treating the problem as a multi-class classification task (e.g., weighted Cross-Entropy Loss) leads to much worse approximations.

References

- R. Palm, U. Paquet, O. Winther. Recurrent relational networks. NeurIPS'18.
- Z. Yang, A. Ishay, J. Lee. Learning to solve constraint satisfaction problems with recurrent transformer. ICLR'23.
- K. Shah, N. Dikkala, X. Wang, R. Panigrahy. Causal language modeling can elicit search and reasoning capabilities on logic puzzles. NeurIPS'24.
- J. Kim, K. Shah, V. Kontonis, S. Kakade, S. Chen. Train for the worst, plan for the best: Understanding token ordering in masked diffusions. ICML'25.

