



UX GUIDELINES

Common action guides

Confirmation

Feedback

Modal

Navigation

Feedback

Feedback is provided to a user so they can recognize the result of an action.

Good feedback UX provides appropriate feedback that communicates effectively between service and user.

Please use at least one type of feedback from these guidelines when necessary to provide results for a user action.


When is feedback used?

Feedback is used when the user has executed an action and the result or status change is difficult to recognize directly on the screen. Users can immediately recognize when their actions are completed through feedback.

How to provide feedback?

Feedback can be categorized into four types depending on the content the user interaction.

It is possible to provide feedback by combining various types within reason that does not disrupt the user experience.

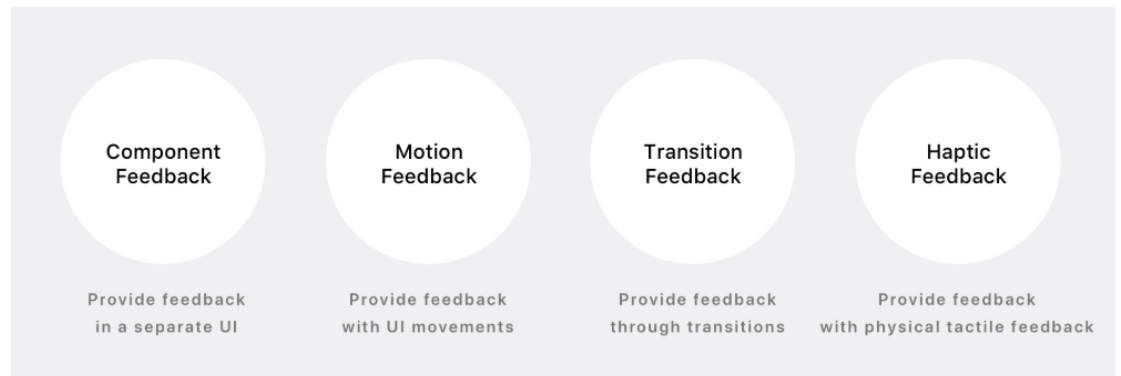

Component feedback

The feedback provided by the element.

Depending on the characteristics of the content that the user interacts with, feedback should consider the components and serving area for the user to use.

Clearly displays the results of an action as guidance, and if related tasks remain, the user can still continue interacting with the current screen.

All component feedback will automatically disappear after a certain amount of time to avoid disruption to the main screen.


Toast overlay

Provided if the user action results are directly related to the primary content of the screen.



Toast overlay

For more information about 'Toast overlay', please click [here](#).

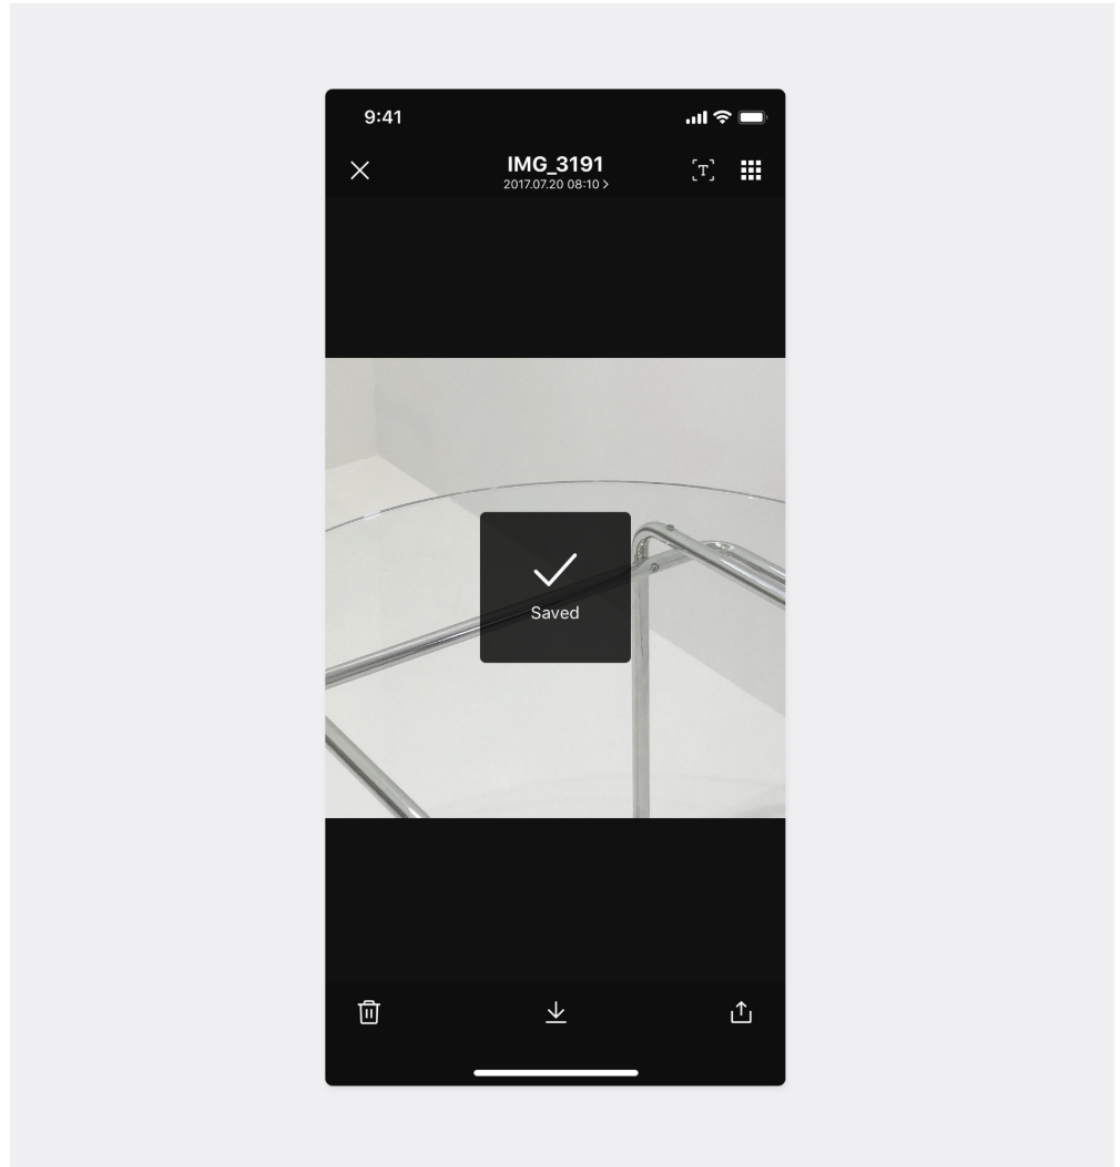


Bottom snackbar

Provided if the user action result is secondary to the primary content of the screen, or if the user action is secondary. Provide at the bottom area and consider accessibility of the action button when displaying the action related to the status change.




Toast overlay

For more information about 'Toast Overlay', please click [here](#).

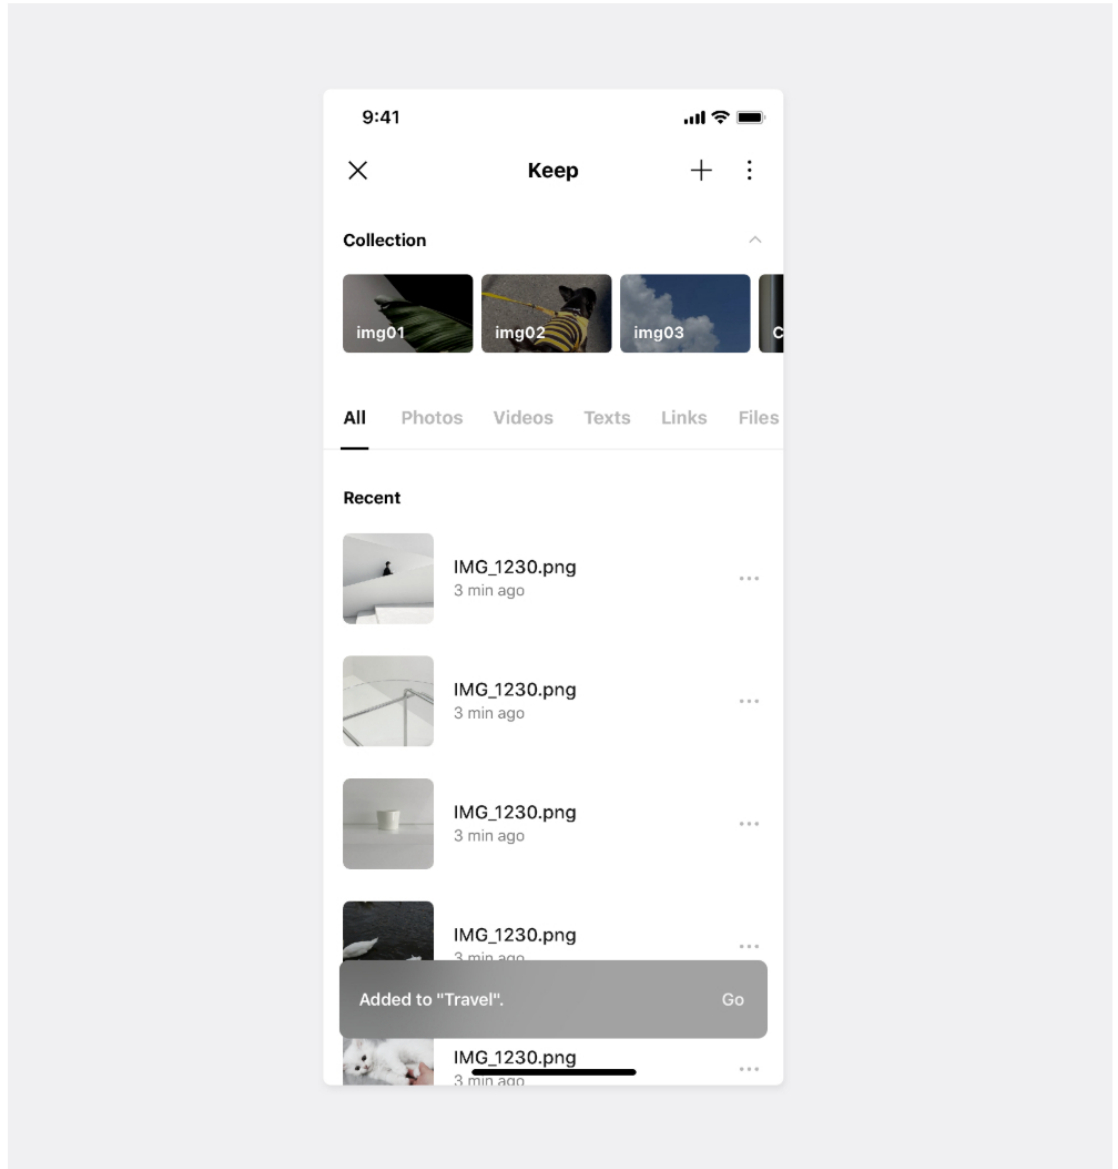


Top snackbar

If main content and features are located at the bottom, such as with chat rooms, feedback at the top avoids their interruption.

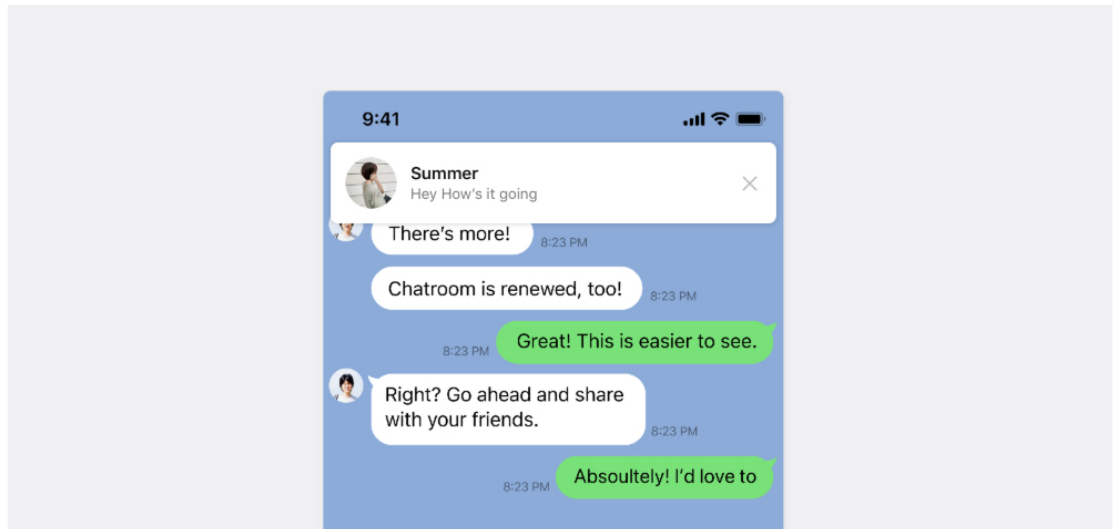



Motion

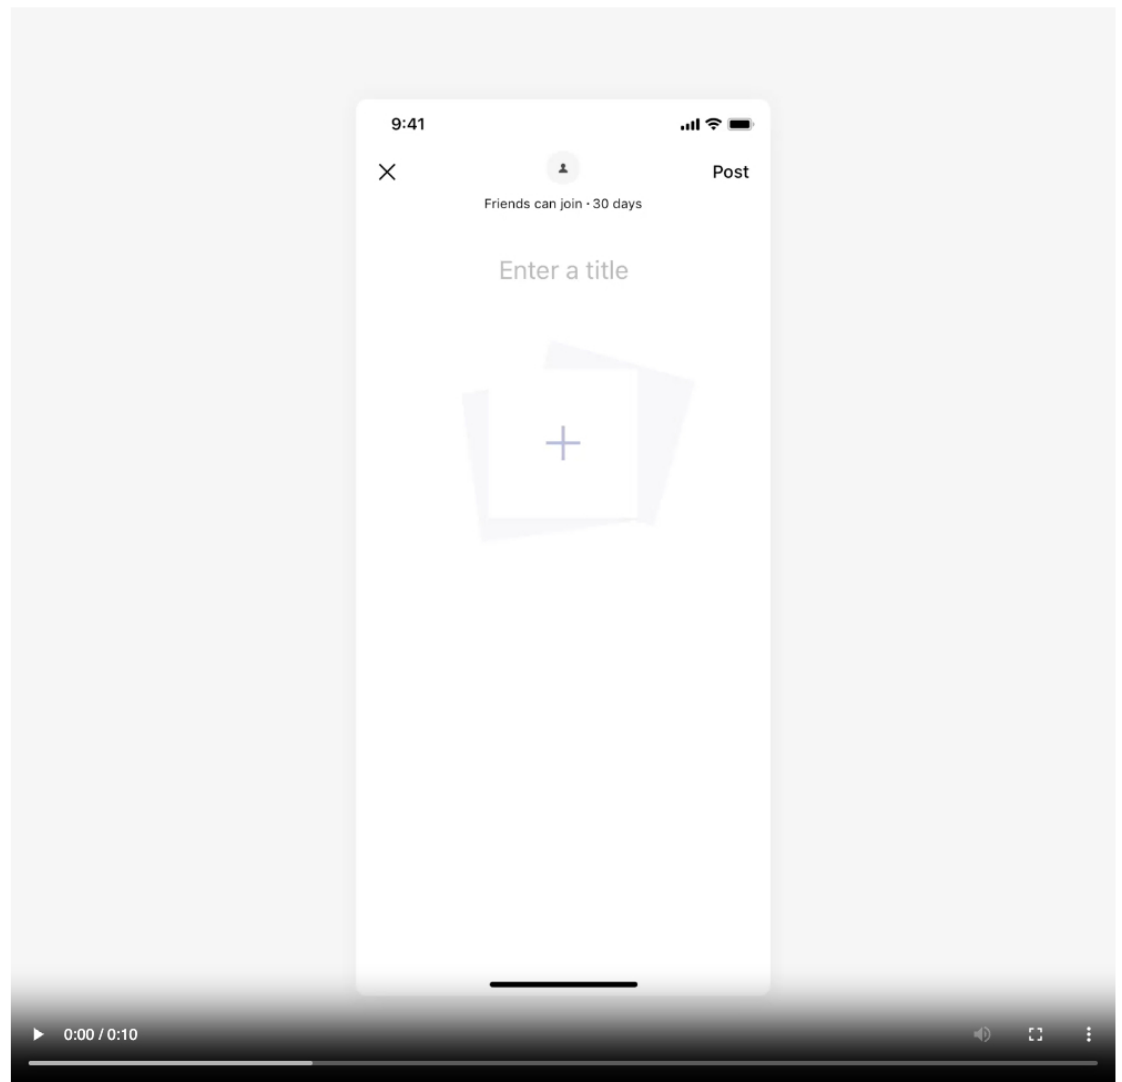

Feedback that provides movement in the interface. It is used when there is a change in status via a user action on the current screen but the result is normally difficult to recognize.

Transition

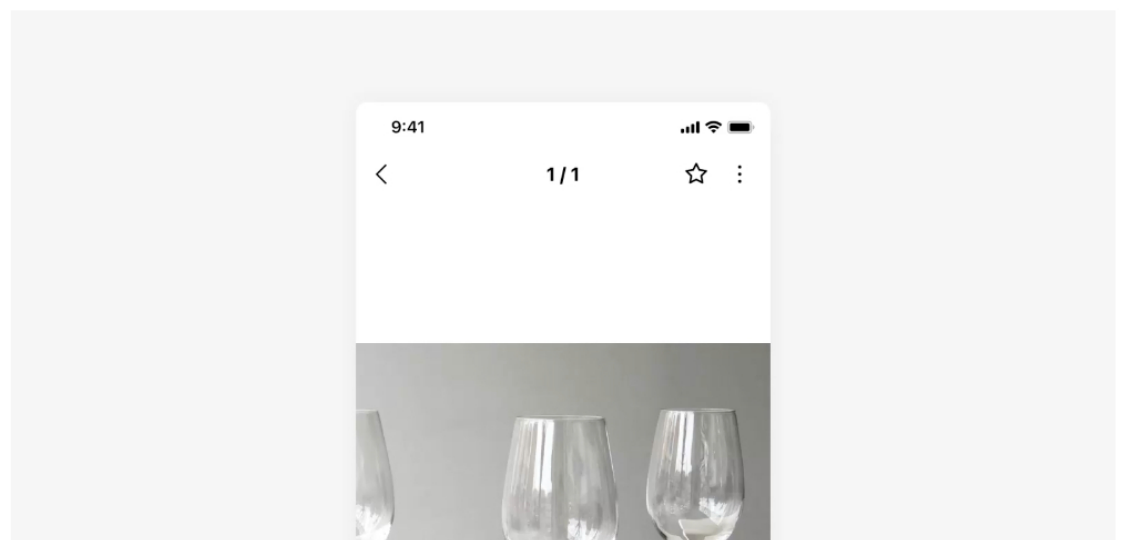

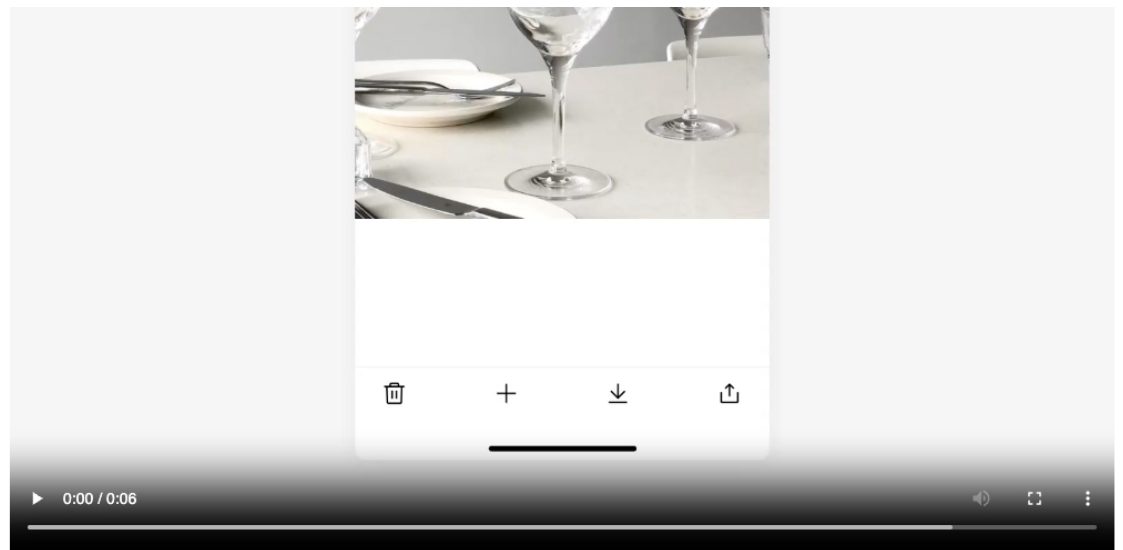

Provide feedback by switching screens. Use when exiting the current screen is the only way to change state.

Haptic

Devices can provide feedback with physical touch such as vibration. When providing haptic feedback, it can generate synergy with visuals in the interface and encourage user participation and interest. However, there is a large difference in the experience per user device, so it should not be used as a main feedback element.

Haptic feedback is provided when there is a noticeable impact of a change in status through user actions, such as account conversion, successful payment, or subscription. It also represents a threshold when a state change occurs through a user action represented by gradual changes and snapping. (i.e. scroll wheel, snap to center or pull to refresh)