The left_join verb

JOINING DATA WITH DPLYR



Chris Cardillo

Data Scientist



Batmobile vs. Batwing



Recall: inner join

```
inventory_parts_joined <- inventories %>%
  inner_join(inventory_parts, by = c("id" = "inventory_id")) %>%
  select(-id, -version) %>%
  arrange(desc(quantity))

inventory_parts_joined
```

```
# A tibble: 258,958 x 4
  set_num part_num color_id quantity
        <chr>
                       <dbl>
                               <dbl>
   <chr>
1 40179-1 3024
                                 900
 2 40179-1 3024
                                900
 3 40179-1 3024
                                 900
 4 40179-1 3024
                                 900
 5 40179-1 3024
                                 900
 6 k34434-1 3024
                         15
                                 810
7 21010-1 3023
                         320
                                 771
 8 k34431-1 3024
                                 720
9 42083-1 2780
                                 684
10 k34434-1 3024
                                 540
# ... with 258,948 more rows
```



Filter for LEGO sets

```
batmobile <- inventory_parts_joined %>%
  filter(set_num == "7784-1") %>%
  select(-set_num)
```

```
batwing <- inventory_parts_joined %>%
  filter(set_num == "70916-1") %>%
  select(-set_num)
```

Comparing tables


batmobile

```
# A tibble: 173 x 3
   part_num color_id quantity
               <dbl>
   <chr>
                         <dbl>
1 3023
                            62
 2 2780
                            28
 3 50950
                            28
 4 3004
                            26
                            25
 5 43093
 6 3004
                            23
 7 3010
                            21
 8 30363
                            21
 9 32123b
                  14
                            19
10 3622
                            18
# ... with 163 more rows
```

batwing

```
# A tibble: 309 x 3
   part_num color_id quantity
   <chr>
               <dbl>
                         <dbl>
 1 3023
                            22
 2 3024
 3 3623
                            20
 4 11477
                            18
                            18
 5 99207
 6 2780
                            17
 7 3666
                            16
 8 22385
                            14
 9 3710
                            14
10 99563
                            13
# ... with 299 more rows
```

Parts and pieces

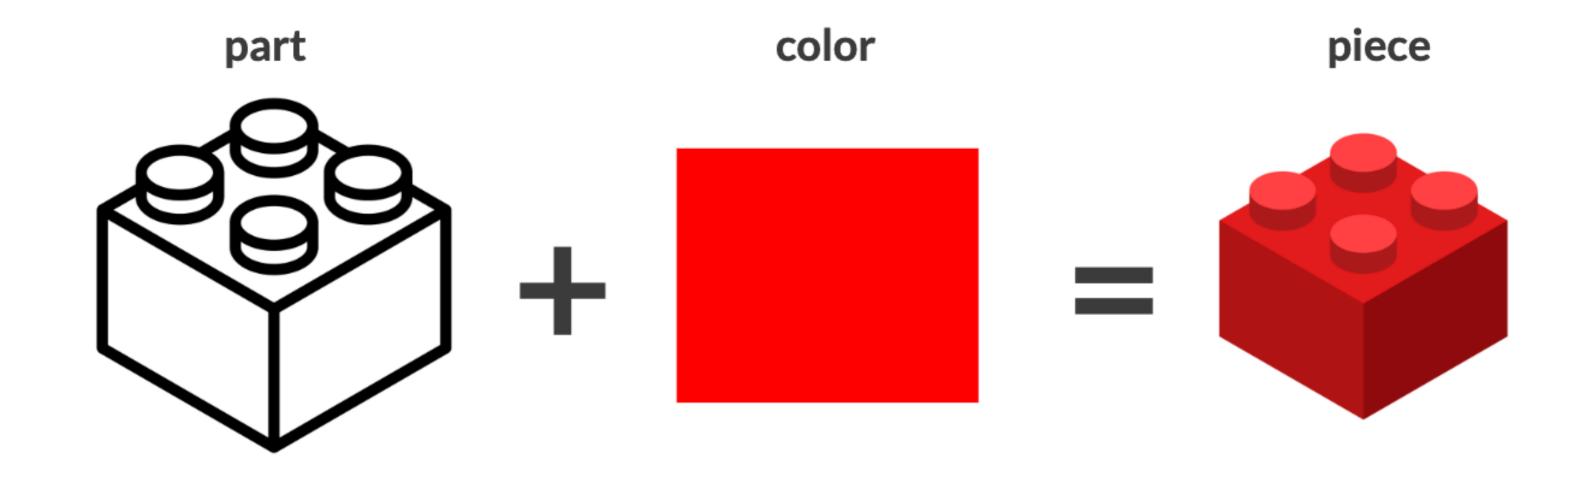

Joining with multiple columns

```
batmobile %>%
inner_join(batwing, by = c("part_num", "color_id"), suffix = c("_batmobile", "_batwing"))
```

```
# A tibble: 45 x 4
   part_num color_id quantity_batmobile quantity_batwing
   <chr>
               <dbl>
                                   <dbl>
                                                    <dbl>
1 2780
                                      28
                                                        17
2 50950
3 3004
                                      26
                  71
4 43093
5 3004
 6 3622
                                      18
7 4286
                                      16
8 3039
                                      12
9 4274
                  71
10 3001
                                      11
# ... with 35 more rows
```

The left join

```
batmobile %>%
  left_join(batwing, by = c("part_num", "color_id"), suffix = c("_batmobile", "_batwing"))
```

```
# A tibble: 173 x 4
   part_num color_id quantity_batmobile quantity_batwing
   <chr>
               <dbl>
                                   <dbl>
                                                    <dbl>
1 3023
                  72
                                      62
                                                        NA
2 2780
                                      28
                                                        17
3 50950
                                      28
4 3004
                  71
                                      26
5 43093
6 3004
                                      23
7 3010
                                                        NA
8 30363
                                                        NA
9 32123b
                  14
                                      19
                                                        NA
10 3622
                                      18
# ... with 163 more rows
```

Join review

Left join Inner join first table second table first table second table a

Let's practice!

JOINING DATA WITH DPLYR



The right-join verb

JOINING DATA WITH DPLYR



Chris Cardillo

Data Scientist




The right join


```
batmobile %>%
  left_join(batwing, by = c("part_num", "color_id"), suffix = c("_batmobile", "_batwing"))
```

```
# A tibble: 173 x 4
   part_num color_id quantity_batmobile quantity_batwing
   <chr>
               <dbl>
                                   <dbl>
                                                     <dbl>
1 3023
                  72
                                      62
                                                        NA
2 2780
                                      28
                                                        17
3 50950
                                      28
4 3004
                  71
                                      26
5 43093
6 3004
                                      23
7 3010
                                                        NA
8 30363
                                                        NA
9 32123b
                  14
                                      19
                                                        NA
10 3622
                                      18
# ... with 163 more rows
```

The left and right join

Left join Right join second table first table

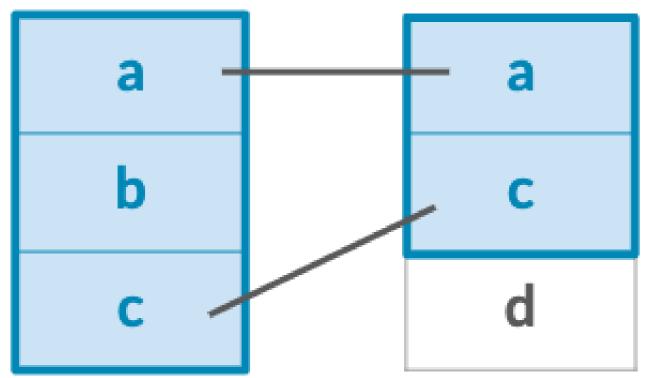

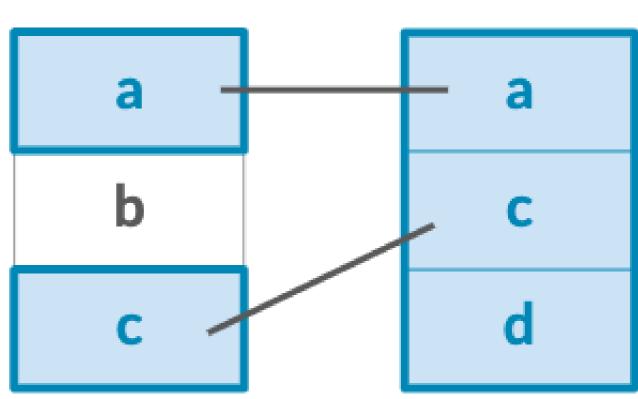

second table

Mirror images

```
batmobile %>%
  right_join(batwing, by = c("part_num", "color_id"), suffix = c("_batmobile", "_batwing"))
```

```
# A tibble: 312 x 4
   part_num color_id quantity_batmobile quantity_batwing
   <chr>
               <dbl>
                                   <dbl>
                                                     <dbl>
1 3023
                                      NA
                                                        22
2 3024
3 3623
                                                        20
                                      10
4 11477
                                                        18
5 99207
                                                        18
6 2780
                                                        17
                                      28
7 2780
                                                        17
8 3666
                                                        16
9 22385
                                                        14
10 3710
                                                        14
# ... with 302 more rows
```

Count and sort

```
sets %>%
count(theme_id, sort = TRUE)
```

```
# A tibble: 569 x 2
  theme_id
     <dbl> <int>
       501
            122
1
       494 111
       435 94
       505 94
       632
       371
            89
       497
            86
       503
             82
            78
       516
10
       220
# ... with 559 more rows
```

Inner join

```
sets %>%
count(theme_id, sort = TRUE) %>%
inner_join(themes, by = c("theme_id" = "id"))
```

```
# A tibble: 569 x 4
  theme_id n name
                                 parent_id
     <dbl> <int> <chr>
                                     <dbl>
       501 122 Gear
                                        NA
       494 111 Friends
                                        NA
 3
       435 94 Ninjago
                                       NA
       505
             94 Basic Set
                                       504
       632 93 Town
                                       504
             89 Supplemental
       371
                                       365
             86 Books
       497
                                      NA
             82 Key Chain
       503
                                       501
             78 Duplo and Explore
       516
                                       507
 9
10
       220
             72 City
                                       217
# ... with 559 more rows
```

Right join

```
sets %>%
count(theme_id, sort = TRUE) %>%
right_join(themes, by = c("theme_id" = "id"))
```

```
# A tibble: 665 x 4
  theme_id n name parent_id
    <dbl> <int> <chr> <dbl>
       1 58 Technic
       2 1 Arctic Technic
       3 4 Competition
3
           13 Expert Builder
       5 6 Model
       6 7 Airport
       7 20 Construction
       8 NA Farm
       9 2 Fire
9
10
       10 3 Harbor
# ... with 655 more rows
```

Replace NAs

```
library(tidyr)

sets %>%
  count(theme_id, sort = TRUE) %>%
  right_join(themes, by = c("theme_id" = "id")) %>%
  replace_na(list(n = 0))
```

```
# A tibble: 665 x 4
  theme_id
                    parent_id
          n name
     <dbl> <dbl> <chr>
                              <dbl>
        1 58 Technic
        2 1 Arctic Technic
        3 4 Competition
        4 13 Expert Builder
        5 6 Model
        6 7 Airport
        7 20 Construction
        8 0 Farm
        9 2 Fire
       10
          3 Harbor
# ... with 655 more rows
```

Let's practice!

JOINING DATA WITH DPLYR



Joining tables to themselves

JOINING DATA WITH DPLYR



Chris Cardillo

Data Scientist




The themes table

themes

```
# A tibble: 665 x 3
     id name
            parent_id
  <dbl> <chr>
                         <dbl>
      1 Technic
      2 Arctic Technic
      3 Competition
      4 Expert Builder
      5 Model
      6 Airport
      7 Construction
      8 Farm
    9 Fire
     10 Harbor
# ... with 655 more rows
```

The hierarchy of themes

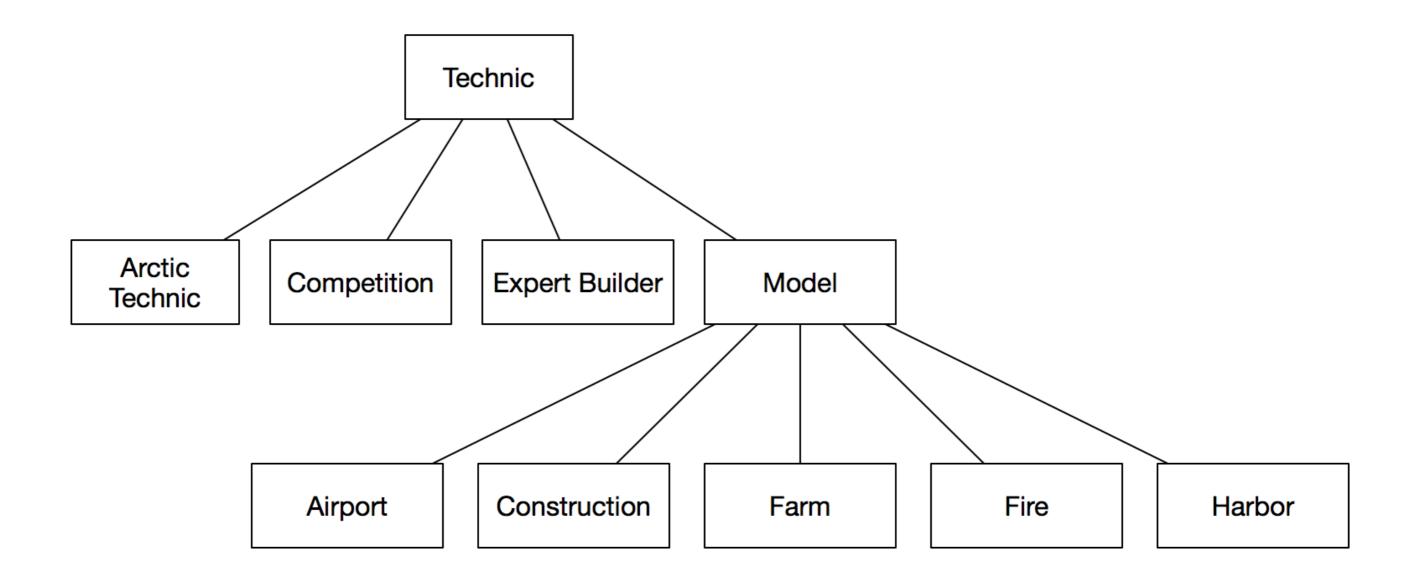

Child-parent table

```
themes %>%
inner_join(themes, by = c("parent_id" = "id"))
```

```
# A tibble: 544 x 5
    id name.x parent_id name.y parent_id.y
  <dbl> <chr> <dbl> <chr>
                                    <dbl>
     2 Arctic Technic
                        1 Technic
                                       NA
     3 Competition
                       1 Technic
                                       NA
     4 Expert Builder
                        1 Technic
     5 Model
                       1 Technic
                                       NA
     6 Airport
                       5 Model
     7 Construction
                       5 Model
           5 Model
     8 Farm
   9 Fire
                        5 Model
    10 Harbor
                        5 Model
    11 Off-Road
                        5 Model
10
# ... with 534 more rows
```

Adding a suffix

```
themes %>%
inner_join(themes, by = c("parent_id" = "id"), suffix = c("_child", "_parent"))
```

```
# A tibble: 544 x 5
   <dbl> <chr> <dbl> <chr>
                         <dbl>
   2 Arctic Technic
1
                  1 Technic
                                  NA
   3 Competition
                 1 Technic
                                  NA
   4 Expert Builder 1 Technic
   5 Model
                 1 Technic
   6 Airport 5 Model
   7 Construction 5 Model
        5 Model
  8 Farm
       5 Model
  9 Fire
   10 Harbor
                 5 Model
   11 Off-Road
                  5 Model
10
# ... with 534 more rows
```


Lord of the Rings themes: parent

```
themes %>%
  inner_join(themes, by = c("parent_id" = "id"), suffix = c("_child", "_parent")) %>%
  filter(name_child == "The Lord of the Rings")
```

Lord of the Rings themes: children

```
themes %>%
  inner_join(themes, by = c("parent_id" = "id"), suffix = c("_child", "_parent")) %>%
  filter(name_parent == "The Lord of the Rings")
```

The Lord of the Rings trilogy

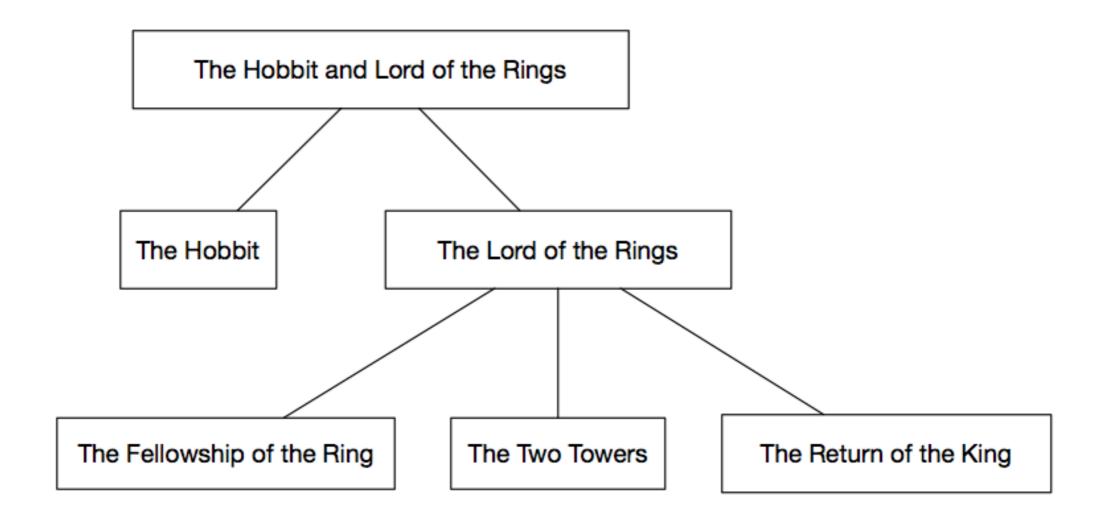

Let's practice!

JOINING DATA WITH DPLYR

