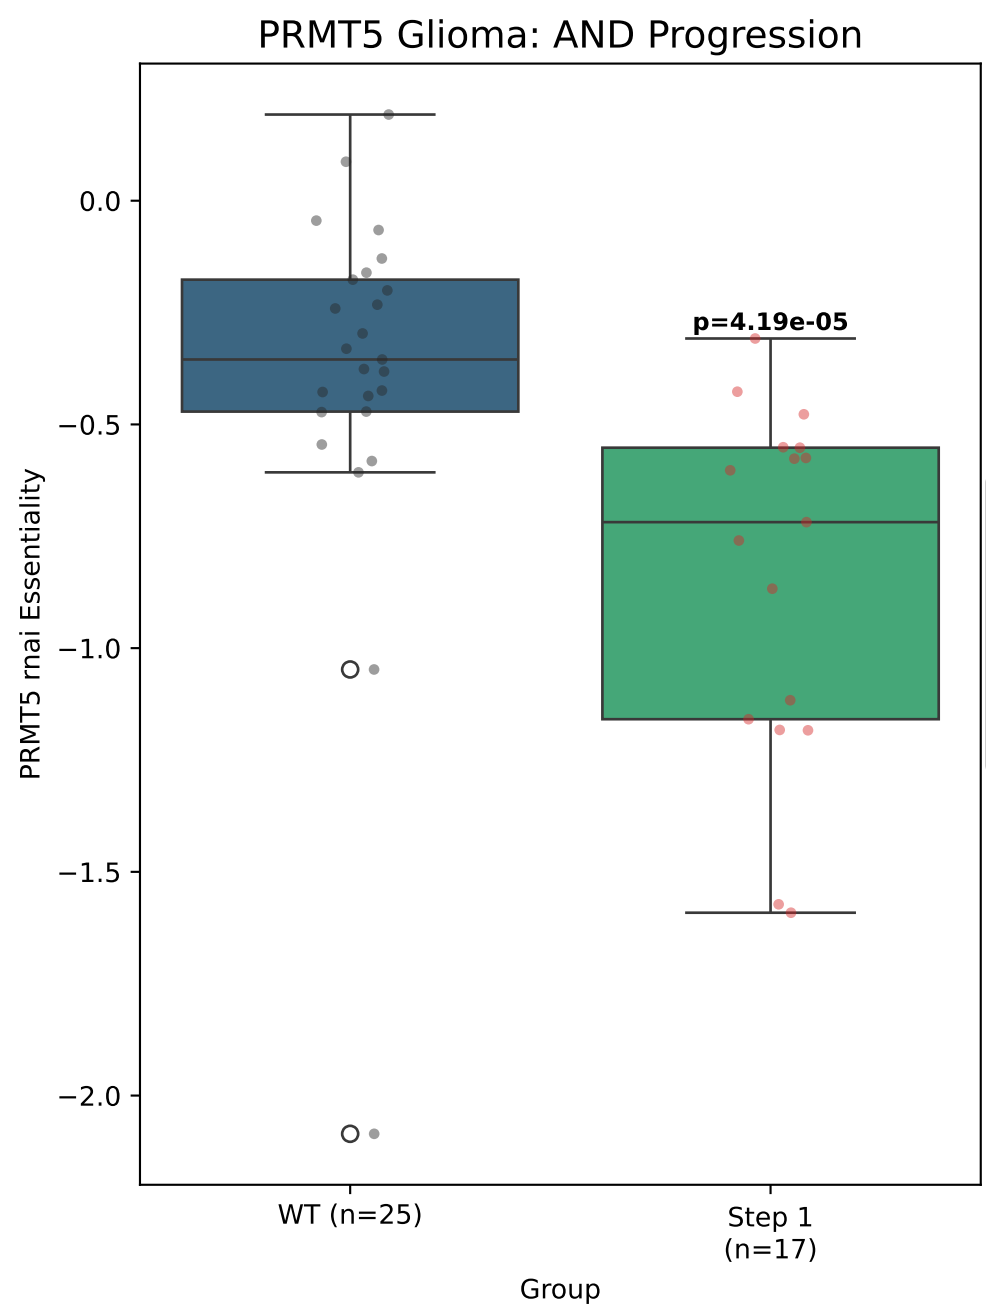


```
STEP GROUPS (discovery masks: AND parent subset)
Red points: sensitive. Blue points: resistant.
p-values are the discovery Wilcoxon stats used for selection.
-------------------------
WT (n=25):
    Baseline (WT), n=25 cell lines

Step 1:
    MTAP_lowexp     discovery=MTAP_lowexp
```

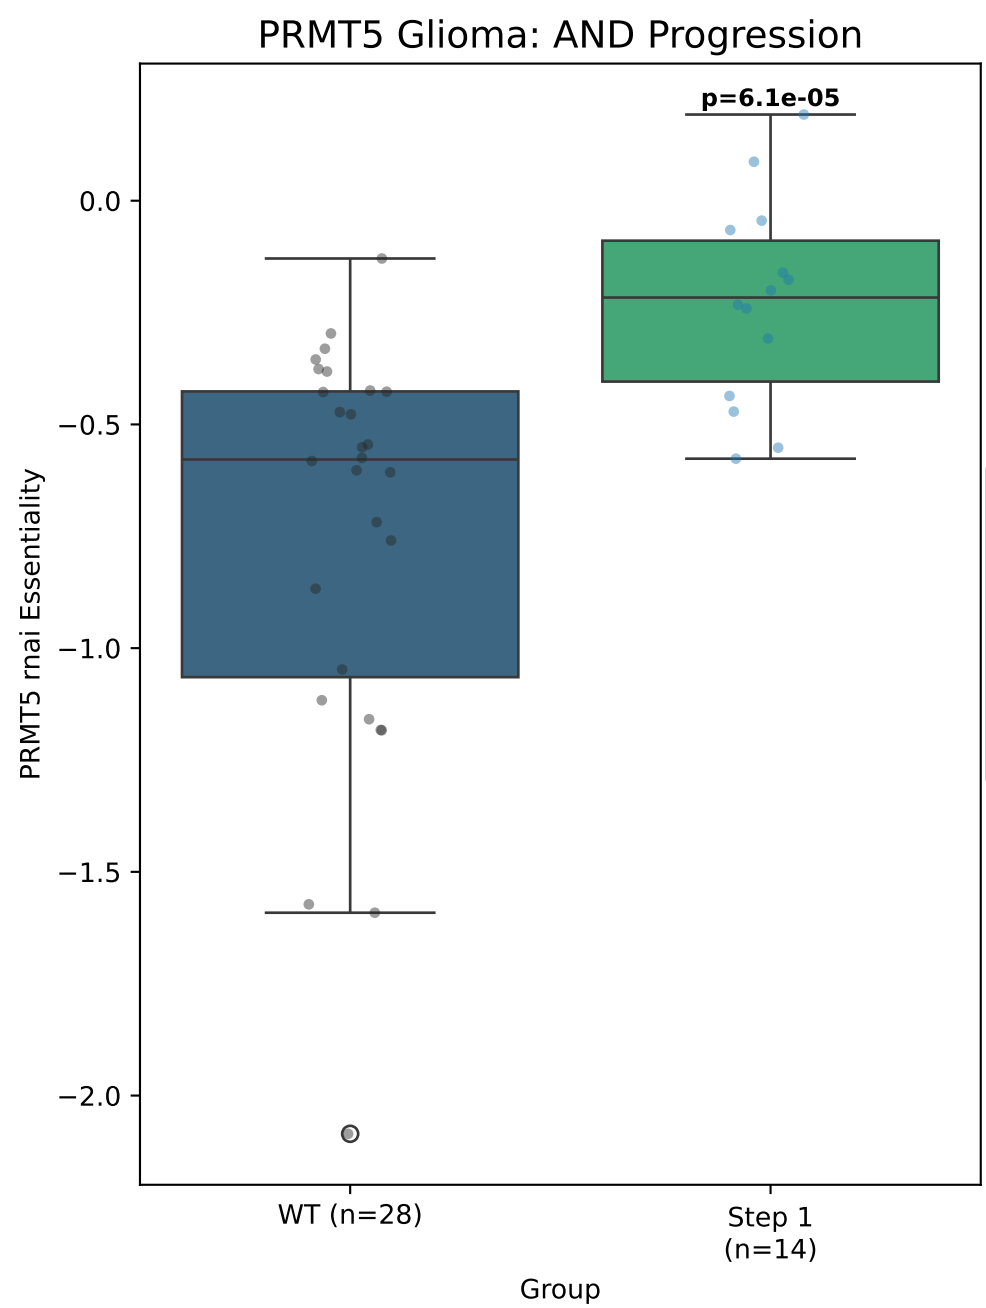


```
STEP GROUPS (discovery masks: AND parent subset)
Red points: sensitive. Blue points: resistant.
p-values are the discovery Wilcoxon stats used for selection.
-------------------------
WT (n=28):
    Baseline (WT), n=28 cell lines

Step 1:
    SH3BGR_highexp
    discovery=SH3BGR_highexp
```

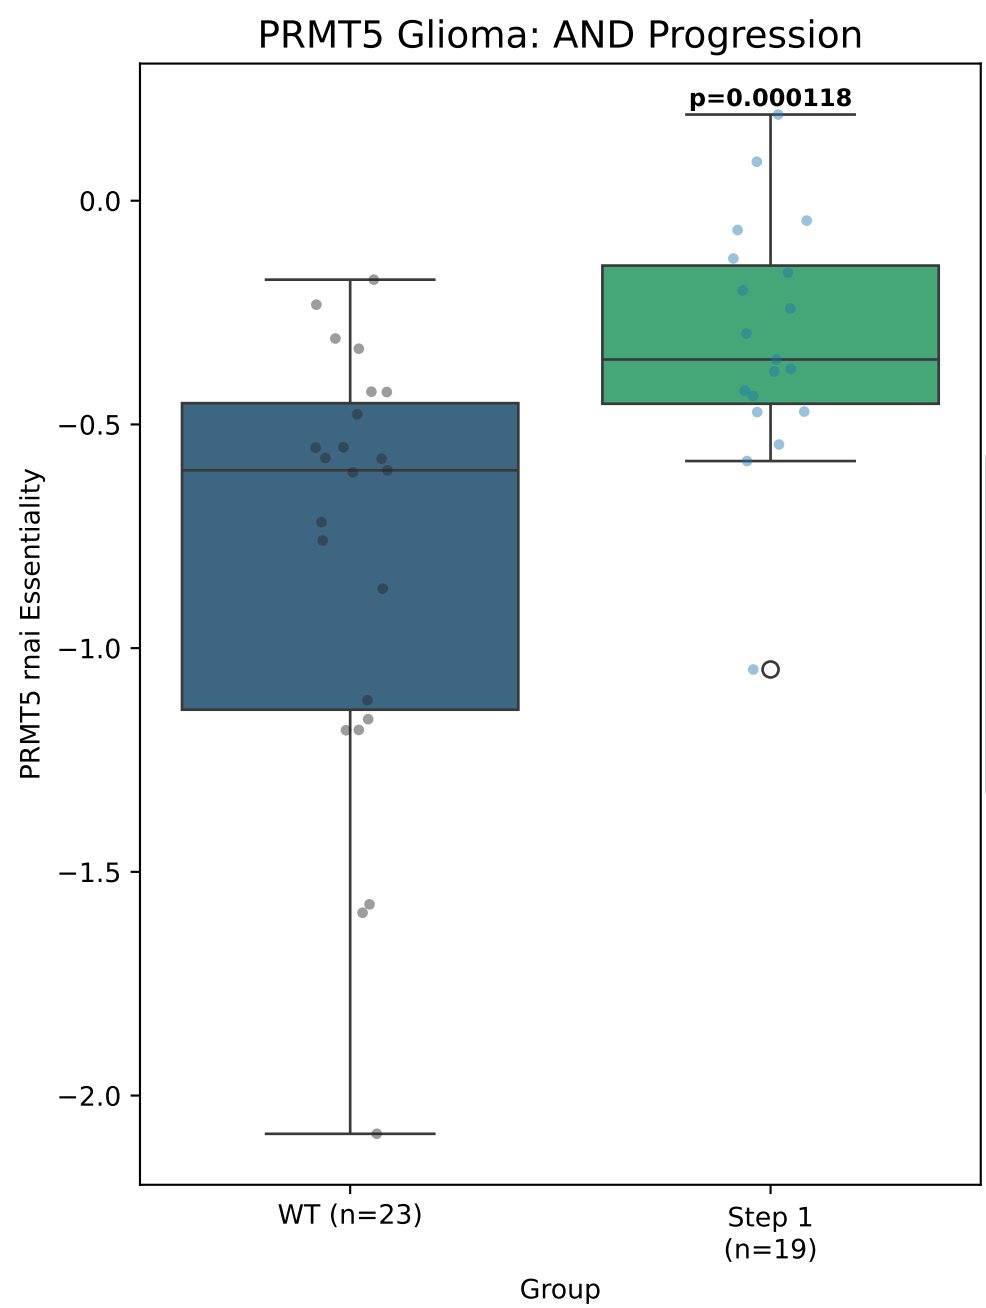


```
STEP GROUPS (discovery masks: AND parent subset)
Red points: sensitive. Blue points: resistant.
p-values are the discovery Wilcoxon stats used for selection.
-------------------------
WT (n=23):
    Baseline (WT), n=23 cell lines

Step 1:
    MTAP_homdel_inverse | MTAP_ko_inverse
    discovery=MTAP_homdel_inverse;MTAP_ko_in
    verse
```