


(a) F_{comp} vs active qubits K
(random routing, $u_j \sim \mathcal{U}[-U_j, U_j]$)



(b) Calibration cost: $O(K^2)$ naive vs $O(K)$ multiplexed

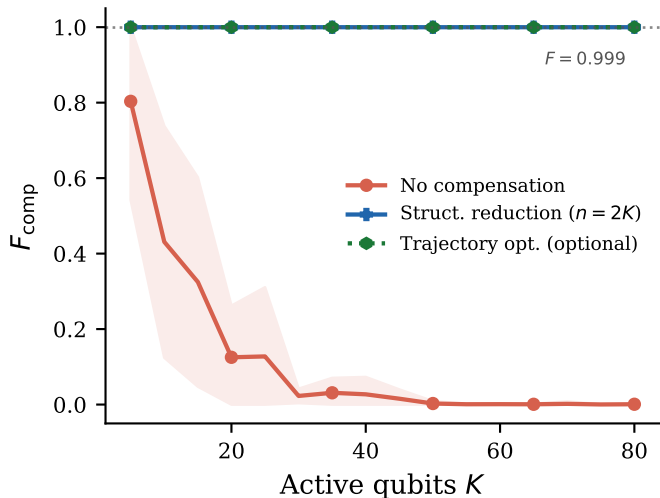