




(a) Sub-array: F_{comp} at $n_{\text{exp}} = 3K$
(shaded $\pm 1\sigma$, $N_{\text{trials}} = 15$)

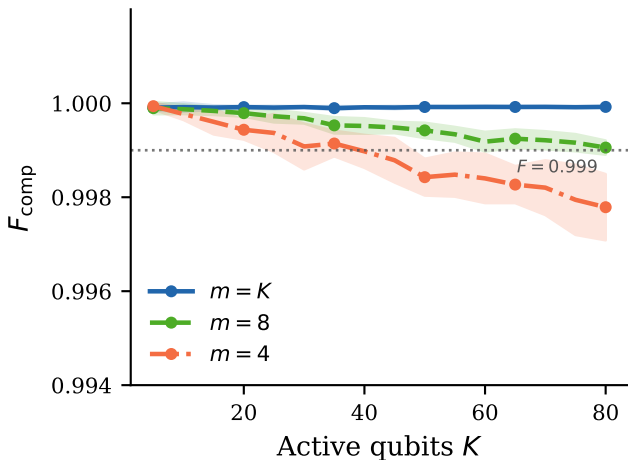

(b) Calibration overhead vs K
(rounds to $F > 0.999$)

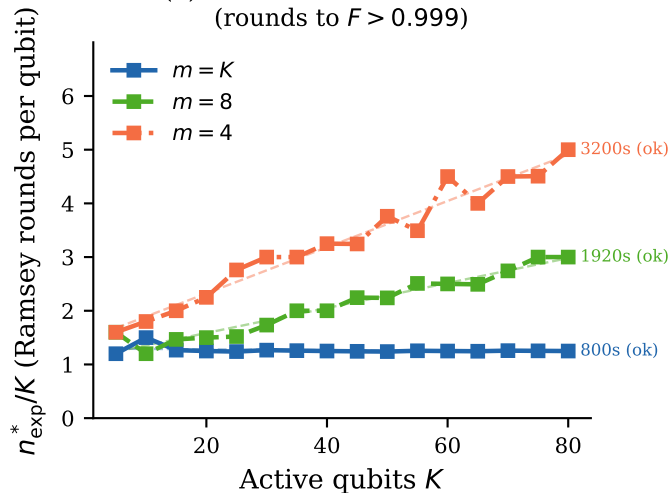

(c) Prior mismatch robustness
($n = 2K$, $\pm 1\sigma$, $N_{\text{trials}} = 15$)

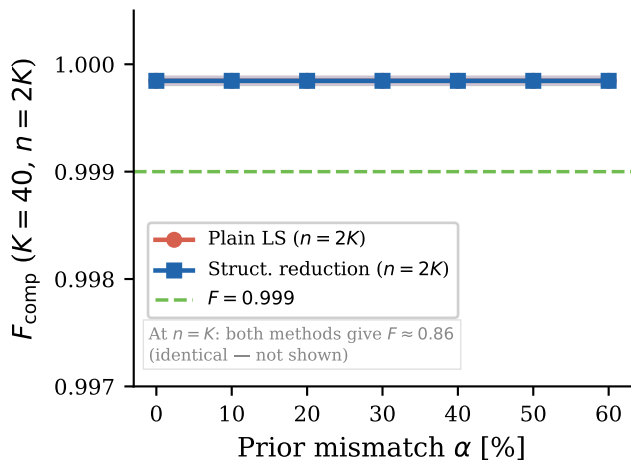

(d) Dense K scan with stochastic noise
($\sigma_{\text{self}} = \sigma_{\varphi}$, $n_{\text{exp}} = 2K$, $\pm 2\sigma$)

