
Contract No. R-24787

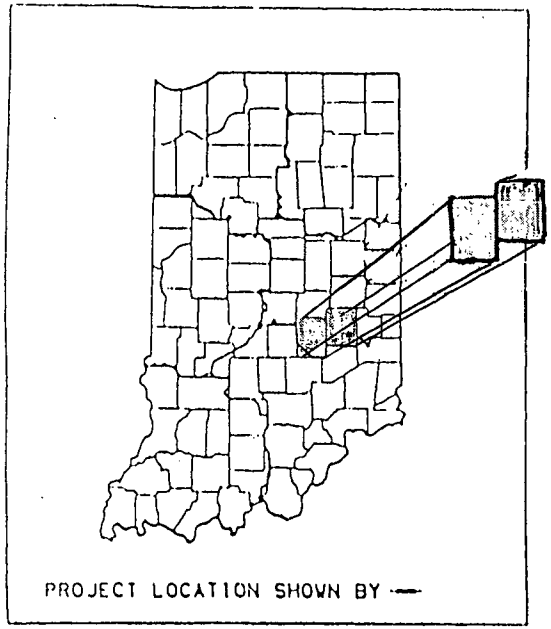


Des. No. 9903400

PROJECT LIMITS:

Sta. 0+000 to Sta. 14+507

INDIANA
DEPARTMENT OF TRANSPORTATION

RRR project on SR44 from I-74, SE ramp, in Shelby County to Mud Creek, in Homer, in Rush County.
(RP 38+54 to RP 47+64)

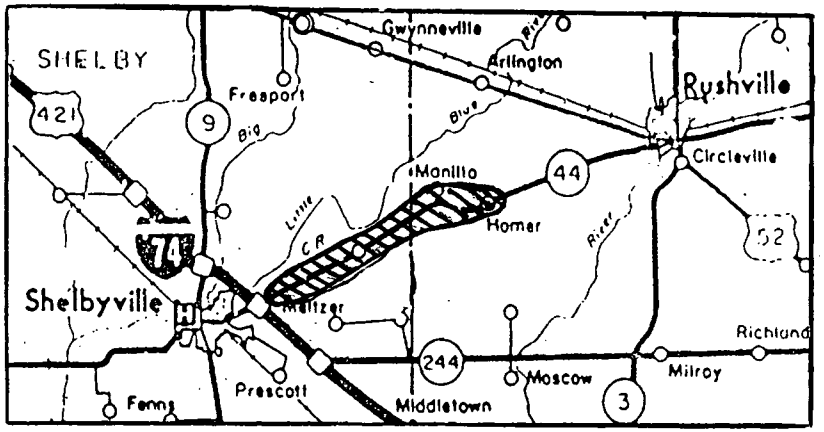

QC/QA PG BINDER 64-22, MAINLINE
QC/QA PG BINDER 64-22, SHOULDER

OBSTRUCTION FREE ZONE TO BE 9.65m FROM ℄

INDIANA DEPARTMENT OF TRANSPORTATION
STANDARD SPECIFICATIONS DATED 1995
TO BE USED WITH THESE PLANS

ADT
MAINLINE ESAL'S 1,550,000 SHOULDER ESAL'S 1,550,000

STEVEN D. BOYER
REGISTERED
No. 900346
STATE OF INDIANA
PROFESSIONAL ENGINEER

RECOMMENDED FOR APPROVAL: 11/10/00
DATE
HEAD DESIGN ENGINEER

ROBERT E. REBLING
REGISTERED
No. 16539
STATE OF INDIANA
PROFESSIONAL ENGINEER

APPROVED FOR LETTING: 11/10/00
DATE
Robert E. Rebling
DEVELOPMENT ENGINEER

CONTRACT R-24787
Des. No. 9903400

INDEX

SHEET NO.	DRAWING INDEX
1	TITLE
2	INDEX
3-4	METRIC STANDARD DRAWINGS INDEX
5-8	STRIP MAP
9	TYPICAL MAINLINE SECTION
10	TYPICAL IMPROVED PUBLIC ROAD & COMMERCIAL DRIVE APPROACH
11	TYPICAL IMPROVED PRIVATE DRIVE APPROACH
12	TYPICAL UNIMPROVED DRIVE APPROACH
13	TYPICAL UNIMPROVED MAILBOX APPROACH
14	TYPICAL TURN LANE & PASSING BLISTER SECTION
15-19	AUXILLARY LANE LOCATIONS & LENGTHS
20	TYPICAL HMA PATCHING SECTION
21	HMA PATCHING TABLE
22	CURVES & CURVE DATA
23-29	SUPERELEVATION TRANSITION DETAIL
30-39	STRUCTURE DATA TABLE
40	SAFETY SHAPE RAIL SECTION
40a	TEMPORARY CONCRETE BARRIER LAYOUT, SHOULDER WIDENING & STRIPING
41-45	GUARDRAIL PLAN SHEET
46-58	UTILITY INVOLVEMENT LOCATIONS
59	DETOUR MAP
62-65	SUGGESTED DETOUR ROUTE ASSEMBLIES
66-68	SUGGESTED DETOUR SIGNS & BARRICADES
69-165	FULL SIZE CROSS SECTION SHEETS

Metric Standard Drawing Index
Effective for Lettings between 1/1/2000 and 4/30/2000

Contract: R-24787

				Drawing	FHWA
205	TECD	02	Temporary Erosion Control Ditch	09/01/1995	01/31/1996
205	TECP	03	Temporary Erosion Control Perimeter	04/03/1995	08/01/1995
402	SHCG	02	Shoulder Corrugations	05/01/1998	05/01/1998
601	CWGS	01	Curved W-Beam Guardrail System	09/01/1998	09/01/1998
601	CWGS	02	Curved W-Beam Guardrail System	01/03/2000	01/03/2000
601	CWGS	03	Curved W-Beam Guardrail System	09/01/1999	09/01/1999
601	CWGS	04	Curved W-Beam Guardrail System	04/03/1995	08/01/1995
601	GRET	06	Guardrail End Treatment	09/01/1998	09/01/1998
601	GRET	08	Guardrail End Treatment	09/01/1998	09/01/1998
601	GRET	09	Guardrail End Treatment	09/01/1998	09/01/1998
601	TBGC	01	Thrie-Beam Guardrail Components	04/01/1996	05/23/1996
601	TBGC	02	Thrie-Beam Guardrail Components	04/01/1996	05/23/1996
601	TTGB	01	Guardrail Transition Type TGB	01/03/2000	01/03/2000
601	TTGB	02	Guardrail Transition Type TGB	01/04/1999	01/04/1999
601	TTGB	03	Guardrail Transition Type TGB	01/03/2000	01/03/2000
601	TTGB	04	Guardrail Transition Type TGB	01/03/2000	01/03/2000
601	TTGB	05	Guardrail Transition Type TGB	01/03/2000	01/03/2000
601	WBGA	01	W-Beam Guardrail Assemblies	01/03/2000	01/03/2000
601	WBGA	02	W-Beam Guardrail Assemblies	01/03/2000	01/03/2000
601	WBGA	03	W-Beam Guardrail Assemblies	09/01/1998	09/01/1998
601	WBGA	05	W-Beam Guardrail Assemblies	09/01/1999	09/01/1999
601	WBGC	01	W-Beam Guardrail Components	04/03/1995	08/01/1995
601	WBGC	02	W-Beam Guardrail Components	09/01/1999	09/01/1999
601	WBGC	03	W-Beam Guardrail Components	01/03/2000	01/03/2000
602	TCCB	01	Traffic Control Median Barrier	09/01/1998	09/01/1998
602	TCCB	02	Traffic Control Median Barrier	01/04/1999	01/04/1999
602	TCCB	04	Traffic Control Median Barrier	01/03/2000	01/03/2000
706	BCBR	04	Bridge Concrete Barrier Rail	01/04/1999	01/04/1999
706	CBRT	02	Concrete Bridge Railing Transition	09/01/1998	09/01/1998
706	CBRT	04	Concrete Bridge Railing Transition	09/01/1998	09/01/1998
715	BKFL	01	Backfill	01/02/1998	01/02/1998
715	BKFL	03	Backfill	01/02/1998	01/02/1998
715	BKFL	07	Backfill	01/02/1998	01/02/1998
715	BKFL	09	Backfill	01/02/1998	01/02/1998
715	MPES	01	Metal Pipe End Section	01/02/1998	01/02/1998
715	MPES	02	Metal Pipe End Section	01/02/1998	01/02/1998
715	MPES	03	Metal Pipe End Section	01/02/1998	01/02/1998
715	PCEX	01	Pipe Culvert Extension	01/02/1998	01/02/1998
715	PHCL	09	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	11	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	12	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	13	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	21	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	22	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	23	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PHCL	10	Pipe Height of Cover Limits	01/02/1998	01/02/1998
715	PIPE	01	Pipe	01/02/1998	01/02/1998
715	PSLC	01	Pipe Service Life Criteria	01/02/1998	01/02/1998
715	PSLC	02	Pipe Service Life Criteria	01/02/1998	01/02/1998
715	PSLC	03	Pipe Service Life Criteria	01/02/1998	01/02/1998
801	TCDT	01	Traffic Control Detour	09/01/1997	09/01/1997
801	TCDT	03	Traffic Control Detour	07/03/1995	08/01/1995
801	TCDV	01	Traffic Control Devices	09/01/1999	09/01/1999
801	TCDV	04	Traffic Control Devices	01/03/2000	01/03/2000
801	TCDV	05	Traffic Control Devices	09/01/1997	09/01/1997
801	TCDV	06	Traffic Control Devices	09/01/1997	09/01/1997
801	TCDV	07	Traffic Control Devices	09/01/1997	09/01/1997
801	TCDV	10	Traffic Control Devices	09/01/1999	09/01/1999
801	TCDV	11	Traffic Control Devices	09/01/1999	09/01/1999
801	TCFO	01	Traffic Control Flagger Operations	09/01/1997	09/01/1997
801	TCFO	02	Traffic Control Flagger Operations	04/01/1996	05/23/1996
801	TCLC	07	Traffic Control Lane Closure	09/01/1997	09/01/1997
801	TCLC	08	Traffic Control Lane Closure	07/03/1995	07/31/1995
801	TCLG	01	Traffic Control Legend	01/02/1998	01/02/1998
801	TCSN	01	Traffic Control Signs	07/03/1995	07/31/1995
801	TCSN	02	Traffic Control Signs	09/01/1997	09/01/1997
801	TCSN	03	Traffic Control Signs	07/03/1995	07/31/1995
801	TCSN	04	Traffic Control Signs	09/01/1997	09/01/1997
801	TCSN	08	Traffic Control Signs	07/03/1995	07/31/1995
801	TCSN	09	Traffic Control Signs	01/02/1996	02/05/1996

Microsoft Excel

Metric Standard Drawing Index
Effective for Lettings between 1/1/2000 and 4/30/2000

Contract: R-24787


				Drawing	FHWA
801	TCSN	11	Traffic Control Signs	09/01/1997	09/01/1997
801	TCSN	12	Traffic Control Signs	09/01/1999	09/01/1999
801	TCSN	13	Traffic Control Signs	09/01/1999	09/01/1999
801	TCTC	05	Traffic Control Temporary Closure	05/01/1997	12/12/96
808	MKNB	04	Markings Narrow Bridge	01/03/2000	01/03/2000
808	MKRM	09	Markings Raised Markers	03/01/1995	04/18/1995
808	MKRM	11	Markings Raised Markers	01/03/2000	01/03/2000
808	MKRM	10	Markings Raised Markers	09/01/1998	09/01/1998


Microsoft Excel

CONTRACT R-24787
OES. NO. 9903400

STRIP MAP

RRR project on SR44 from I-74, SE ramp, in Shelby County to Mud Creek, in Homer, in Rush County.



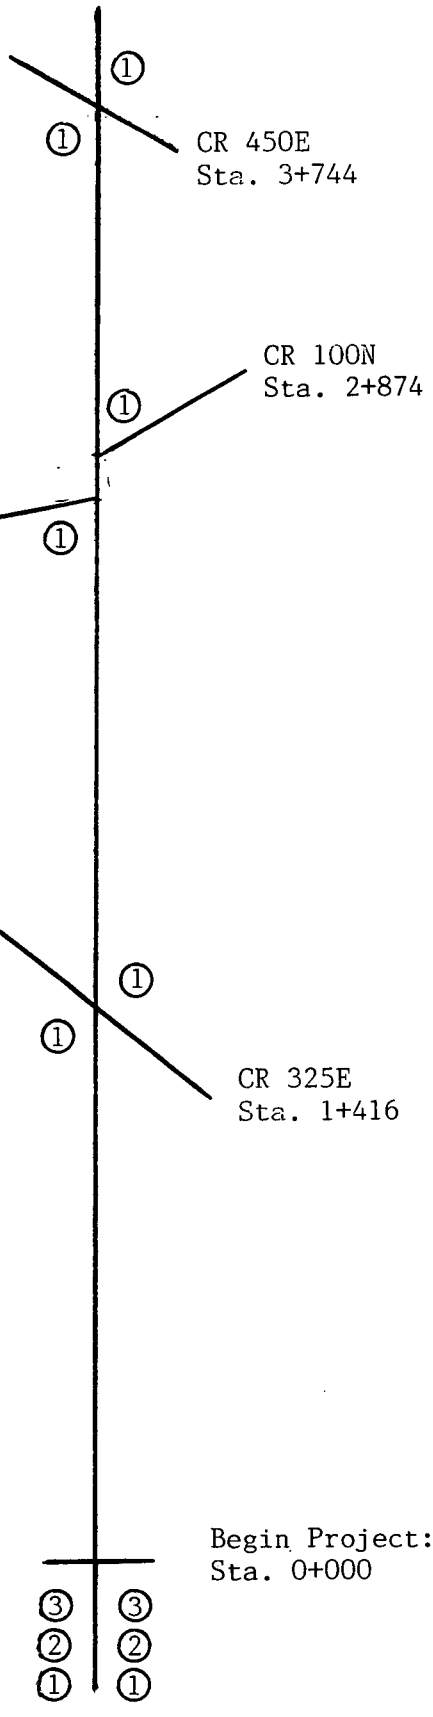

LEGEND


(1) CONSTRUCTION SIGN XW20-1



(2) CONSTRUCTION SIGN XG20-1




(3) CONSTRUCTION SIGN XG20-2



CONTRACT R-24787
Des. No. 9903400

STRIP MAP

RRR project on SR44 from I-74, SE ramp, in Shelby County to Mud Creek, in Homer, in Rush County.

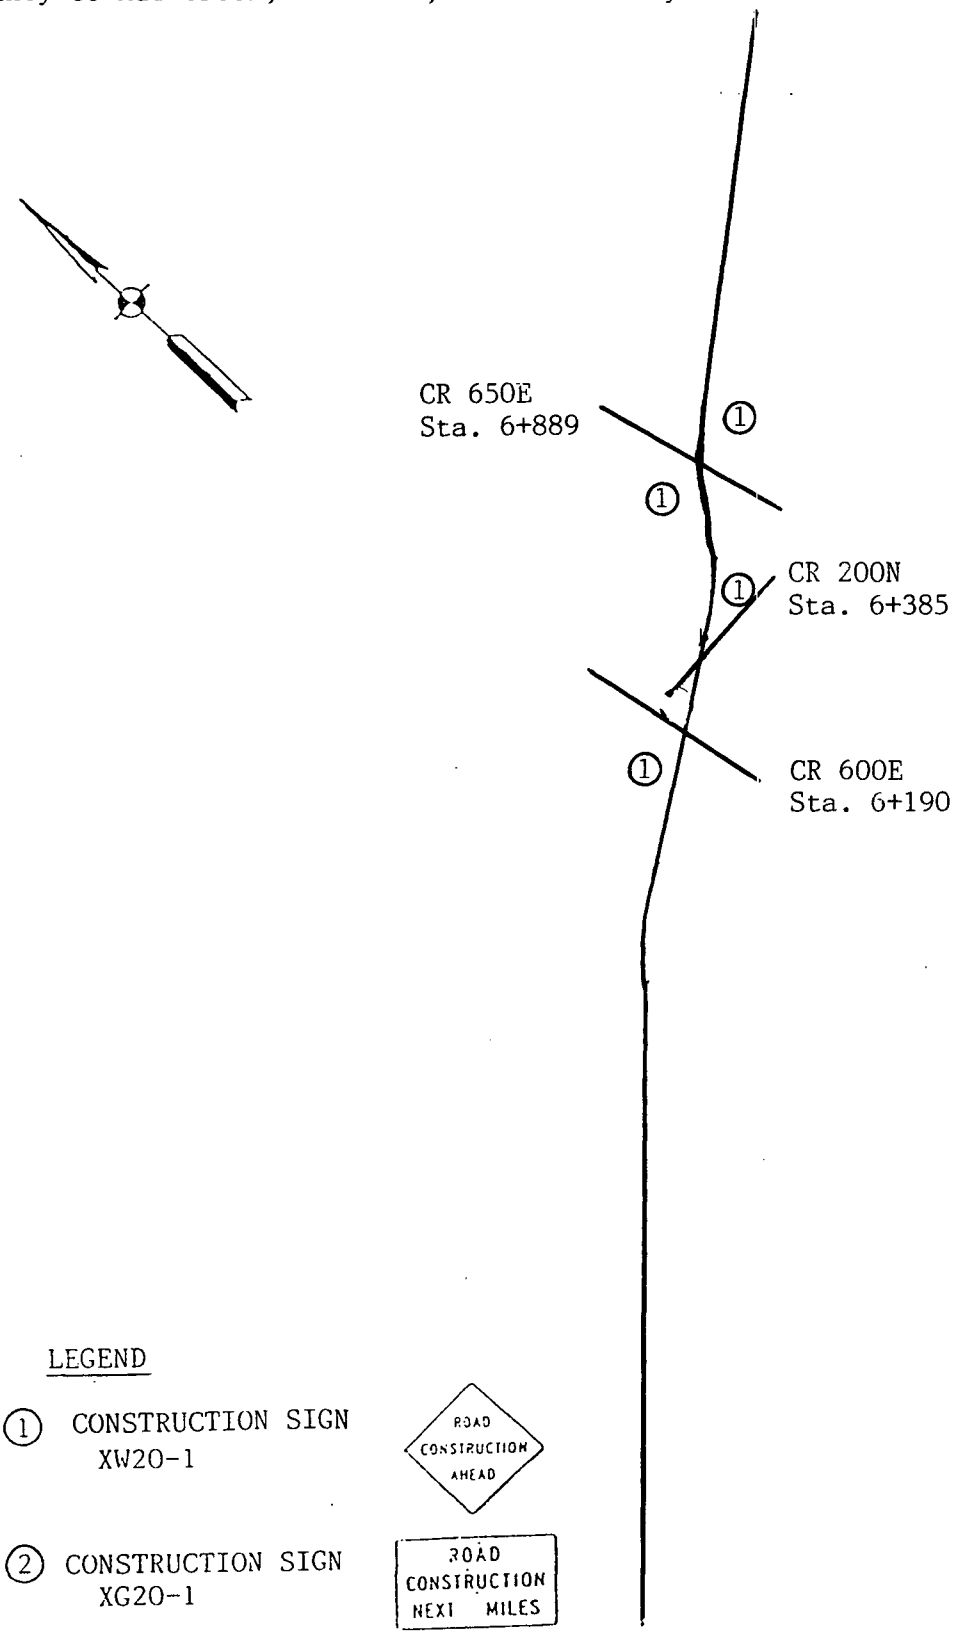


LEGEND

1. CONSTRUCTION SIGN XW20-1

2. CONSTRUCTION SIGN XG20-1


3. CONSTRUCTION SIGN XG20-2



CONTRACT R-24787
Des. No. 9903400

STRIP MAP

RRR project on SR44 from I-74, SE ramp, in Shelby County to Mud Creek, in Homer, in Rush County.

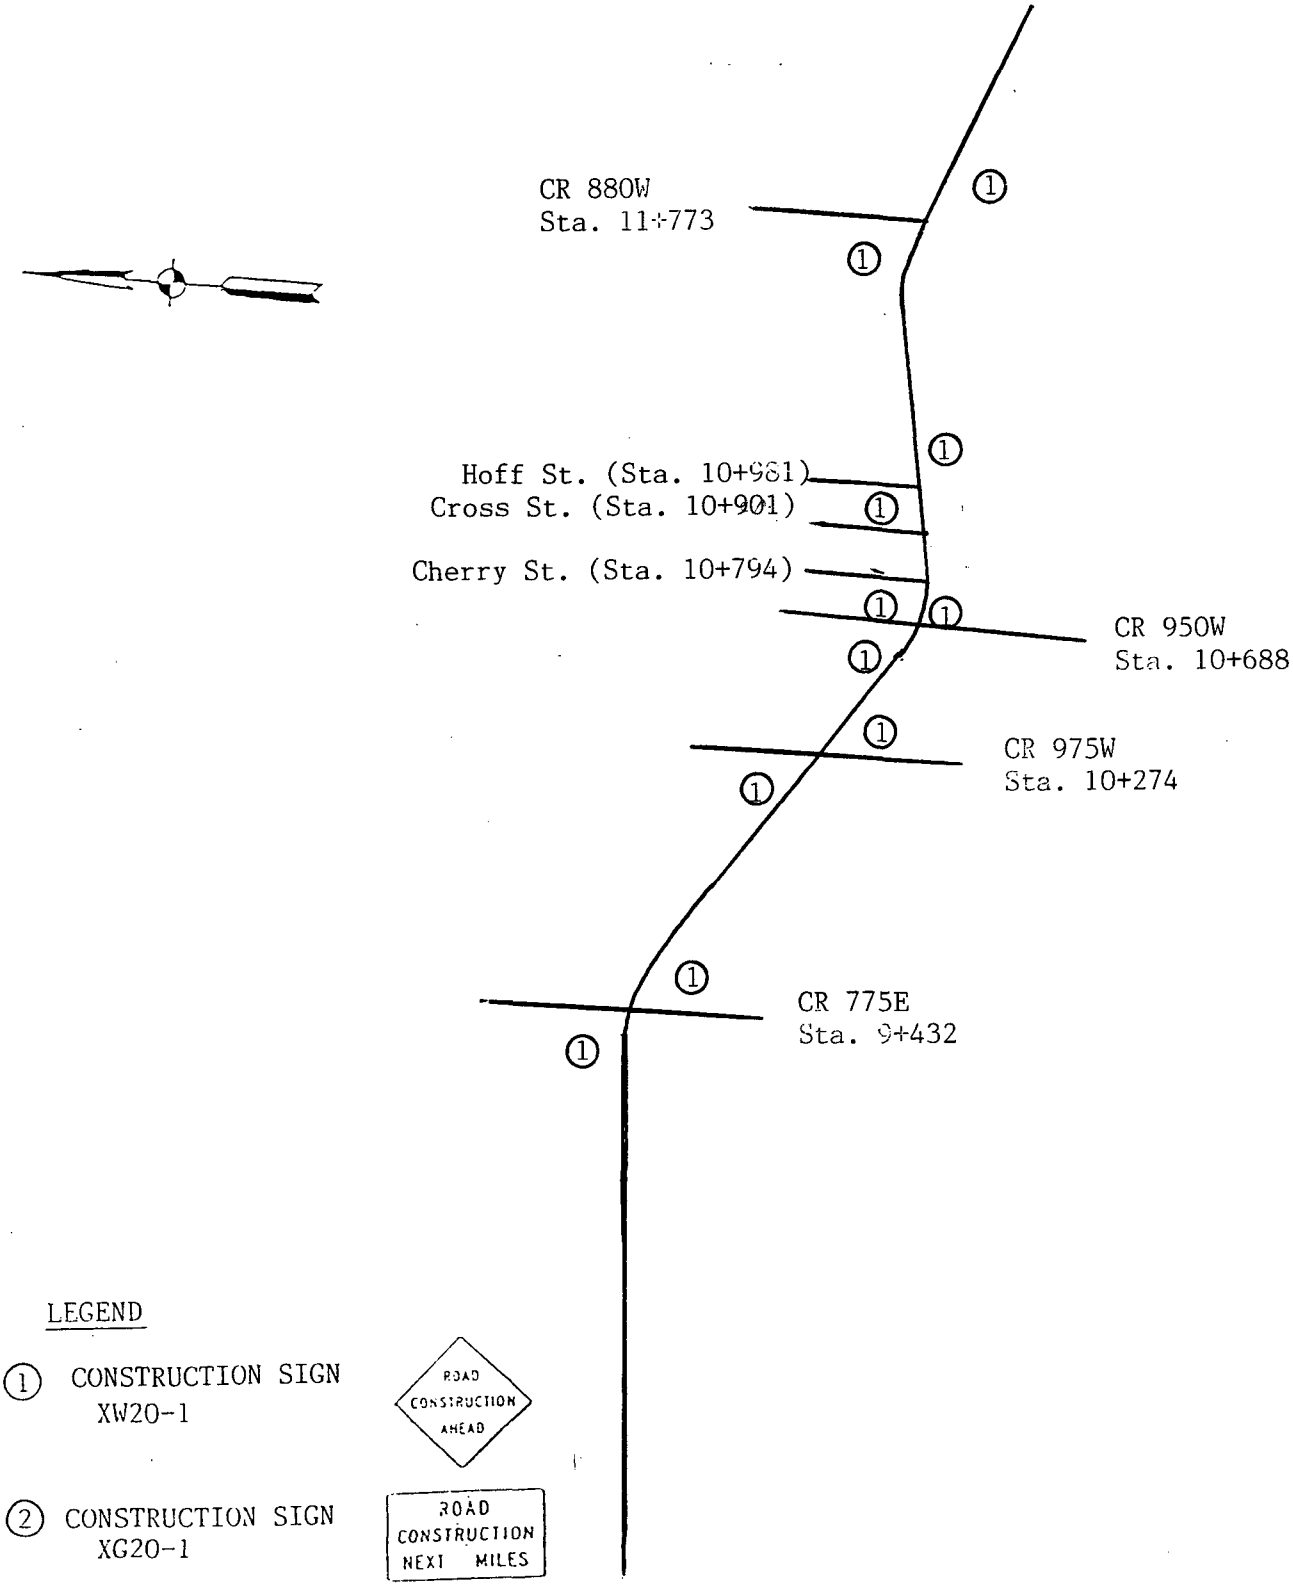


LEGEND

(1) CONSTRUCTION SIGN XW20-1

(2) CONSTRUCTION SIGN XG20-1


(3) CONSTRUCTION SIGN XG20-2




CONTRACT R-24787
Des. No. 9903400

STRIP MAP

RRR project on SR44 from I-74, SE ramp, in Shelby County to Mud Creek, in Homer, in Rush County.



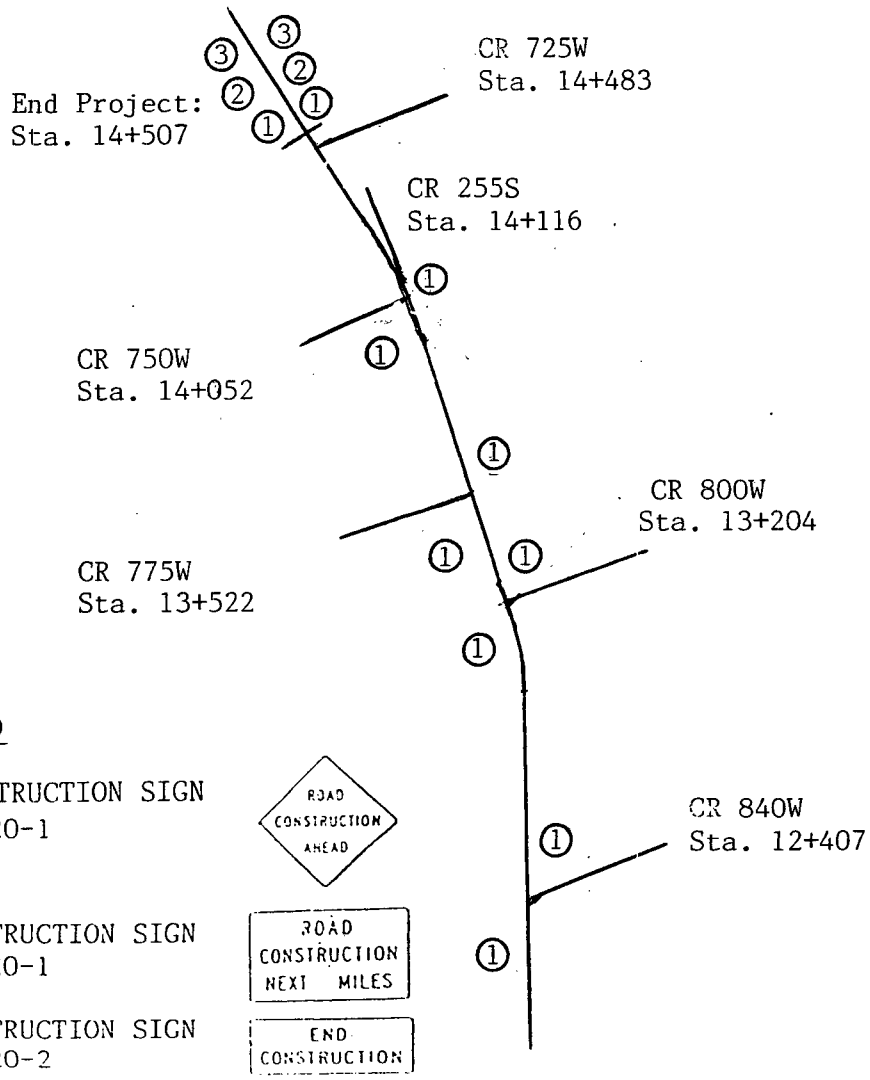


LEGEND


① CONSTRUCTION SIGN XW20-1

② CONSTRUCTION SIGN XG20-1

③ CONSTRUCTION SIGN XG20-2



CONTRACT R-24787
DES. NO. 9903400

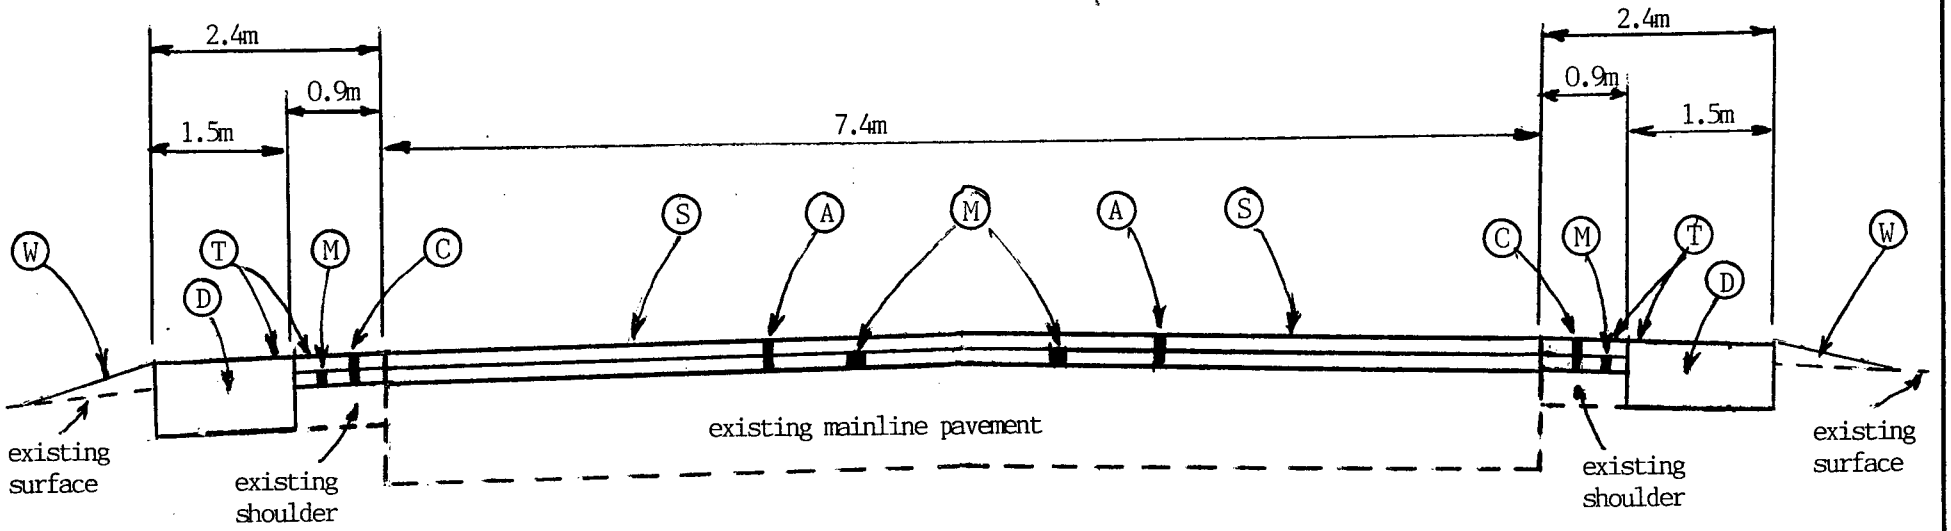

TYPICAL SECTION

Sta. 0+000 to Sta. 14+460

LEGEND

(A) 75kg/m^2 QC/QA HMA Surface, 9.5mm, Mainline over
150kg/m^2 QC/QA HMA Intermediate, 19.0mm, Mainline

(C) 75kg/m^2 QC/QA HMA Surface, 9.5mm, Shoulder over
150kg/m^2 QC/QA HMA Intermediate, 19.0mm, Shoulder

(D) 150mm Compacted Agg., Type O, Size 53, Shoulder

(M) Surface Milling, Asphalt, 25mm


(S) 2.00% Slope


(T) 4.00% Slope

(W) Wedge, Milled or excavated material may be used

QC/QA PG BINDER 64-22, MAINLINE
QC/QA PG BINDER 64-22, SHOULDER

CONTRACT	R-24787
Des. No.	9903400

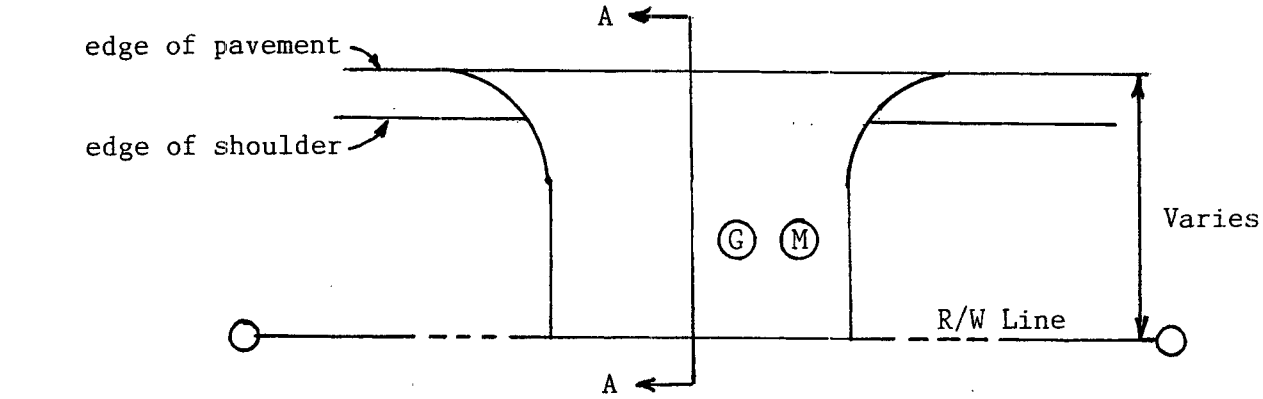

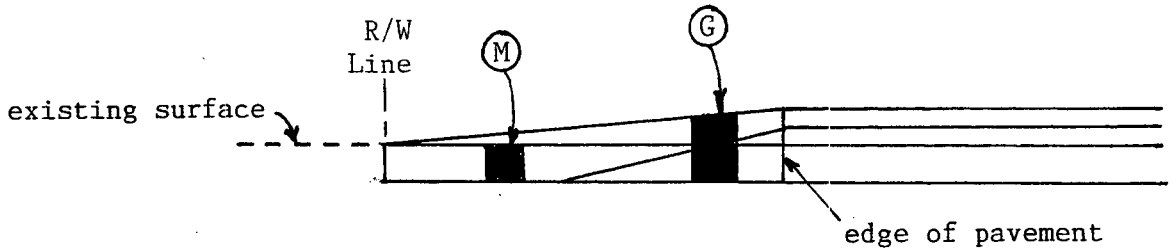

Section A-A


TYPICAL PUBLIC ROAD APPROACH
AND IMPROVED COMMERCIAL DRIVE APPROACH


LEGEND

(G) Varies 32mm to 94mm HMA for Approaches
(75kg/m^2 HMA Surface, 9.5mm, over
150kg/m^2 HMA Intermediate, 19.0mm)

(M) Surface Milling, Asphalt, 25mm

QC/QA PG BINDER 64-22, MAINLINE
QC/QA PG BINDER 64-22, SHOULDER

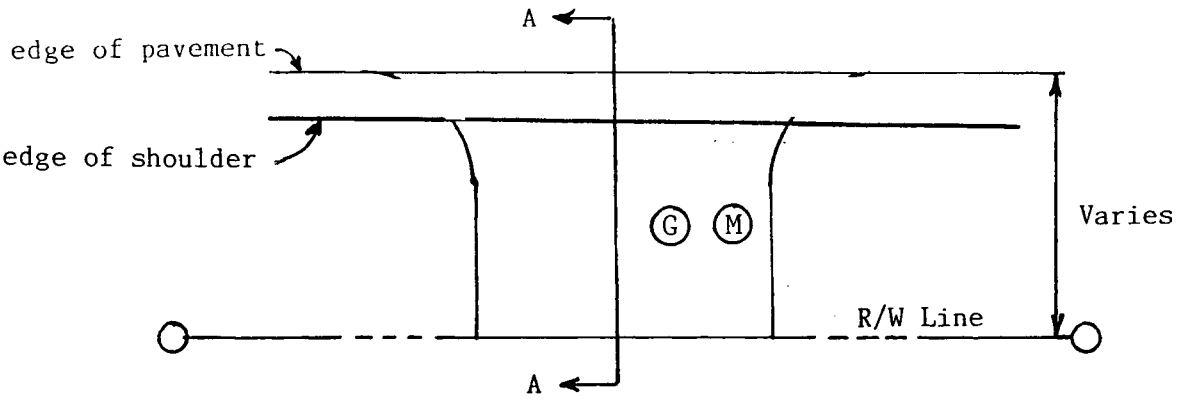

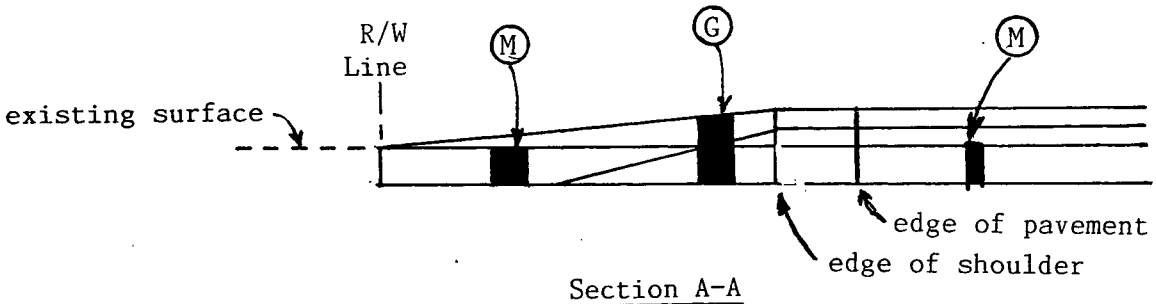

Section A-A


TYPICAL IMPROVED PRIVATE
DRIVE APPROACH

LEGEND

(G) Varies 32mm to 94mm HMA for Approaches
(75 kg/m² HMA Surface, 9.5mm, over
150 kg/m² HMA Intermediate, 19mm)

(M) Surface Milling, Asphalt, 25mm

QC/QA PG BINDER 64-22, MAINLINE
QC/QA PG BINDER 64-22, SHOULDER

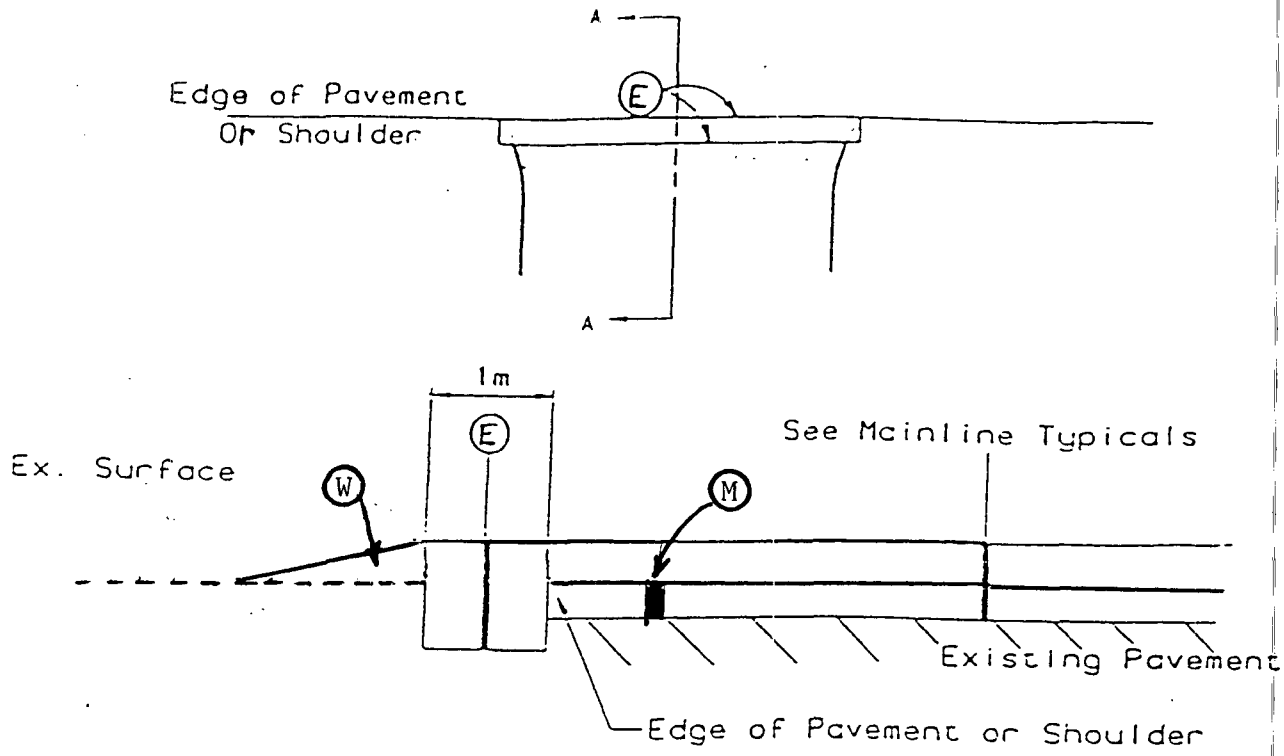

SECTION A - A

TYPICAL UNIMPROVED DRIVE APPROACHES

LEGEND


(E) 360 kg/m² HMA for Approaches
(75 kg/m² HMA Surface, 9.5mm, over
285 kg/m² HMA Intermediate, 19.00mm,)

(M) Surface Milling, Asphalt, 25mm

(W) Wedge, milled material shall be used

QC/QA PG BINDER 64-22, MAINLINE
QC/QA PG BINDER 64-22, SHOULDER

TYPICAL UNIMPROVED MAILBOX APPROACH

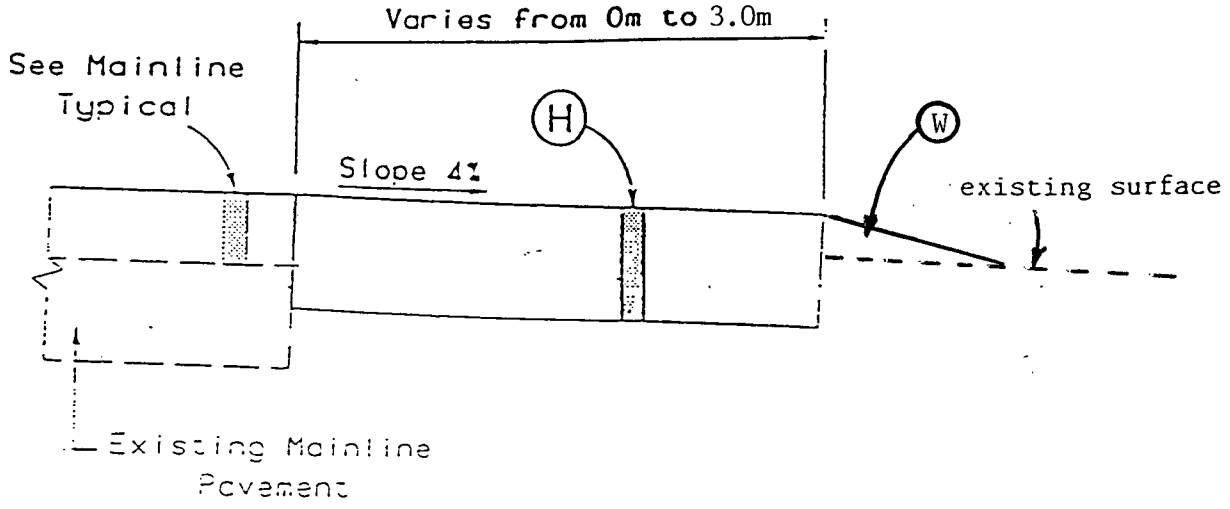


LEGEND:

(H) 360 kg/m² HMA for Approaches
(75 kg/m² HMA Surface 9.5mm over
285 kg/m² HMA Intermediate, 19.0mm over)

(W) Wedge, milled material shall be used

QC/QA	PG BINDER 64-22, MAINLINE
QC/QA	PG BINDER 64-22, SHOULDER

APPTYP4

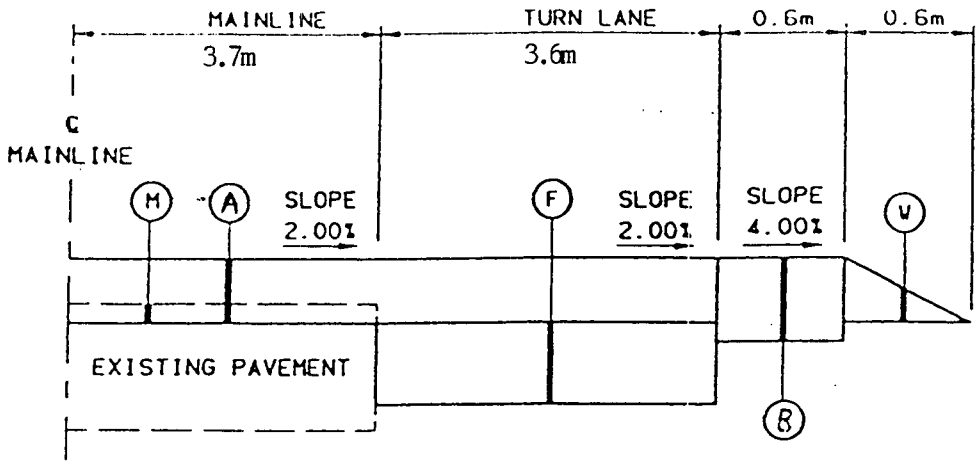

TYPICAL TURN LANE

LEGEND

(A) 75kg/m² QC/QA HMA Surface 9.5mm, Mainline
150kg/m² QC/QA HMA Intermediate 19.0mm, Mainline

(B) 75kg/m² HMA Surface 9.5mm, Shoulder
225kg/m² HMA Intermediate 19.0mm, Shoulder

(F) 495kg/m² Widening with HMA

(M) Surface Milling, Asphalt, 25mm


(W) Wedge, milled material shall be used.

QC/QA PG BINDER 64-22, MAINLINE
QC/QA PG BINDER 64-22, SHOULDER

TURN

CONTRACT R-24787
Des. No. 9903400

AUXILLARY LANE
LOCATIONS & LENGTHS

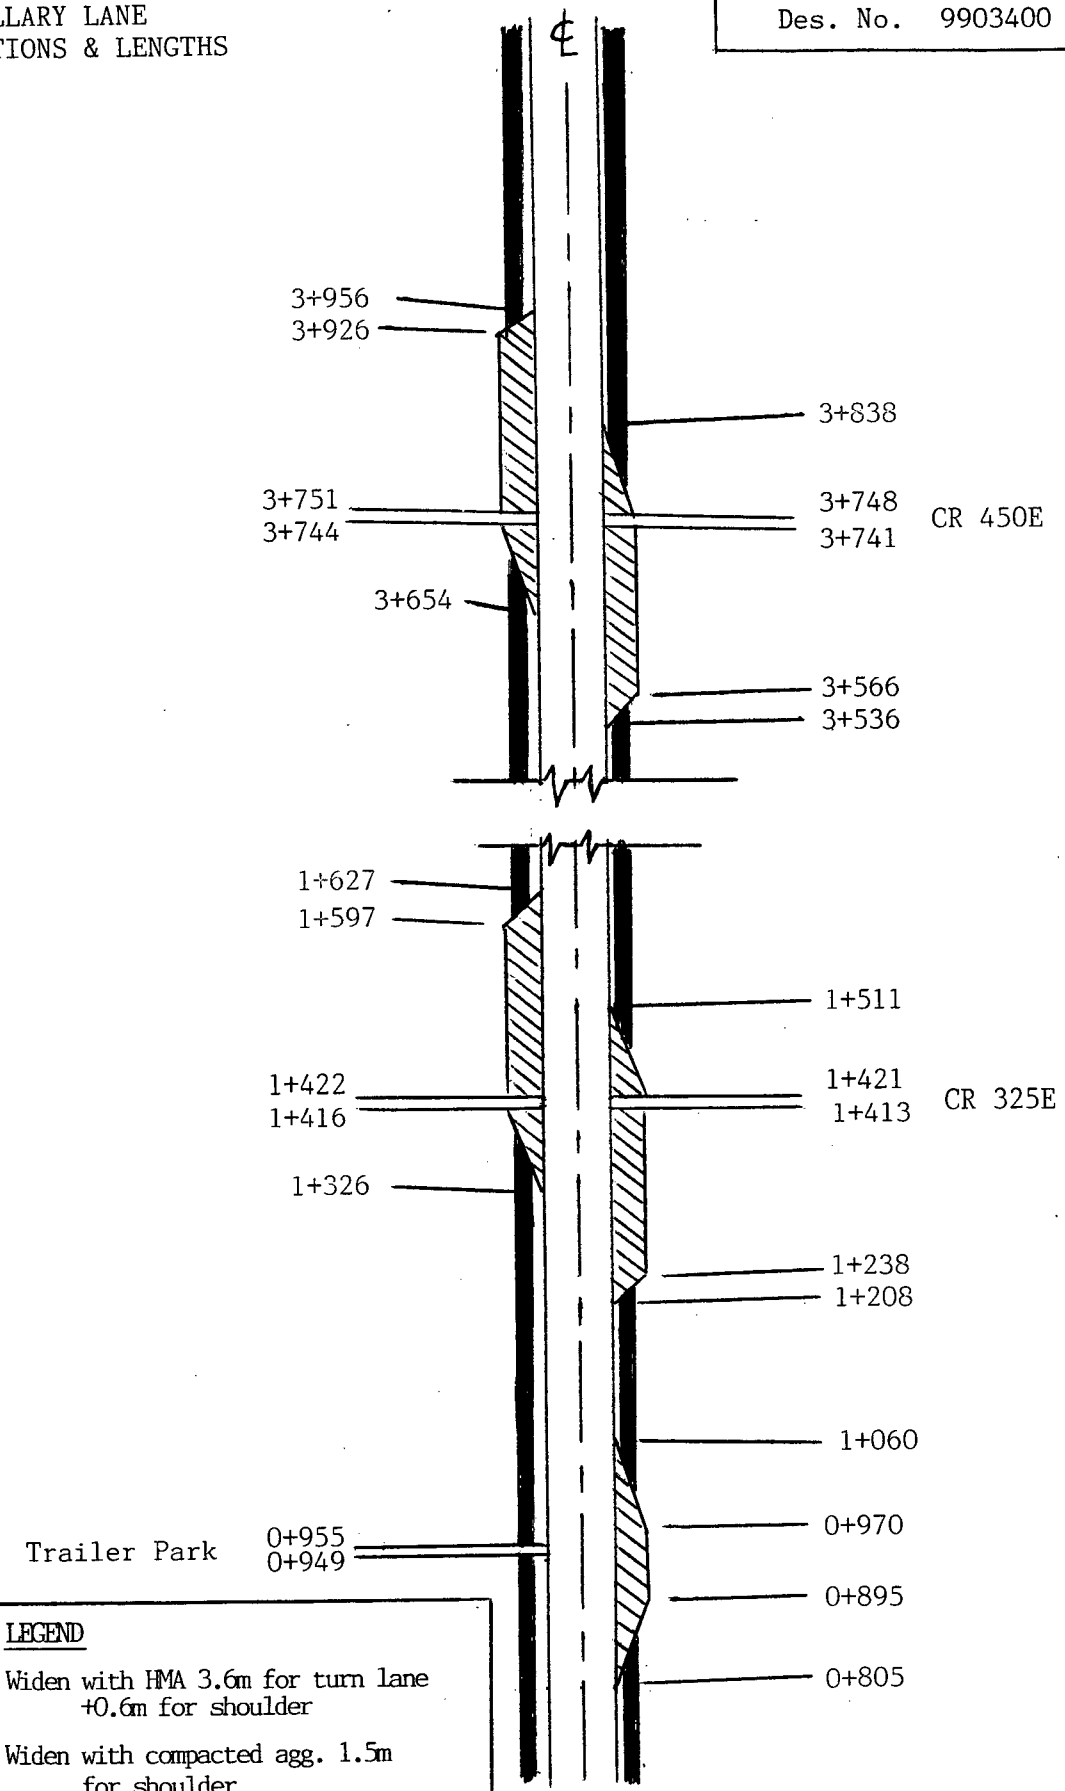


LEGEND

Widen with HMA 3.6m for turn lane +0.6m for shoulder

Widen with compacted agg. 1.5m for shoulder

AUXILLARY LANE
LOCATIONS & LENGTHS

CONTRACT R-24787
Des. No. 9903400

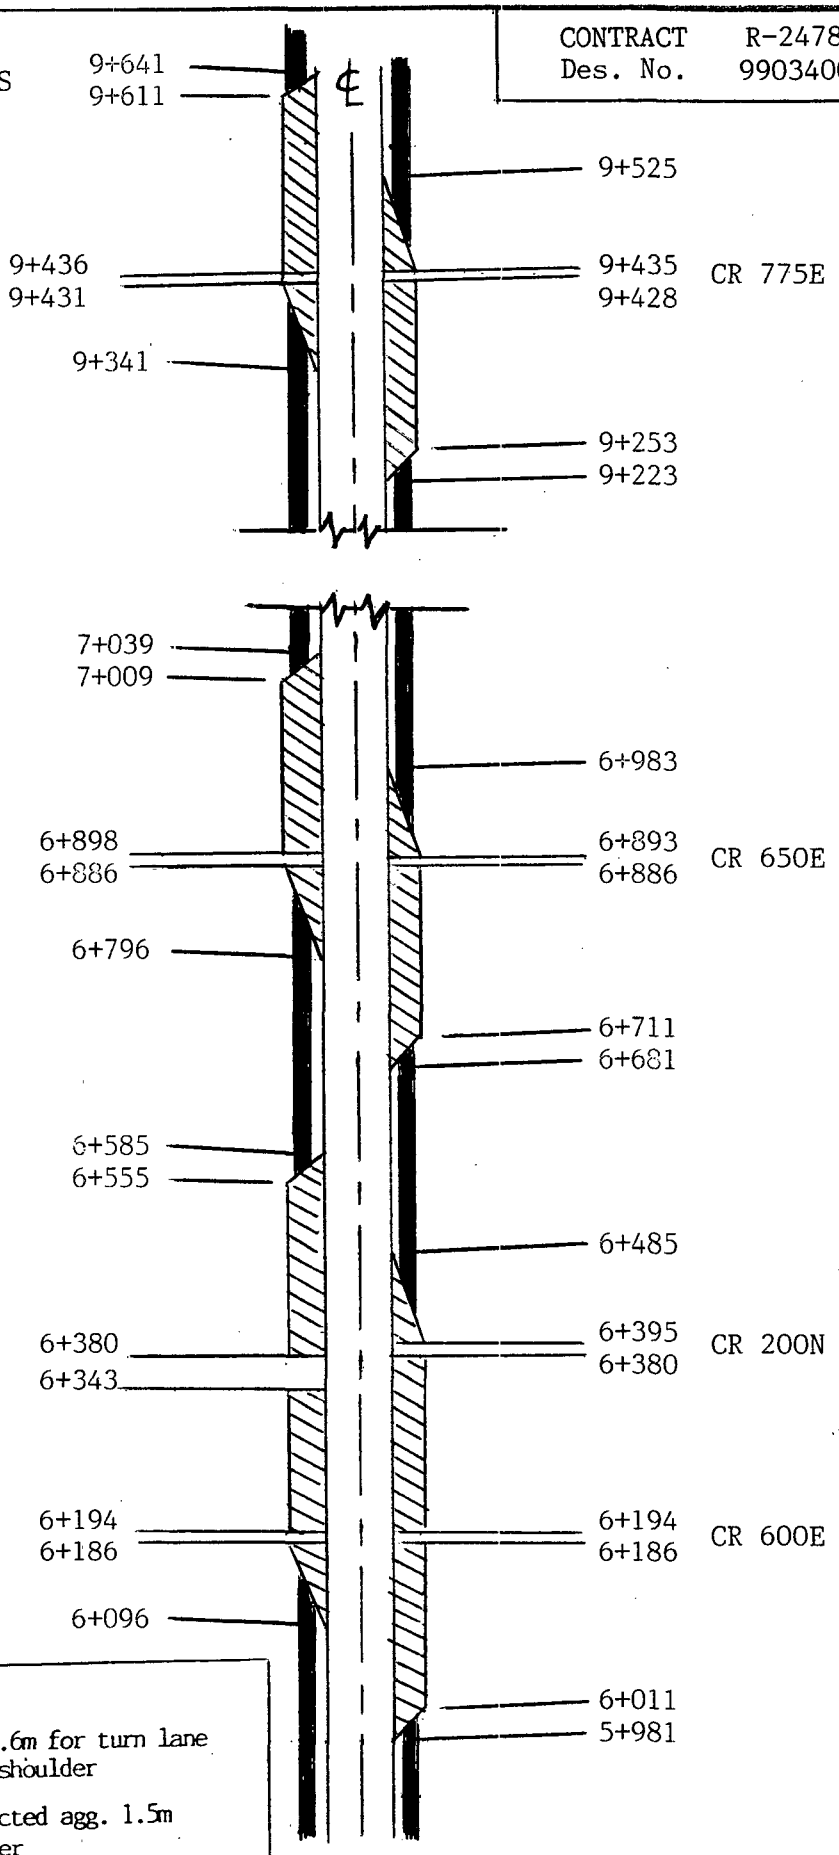


LEGEND

Widen with HMA 3.6m for turn lane +0.6m for shoulder

Widen with compacted agg. 1.5m for shoulder

AUXILLARY LANE
LOCATIONS & LENGTHS

CONTRACT R-24787
Des. No. 9903400

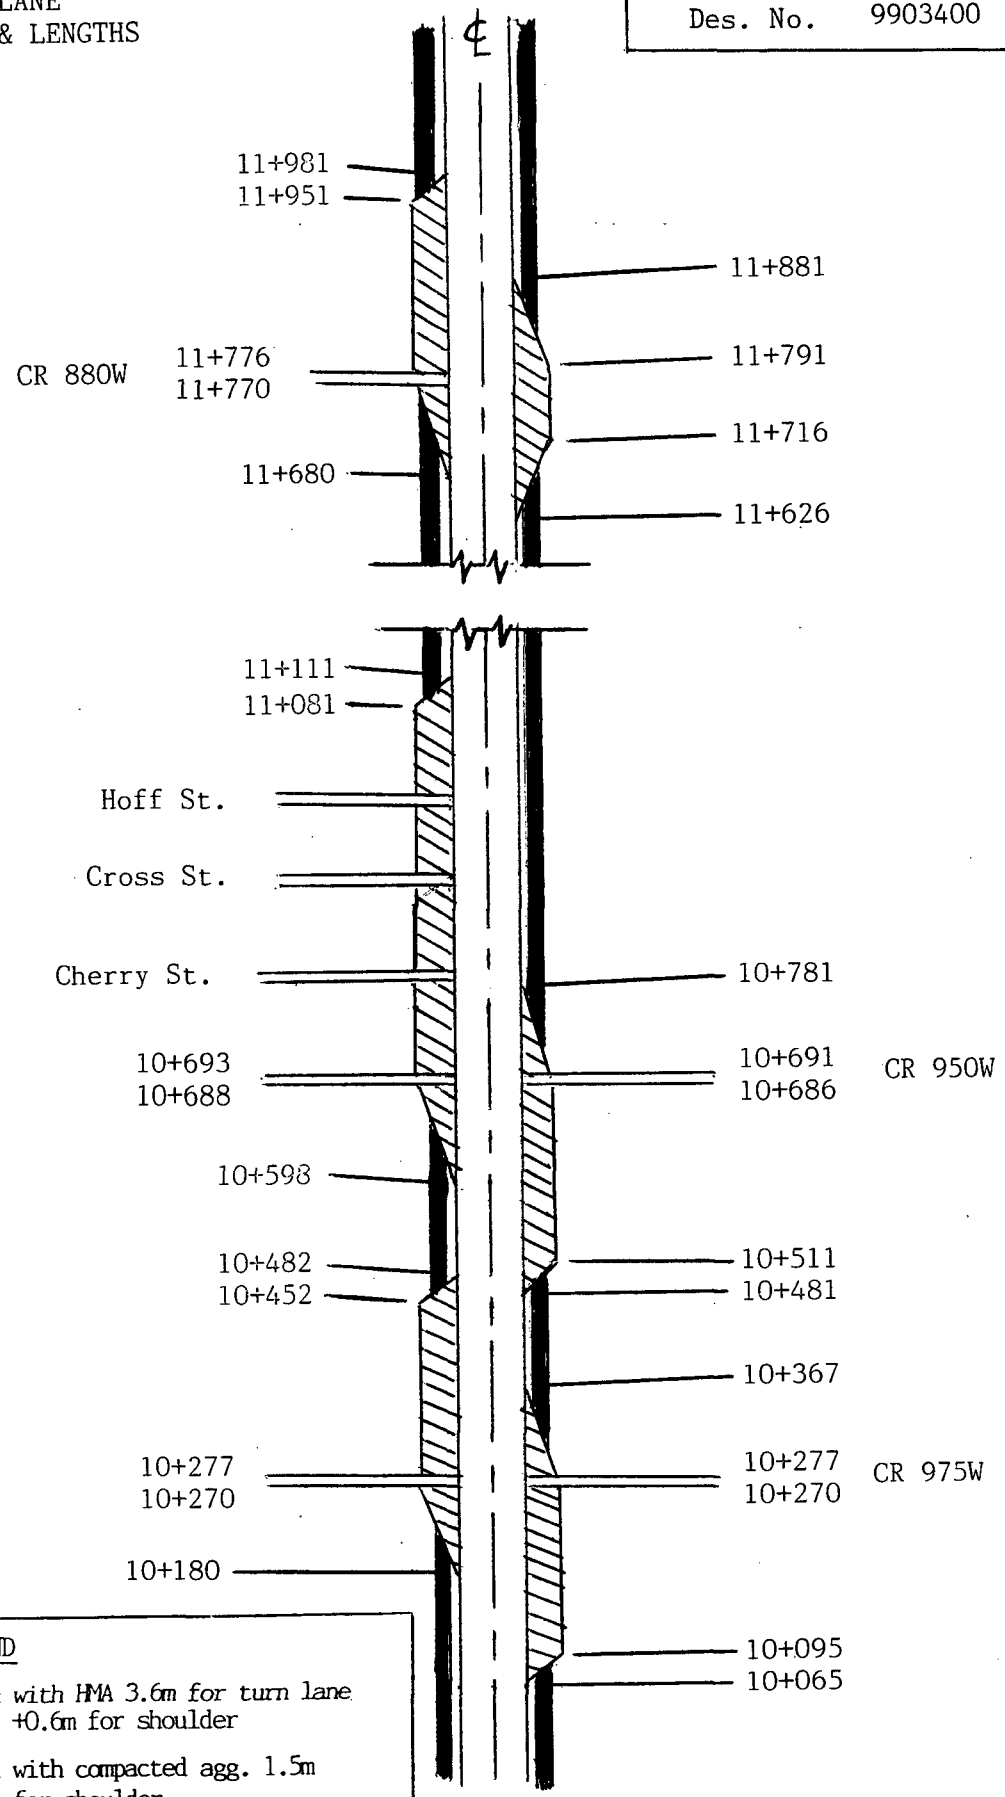


LEGEND

Widen with HMA 3.6m for turn lane +0.6m for shoulder

Widen with compacted agg. 1.5m for shoulder


AUXILLARY LANE
LOCATIONS & LENGTHS

CONTRACT R-24787
Des. No. 9903400

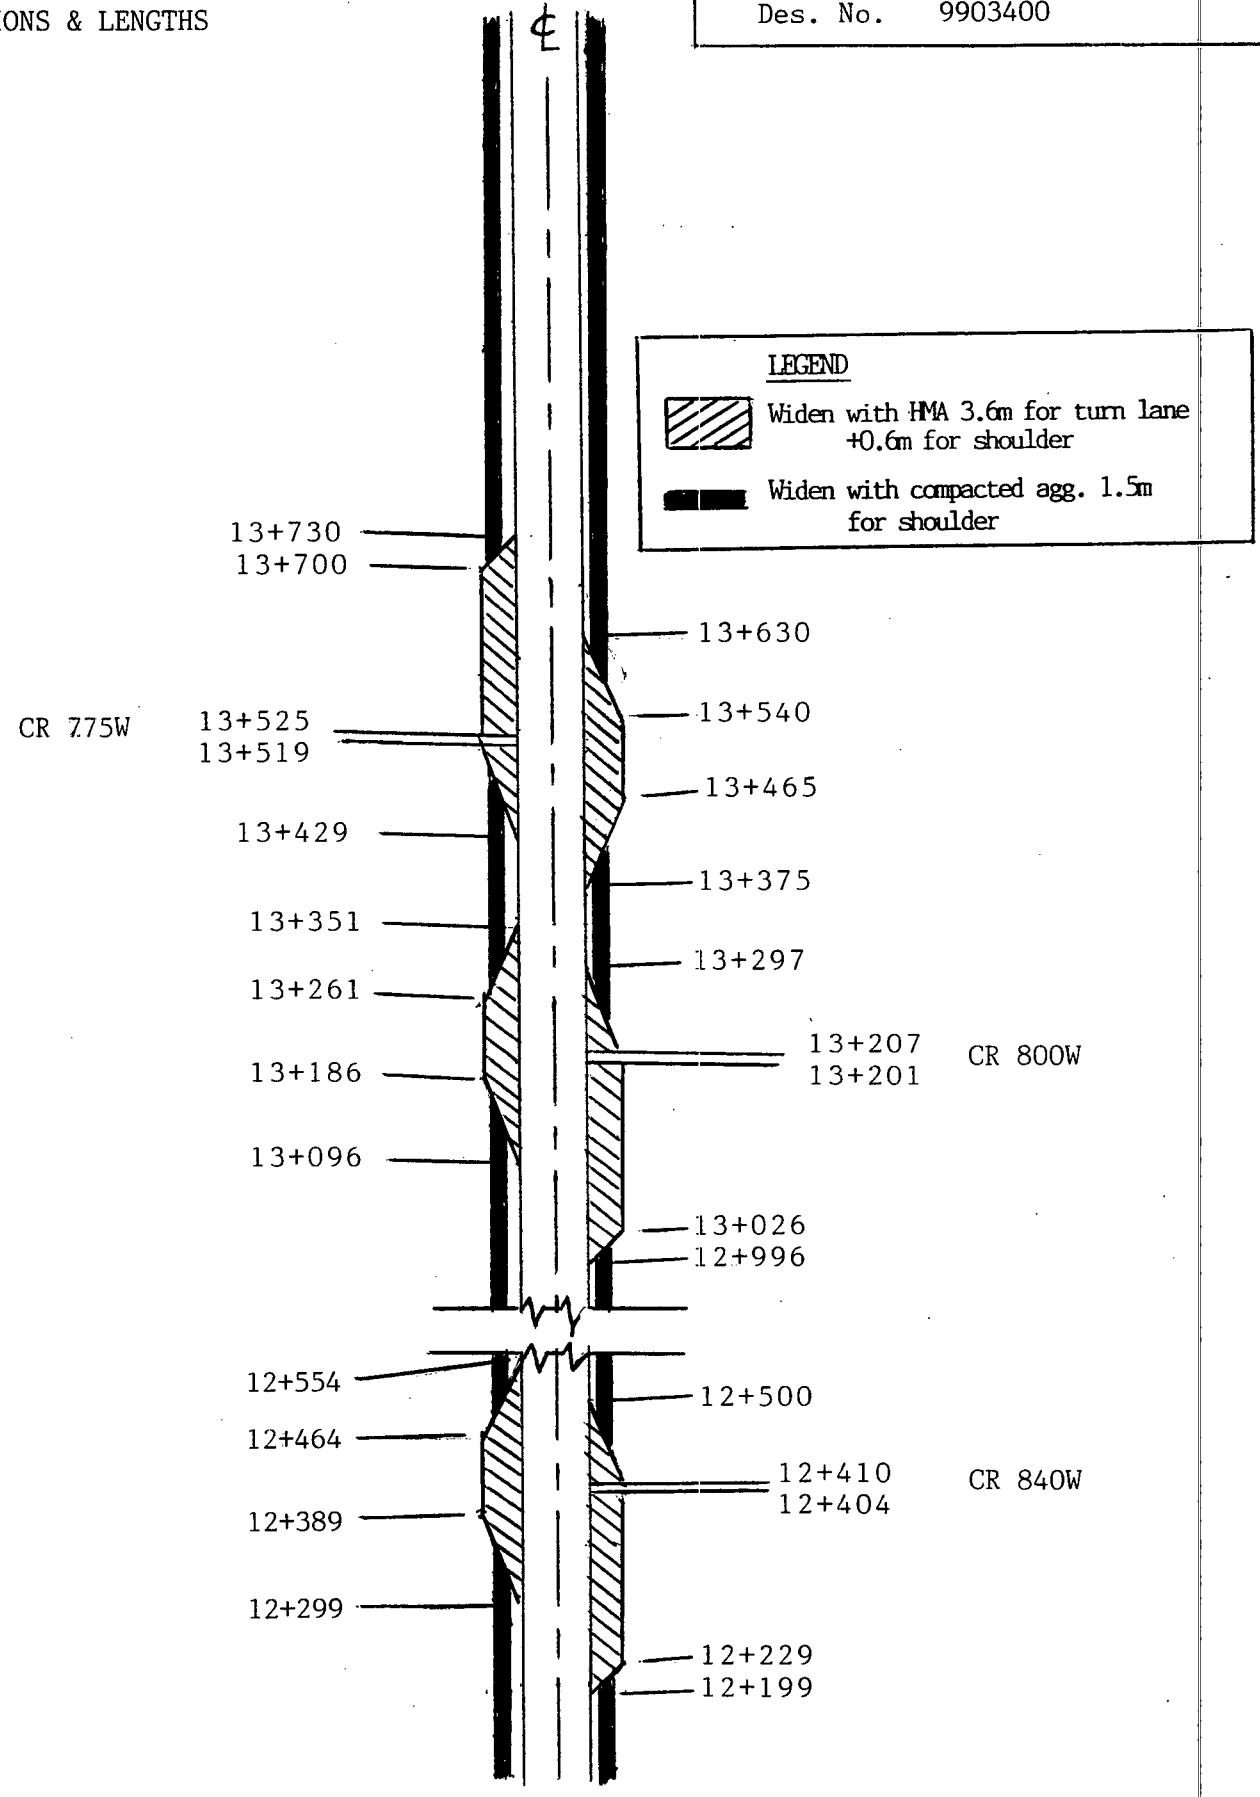


AUXILLARY LANE
LOCATIONS & LENGTHS

CONTRACT R-24787
Des. No. 9903400

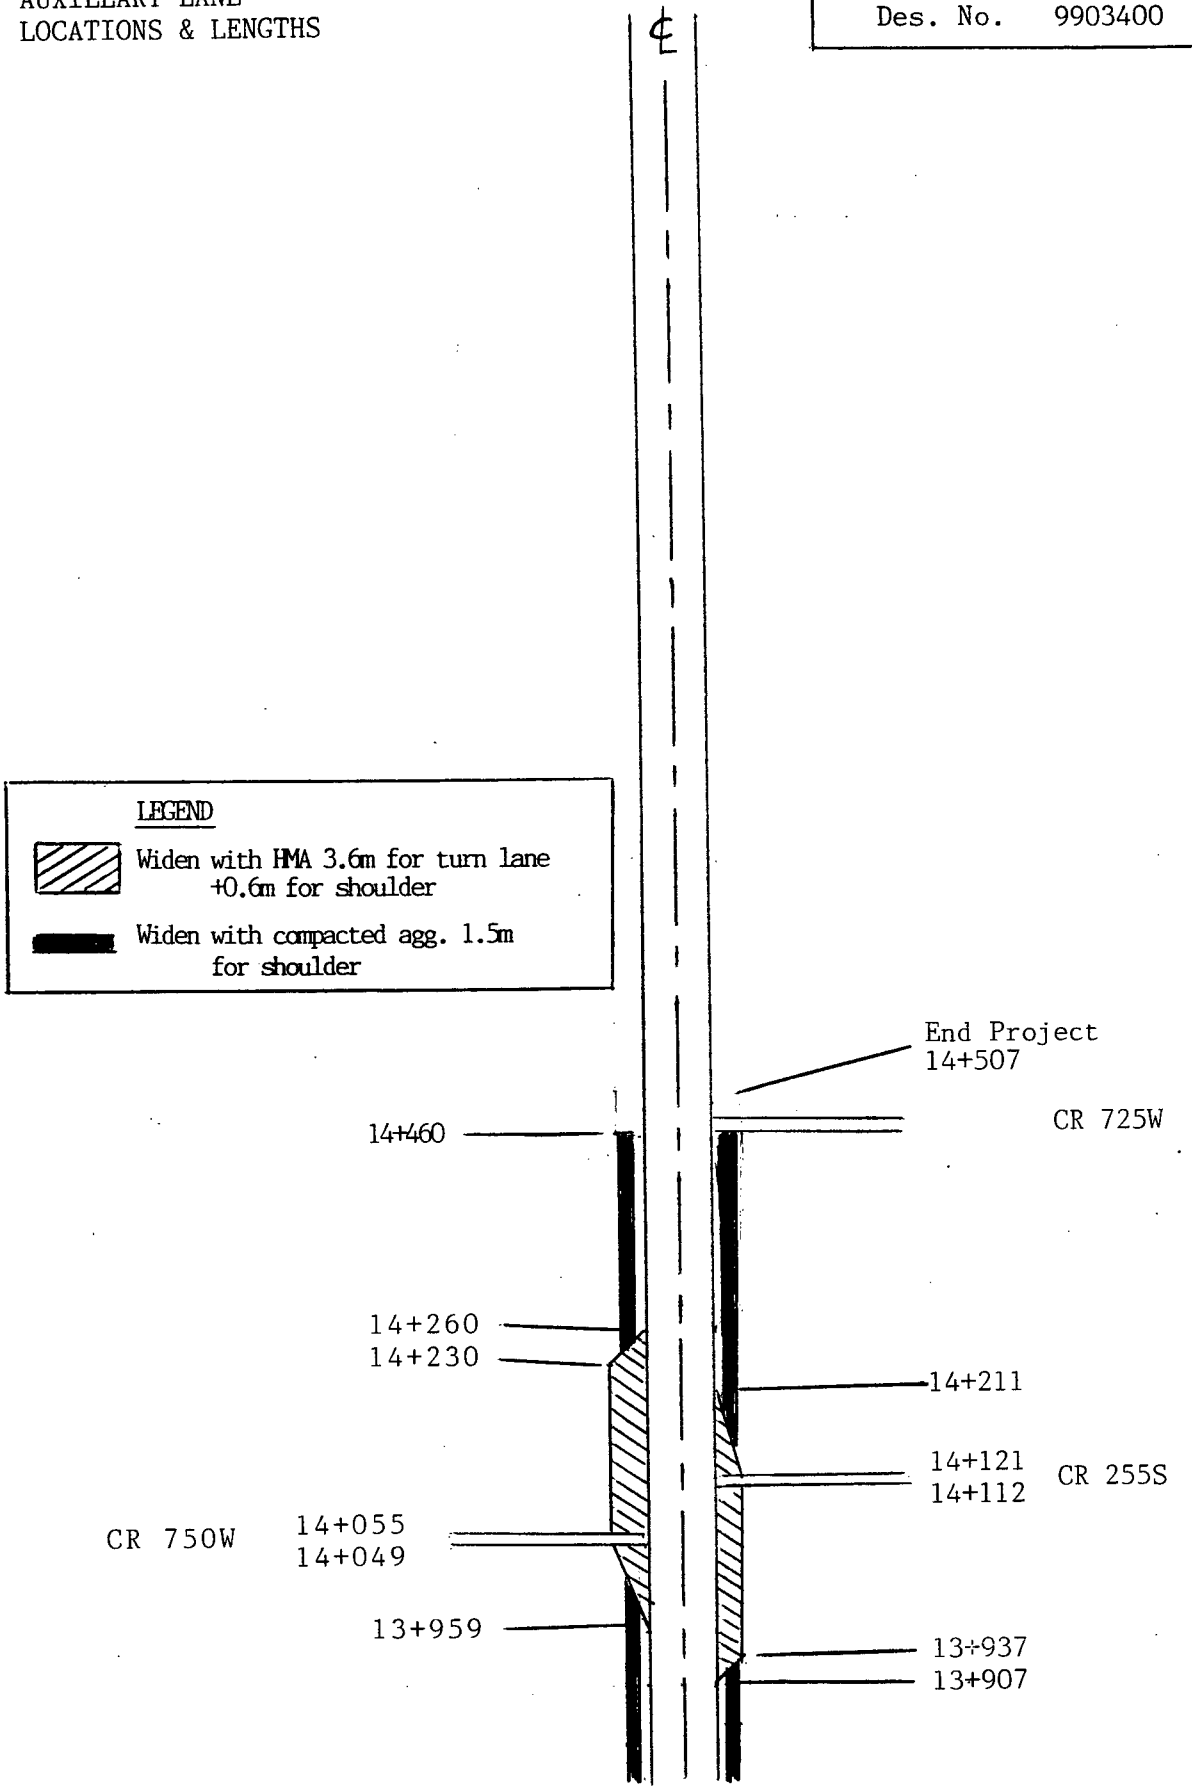

CONTRACT R-24787
DES. NO. 9903400

TYPICAL SECTION FOR PAVEMENT PATCHING

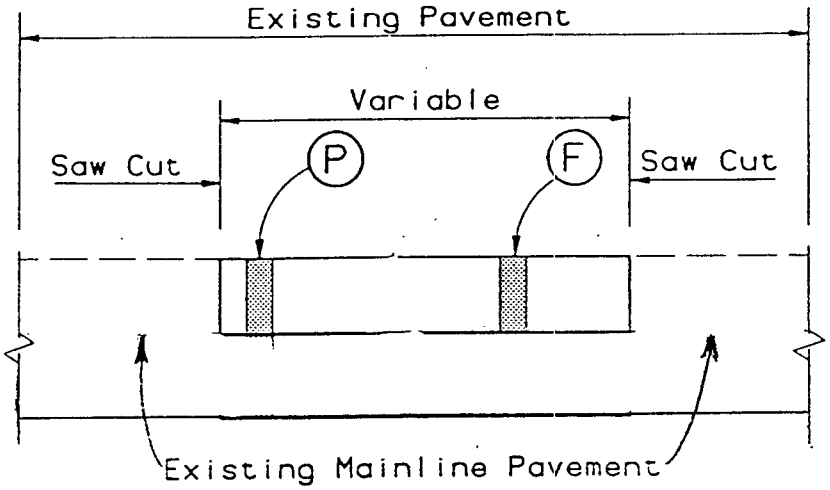

(P) Remove Existing Pavement and Subbase to A Depth of 300mm

(F) 720kg/m² HMA for Patching

NOTE:
The plan quantities for patching pavement are supplied for information only. Exact locations to be determined by the project engineer.

PATCHBII

HMA

PATCHING TABLE

SR44

CONTRACT R-24787
Des. No. 9903400

STA.	to STA.	LANE	LENGTH (m)	WIDTH (m)	AREA (m^2)	
0+100	0+352	EB	252	1	252	
0+889	1+069	EB	180	2	360	
6+016	6+072	EB	56	1	56	
9+167	9+500	EB	333	1	333	
9+600	9+871	EB	271	1	271	
10+570	10+750	EB	180	1	180	
10+925	11+090	EB	165	1	165	
11+300	11+500	EB	200	1	200	
11+595	11+856	EB	261	1	261	
12+400	12+520	EB	120	1	120	
12+850	13+220	EB	370	1	370	
13+970	14+470	EB	500	1	500	
3+662	3+739	WB	77	1	77	
5+788	6+000	WB	212	1	212	
6+572	6+805	WB	233	1	233	
8+243	8+922	WB	679	1	679	
9+843	10+034	WB	191	1	191	
10+285	10+891	WB	606	1	606	
11+041	11+760	WB	719	1	719	
11+798	12+135	WB	337	1	337	
12+892	13+101	WB	209	1	209	
12+462	13+941	WB	1479	1	1479	
14+127	14+290	WB	163	1	163	
14+383	14+483	WB	100	1	100	
					8073	


TOTAL PATCHING QUANTITY (Mg)

$(8073m^2)(0.720Mg/m^2) = 5813Mg$


NOTE: FOR INFORMATION ONLY, ACTUAL QUANTITY AND LOCATIONS TO BE DETERMINED BY THE PROJECT ENGINEER.

CONTRACT R-24787
Des. No. 9903400

CURVES AND CURVE DATA

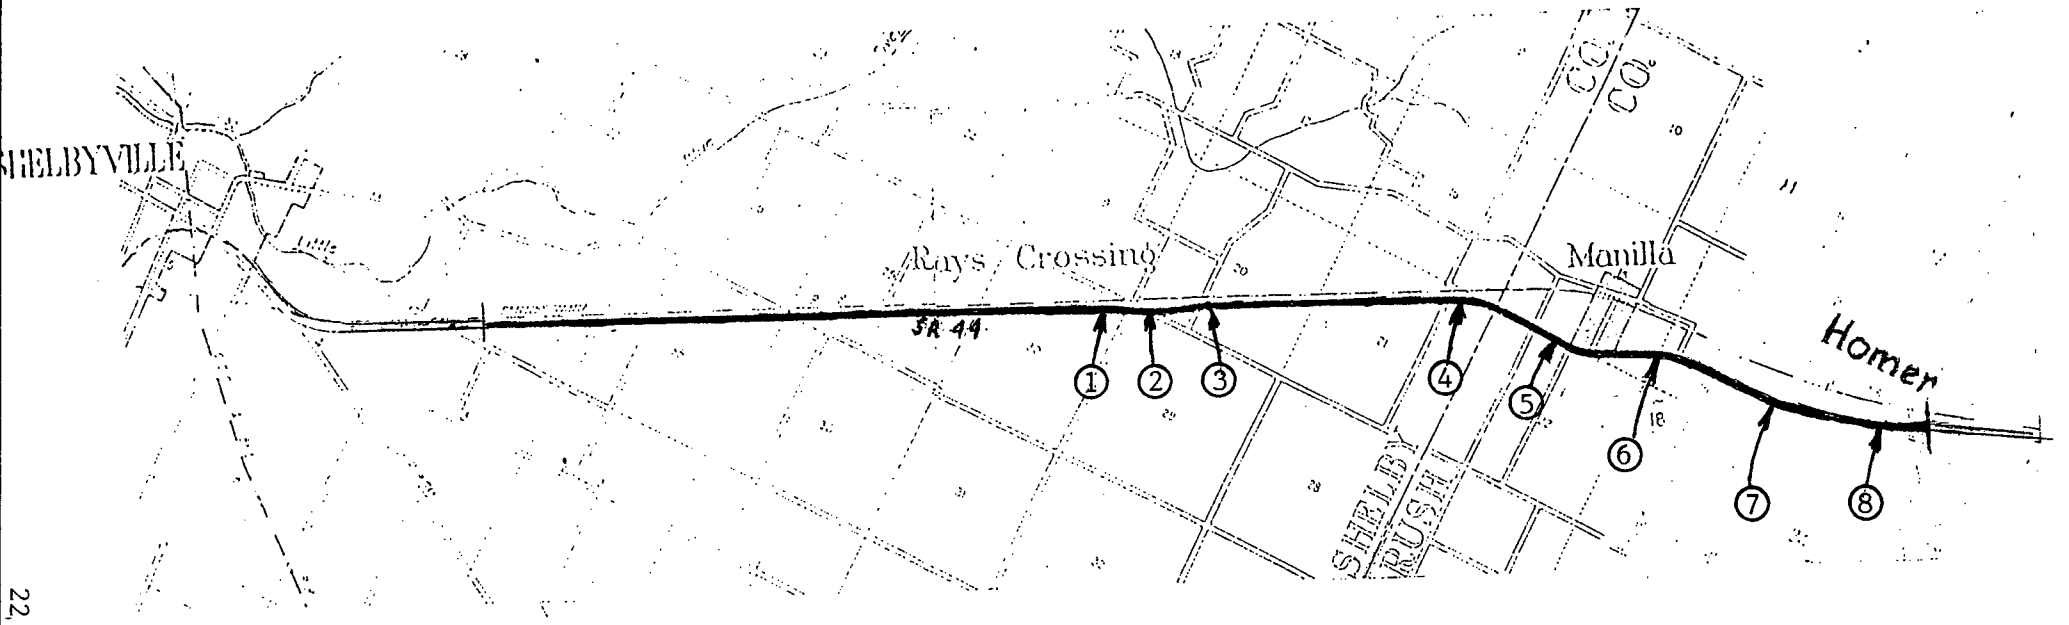

curve 1	curve 2	curve 3	curve 4	curve 5	curve 6	curve 7	curve 8
Δ = 4°05' R	Δ = 12°34' L	Δ = 8°43' R	Δ = 29°32' R	Δ = 27°30' L	Δ = 26°55' R	Δ = 14°00' L	Δ = 8°38' L
D = 0°24'	D = 1°30'	D = 1°00'	D = 2°00'	D = 3°00'	D = 2°30'	D = 1°30'	D = 0°45'
T = 155.68m	T = 128.20m	T = 133.11m	T = 230.19m	T = 142.46m	T = 167.18m	T = 142.95m	T = 175.78m
L = 311.14m	L = 255.36m	L = 265.69m	L = 450.10m	L = 279.41m	L = 328.18m	L = 284.47m	L = 350.86m
E = 2.74m	E = 7.03m	E = 5.05m	E = 29.82m	E = 17.18m	E = 19.73m	E = 8.74m	E = 6.62m
R = 4367m	R = 1164m	R = 1747m	R = 873m	R = 582m	R = 699m	R = 1164m	R = 2329m
PC = 5+539.4	PC = 6+436.2	PC = 6+806.7	PC = 9+428.4	PC = 10+651.0	PC = 11+569.7	PC = 12+944.7	PC = 13+891.1
PI = 5+695.1	PI = 6+564.4	PI = 6+939.8	PI = 9+658.6	PI = 10+793.5	PI = 11+736.9	PI = 13+087.7	PI = 14+066.9
PT = 5+850.5	PT = 6+691.5	PT = 7+072.4	PT = 9+878.5	PT = 10+930.4	PT = 11+897.9	PT = 13+229.2	PT = 14+241.9
e = Normal Crown	e = 0.034	e = 0.025	e = 0.045	e = 0.061	e = 0.053	e = 0.034	e = Remove Crown

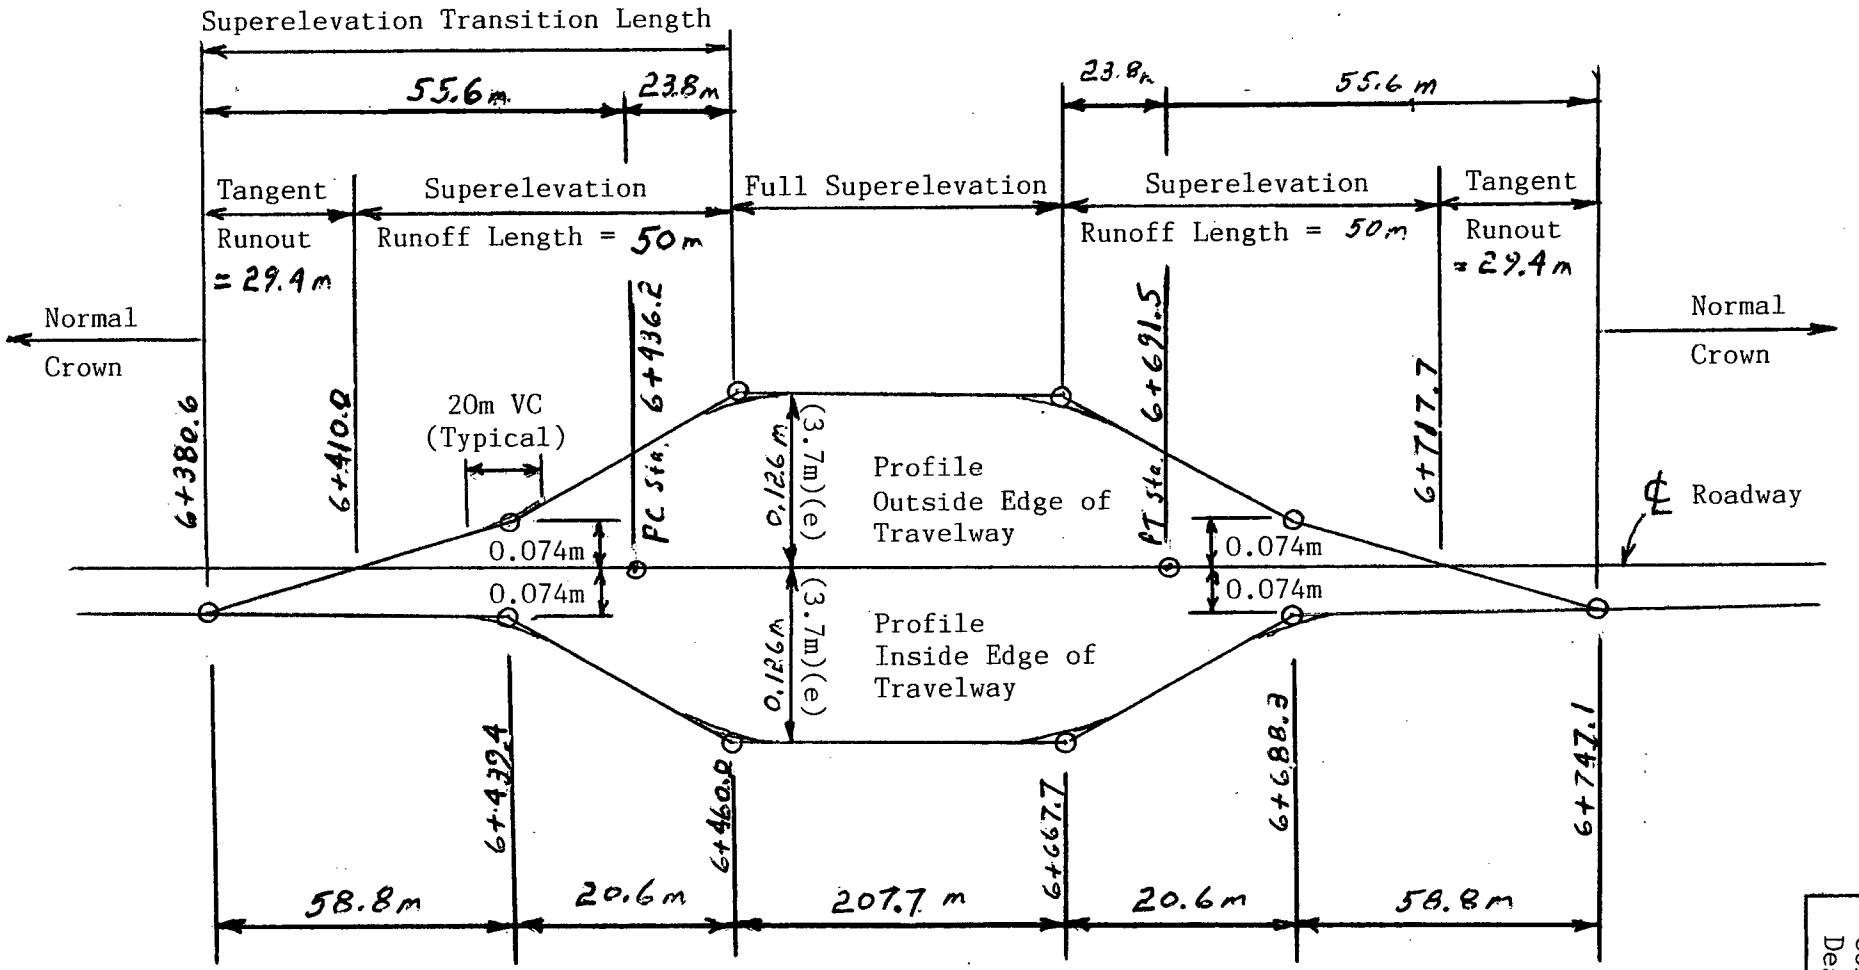

SUPERELEVATION TRANSITION DETAIL


Curve 2

e=0.034m/m (e_{max} = 0.08m/m & V=90kph)

high shoulder (Rt.) 2% down from TL
low shoulder (Lt.) 4% down
existing e approx. 0.028

121.32Mg of Intermediate has been included into estimate for the purpose of getting required superelevation for this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

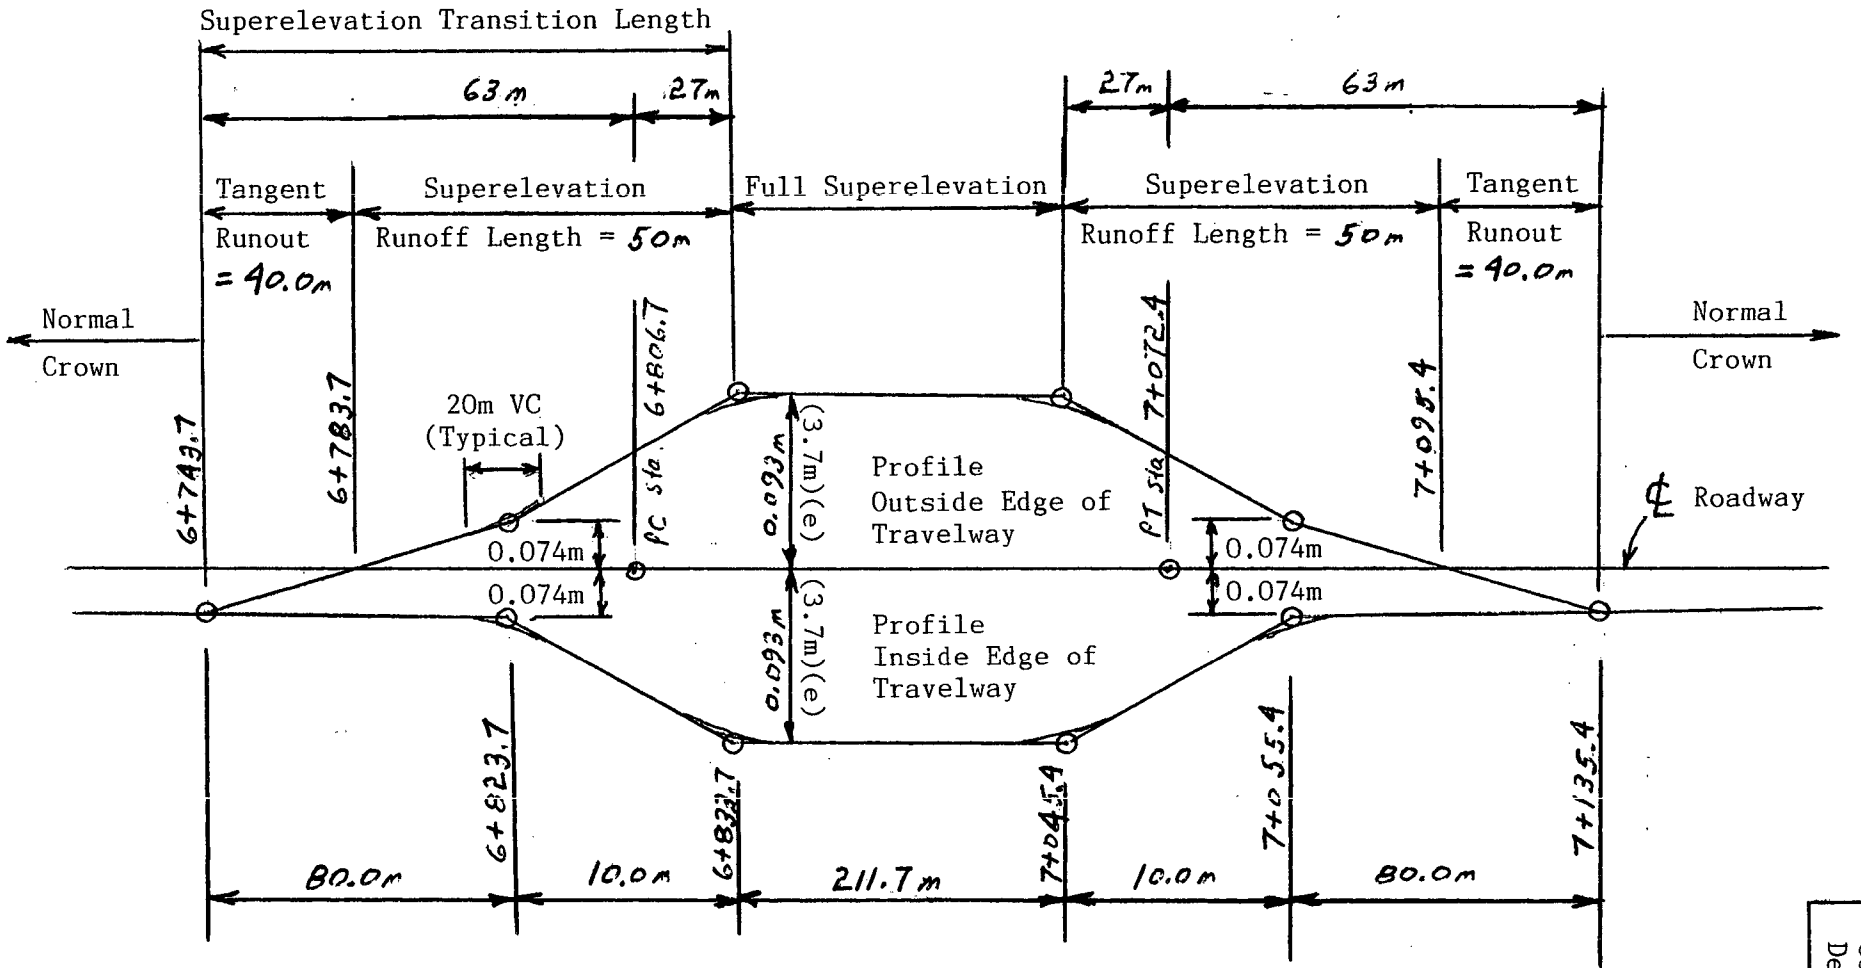

SUPERELEVATION TRANSITION DETAIL


Curve 3

e = 0.025m/m (e_{max} = 0.08m/m & V=90kph)

high shoulder (Lt.) 4% down
low shoulder (Rt.) 4% down
existing e approx. 0.025

0.00Mg of Intermediate has been included into estimate for the purpose of getting required superelevation for this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

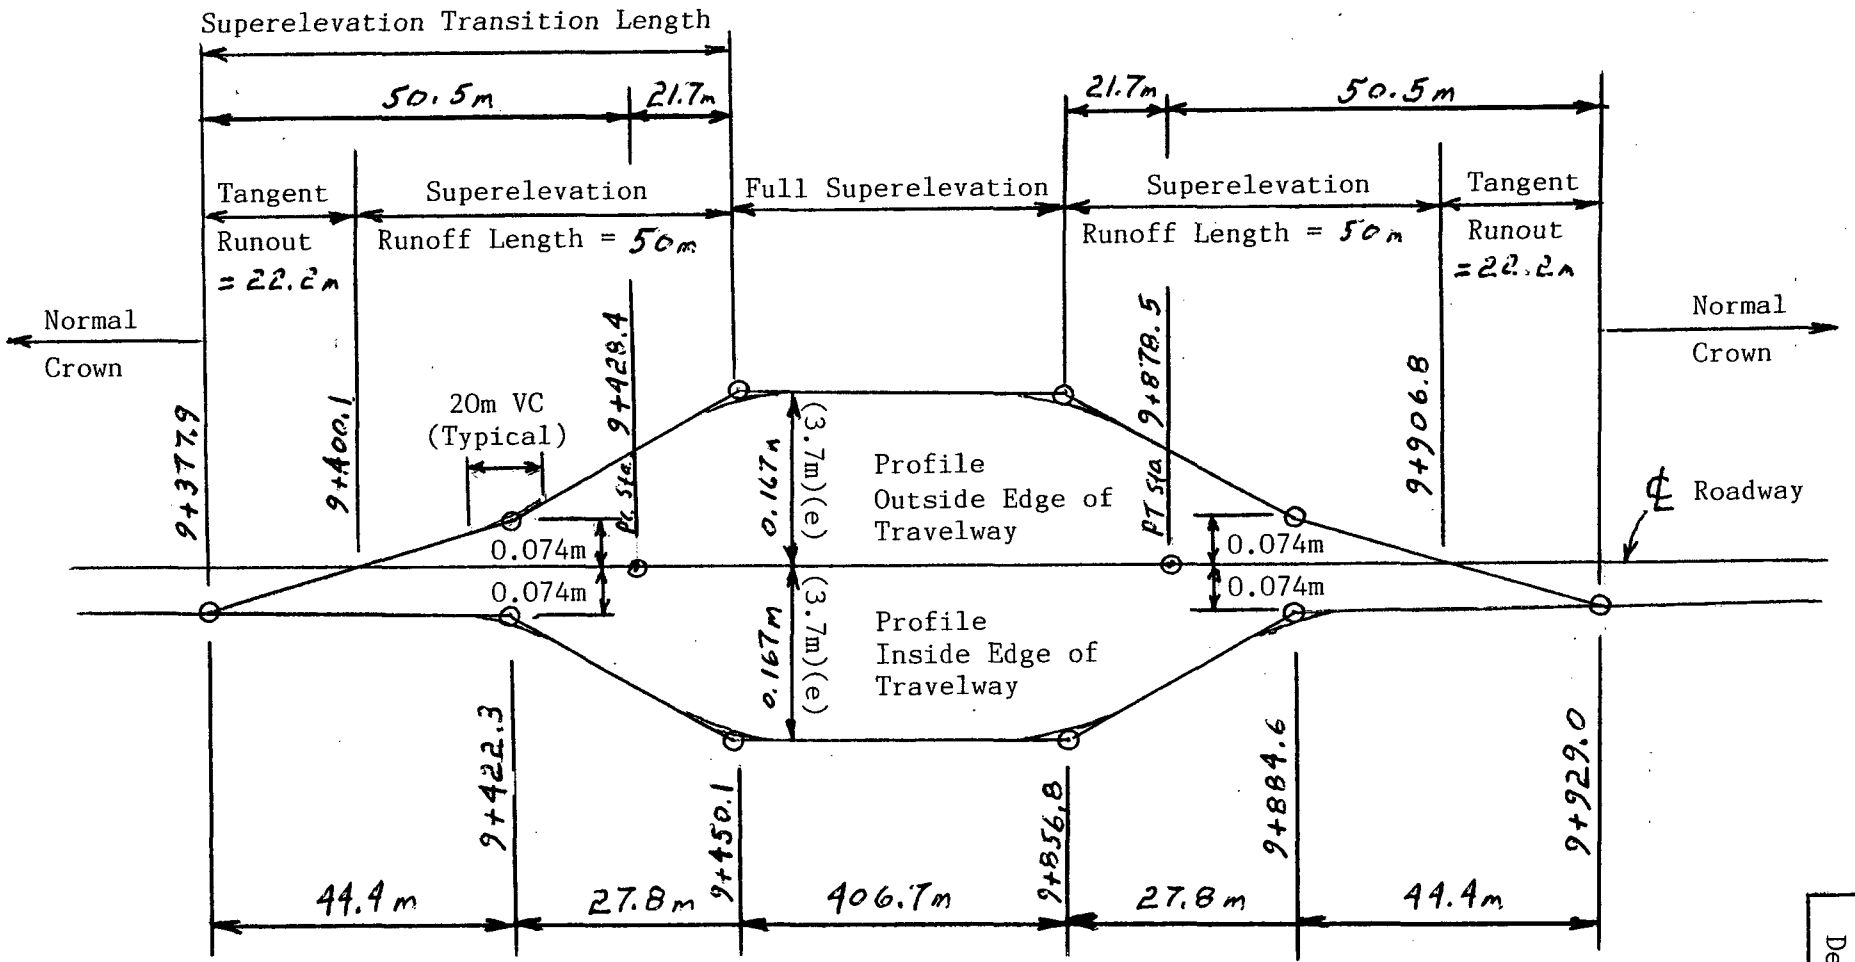


SUPERELEVATION TRANSITION DETAIL

Curve 4

e=0.045m/m (e_{max} = 0.08m/m & V=90kph)
high shoulder (Lt.) +1% toward TL
low shoulder (Rt.) -0.045
existing e approx. 0.024

699.22Mg of Intermediate has been included into estimate for the purpose of getting required superelevation for this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

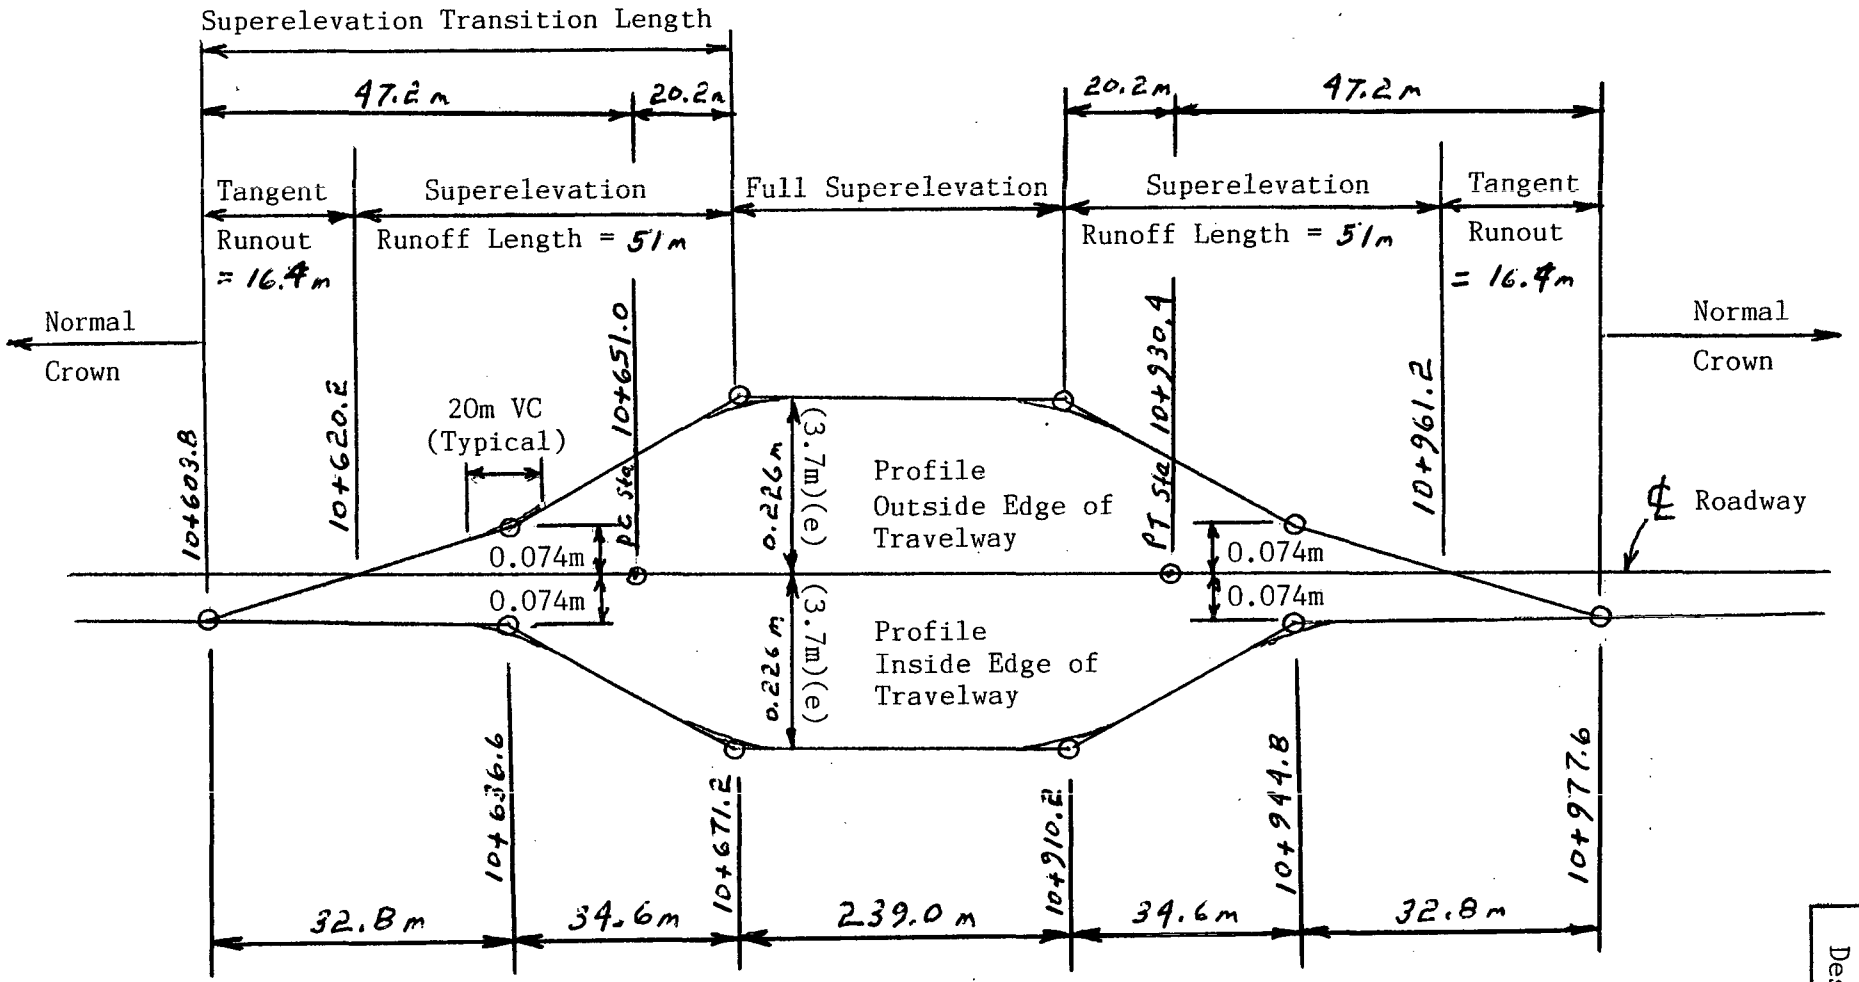


SUPERELEVATION TRANSITION DETAIL

Curve 5

e=0.061m/m (e_{max} = 0.08m/m & V=90kph)
high shoulder (Rt.) +1% toward TL
low shoulder (Lt.) -0.061
existing e approx. 0.036

560.19Mg of Intermediate has been included into estimate for the purpose of getting required superelevation of this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

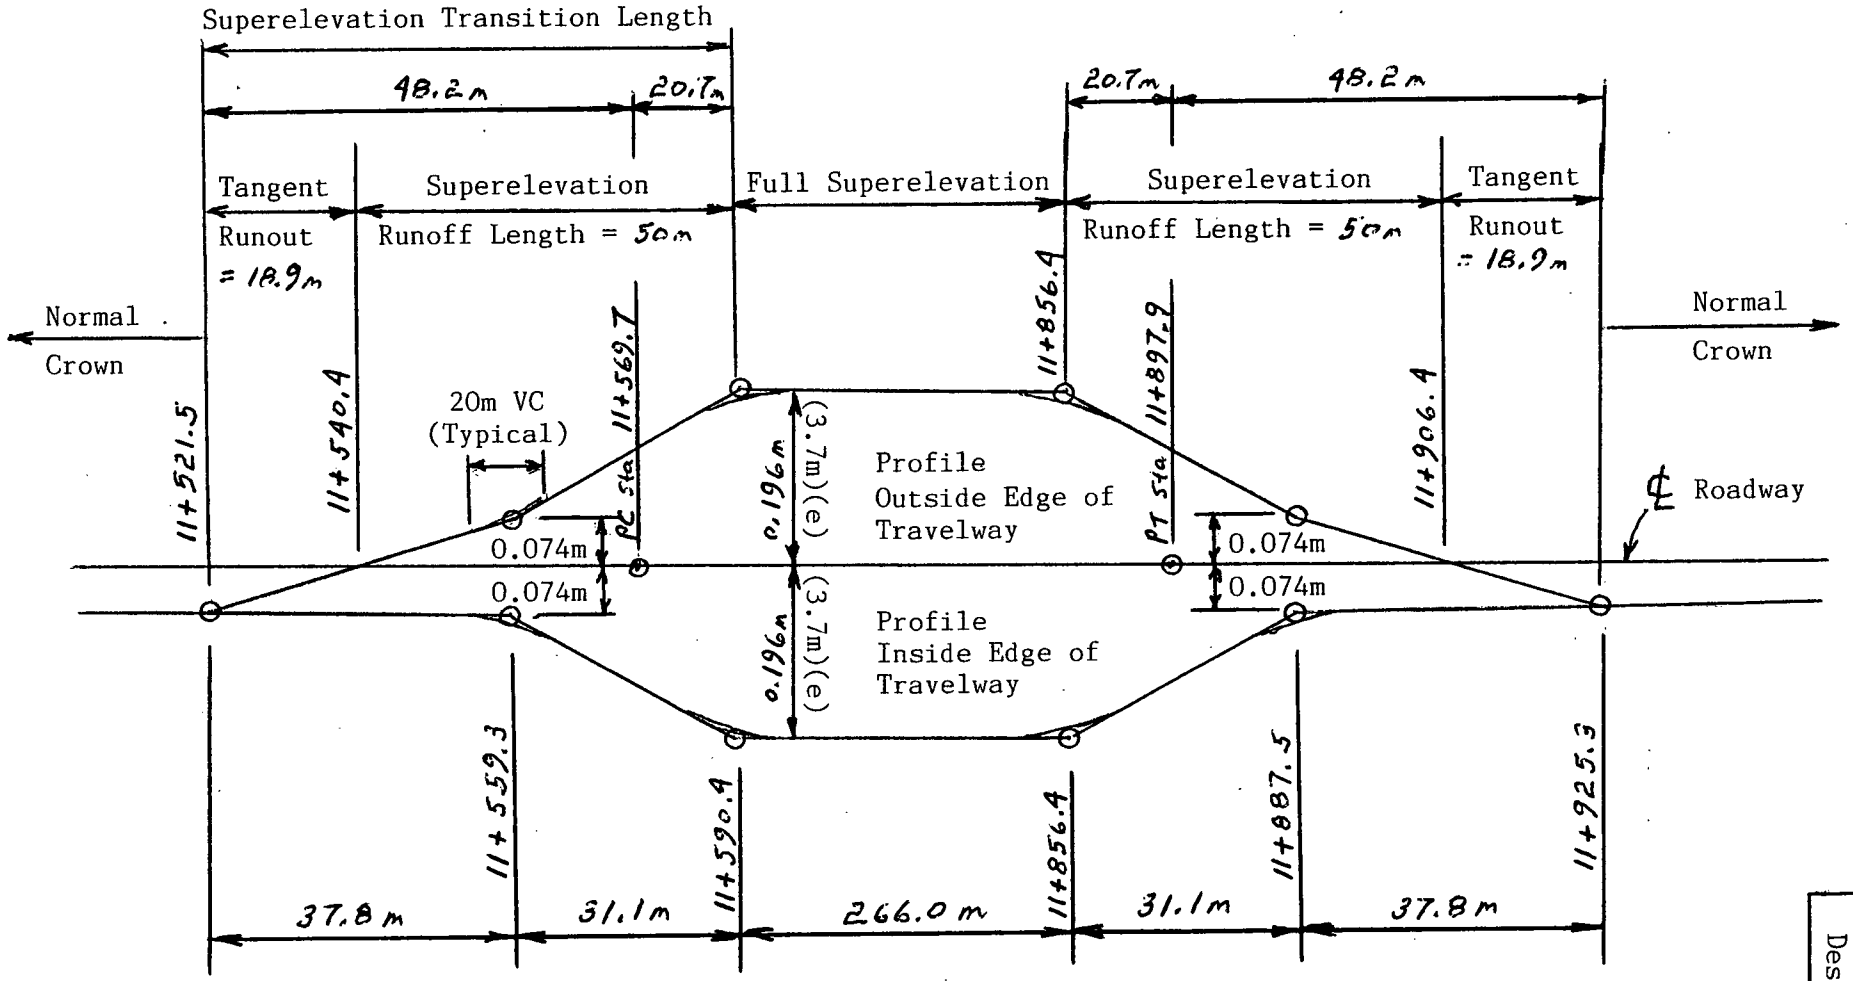


SUPERELEVATION TRANSITION DETAIL

Curve 6

e=0.053m/m (e_{max} = 0.08m/m & V=90kph)
high shoulder (Lt.) +1% toward TL
low shoulder (Rt.) -0.053
existing e approx. 0.032

505.06Mg of Intermediate has been included into estimate for the purpose of getting required superelevation for this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

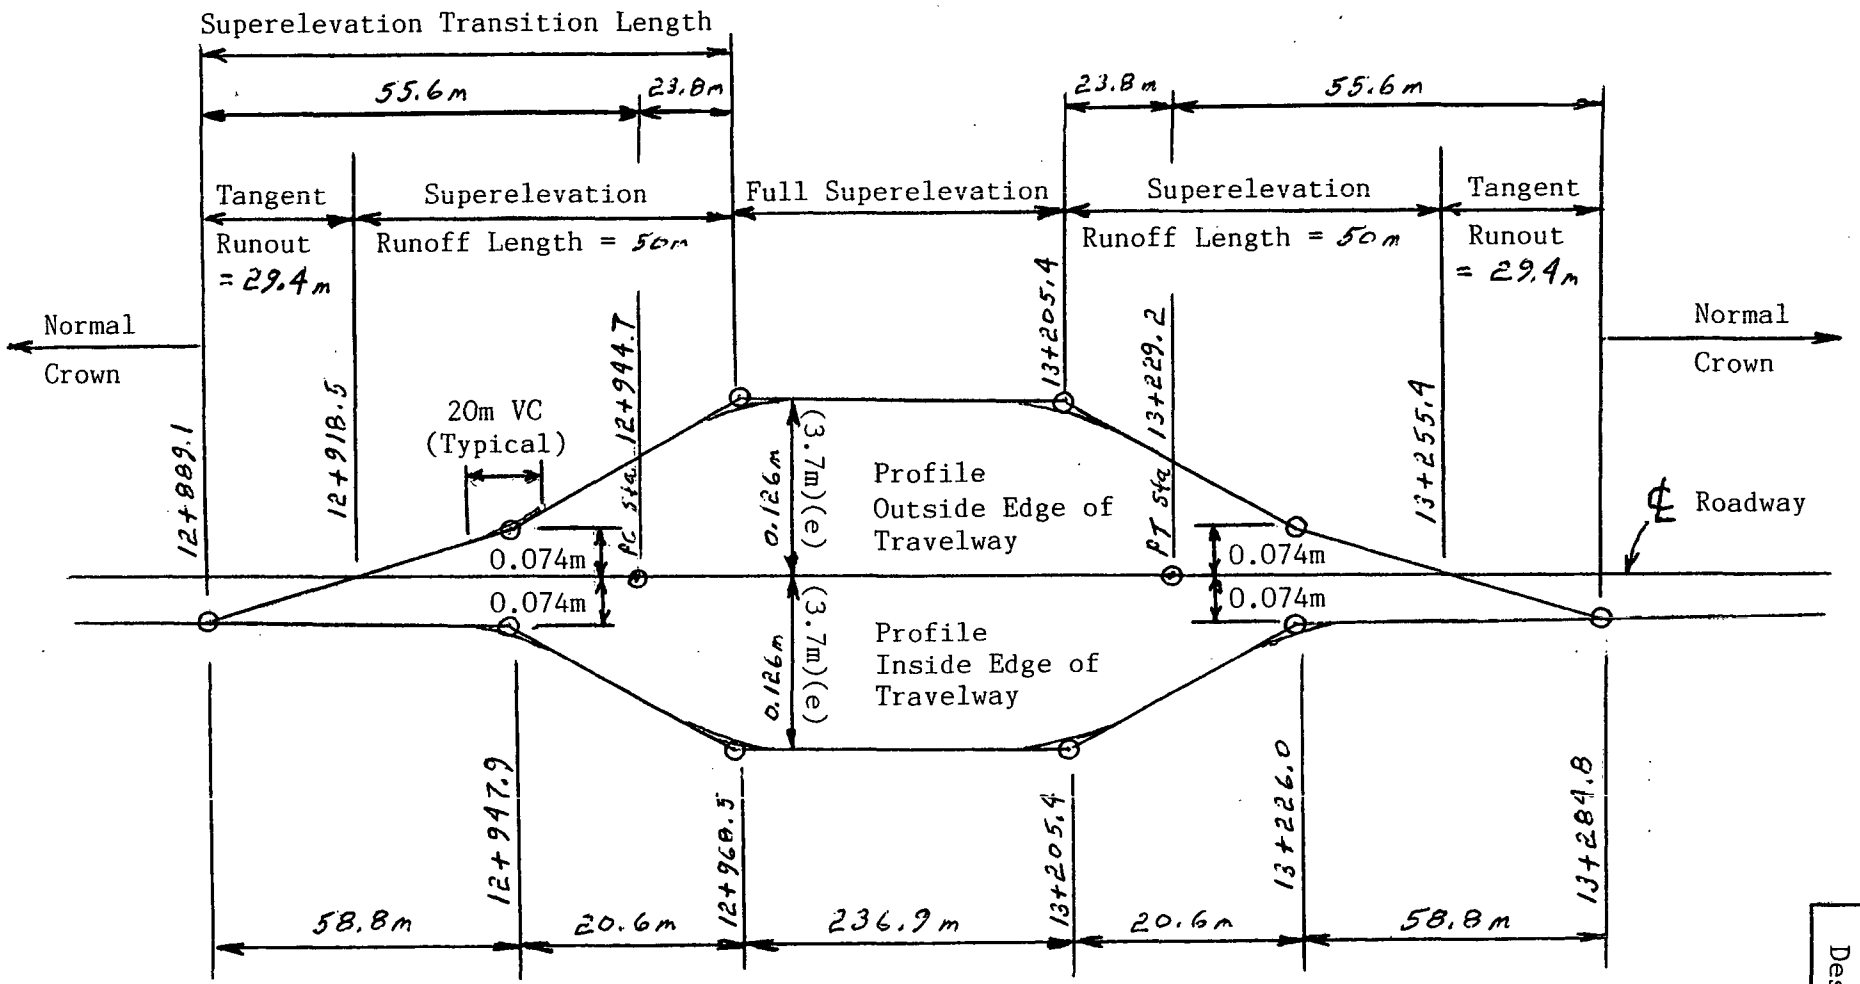


SUPERELEVATION TRANSITION DETAIL

Curve 7

e=0.034m/m (e_{max} = 0.08m/m & V=90kph)
high shoulder (Rt.) -2%
low shoulder (Lt.) -4%
existing e approx. 0.018

354.21Mg of Intermediate has been included into estimate for the purpose of getting required superelevation for this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

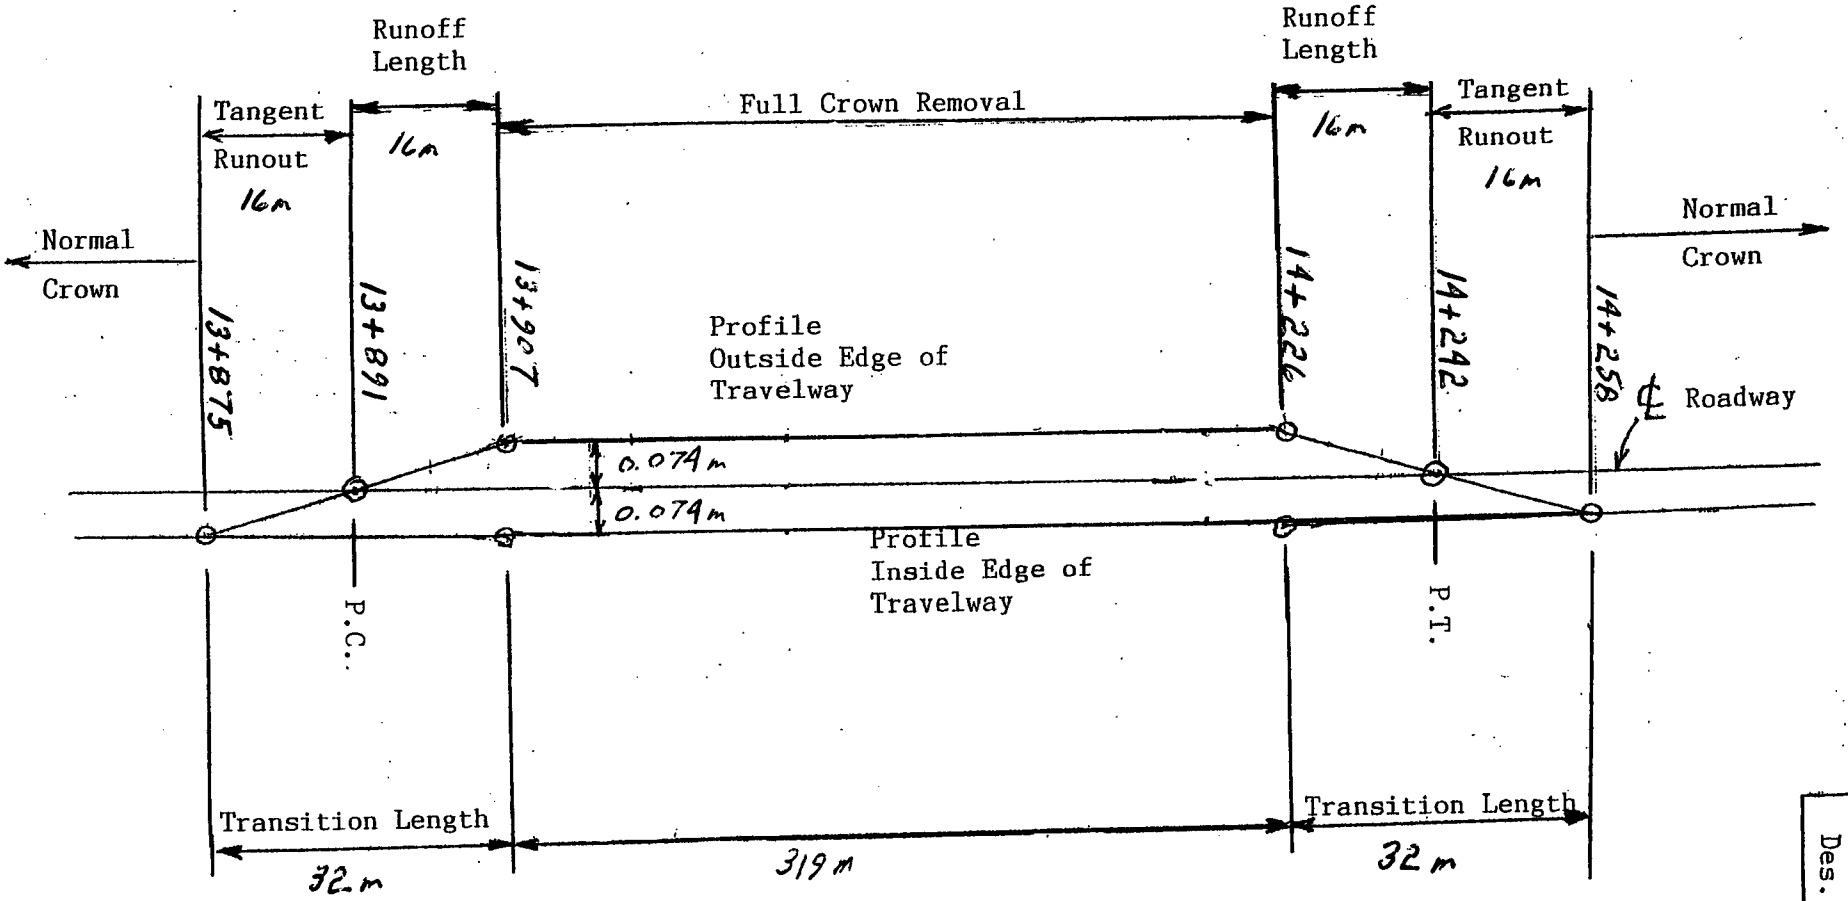

SUPERELEVATION TRANSITION DETAIL

Curve 8

e = 0.02 (Remove Crown)
V = 90km/h
high shoulder (Rt.) -4%
low shoulder (Lt.) -4%
existing e approx 0.008

276.78Mg of Intermediate has been included into estimate for the purpose of getting required superelevation for this curve. This quantity is for estimating purposes only. Actual quantity may vary.

CONTRACT R-24787
Des. No. 9903400

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE mm	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH m	SKEW	FLOW LINE: COVER m	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL cu.m	BACKFILL METHOD	AGG. 2 Mg	AGG. 12 cu.m	RIPRAP sq.m	PIPE END SECTION EA.	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
1	0+244			X	450	1	concrete											2						Remove 2 headwalls, Add 2 end sections
2	0+439		X		375	3	CM	8.0					1.20	2				2						Remove 2 headwalls Replace pipe, Add 2 end sections
3	0+447	X			375	3	CM											2						Remove 2 headwalls, Add 2 end sections, Recut ditch
4	0+604			X	450	1	concrete											2						Remove 2 headwalls, Add 2 end sections
5	0+159	X			375	3	CM	19.0					2.86	2				2						Remove 2 headwalls, Replace pipe, Add 2 end sections, Recut ditch
6	1+159			X	375	1	concrete	2.0										2						Remove 2 headwalls, Extend 2.0m South, Add 2 end sections
7	1+552			X	600	1	concrete	2.6										2						Remove 2 headwalls, Extend 1.7m South, Extend 0.9m North, Add 2 end sections
8	2+023			X			Box																	Remove barrier wall Add safety shape rail, Add guardrail
9	2+113		X		375	3	CM	6.0					0.90	2				2						Replace pipe, Add 2 end sections

PH = 7.0, UNLESS OTHERVISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE mm	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH m	SKEW	FLOW LINE: COVER m	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL cu.m	BACKFILL METHOD	AGG. 2 Mg	AGG. 12 cu.m	RIPRAP sq.m	PIPE END SECTION EA.	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
10	2+243		X		450	1	concrete	2.0										2						Remove 2 headwalls, Extend 2.0m South, Add 2 end sections
11	2+572	X			375	3	CM	7.0					1.05	2				2						Replace pipe, Add 2 end sections
12	2+785	X			375	3	CM	7.0					1.05	2				2						Remove 2 headwalls, Replace pipe, Add 2 end sections
13	2+789	X			375	1	CM	2.0										2						Remove 2 headwalls, Extend 2.0m West, Add 2 end sections
14	2+817			X			Box		50															Remove barrier wall, Add safety shape rail, Intersection to be programmed for realignment & structure replacement
15	3+289	X			375	3	concrete											2						Remove 2 headwalls, Add 2 end sections
16	3+380		X		375	3	CM	12.0																Remove private drive, Remove pipe
17	3+386			X	600	1	concrete	19.5					8.70	1				2						Remove 2 headwalls, Remove pipe, Replace & relocate pipe 5.0m West to Sta. 3+381, Add 2 end sections

PH = 7.0, UNLESS OTHERVISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE (mm)	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH (m)	SKEW	FLOW LINE: COVER (m)	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL (cu.m)	BACKFILL METHOD	AGG. 2 (Mg)	AGG. 12 (cu.m)	RIPRAP (sq.m)	PIPE END SECTION (EA.)	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
18	3+393		X		375	3	CM	8.7					1.31	2				1						Replace & relocate pipe, Extend 3.7m West, Replace 1 end section, Recut ditch, Widen drive
19	3+411		X		375	3	CM	7.0					1.05	2										Replace pipe
20	3+514		X		375	3	CM											2						Add 2 end sections
21	3+682			X	450	1	CM	0.65										2						Extend 0.65m South, Add 2 end sections
22	3+755	X			375	1	CM											2						Remove 2 headwalls, Add 2 end sections
23	4+156			X	375	1	concrete	15.0					5.00	1				2						Remove 2 headwalls, Replace pipe, Extend 1.0m South, Add 2 end sections
24	5+167	X			375	3	CM	7.0					1.05	2				2						Add new pipe, Add 2 end sections
25	5+576		X		375	3	CM						0.97	2										Relocate pipe, Relocate ditch
26	5+589			X			Box																	Add guardrail
27	5+653	X			375	3	concrete											2						Remove 2 headwalls, Add 2 end sections

PH = 7.0, UNLESS OTHERVISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE (mm)	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH (m)	SKEW	FLOW LINE: COVER (m)	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL (cu.m)	BACKFILL METHOD	AGG. 2 (Mg)	AGG. 12 (cu.m)	RIPRAP (sq.m)	PIPE END SECTION (EA.)	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
28	5+653		X		375	3	CM											2						Remove 2 headwalls, Add 2 end sections
29	6+330			X	450	1	concrete	19.3					4.90	1				2						Remove 2 headwalls, Replace pipe, Add 2 end sections
30	6+675		X		375	3	CM	12.0					1.81	2				2						Remove 2 headwalls, Replace pipe, Add 2 end sections
31	6+614			X	600	1	concrete	4.5										2						Remove 2 headwalls, Extend 1.25m South, Extend 3.25m North, Add 2 end sections
32	6+746		X		375	3	CM	19.0					4.37	2				2						Remove 2 headwalls, Replace & relocate pipe, Extend each end 2.0m, Add 2 end sections
33	6+793		X		375	3	CM	15.0					3.71	2				2						Remove 2 headwalls, Replace & relocate pipe, Extend each end 2.0m, Add 2 end sections
34	7+015			X																				
35	7+039			X	750	1	concrete	1.0									40.0	2						Remove 2 headwalls, Extend 1.0m South, Add 2 end sections, Riprap each end

PH = 7.0, UNLESS OTHERWISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION STATION	LEFT	RIGHT	CROSS	PIPE SIZE mm	DESCRIPTION TYPE	DESCRIPTION (SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.)	LENGTH m	SKEW	FLOW LINE COVER m	FLOW LINE UP STREAM ELEV.	FLOW LINE DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL cu.m	BACKFILL METHOD	AGG. 2 Mg	AGG. 12 cu.m	RIPRAP sq.m	PIPE END SECTION EA.	GRATED BOX END SECTION TYPE	GRATED BOX END SECTION SLOPE	GRATED BOX END SECTION EA.	SAFETY METAL END SECTION SLOPE	SAFETY METAL END SECTION EA.	REMARKS
36	7+148			X			Box		41															Remove barrier walls, Add safety shape rails, Add guardrail
37	7+200		X		375	3	CM	2.0					0.26	2				2						Relocate pipe, Extend 2.0m East, Add 2 end sections
38	7+558			X	450	1	concrete	2.0										2						Remove 2 headwalls, Extend 2.0m South, Add 2 end sections
39	7+958			X	600	1	concrete	4.4										2						Remove 2 headwalls, Extend 2.0m North, Extend 2.4m South, Add 2 end sections
40	8+245		X		375	3	CM	7.0					1.05	2				2						Remove 2 headwalls, Replace pipe, Add 2 end sections
41	8+538	X			300	3	CM											2						Remove 2 headwalls, Add 2 end sections
42	8+613	X			375	3	CM	14.0					2.11	2				2						Replace pipe, Extend each end 1.0m Add 2 end sections
43	8+708	X			375	3	CM	12.0					1.81	2				2						Replace pipe, Add 2 end sections
44	8+757	X			375	3	CM											2						Add 2 end sections

PH = 7.0, UNLESS OTHERWISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE (mm)	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH (m)	SKEW	FLOW LINE: COVER (m)	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL (cu.m)	BACKFILL METHOD	AGG. 2 (Mg)	AGG. 12 (cu.m)	RIPRAP (sq.m)	PIPE END SECTION (EA.)	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
45	8+794	X			375	3	CM											2						Add 2 end sections
46	8+853	X			375	3	CM											2						Remove 2 headwalls, Add 2 end sections
47	8+989			X			Bridge 44-73-6470		45															Remove barrier walls, Add safety shape rails, Add guardrail
48	9+168			X	375	1	concrete	4.0										2						Remove 2 headwalls, Extend each end 2.0m, Add 2 end sections
49	9+175		X		375	3	CM	15.0					2.26	2				2						Remove 1 headwall, Replace & relocate pipe, Add 2 end sections
50	9+433	X			375	1	CM						4.14	1				2						Remove 2 headwalls, Relocate pipe 2.2m North Add 2 end sections
51	9+626			X	450	1	concrete	1.4										2						Remove 2 headwalls, Extend 1.4m North, Add 2 end sections
52	9+836	X			375	3	CM	23.0					3.46	2				2						Replace pipe, Add 2 end sections
53	10+256			X	450	1	concrete	4.9										2						Remove 2 headwalls, Extend 2.35m North, Extend 2.55m South, Add 2 end sections

PH = 7.0, UNLESS OTHERWISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION STATION	LEFT	RIGHT	CROSS	PIPE SIZE mm	DESCRIPTION TYPE	DESCRIPTION (SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.)	LENGTH m	SKEW	FLOW LINE COVER m	FLOW LINE UP STREAM ELEV.	FLOW LINE DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL cu.m	BACKFILL METHOD	AGG. 2 Mg	AGG. 12 cu.m	RIPRAP sq.m	PIPE END SECTION EA.	GRATED BOX END SECTION TYPE	GRATED BOX END SECTION SLOPE	GRATED BOX END SECTION EA.	SAFETY METAL END SECTION SLOPE	SAFETY METAL END SECTION EA.	REMARKS
54	10+295			X	450	1	concrete	4.5										2						Remove 2 headwalls, Extend 2.35m North, Extend 2.15m South, Add 2 end sections
55	10+332	X			375	3	CM	6.0					0.90	2				2						Replace pipe, Extend each end 1.0m Add 2 end sections
56	10+350	X			375	3	CM	6.0					0.39	2				2						Replace & relocate pipe, Extend each end 1.0m Add 2 end sections
57	10+383	X			375	3	CM	7.0					1.04	2				2						Remove 2 timber headwall Replace & relocate pipe, Add 2 end sections
58	10+430	X			375	3	CM	6.0					0.83	2				2						Replace & relocate pipe, Add 2 end sections
59	10+489	X			375	3	CM						0.53	2				2						Relocate pipe, Add 2 end sections
60	10+562			X	450	1	concrete	4.0										2						Remove 2 headwalls, Extend 1.95m North, Extend 2.45m South, Add 2 end sections
61	10+691	X			375	1	CM						2.12	1				2						Remove 2 headwalls, Relocate pipe, Add 2 end sections
62	10+794	X			450	1	concrete						2.30	1				2						Remove 2 headwalls, Relocate pipe, Add 2 end sections

PH = 7.0, UNLESS OTHERWISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE mm	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH m	SKEW	FLOW LINE: COVER m	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL cu.m	BACKFILL METHOD	AGG. 2 Mg	AGG. 12 cu.m	RIPRAP sq.m	PIPE END SECTION EA.	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
63	10+829	X			375	3	CM	15.0					1.86	2				2						Replace & relocate pipe, Add 2 end sections
64	10+901	X			375	1	concrete											2						Remove 2 headwalls, Add 2 end sections
65	10+901		X		375	3	CM	5.0					0.92	2				2						Remove 2 headwalls, Replace & relocate pipe, Add 2 end sections
66	10+930	X			375	3	CM	10.0					2.12	2				2						Remove 2 headwalls, Replace & relocate pipe, Add 2 end sections
67	10+961	X			375	3	CM	12.0					0.96	2				2						Replace pipe, Add 2 end sections
68	10+964		X		375	3	CM						0.89	2				1						Relocate pipe, Replace 1 end section
69	10+980	X			375	1	CM	6.0					0.88	1				2						Remove 2 headwalls, Replace & relocate pipe, Add 2 end sections
70	11+020	X			375	3	CM	6.0					0.99	2				2						Remove 2 headwalls, Replace & relocate pipe, Add 2 end sections
71	11+037	X			375	3	CM	9.0					1.25	2				2						Remove 2 headwalls, Replace & relocate pipe, Add 2 end sections
72	11+071			X	375	1	concrete	4.9										2						Remove 2 headwalls, Extend 2.15m North, Extend 2.75m South, Add 2 end sections

PH = 7.0, UNLESS OTHERWISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE (mm)	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH (m)	SKEW	FLOW LINE: COVER (m)	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL (cu.m)	BACKFILL METHOD	AGG. 2 (Mg)	AGG. 12 (cu.m)	RIPRAP (sq.m)	PIPE END SECTION (EA.)	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
73	11+076	X			375	3	CM	8.0					1.24	2				2						Replace & relocate pipe, Add 2 end sections
74	11+440			X	375	1	concrete											2						Remove 2 headwalls, Add 2 end sections
75	11+559		X		375	3	CM											2						Remove 2 headwalls, Add 2 end sections
76	11+599	X			375	3	CM											2						Remove 2 headwalls, Add 2 end sections
77	11+998		X		300	3	CM	2.0										2						Remove 2 headwalls, Extend each end 1.0m Add 2 end sections
78	12+320			X	600	1	concrete	4.6										2						Remove 2 headwalls, Extend 1.95m North, Extend 2.65m South, Add 2 end sections
79	12+407		X		600	1	CM						4.73	1				2						Remove 2 headwalls, Relocate pipe, Add 2 end sections
80	12+613	X			375	3	CM						0.37	2				2						Remove 2 headwalls, Relocate pipe, Add 2 end sections
81	12+750	X			375	3	concrete											2						Remove 2 headwalls, Add 2 end sections
82	13+362			X	600	1	concrete	1.3										2						Remove 2 headwalls, Extend 1.25m South, Add 2 end sections

PH = 7.0, UNLESS OTHERWISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED


CONTRACT R-24787
DES. NO. 9903400

STRUCTURE DATA

STRUCTURE NUMBER	LOCATION: STATION	LOCATION: LEFT	LOCATION: RIGHT	LOCATION: CROSS	PIPE SIZE mm	DESCRIPTION: TYPE	DESCRIPTION: SEE STDS. FOR ACCEPT. PIPE MAT'L TO BE USED FOR EACH TYPE OF PIPE & FOR LEGEND OF ABBREVIATIONS.	LENGTH m	SKEW	FLOW LINE: COVER m	FLOW LINE: UP STREAM ELEV.	FLOW LINE: DOWN STREAM ELEV.	"B" BORROW FOR STR. BACKFILL cu.m	BACKFILL METHOD	AGG. 2 Mg	AGG. 12 cu.m	RIPRAP sq.m	PIPE END SECTION EA.	GRATED BOX END SECTION: TYPE	GRATED BOX END SECTION: SLOPE	GRATED BOX END SECTION: EA.	SAFETY METAL END SECTION: SLOPE	SAFETY METAL END SECTION: EA.	REMARKS
83	13+522	X			375	1	CM											2						Remove 2 headwalls, Add 2 end sections
84	13+567		X		300	3	CM	7.0					1.37	2				2						Replace & relocate pipe, Remove 2 headwalls, Add 2 end sections, Recut ditch
85	13+582			X	450	1	concrete	4.5					1.43	1				2						Remove 2 headwalls, Extend 2.25m North, Extend 2.25m South, Add 2 end sections
86	14+052	X			375	1	CM	12.0					2.33	1				2						Remove 2 headwalls, Replace pipe, Add 2 end sections Recut ditch
87	14+109		X		450	1	concrete											2						Remove 2 headwalls, Add 2 end sections
88	14+344		X		375	3	CM	6.0					0.94	2				2						Remove 2 headwalls, Replace & relocate pipe, Add 2 end sections
89	14+351	X			375	3	CM											2						Remove 2 headwalls, Add 2 end sections

PH = 7.0, UNLESS OTHERVISE NOTED
CONDITION = ABRASIVE, UNLESS OTHERWISE NOTED

CONTRACT R-24787
Des. No. 9903400

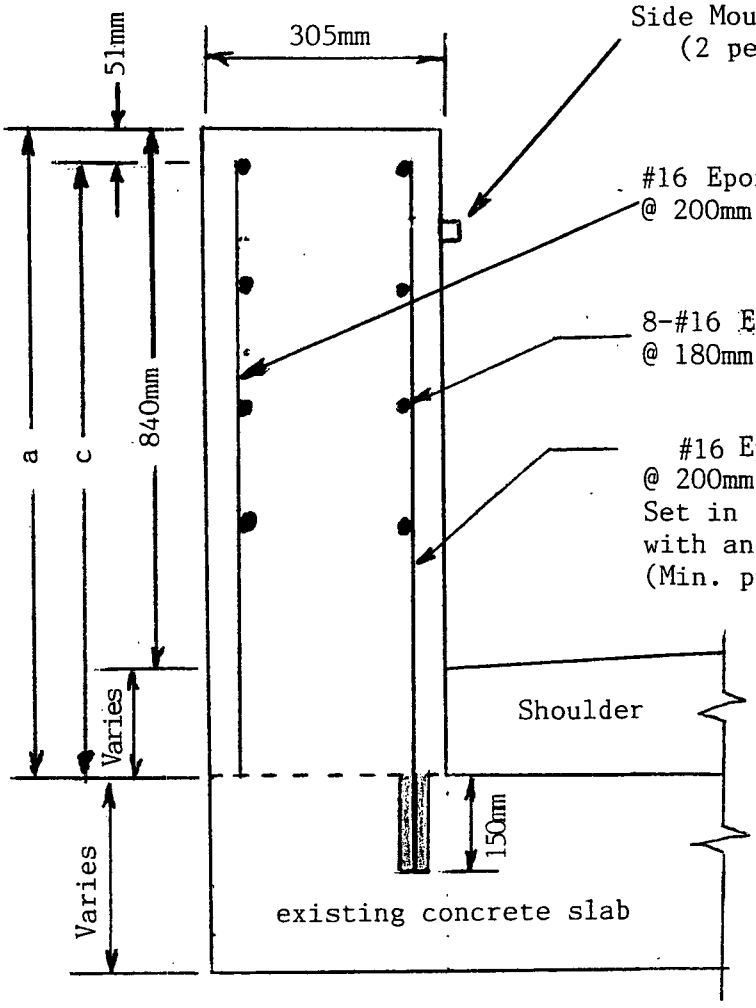


Minimum Lap for #16 Bars is 580mm

SAFETY SHAPE RAIL SECTION


Structure #	Station	Length of rail (mm)	b (mm)	* a (mm)	* c (mm)	No. of #16bars @ c	No. of #16bars @ (c+150)	Volume of Safety Shape (m^3)
8	2+023	6400	6298	1348	1297	33	33	2.63
14	2+817	6250	6148	1348	1297	32	32	2.57
36	7+148	4700	4598	1348	1297	24	24	1.93
47	8+989	7791	7689	1031	980	40	40	2.45

*NOTE - Lengths a & c are estimated only. Actual lengths to be determined in field.

CONTRACT R-24787
Des. No. 9903400

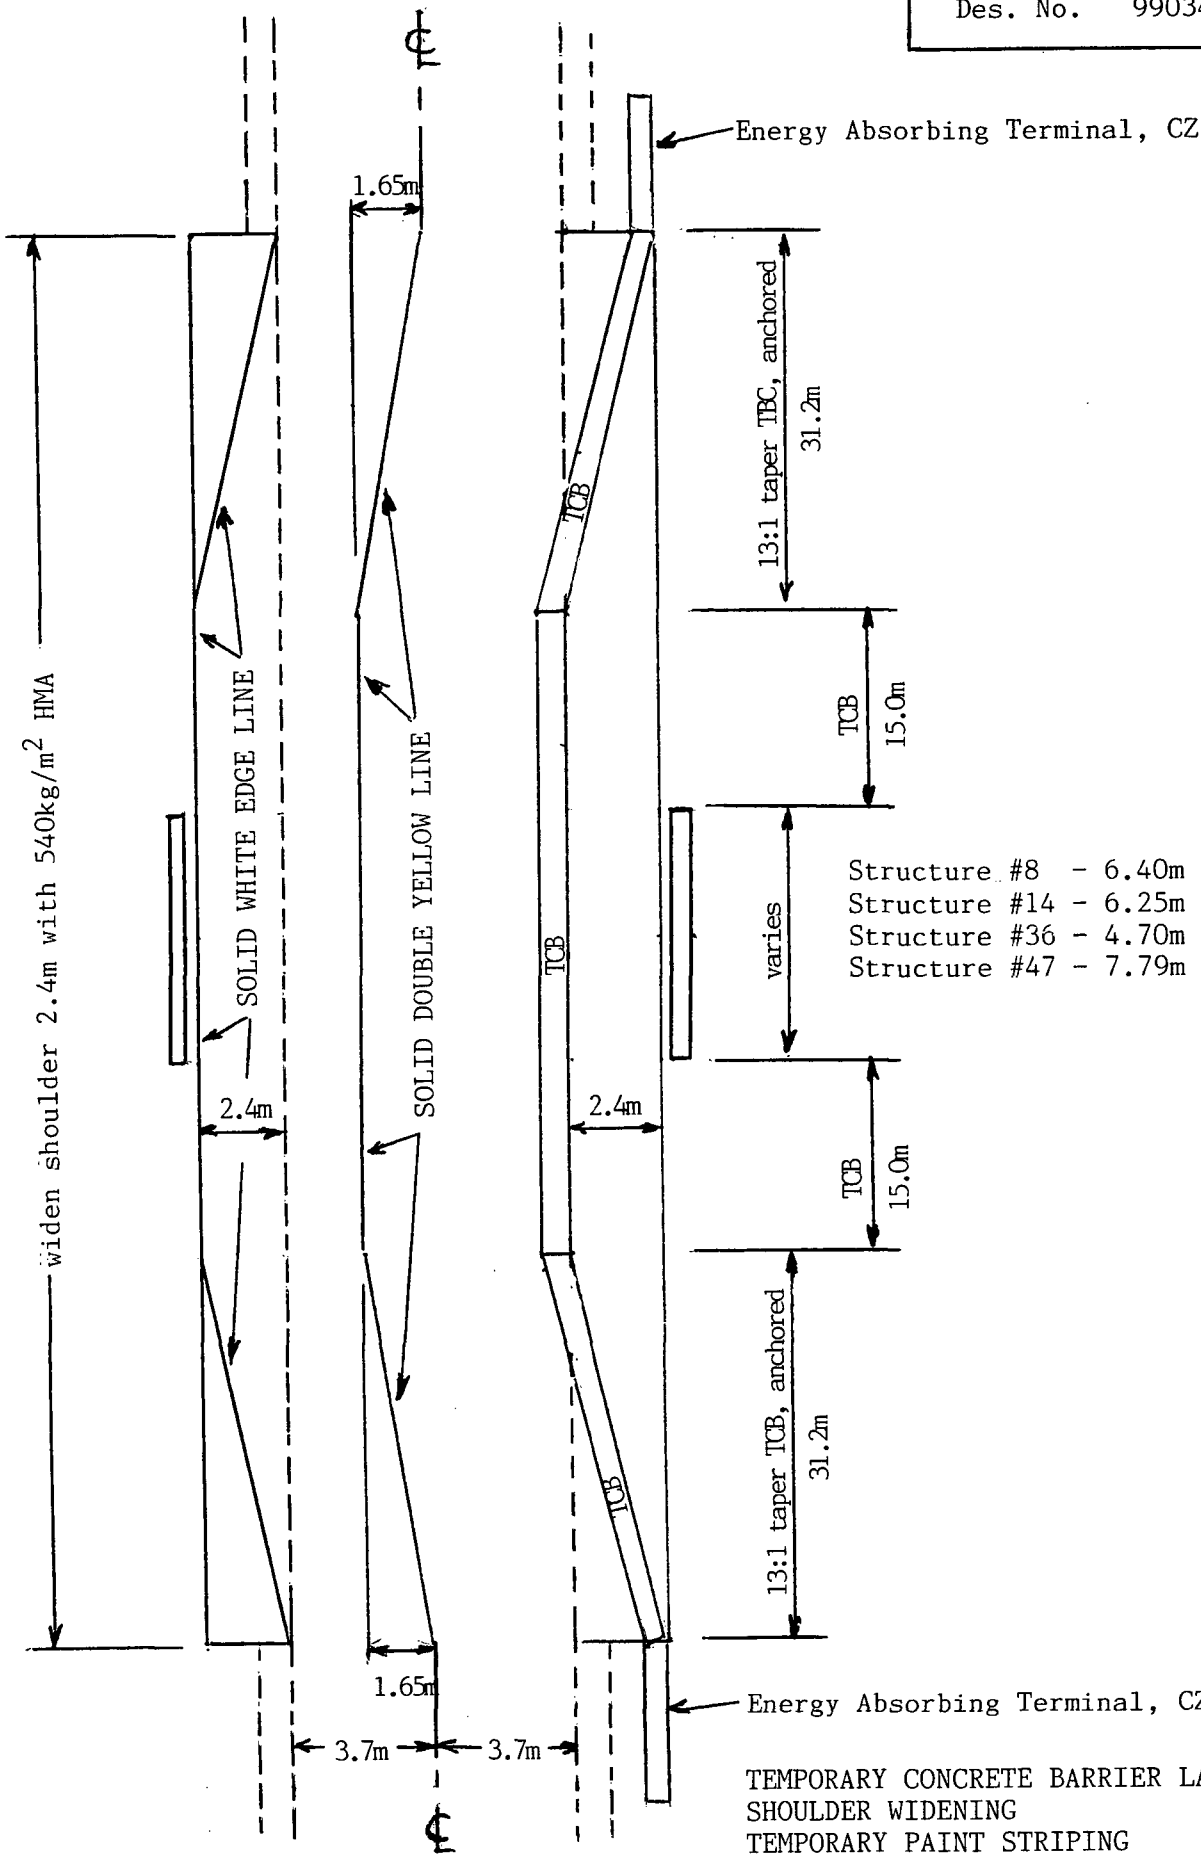

TEMPORARY CONCRETE BARRIER LAYOUT
SHOULDER WIDENING
TEMPORARY PAINT STRIPING

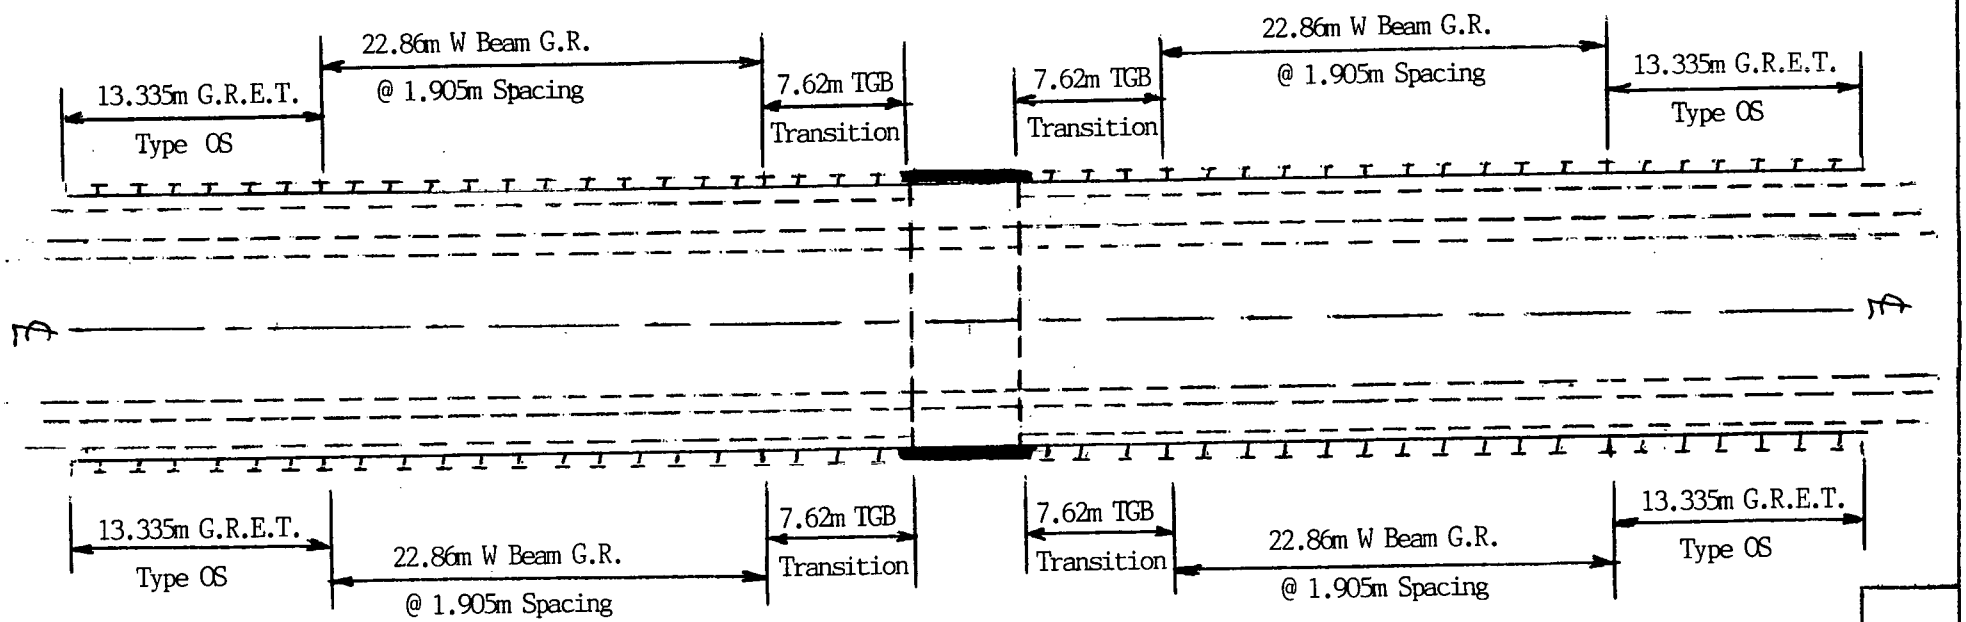


GUARDRAIL PLAN SHEET

CONCRETE BOX STRUCTURE AT STA. 2+023

Structure #8

CONTRACT R-24787
Des. No. 9903400

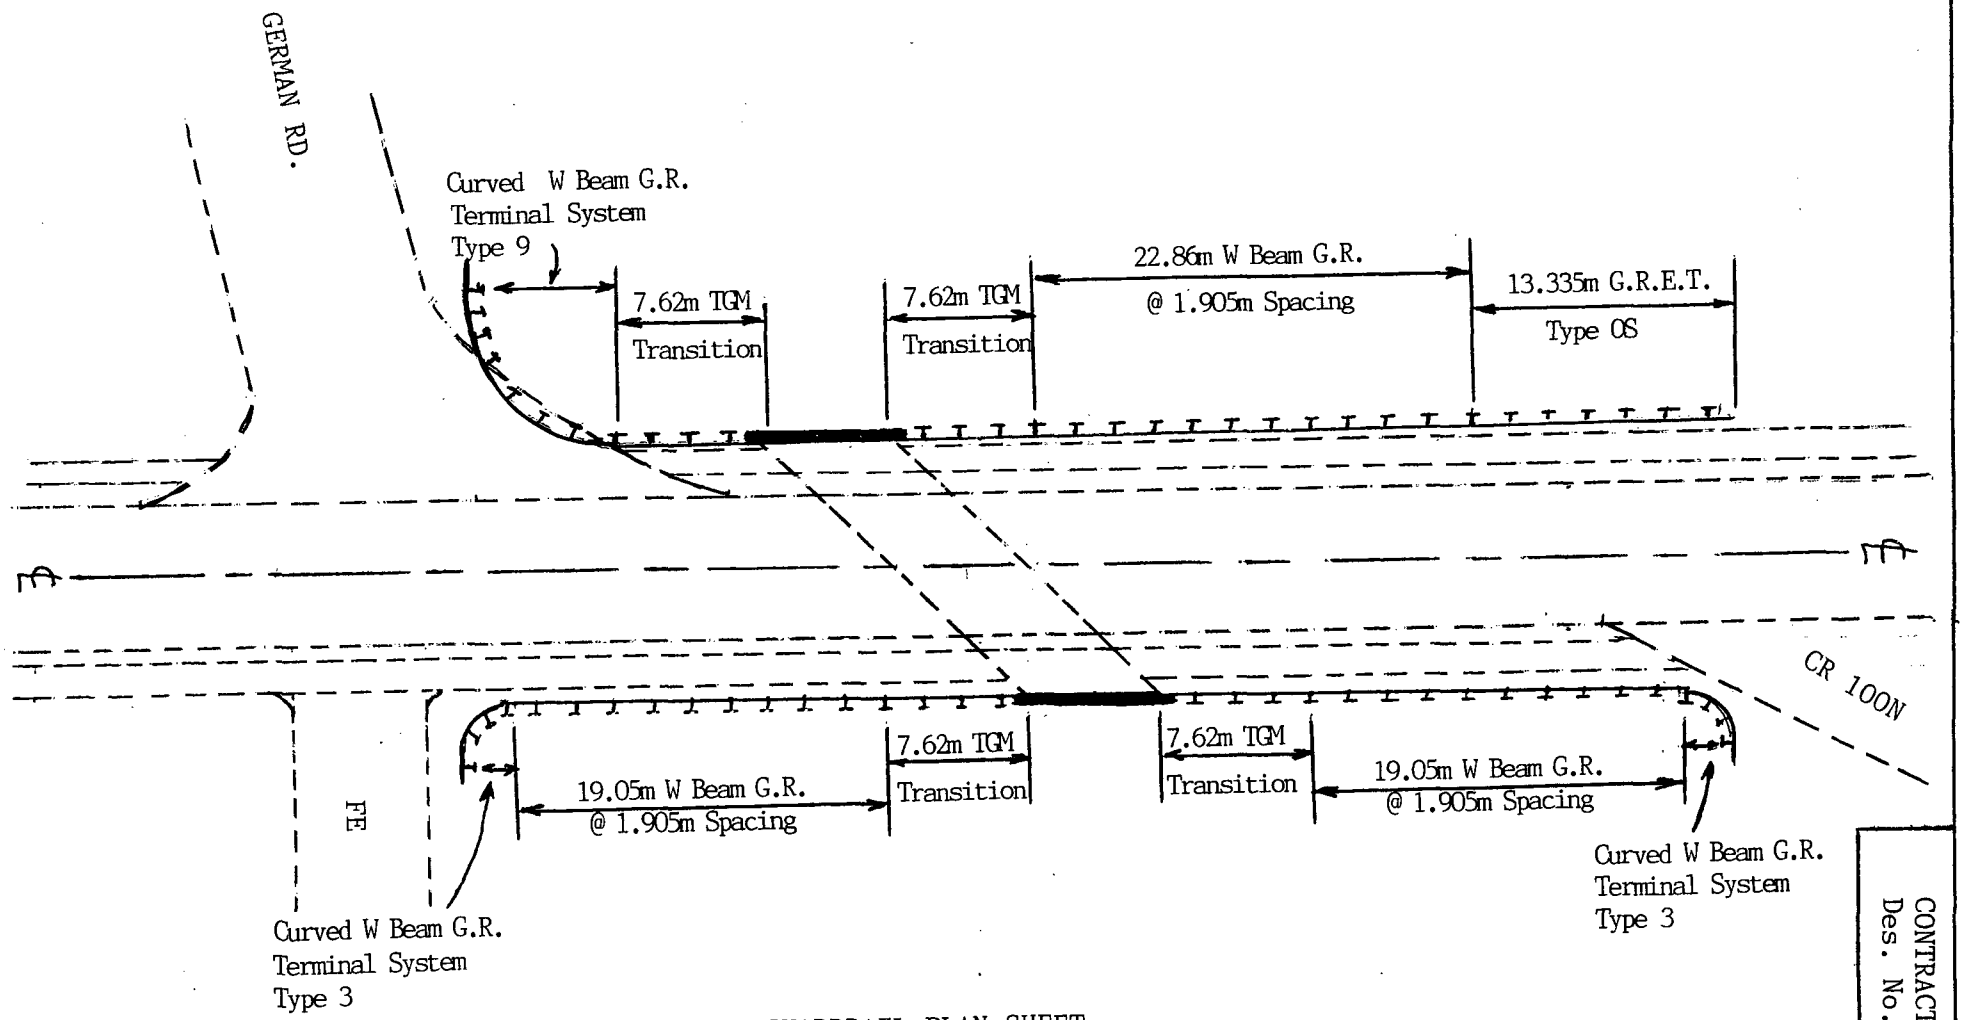


GUARDRAIL PLAN SHEET

CONCRETE BOX STRUCTURE AT STA. 2+817

Structure #14

CONTRACT R-24787
Des. No. 9903400

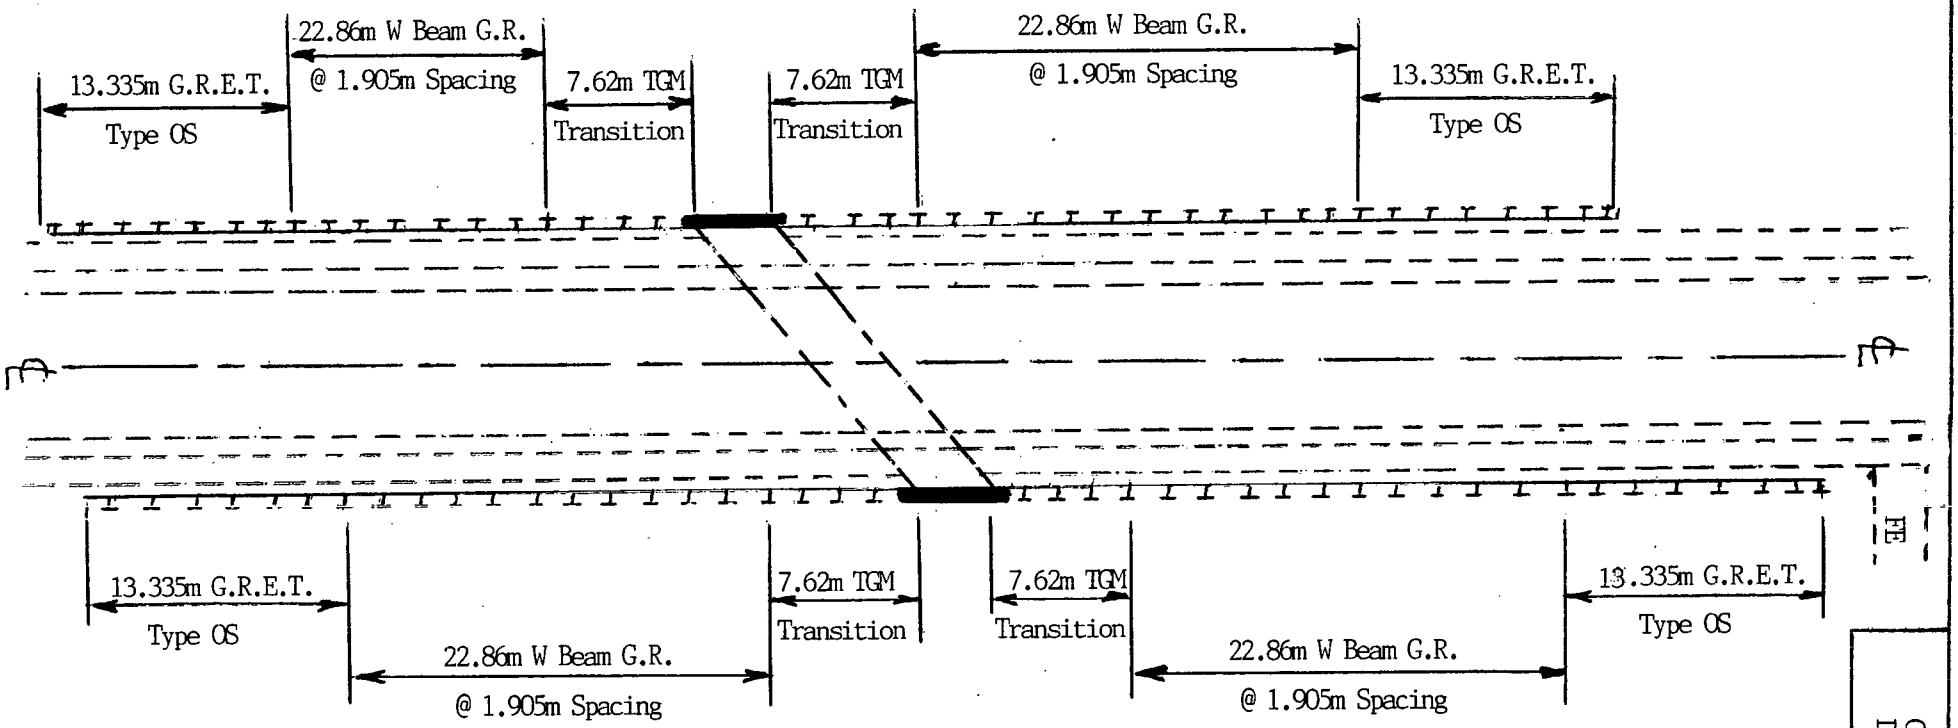


GUARDRAIL PLAN SHEET

CONCRETE BOX STRUCTURE AT STA. 7+148

Structure #36

CONTRACT R-24787
Des. No. 9903400

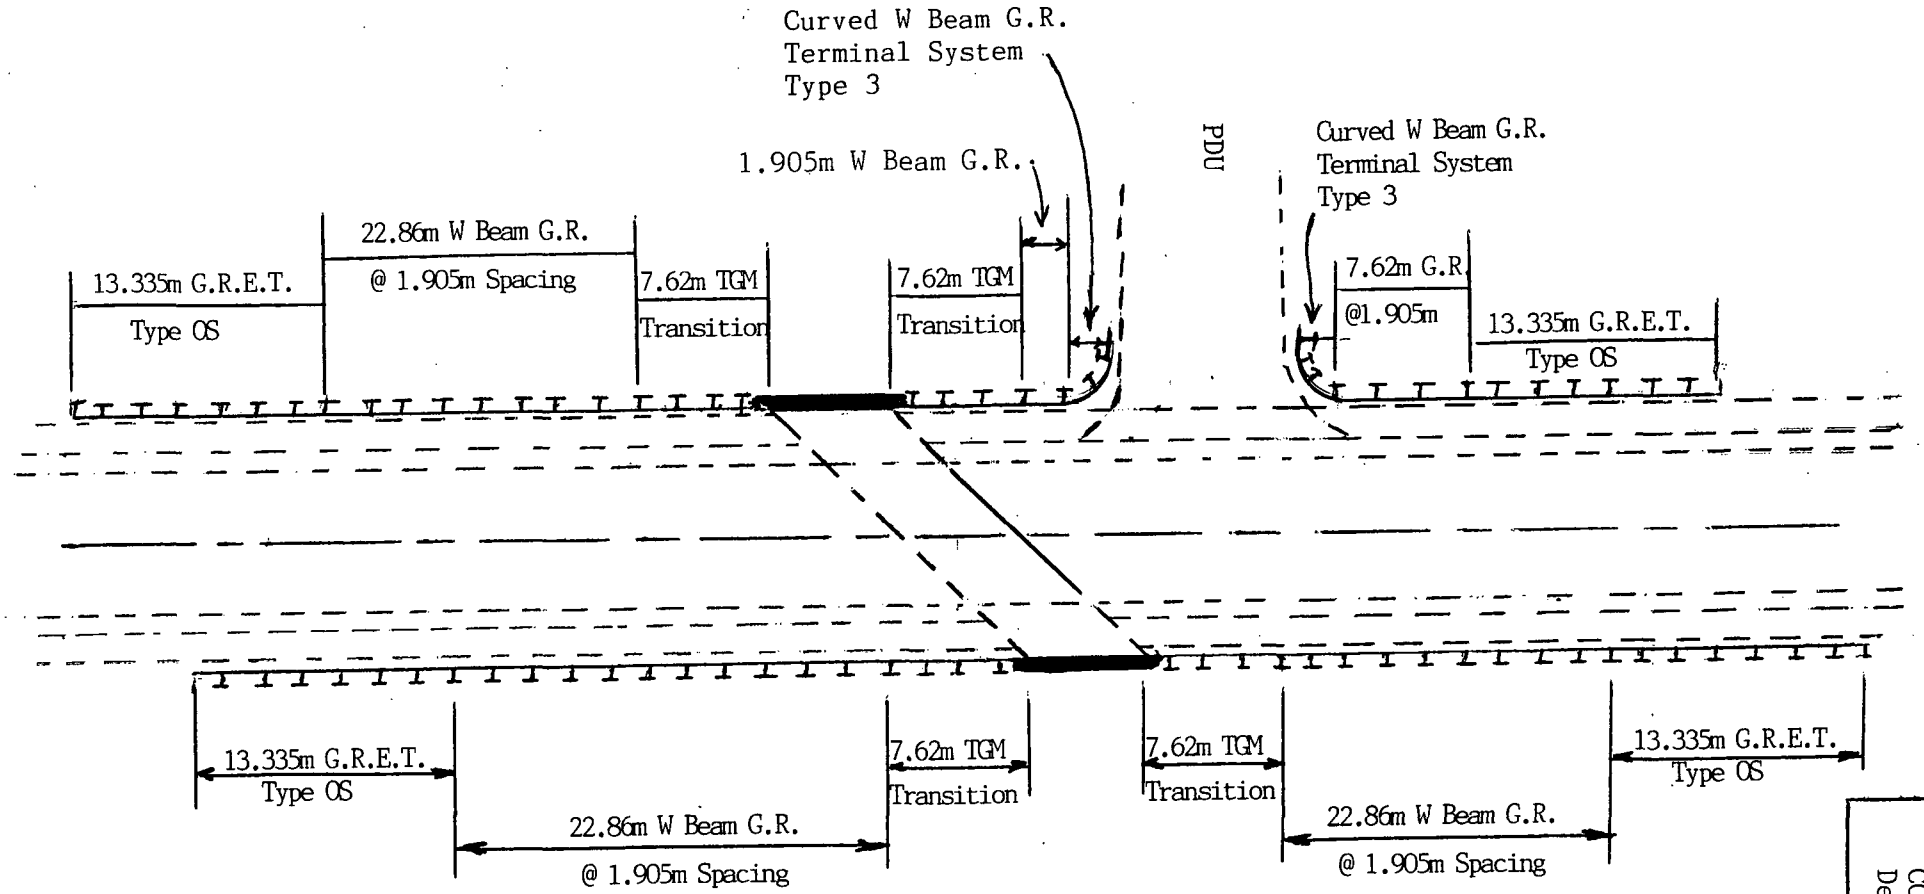

GUARDRAIL PLAN SHEET


BRIDGE #44-73-6470 AT STA. 8+989
Structure #47

CONTRACT R-24787
Des. No. 9903400

AT Woodland

CONTRACT
DES. NO.


UTILITY INVOLVEMENT AT INTERSECTION

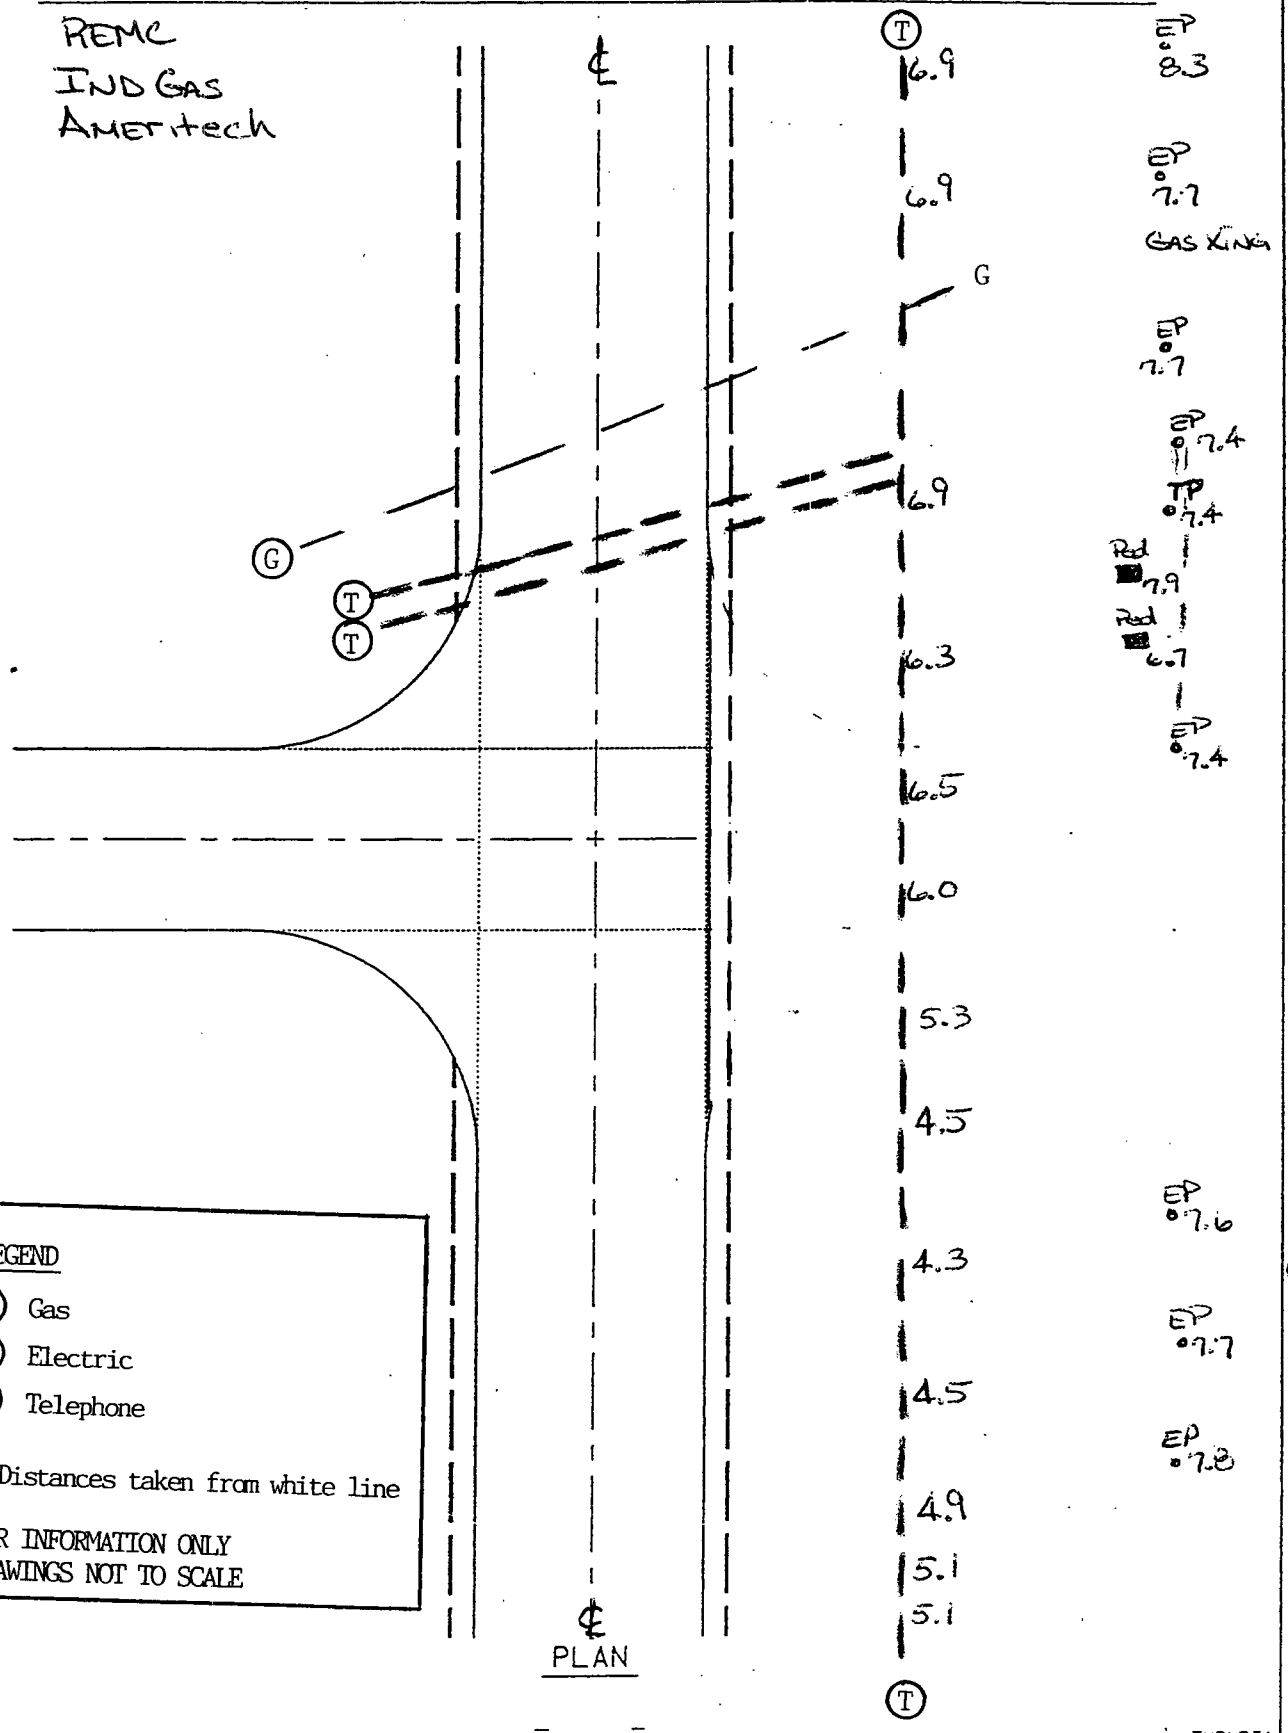

CONTRACT
DES. NO.

SR44 @ CR325E

UTILITY INVOLVEMENT AT INTERSECTION

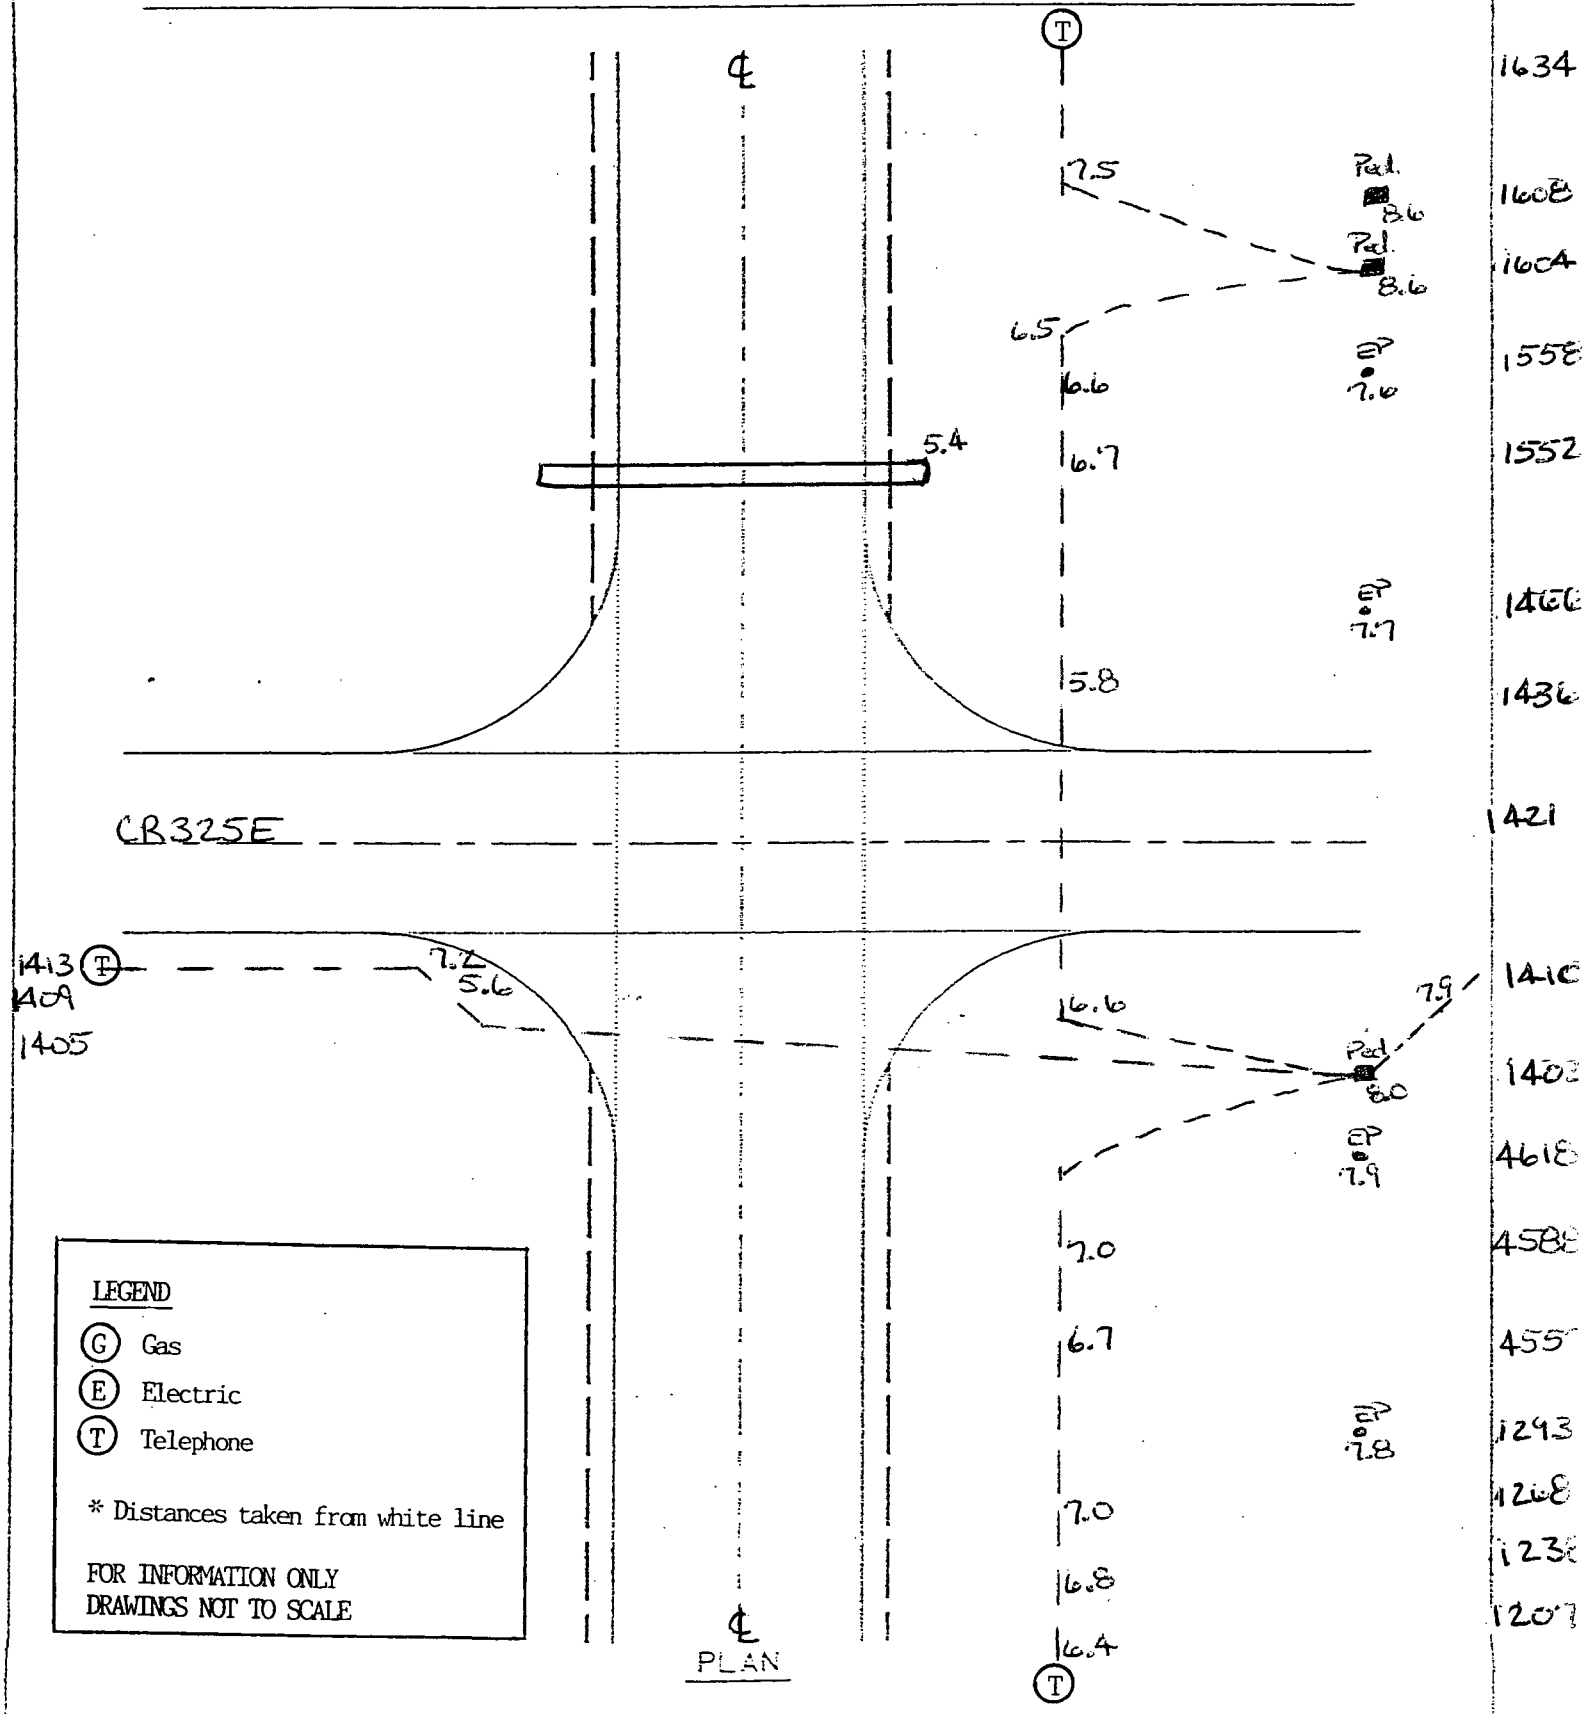

LEGEND

- (G) Gas
- (E) Electric
- (T) Telephone


* Distances taken from white line

FOR INFORMATION ONLY
DRAWINGS NOT TO SCALE

CONTRACT
DES. NO.

CR450E @ SR44


UTILITY INVOLVEMENT AT INTERSECTION

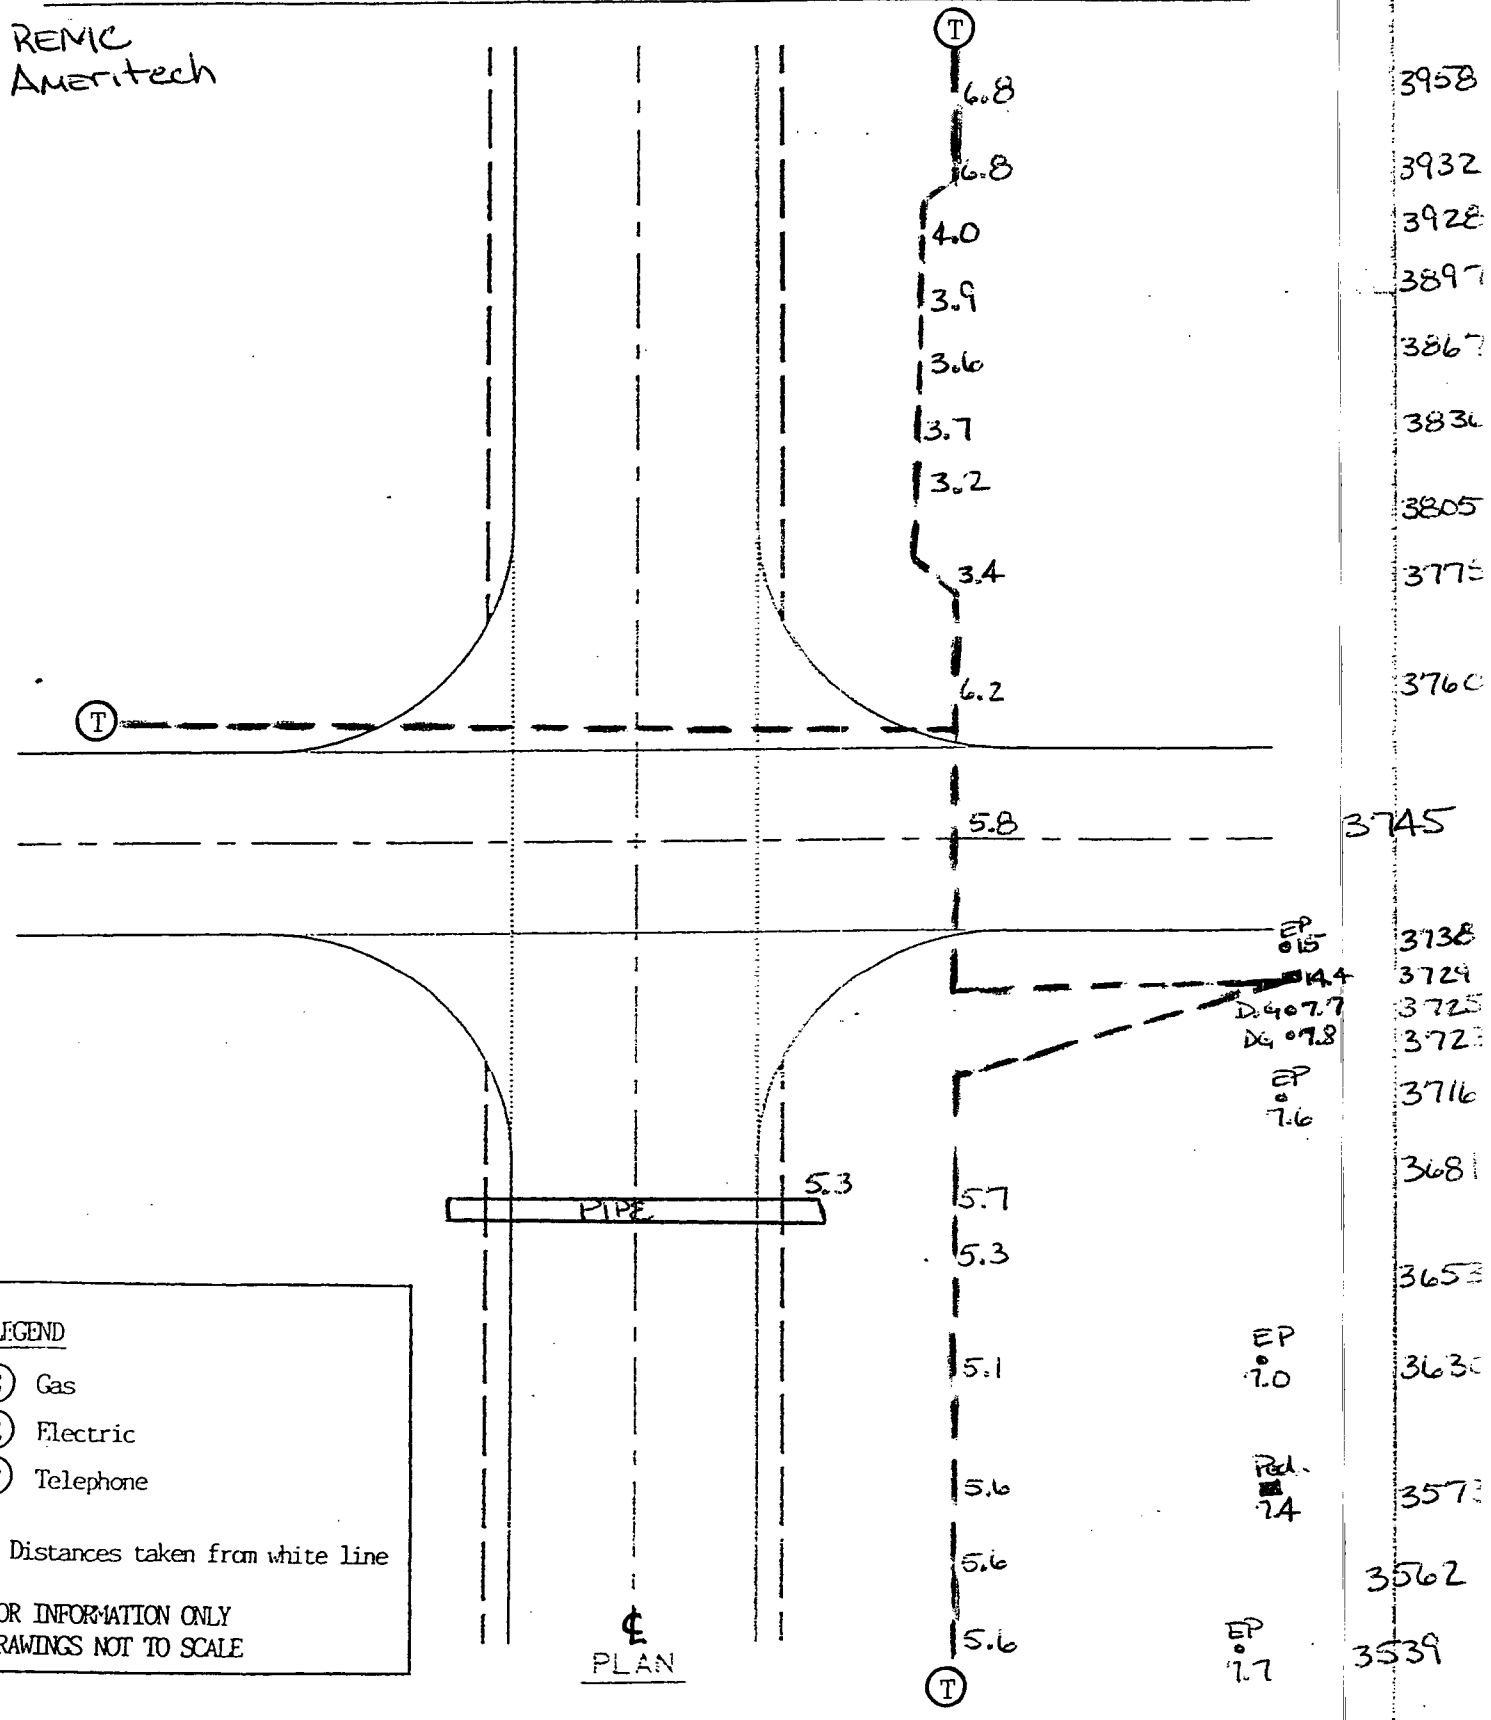

EXISTING ROADWAY - FIELD NOTES

OAD SR44 SECTION _____ PAGE _____

ROM: AT CR600E / CR200N TO: _____

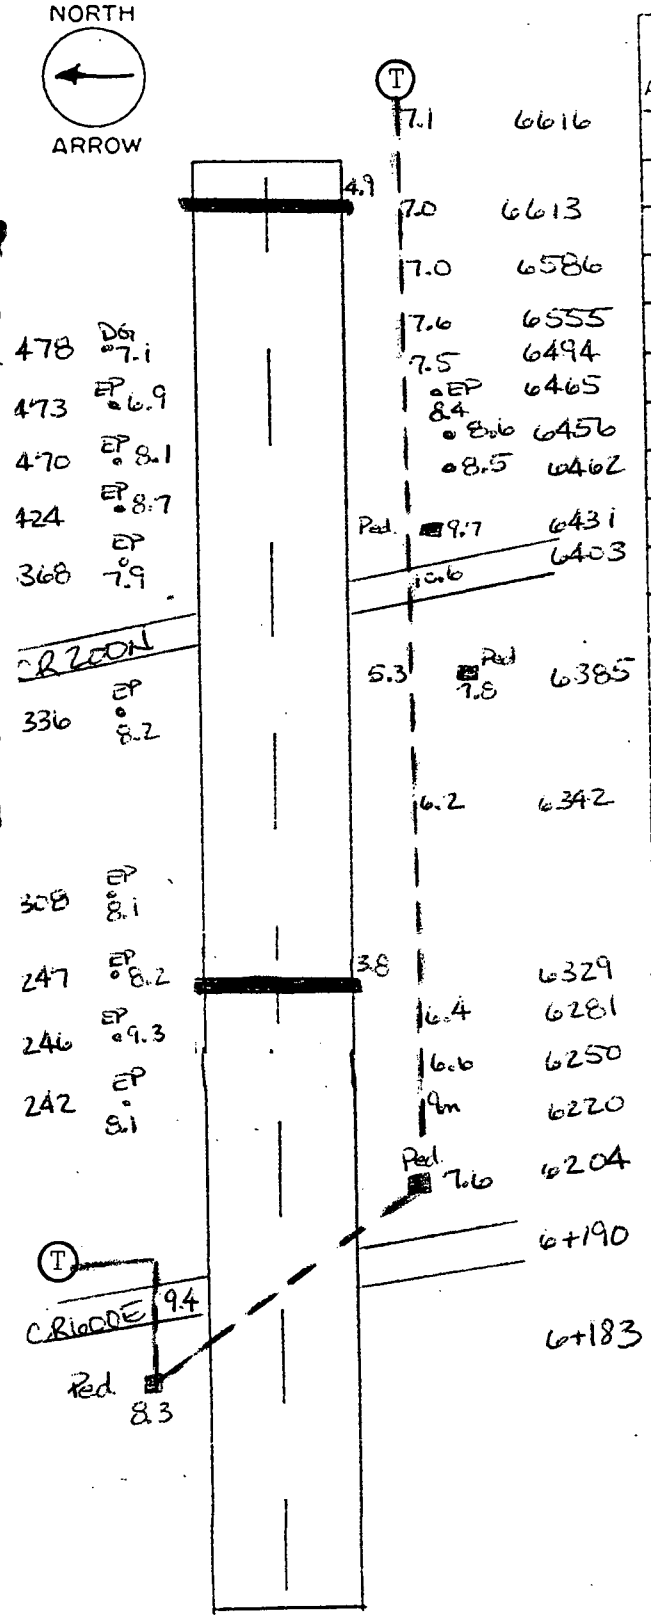


ROAD/STR APPROACH		COMMERCIAL DRIVES		PRIVATE DRIVES		MAIL BOXES		REMOVE	REMOVE
I	U	I	U	I	U	I	U		

CONTRACT
DES. NO.

SR44 @ CR 650E

UTILITY INVOLVEMENT AT INTERSECTION


PSI
Ameritech

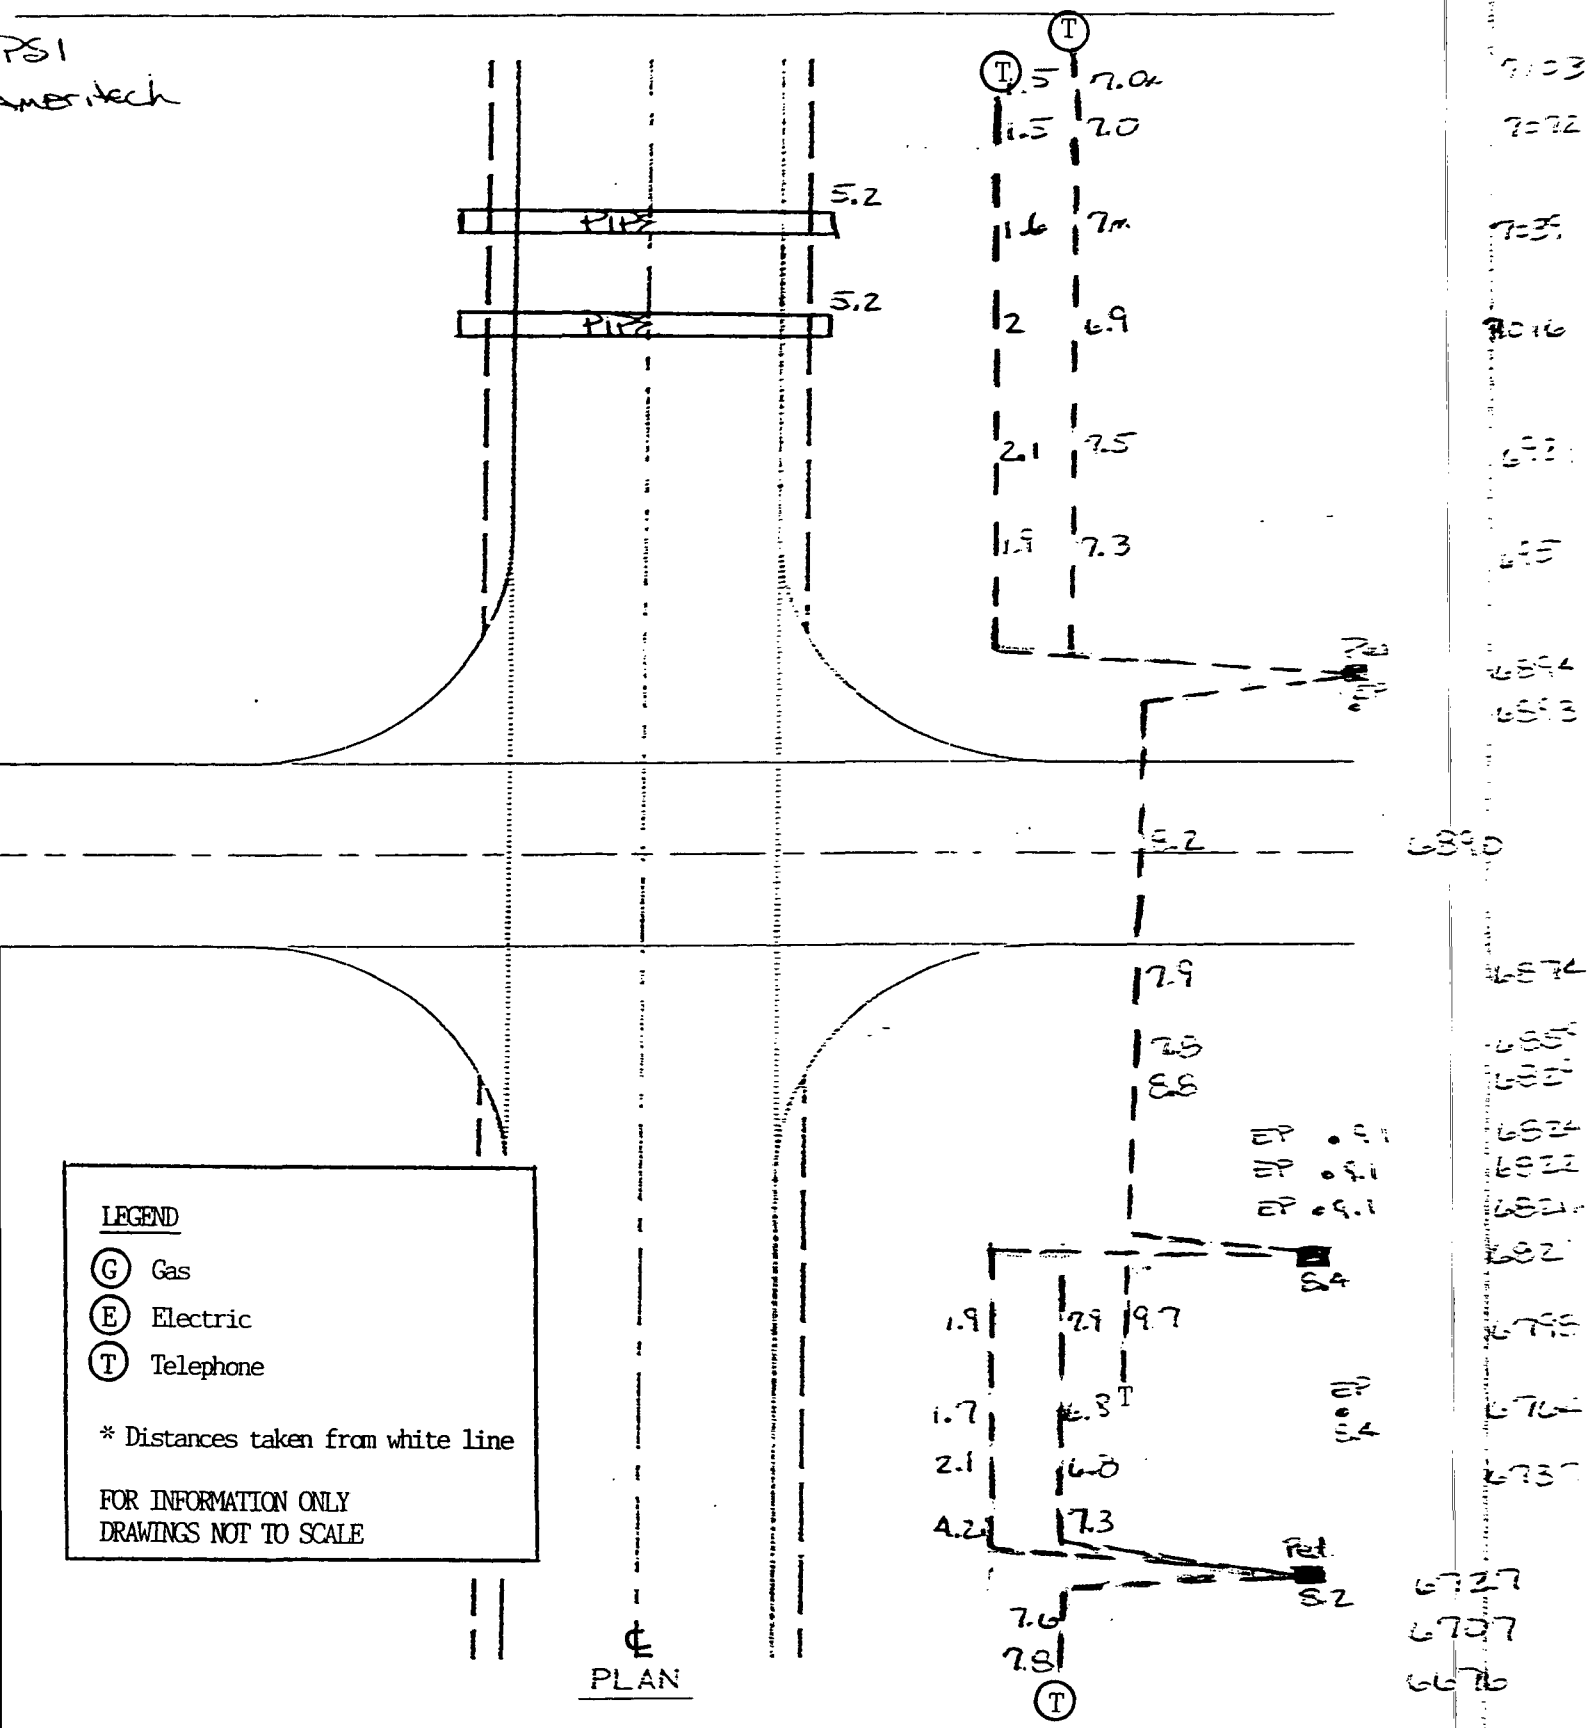

CONTRACT
DES. NO.

SR44 @ CR775E

UTILITY INVOLVEMENT AT INTERSECTION

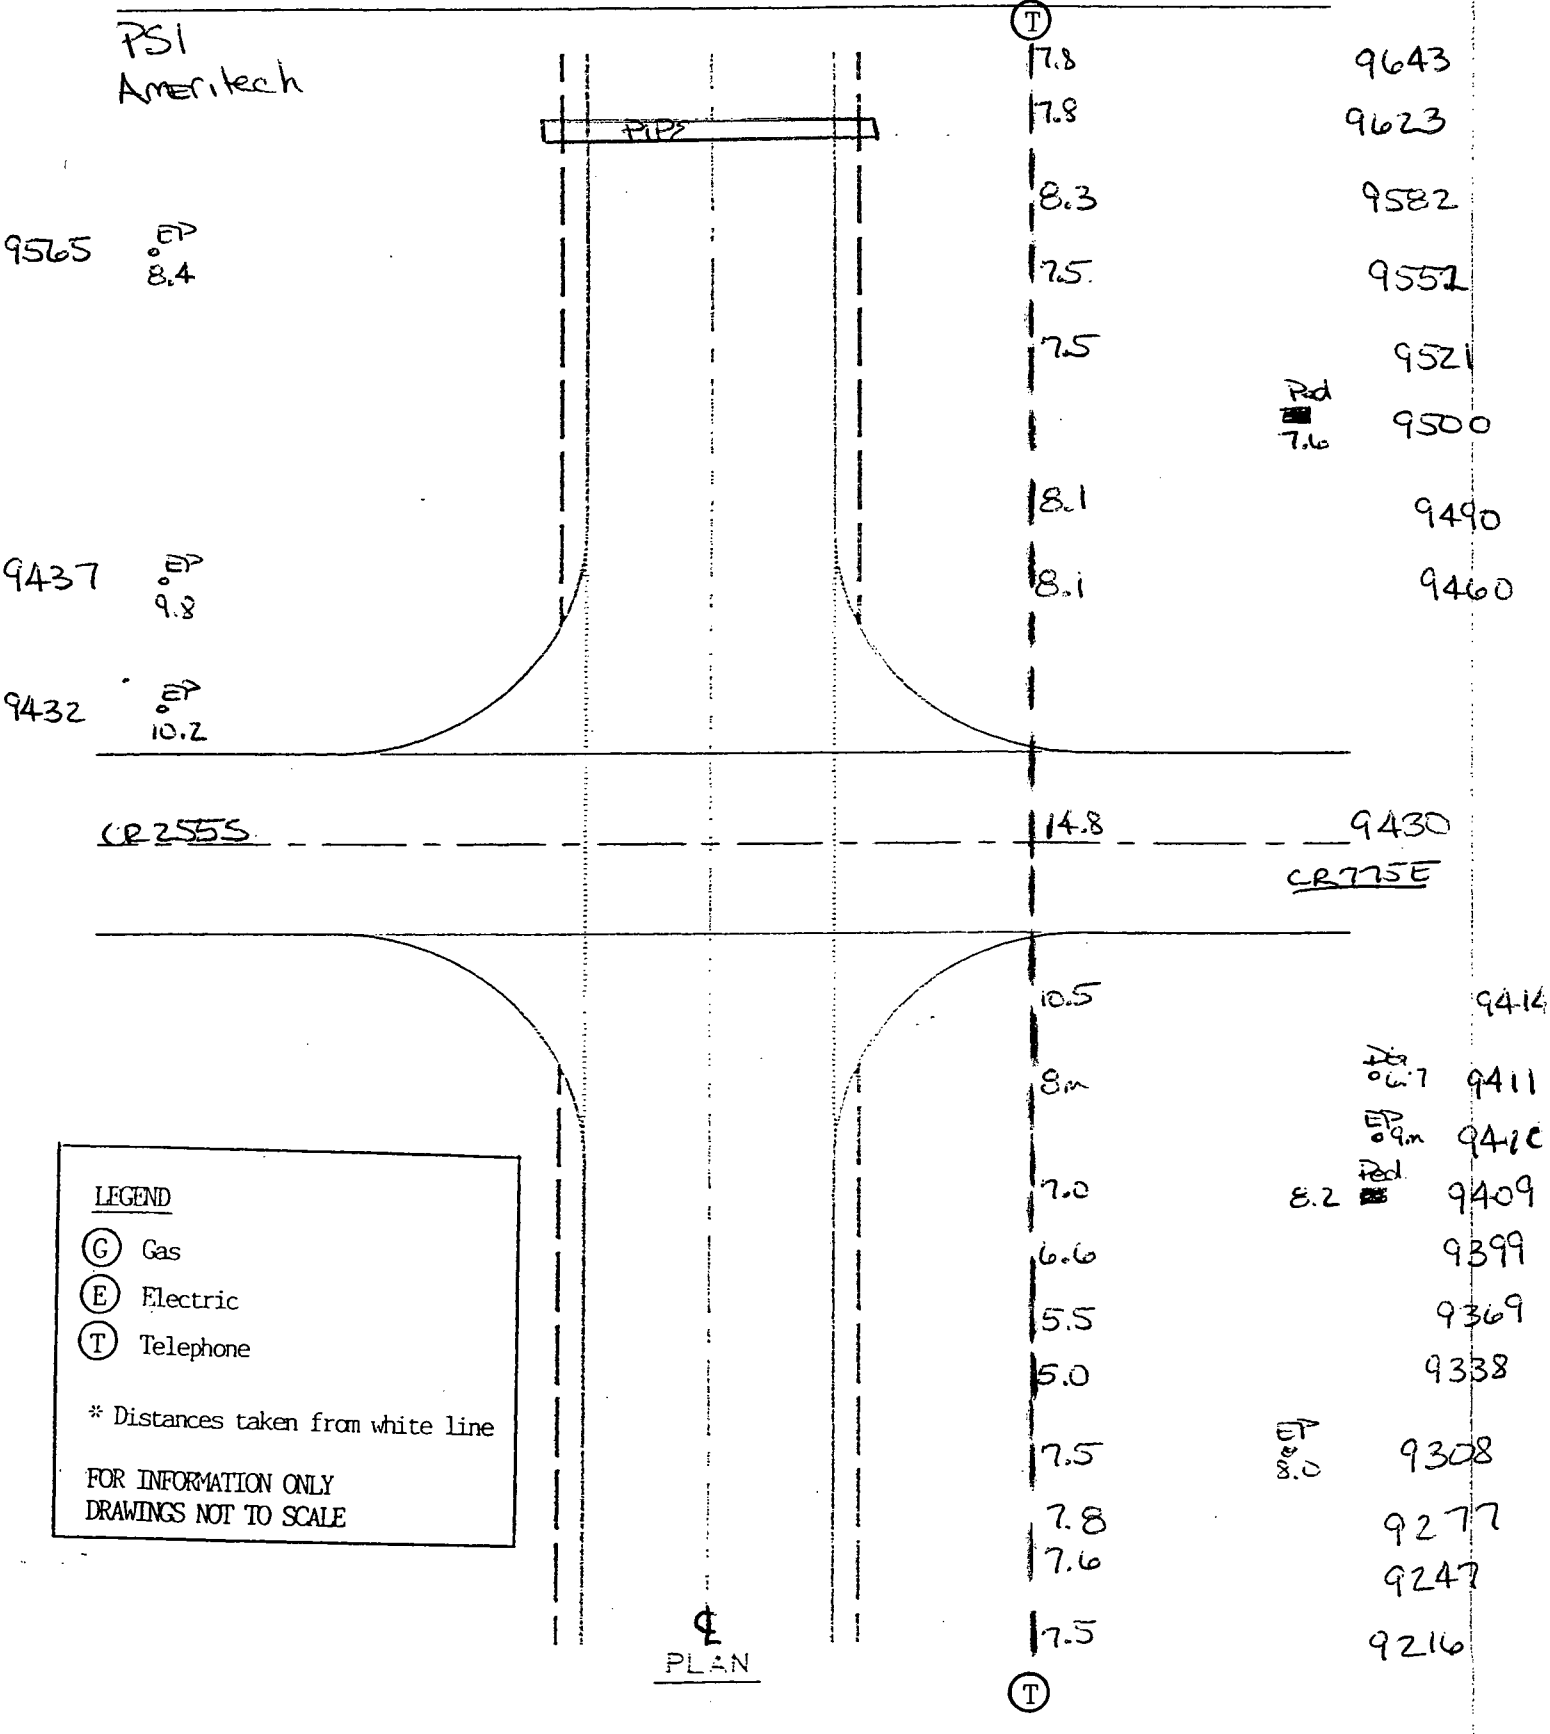

LEGEND

(G) Gas
(E) Electric
(T) Telephone


* Distances taken from white line

FOR INFORMATION ONLY
DRAWINGS NOT TO SCALE

CONTRACT
DES. NO.

SR44 @ CR 975W

UTILITY INVOLVEMENT AT INTERSECTION

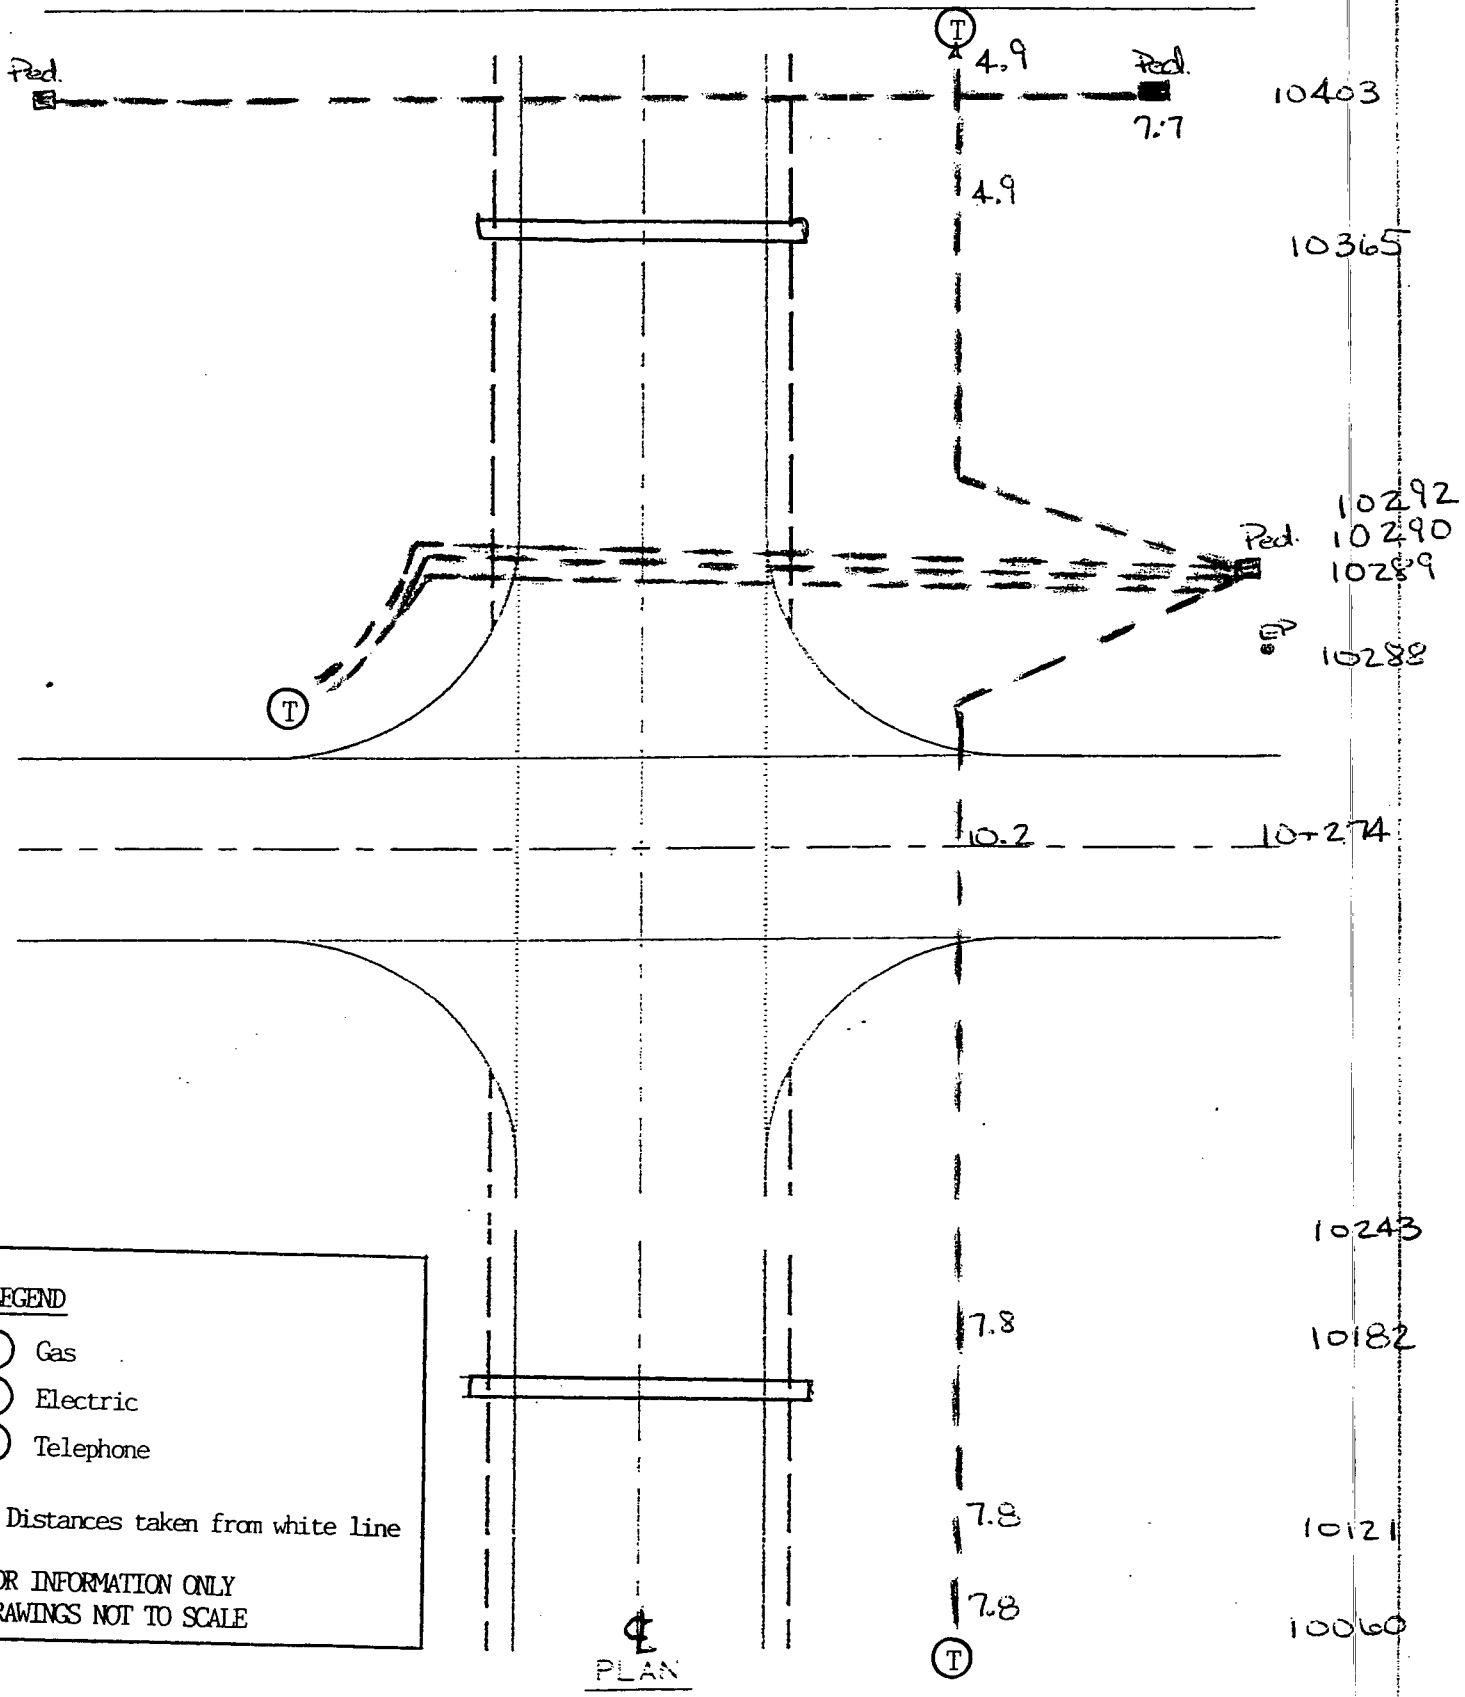


EXISTING ROADWAY - FIELD NOTES

ROAD SR44 SECTION _____ PAGE _____

FROM: @ CR950W TO: _____

NORTH

ARROW

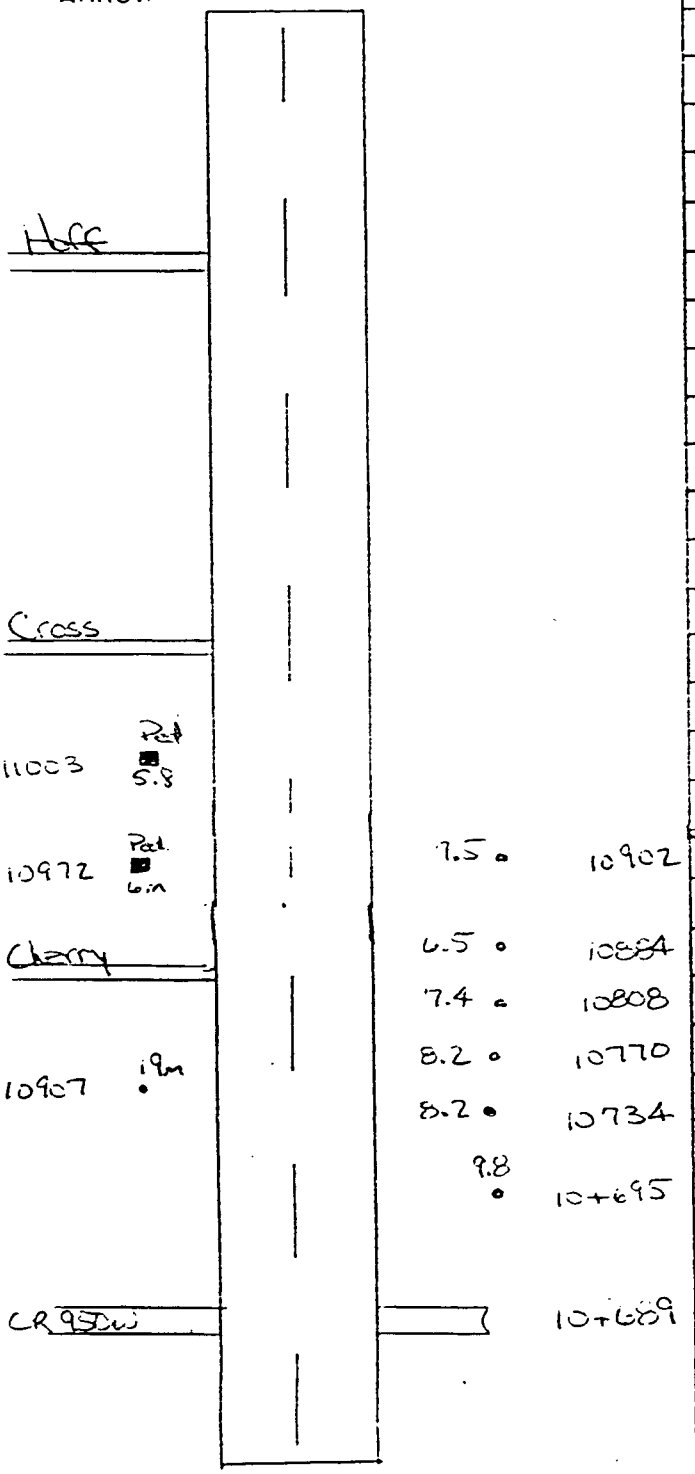


ROAD/STR APPROACH		COMMCL. DRIVES		PRIVATE DRIVES		MAIL BOXES		REMARKS	ITEM
I	U	I	U	I	U	I	U		

CONTRACT
DES. NO.

SR44 @ CR 880W

Amertech

UTILITY INVOLVEMENT AT INTERSECTION

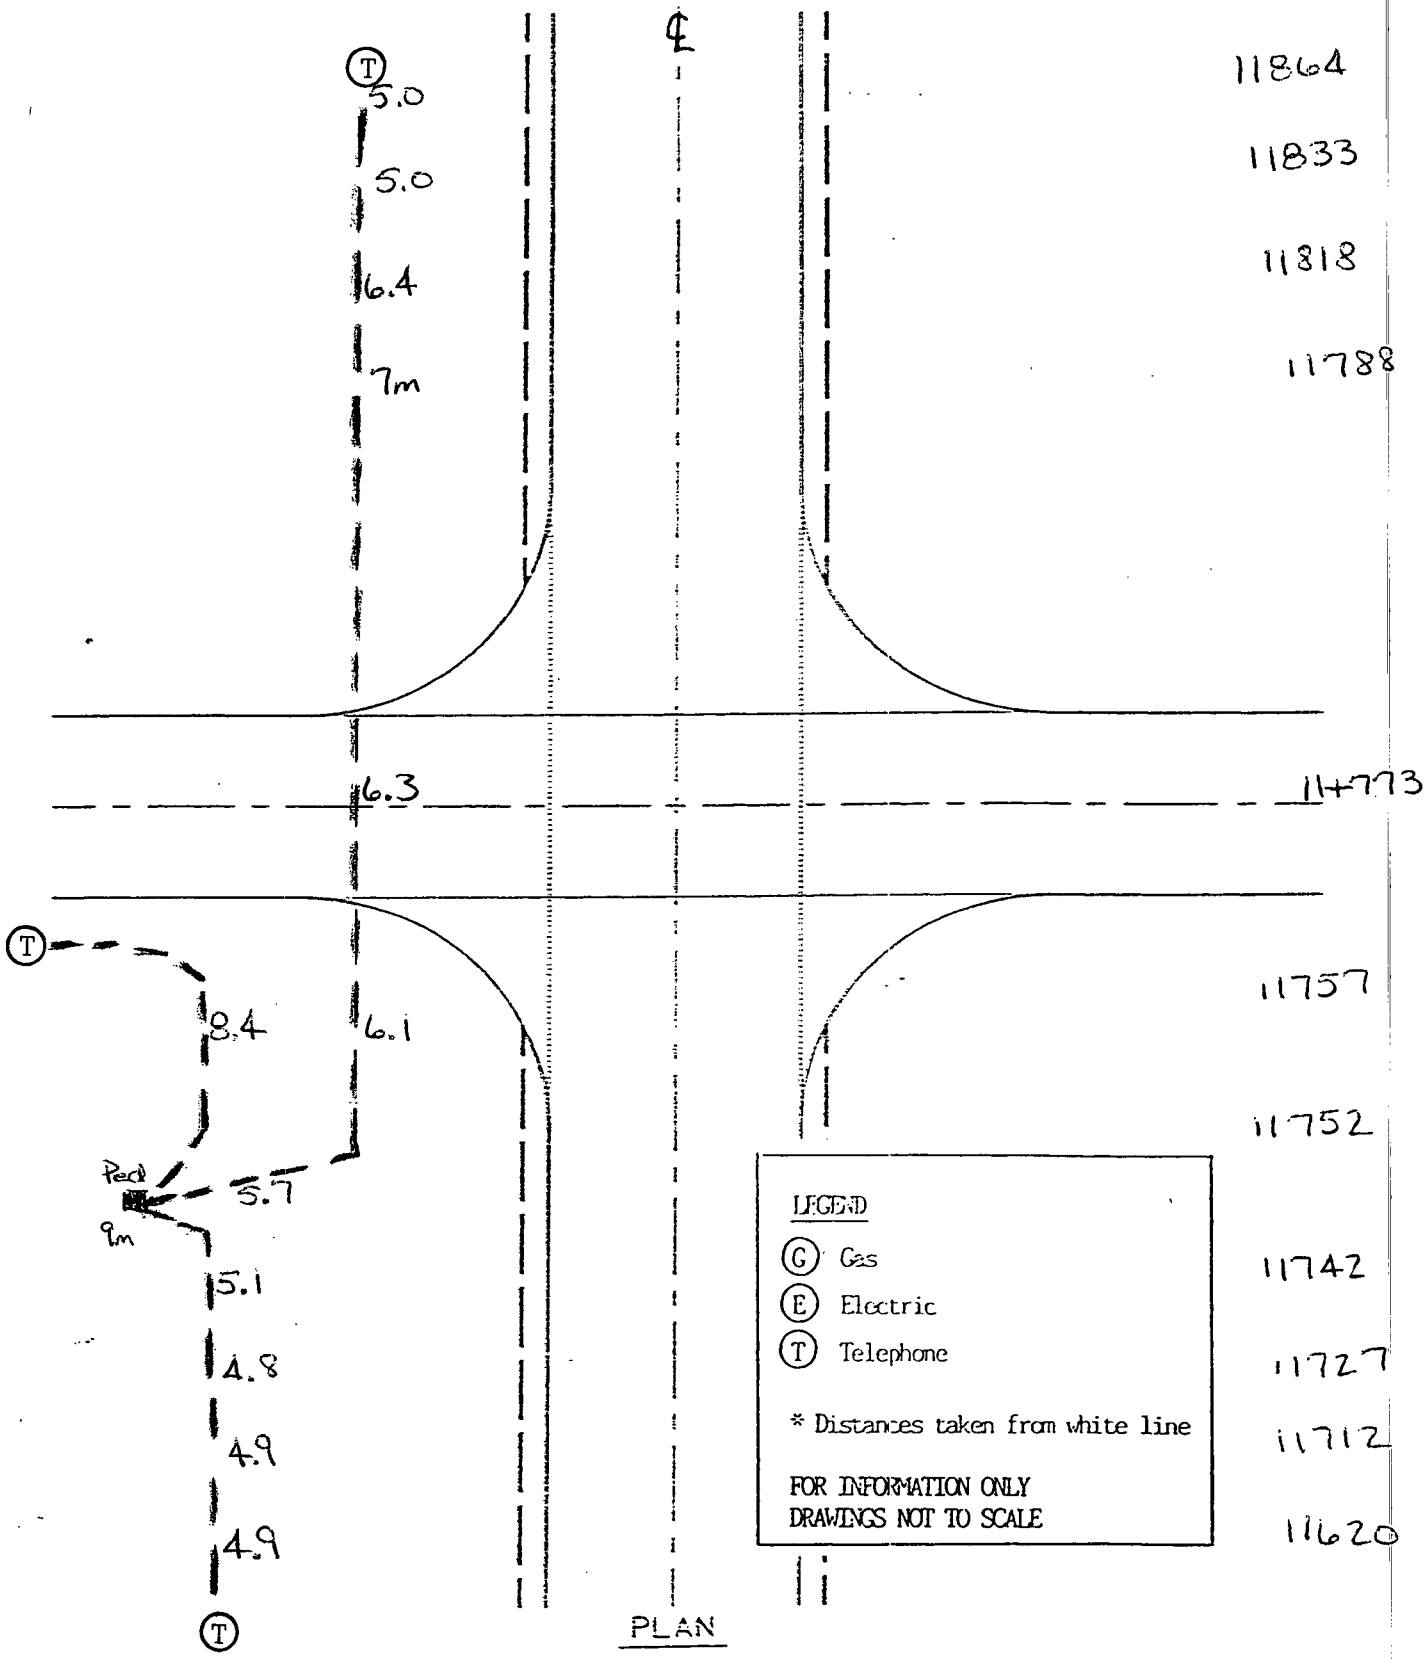


PLAN

CONTRACT
DES. NO.

SR44 @ CR 840W


UTILITY INVOLVEMENT AT INTERSECTION

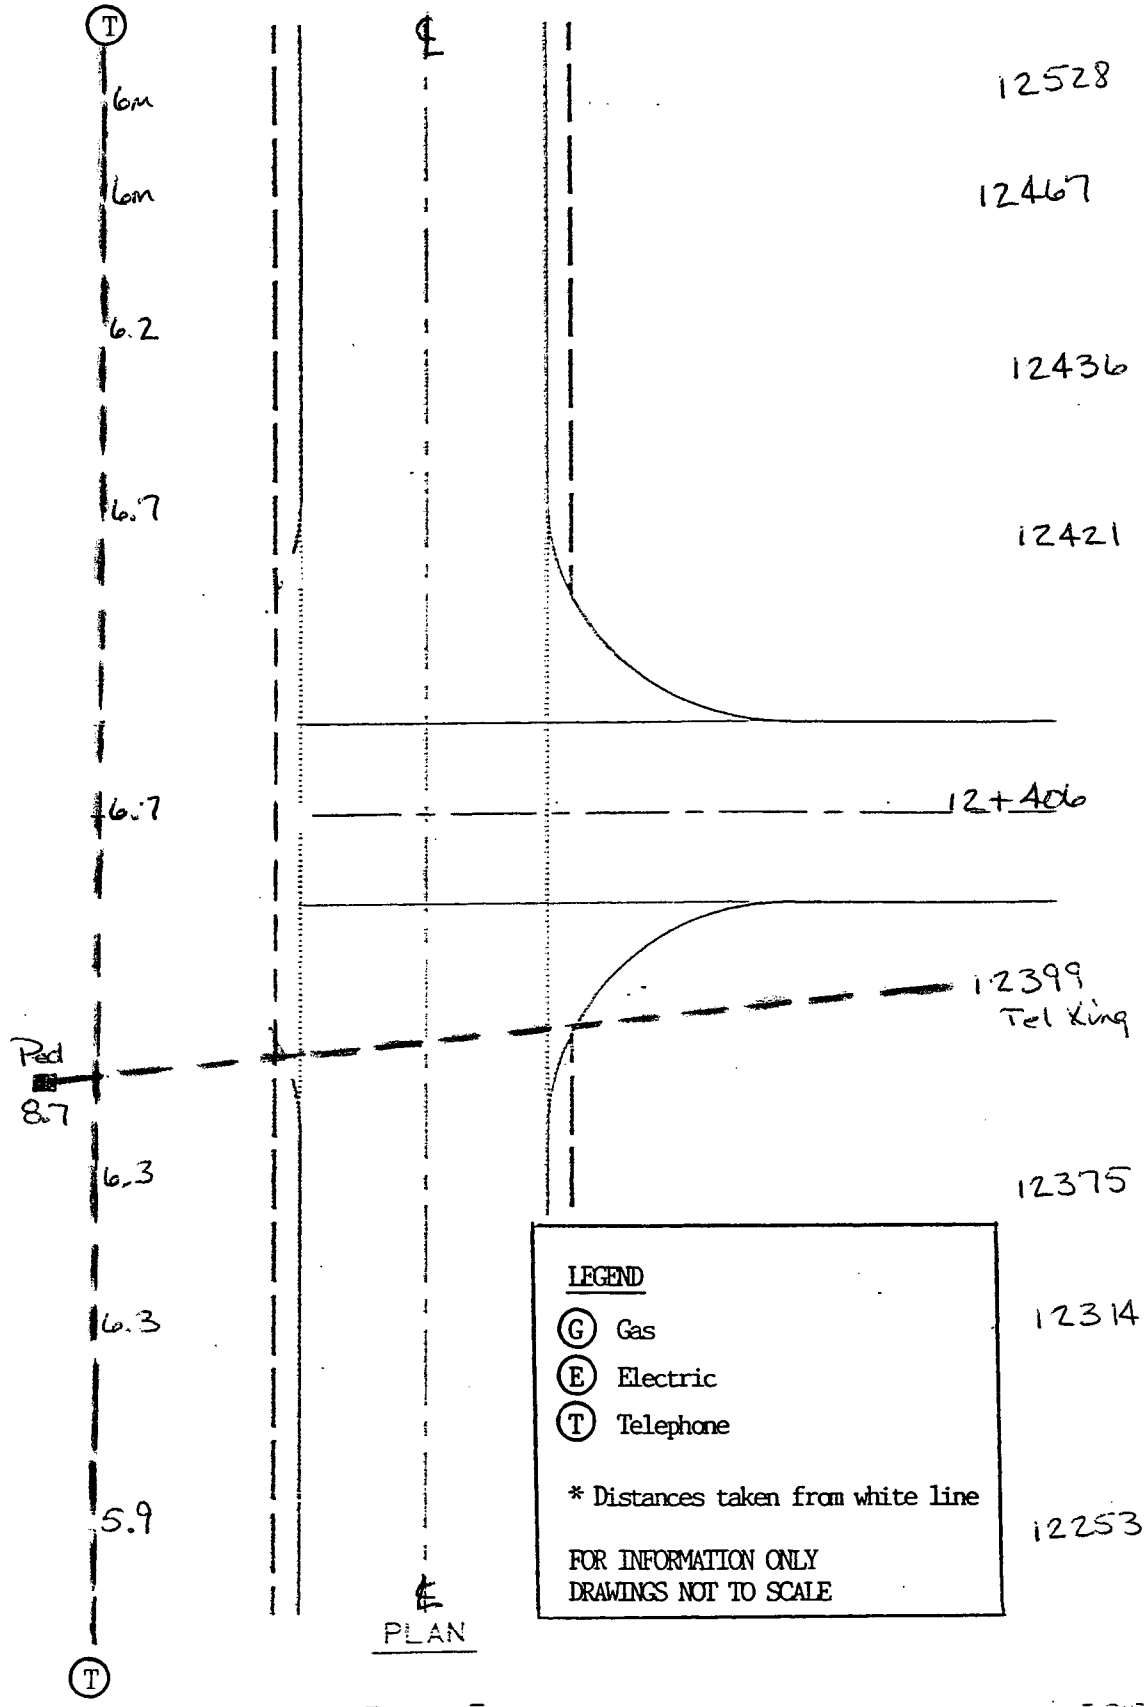

CONTRACT
DES. NO.

SR44 @ CR800W


UTILITY INVOLVEMENT AT INTERSECTION

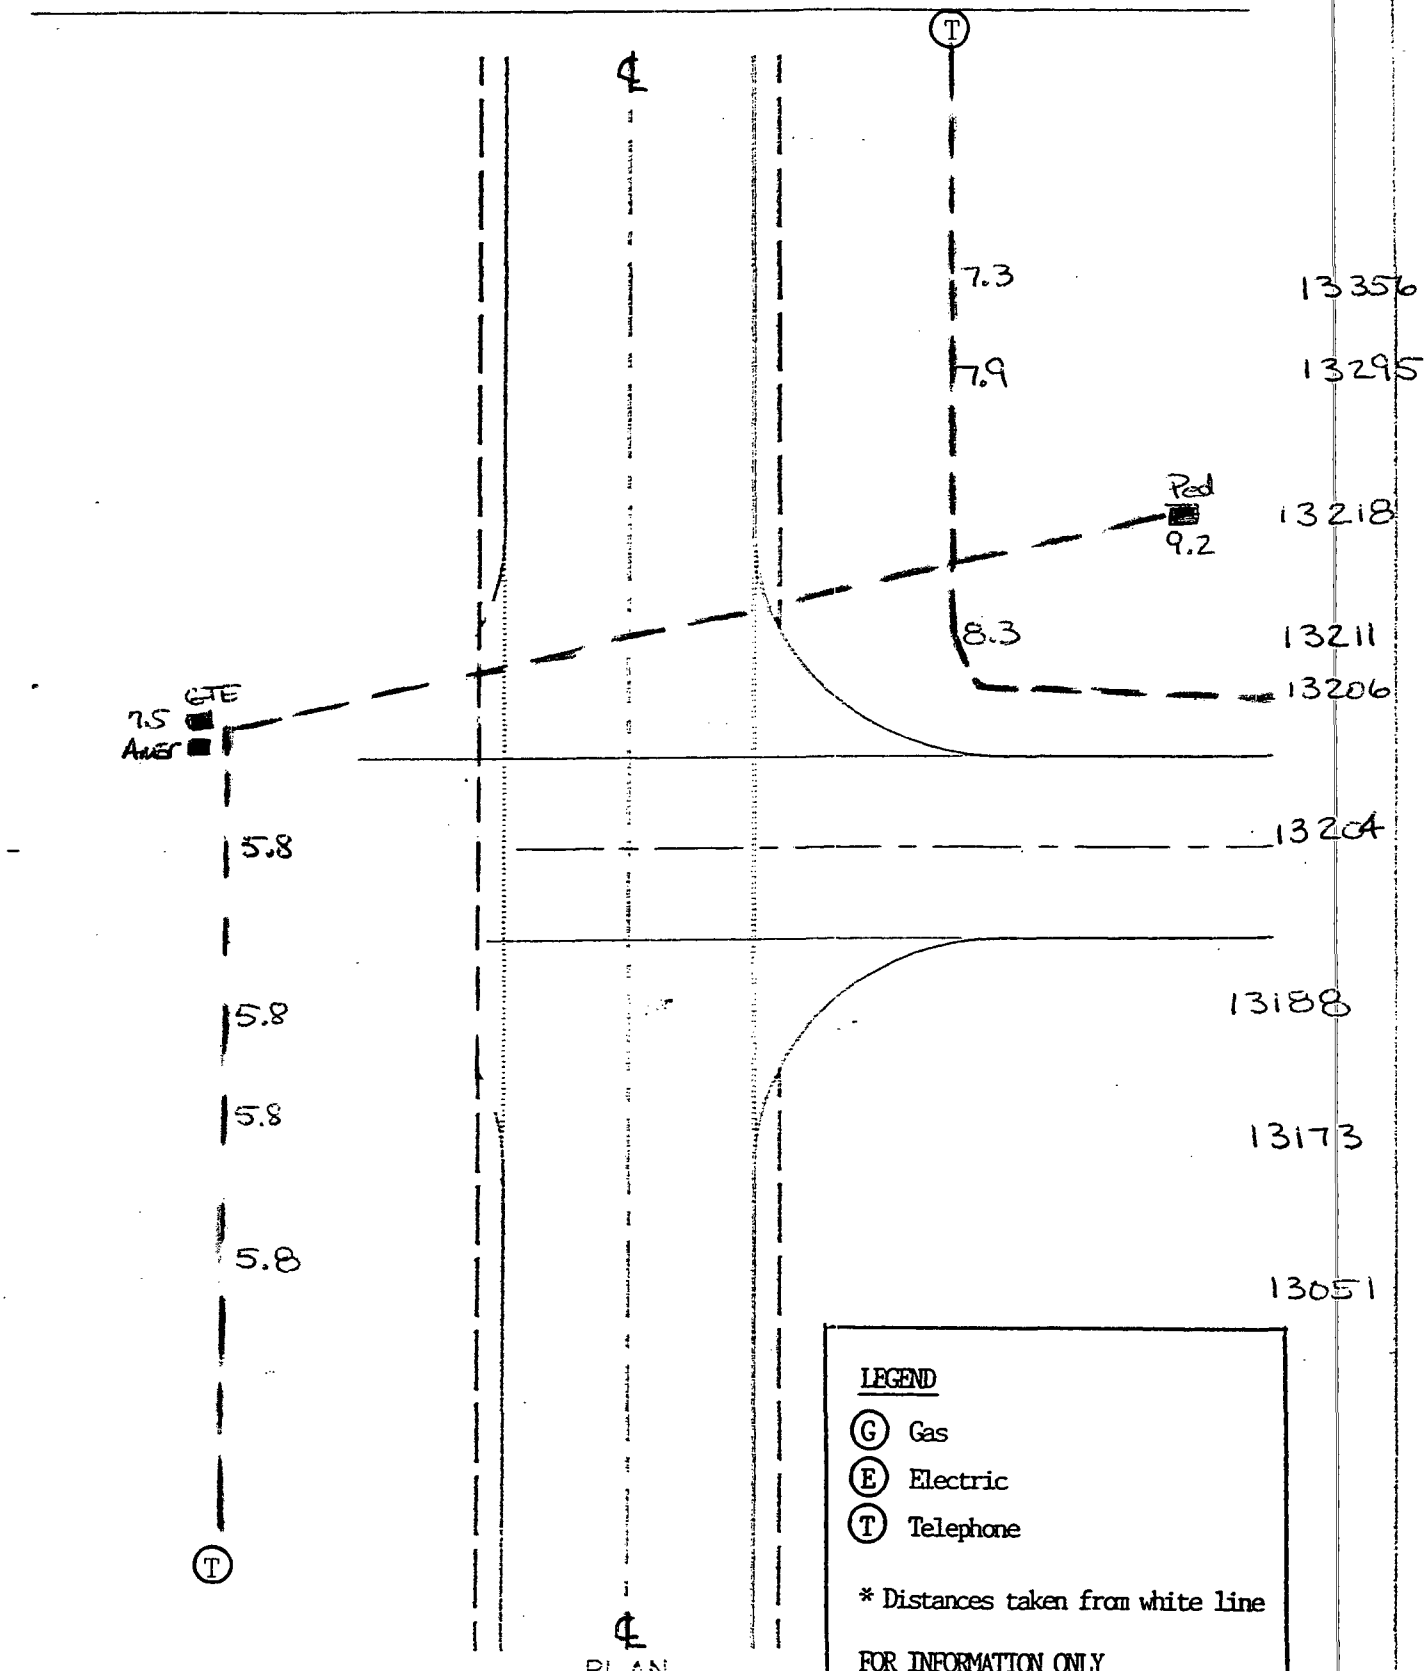

CONTRACT
DES. NO.

SR44@CR775W


UTILITY INVOLVEMENT AT INTERSECTION

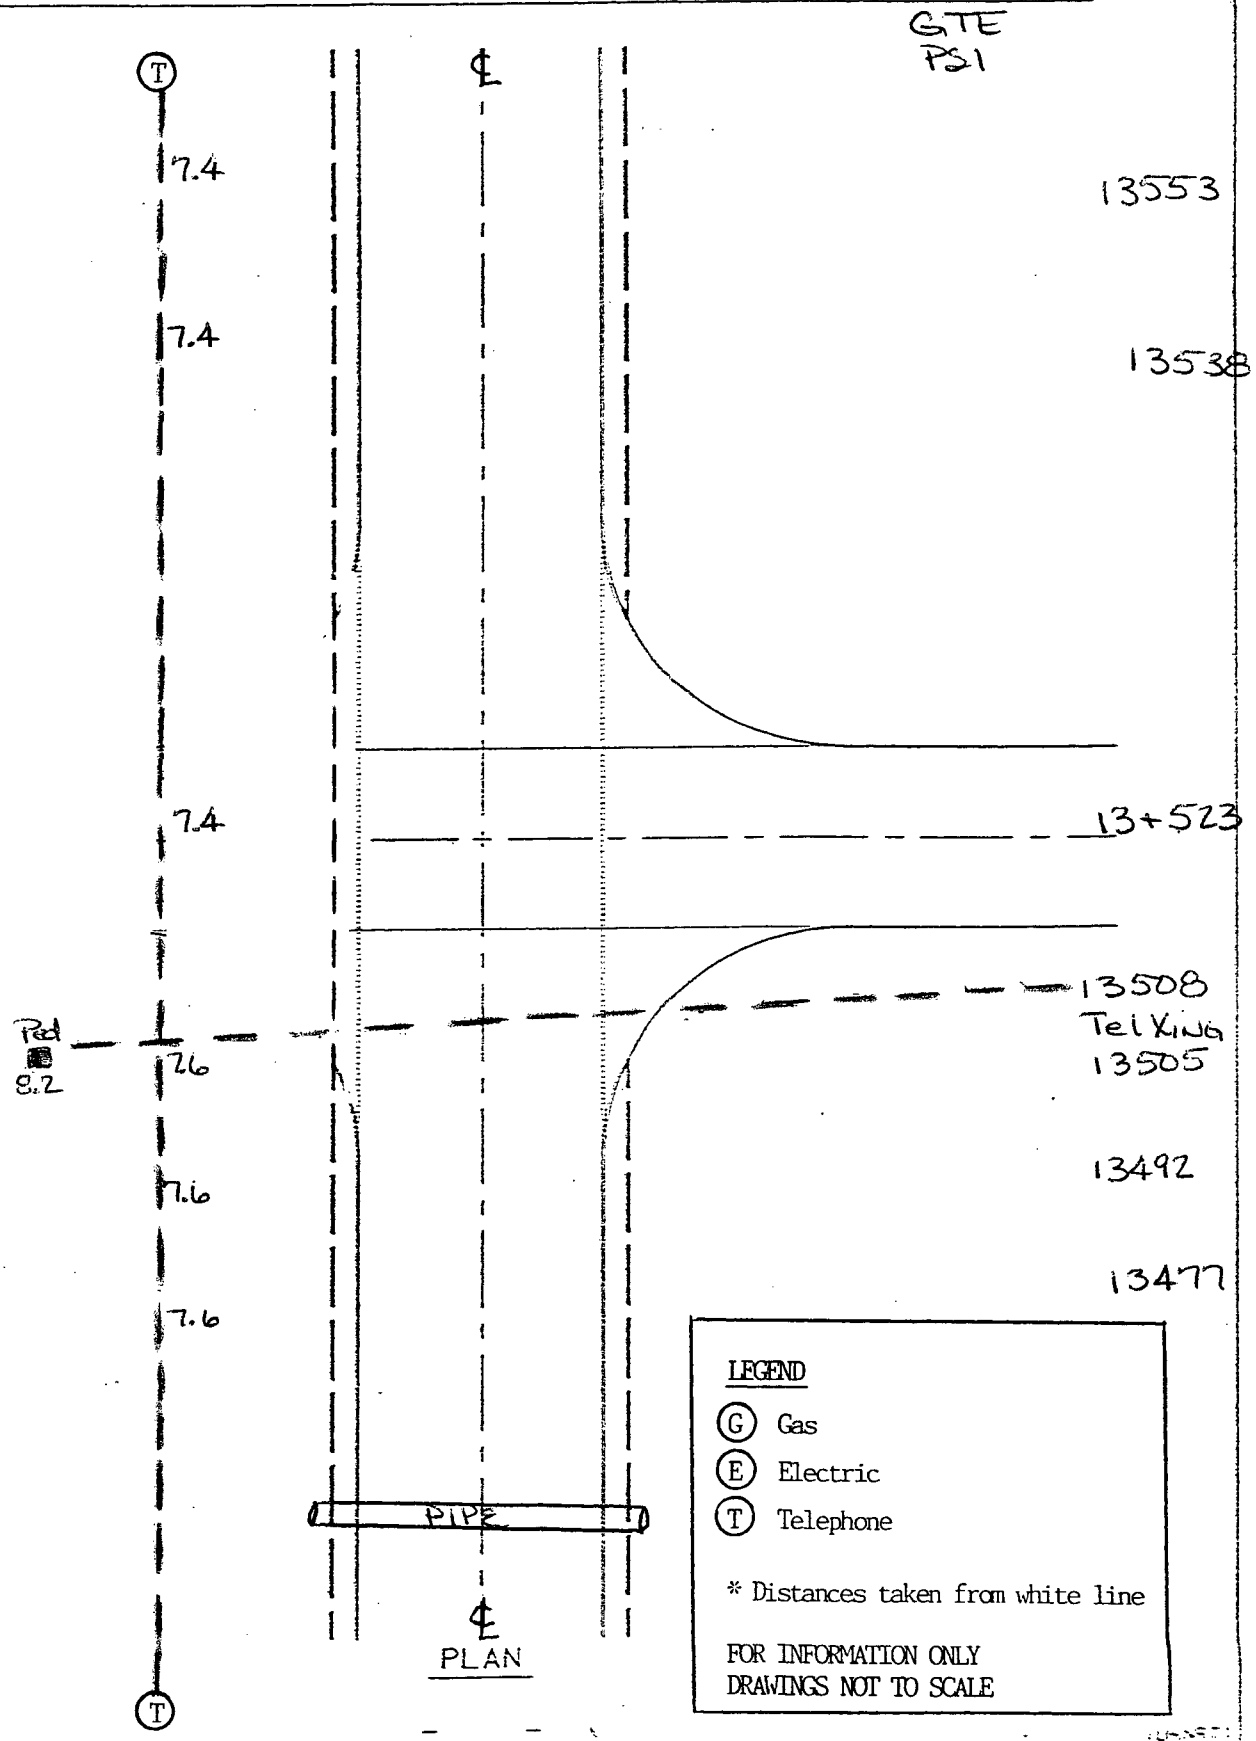

CONTRACT
DES. NO.

SR44 @ CR 75DW


UTILITY INVOLVEMENT AT INTERSECTION

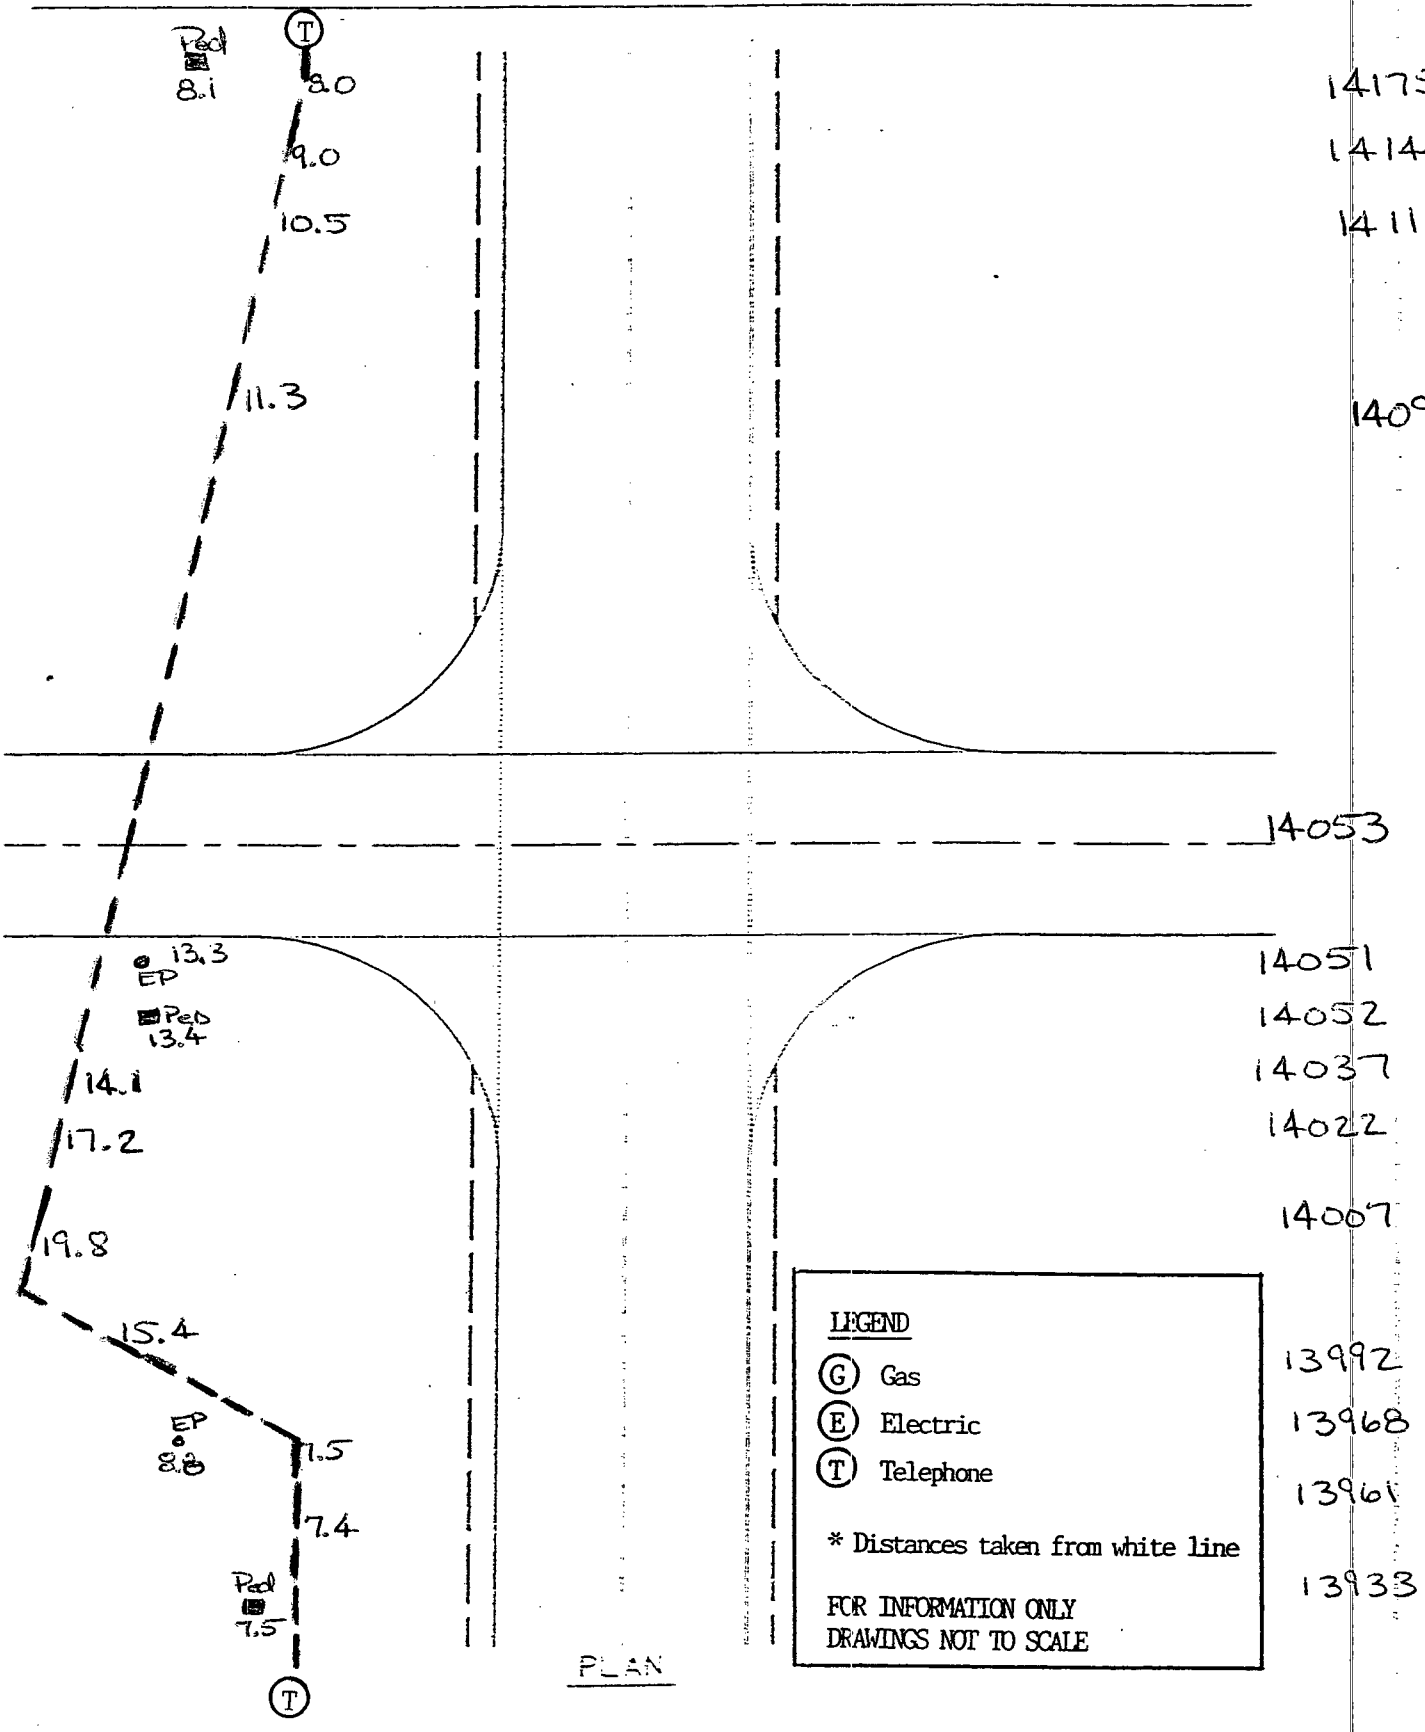

PLAN


CONTRACT R-24787
Des. No. 9903400

SR44

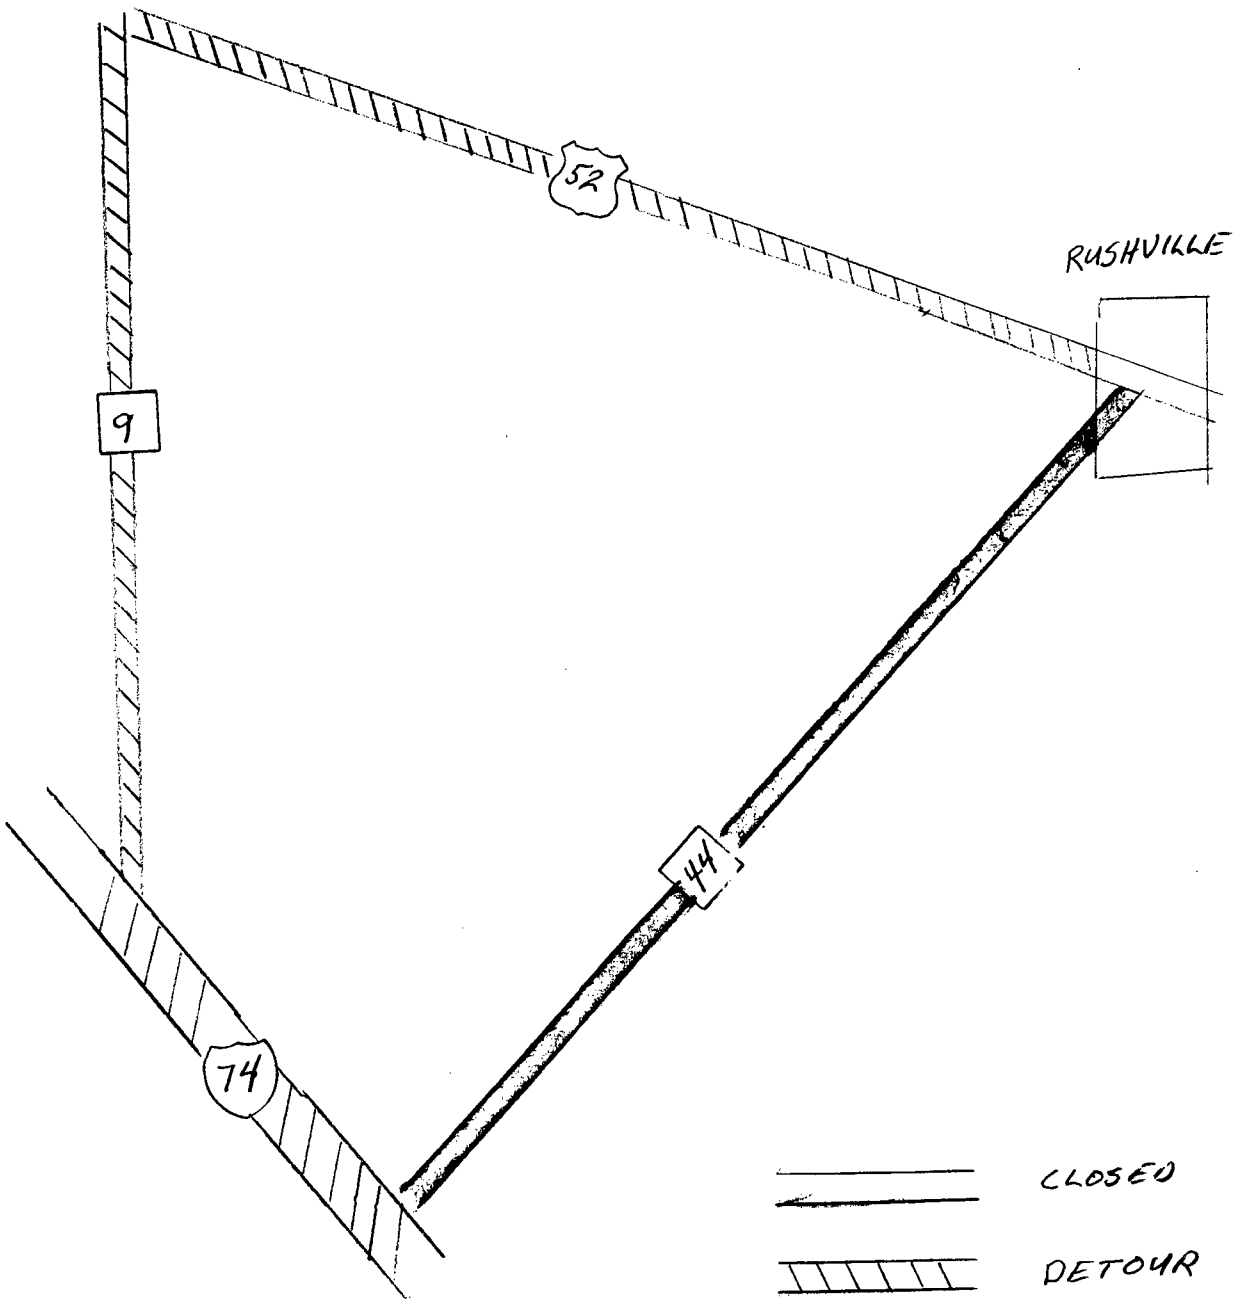

DETOUR MAP


CONTRACT R-24787
Des. No. 9903400

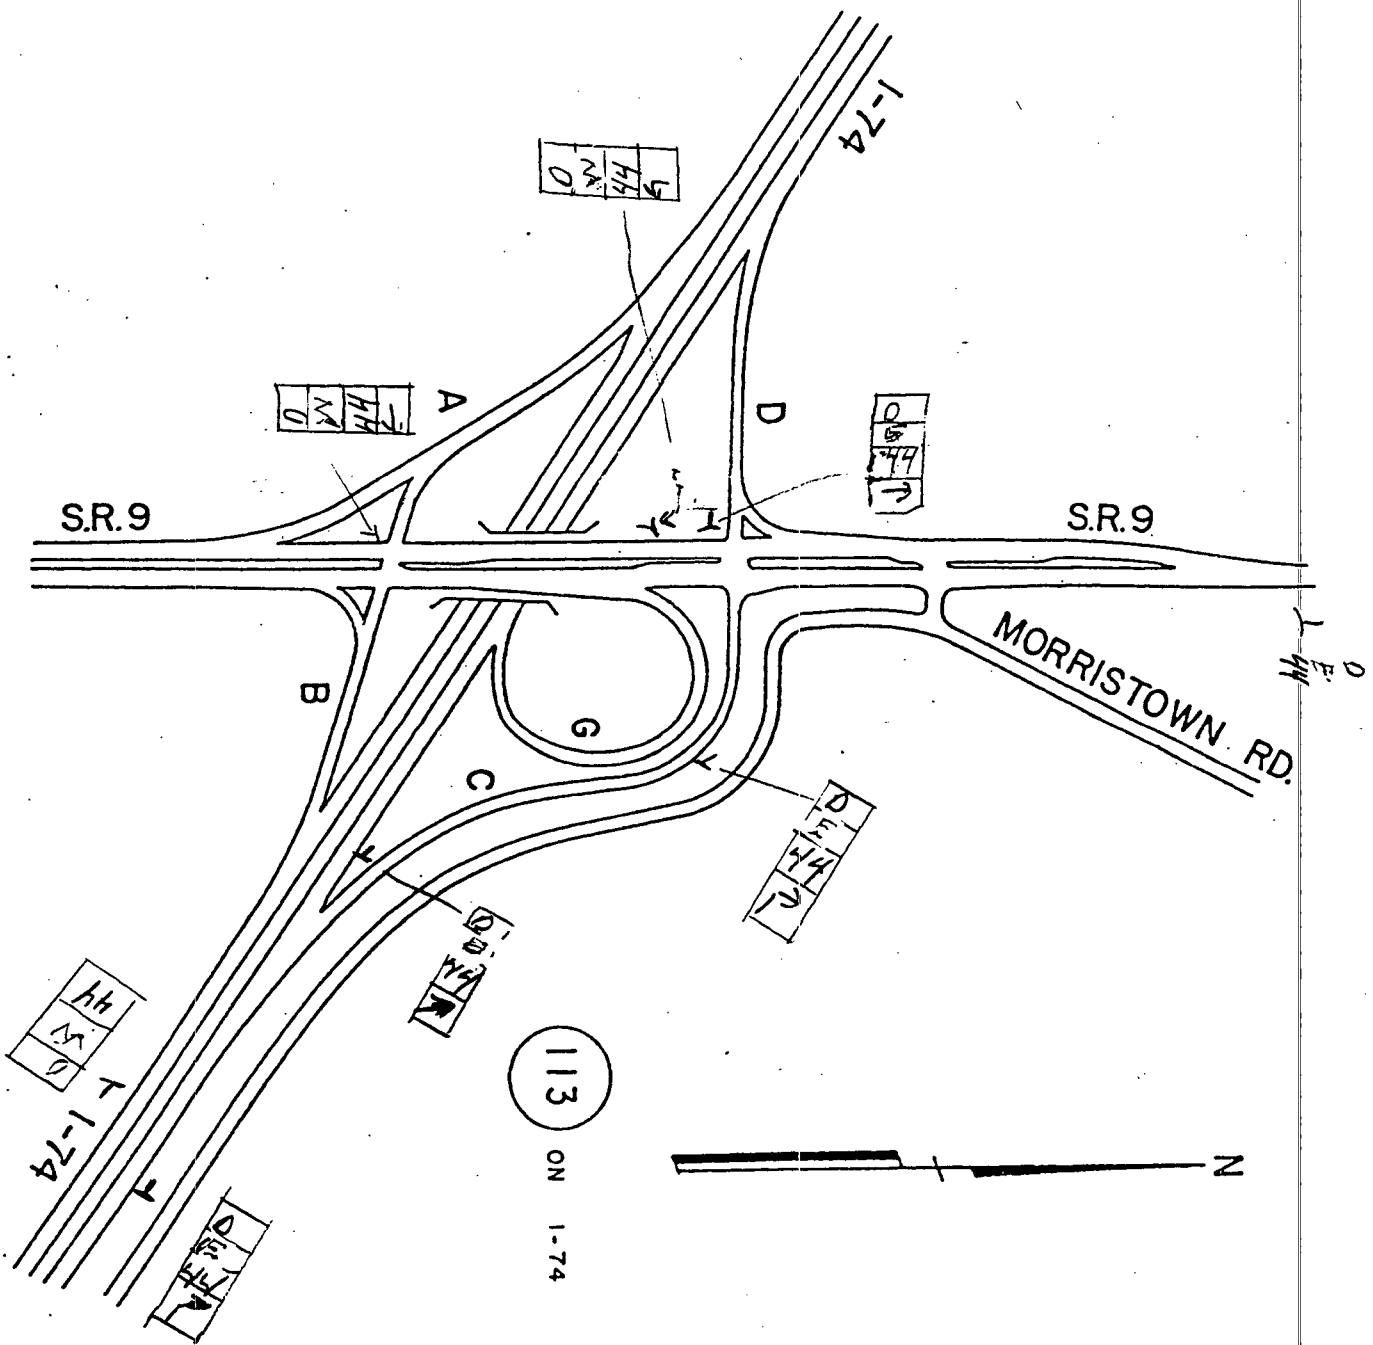

SHELBY COUNTY

SUGGESTED DETOUR ROUTE ASSEMBLIES


CONTRACT R-24787
Des. No. 9903400

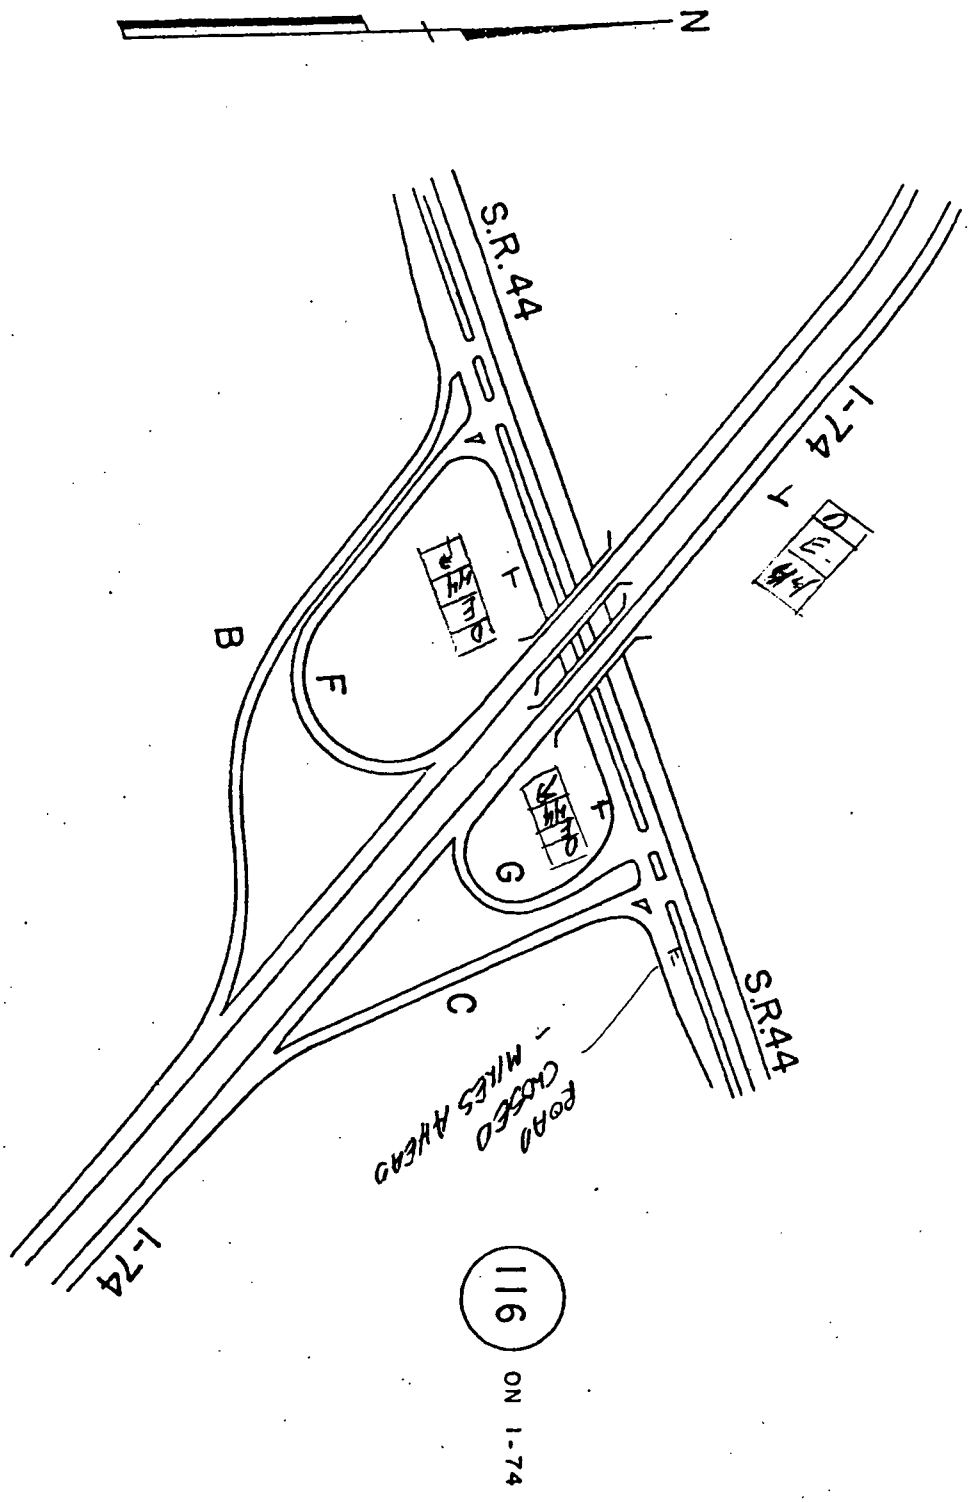


SHELBY COUNTY

SUGGESTED DETOUR ROUTE ASSEMBLIES

CONTRACT R-24787
Des. No. 9903400

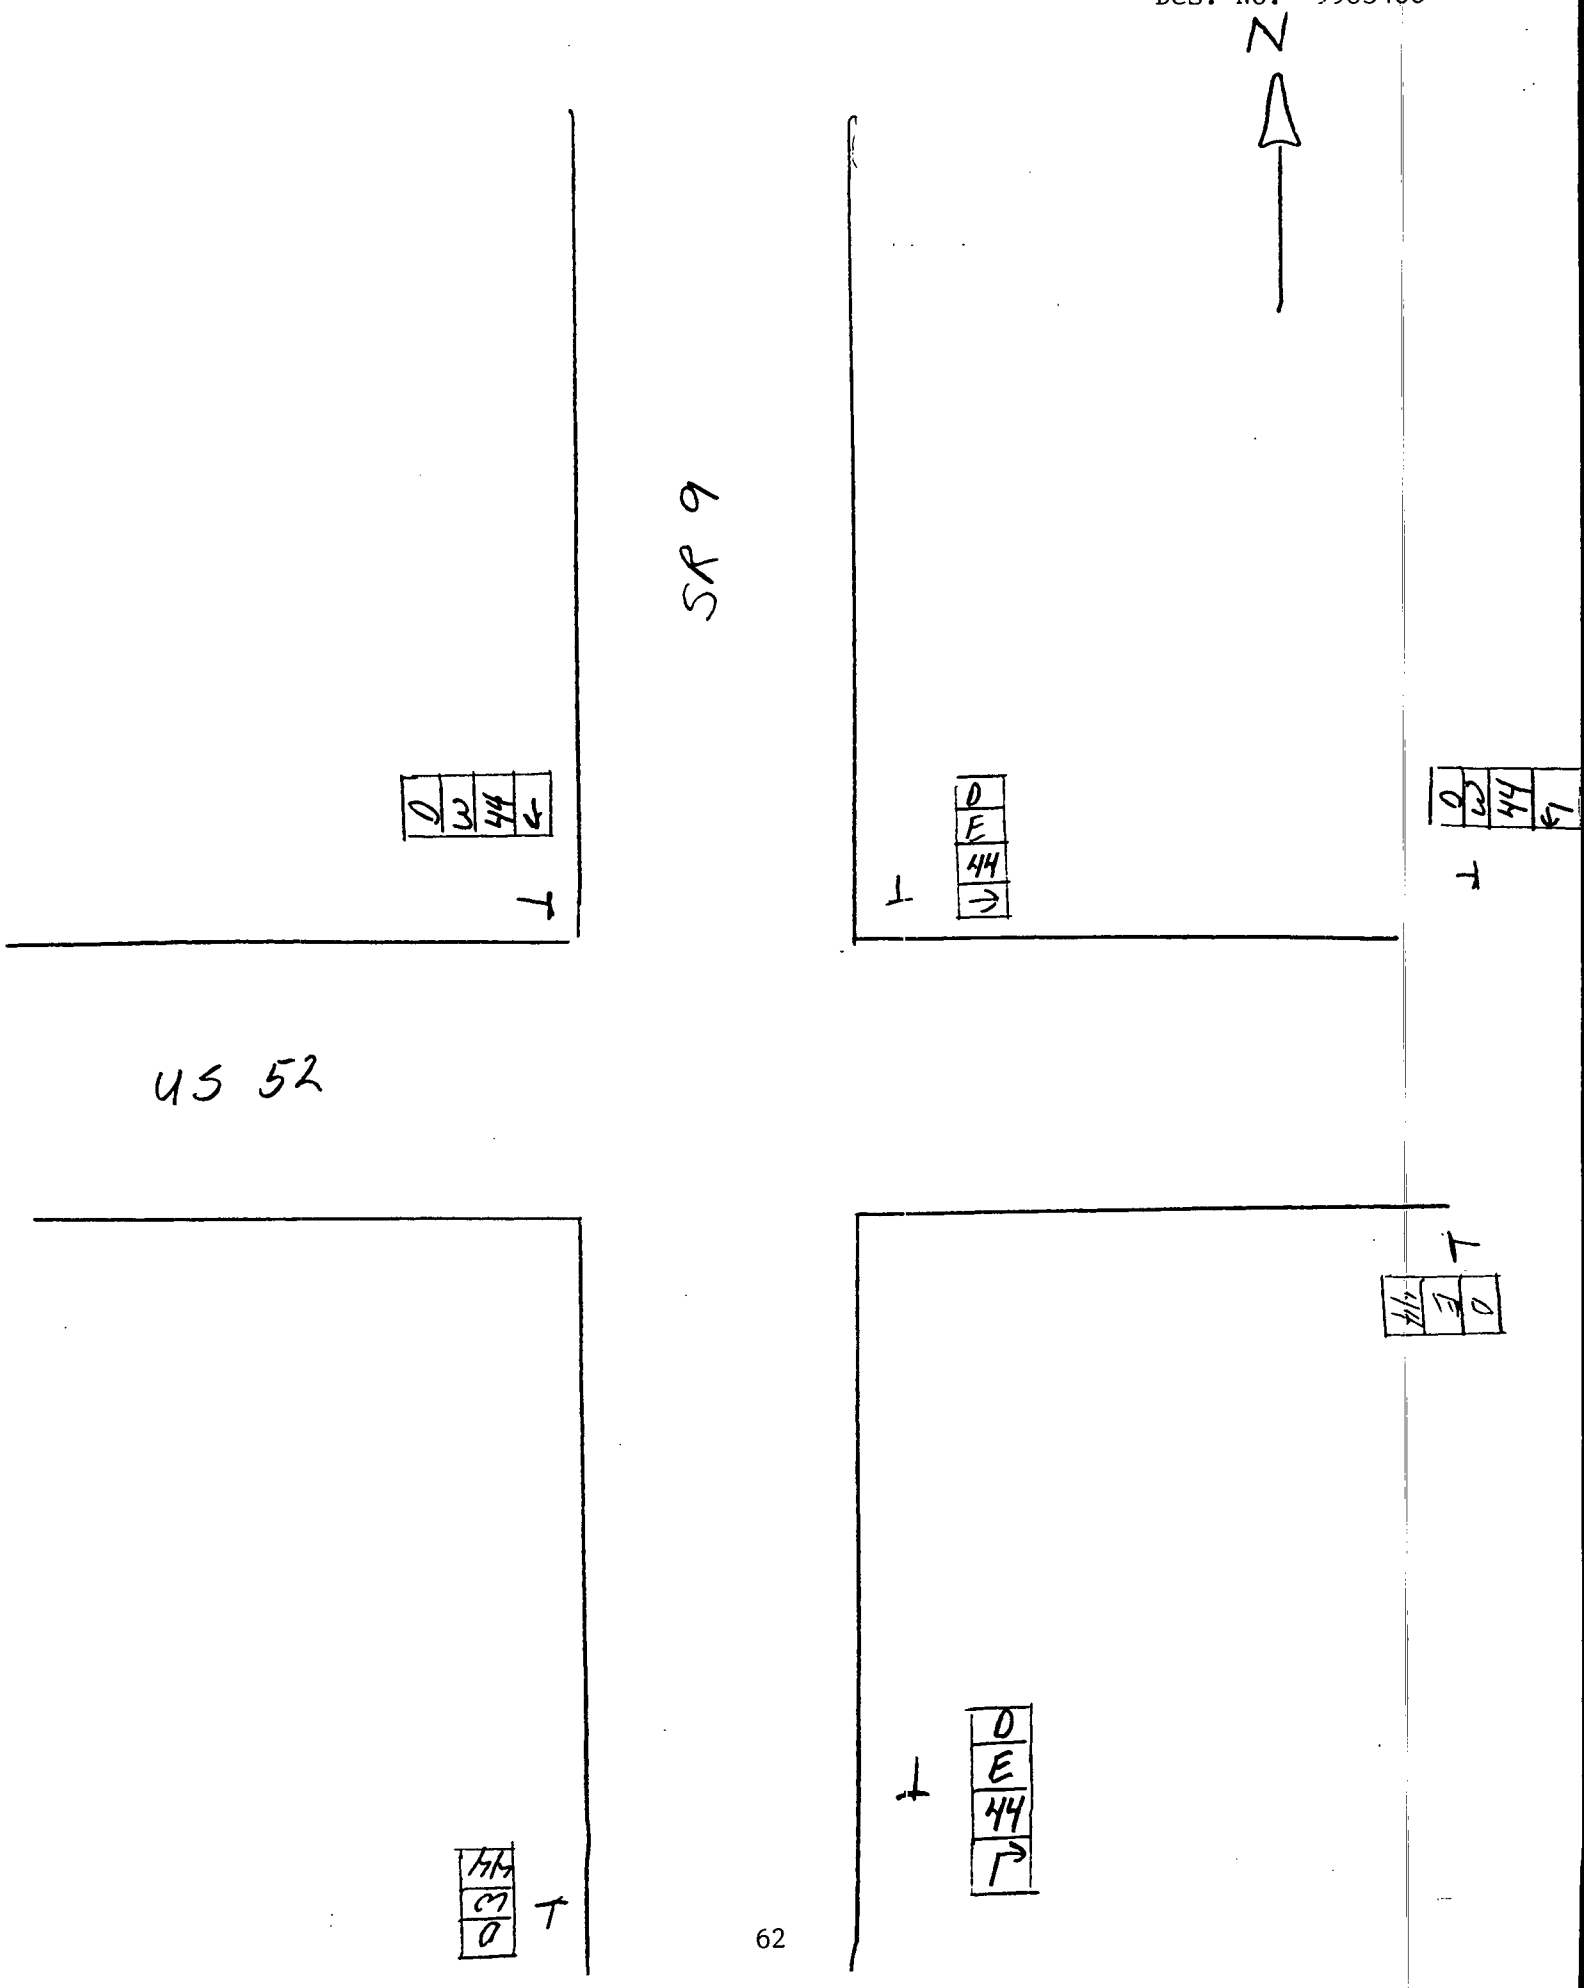


CONTRACT R-24787
Des. No. 9903400

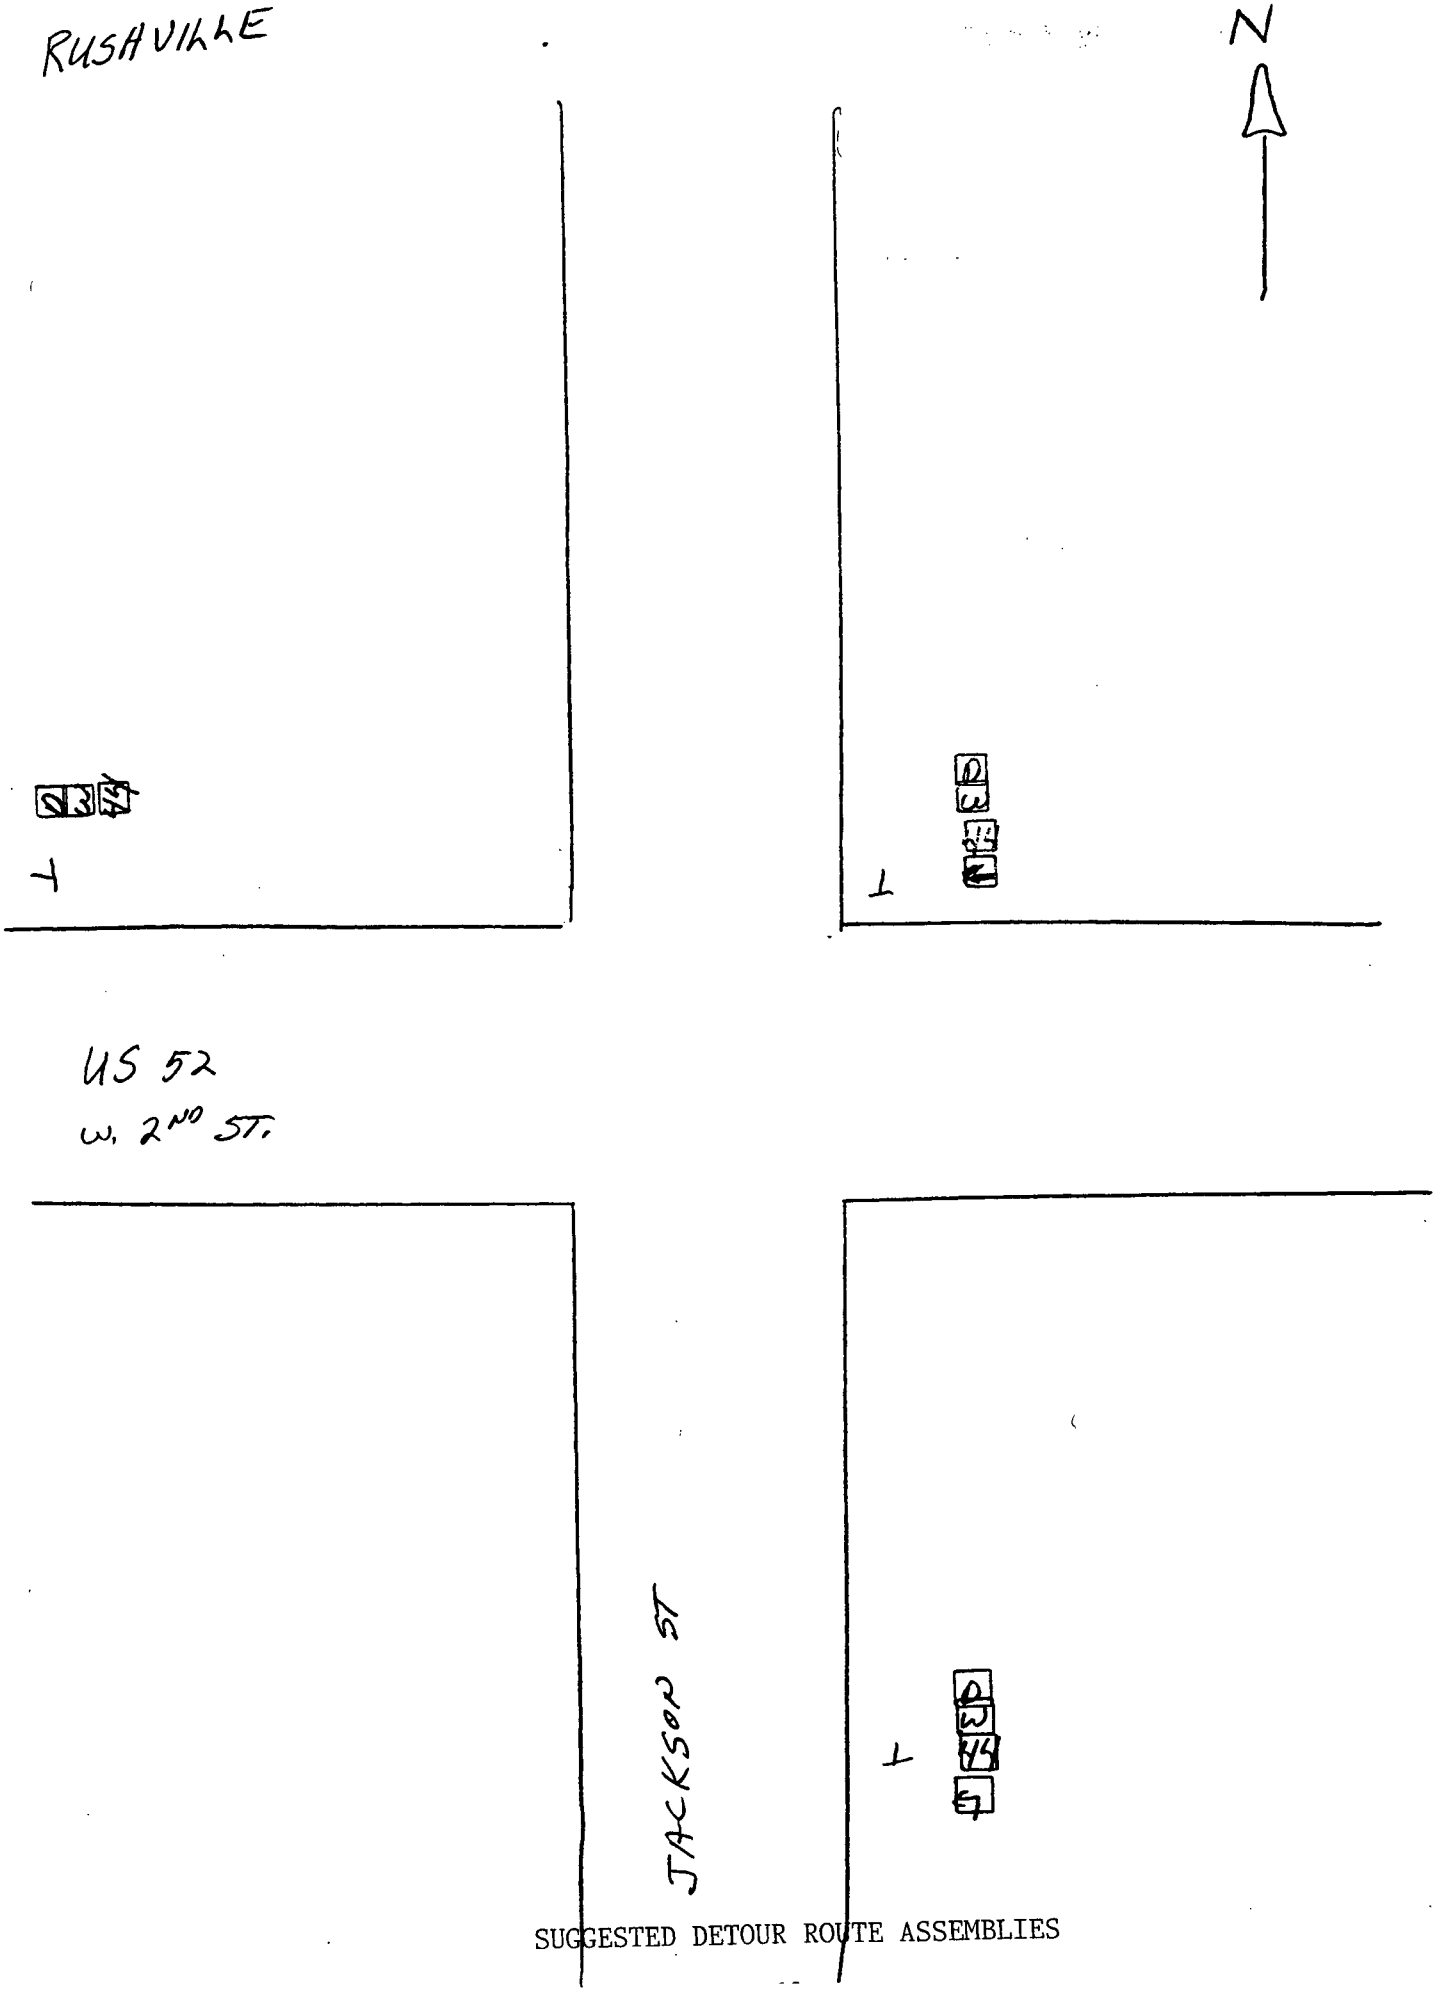

SUGGESTED DETOUR ROUTE ASSEMBLIES

CONTRACT R-24787
Des. No. 9903400


RUSHVILLE

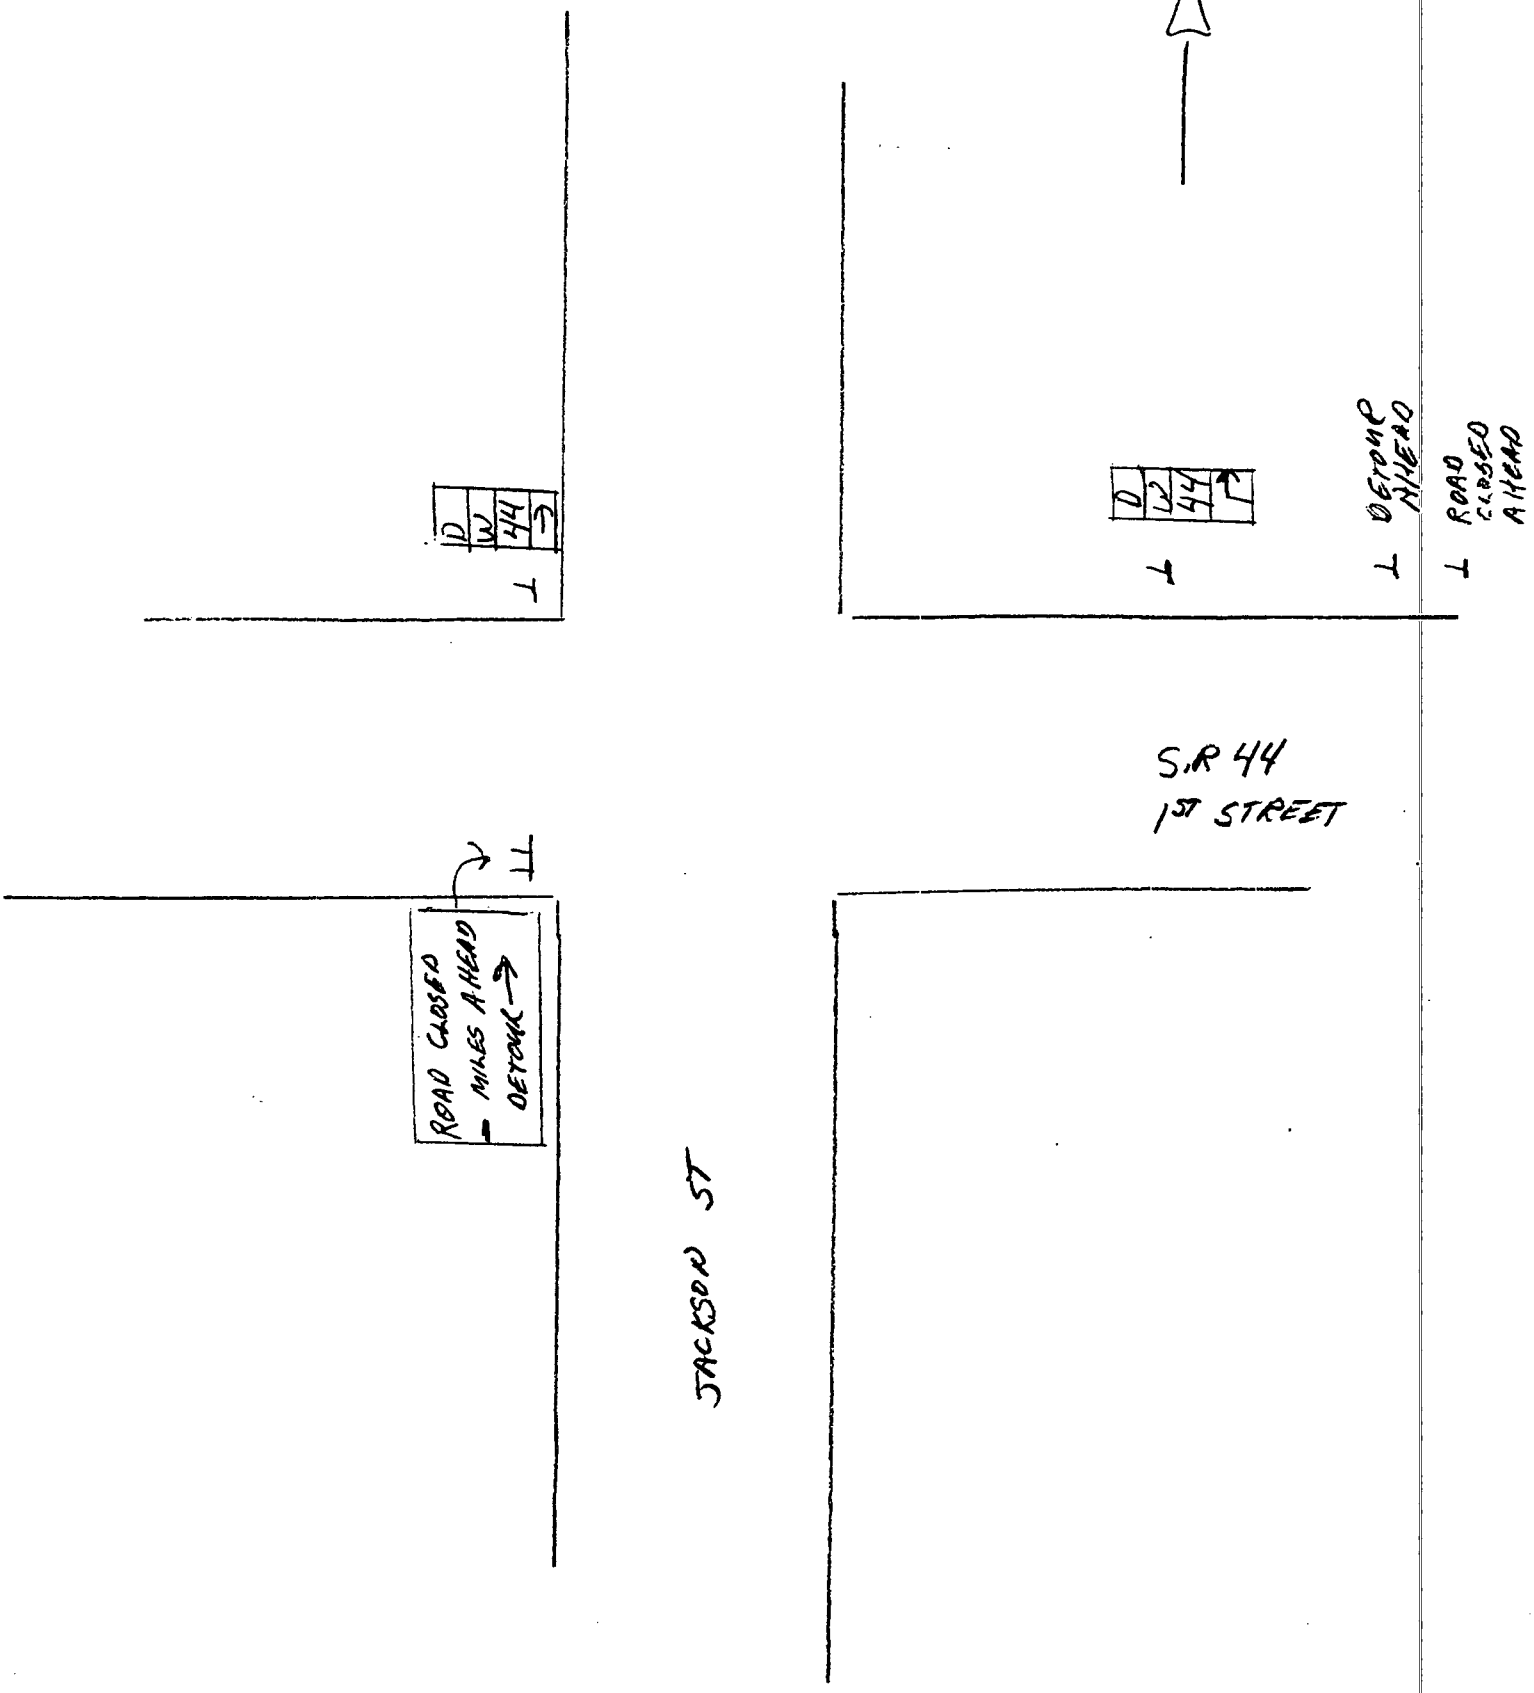

SUGGESTED DETOUR ROUTE ASSEMBLIES


RUSHVILLE

CONTRACT R-24787
Des. No. 9903400

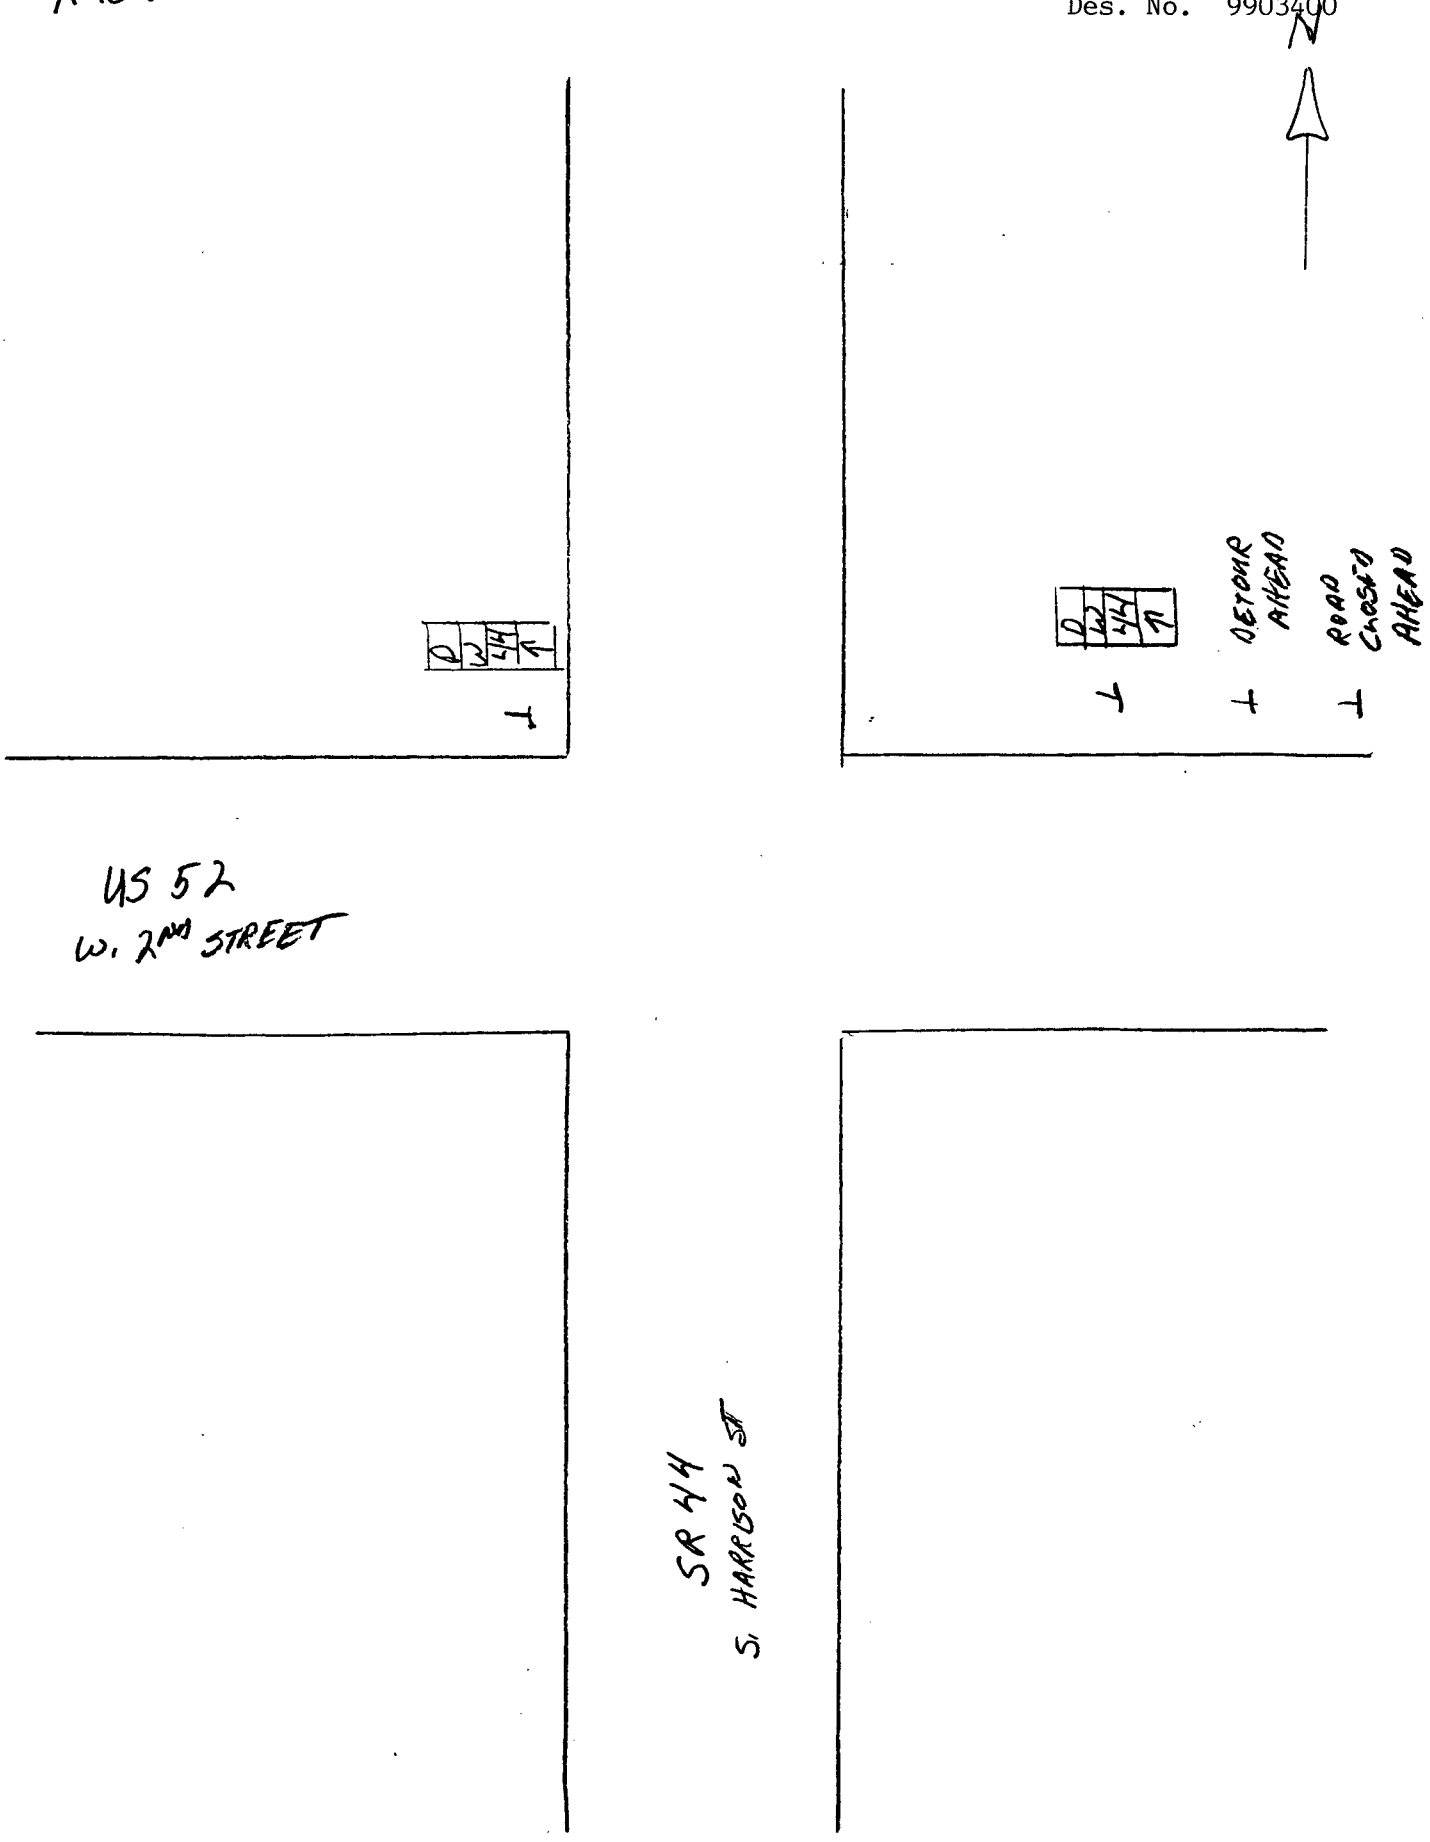

SUGGESTED DETOUR ROUTE ASSEMBLIES


CONTRACT R-24787
DES. NO. 9903400

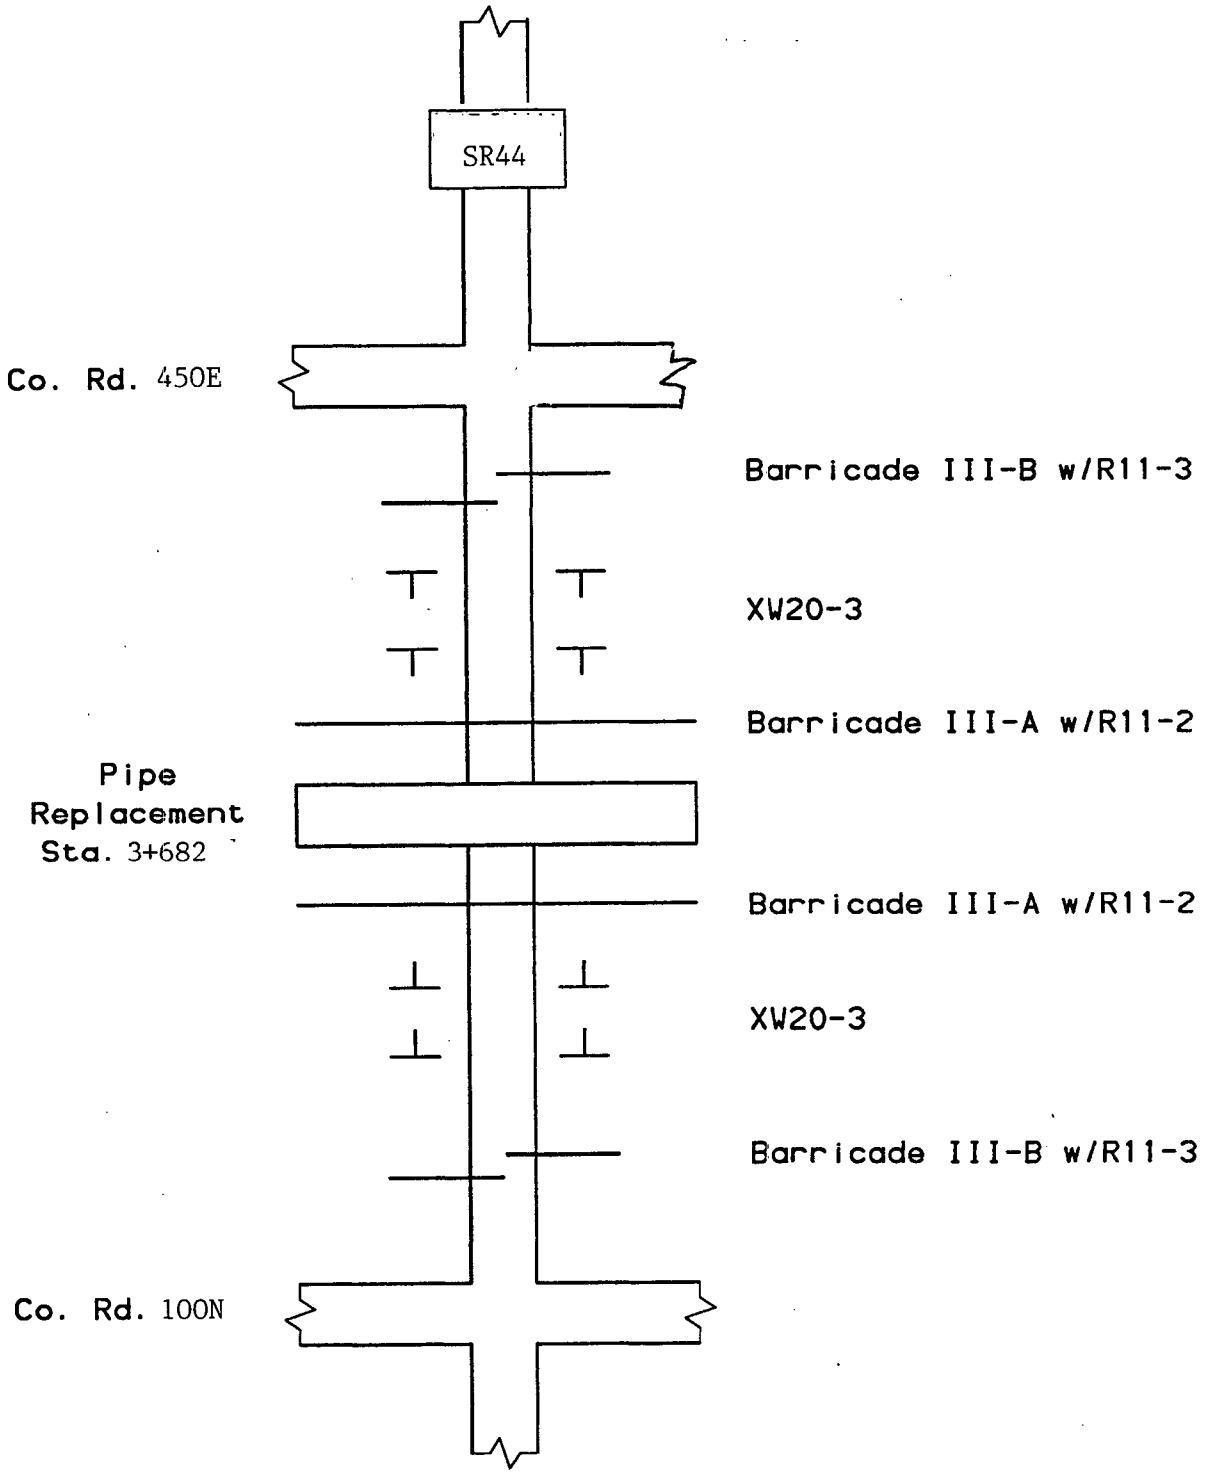

SUGGESTED DETOUR SIGNS

See Std. Sheet For Additional Details


CONTRACT R-24787
DES. NO. 9903400

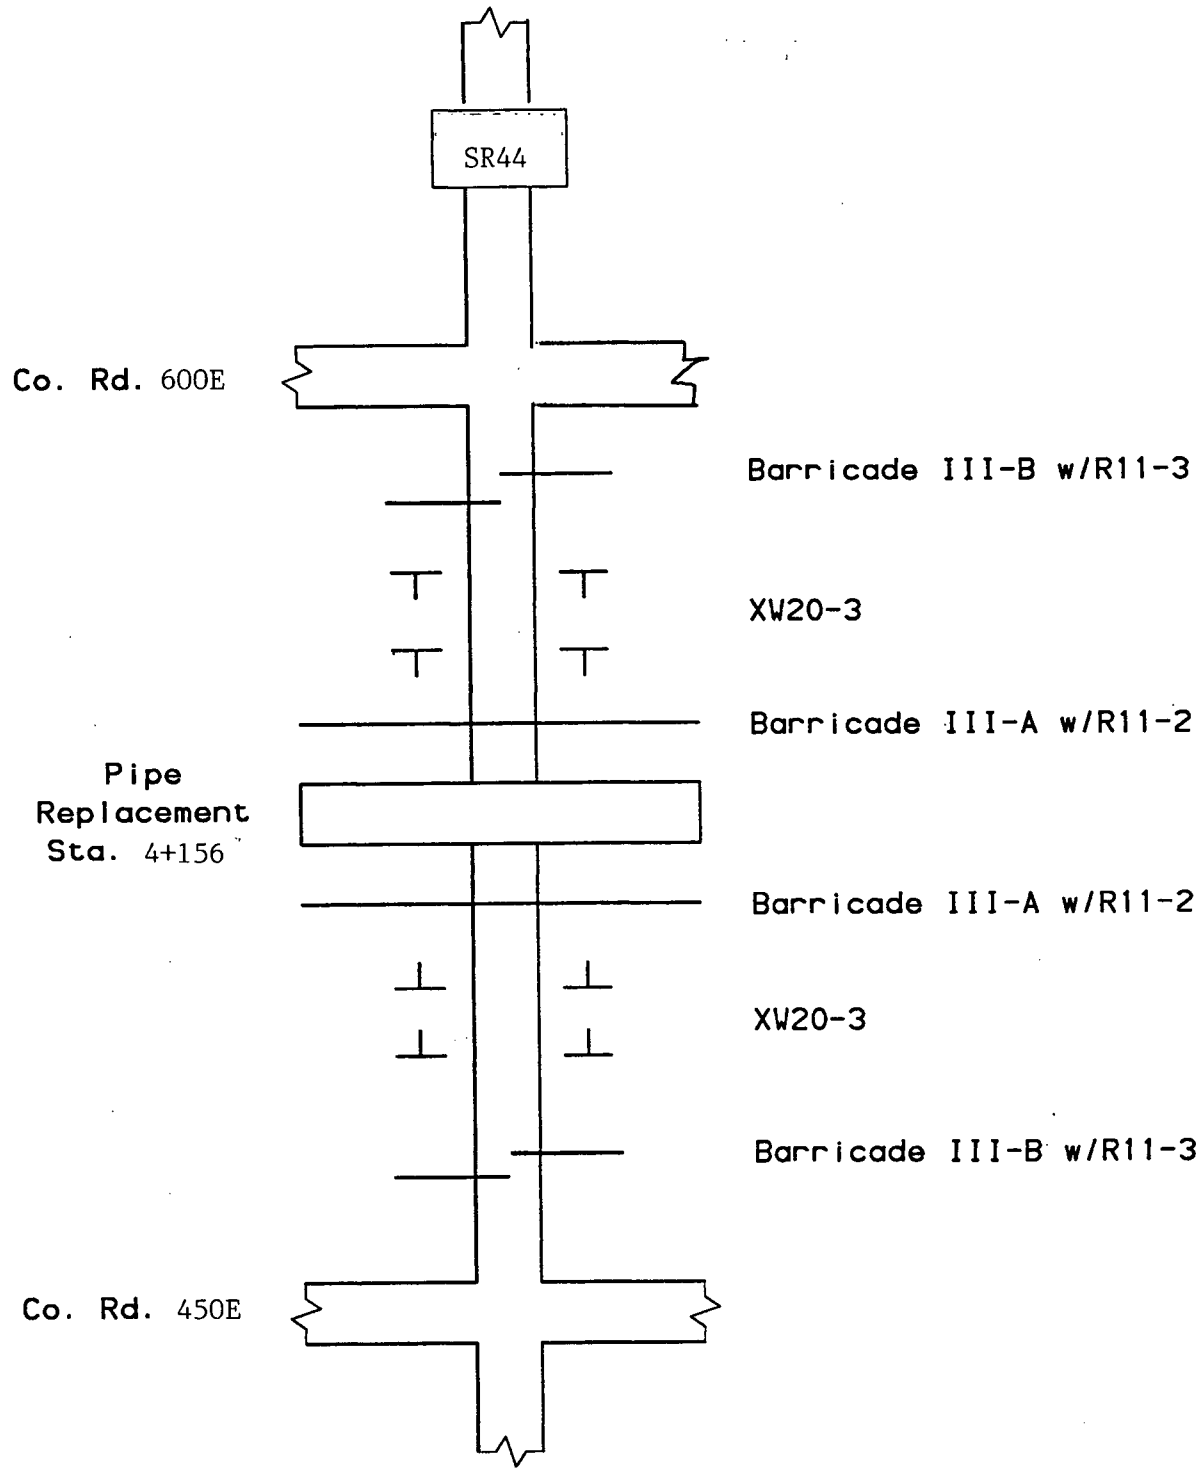

SUGGESTED DETOUR SIGNS

See Std. Sheet For Additional Details

CONTRACT R-24787
DES. NO. 9903400

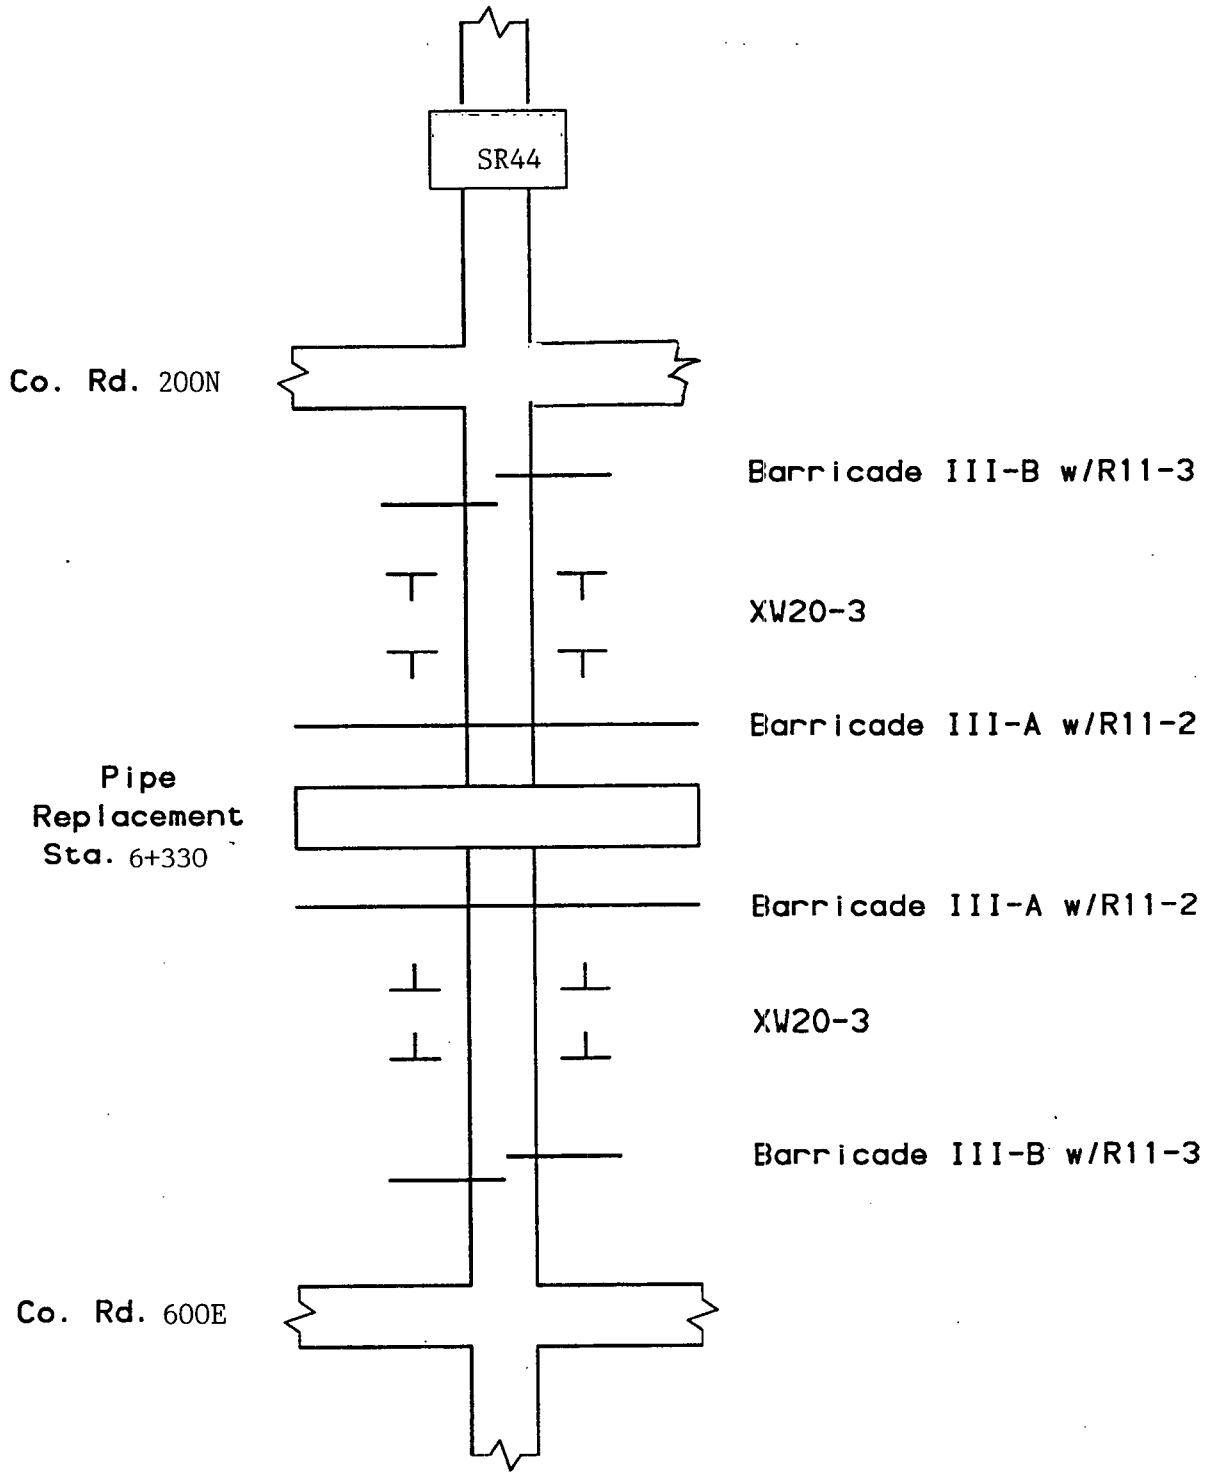

SUGGESTED DETOUR SIGNS

See Std. Sheet For Additional Details