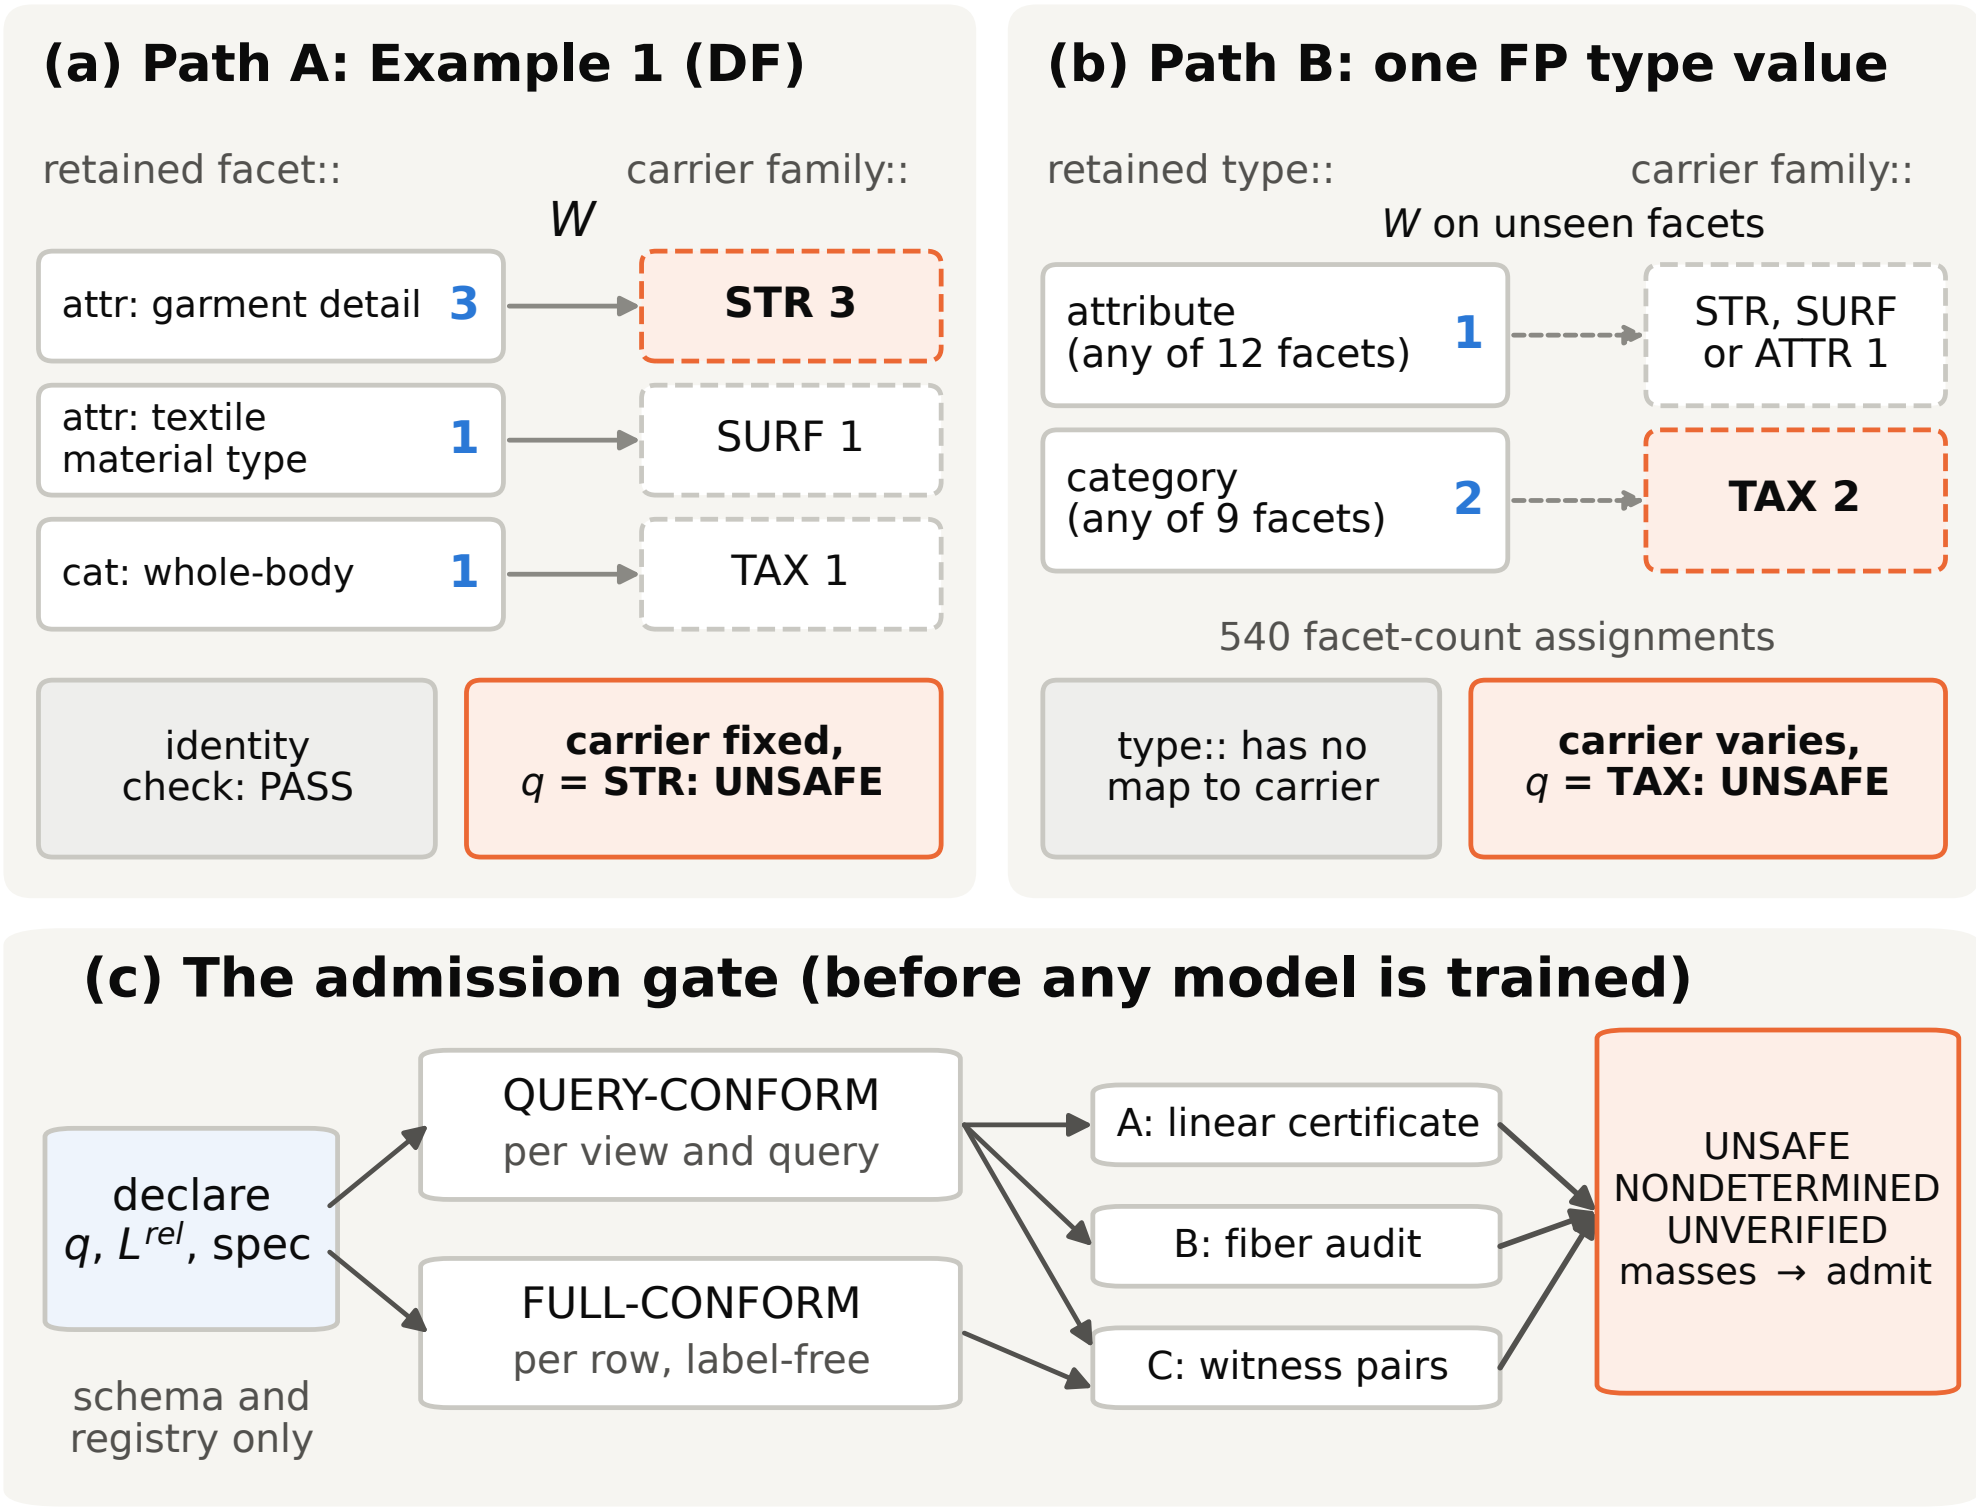
(a) Path A: Example 1 (DF)
retained facet::
carrier family::
W
attr: garment detail
3
STR 3
attr: textile material type
1
SURF 1
cat: whole-body
1
TAX 1
identity check: PASS
carrier fixed, q = STR: UNSAFE
(b) Path B: one FP type value
retained type::
carrier family::
W on unseen facets
attribute (any of 12 facets)
1
STR, SURF or ATTR 1
category (any of 9 facets)
2
TAX 2
540 facet-count assignments
type:: has no map to carrier
carrier varies, q = TAX: UNSAFE
(c) The admission gate (before any model is trained)
declare q, L^rel, spec
schema and registry only
QUERY-CONFORM
per view and query
FULL-CONFORM
per row, label-free
A: linear certificate
B: fiber audit
C: witness pairs
UNSAFE
NONDETERMINED
UNVERIFIED
masses → admit