




SERIOUS. SOLID. IMPACT.

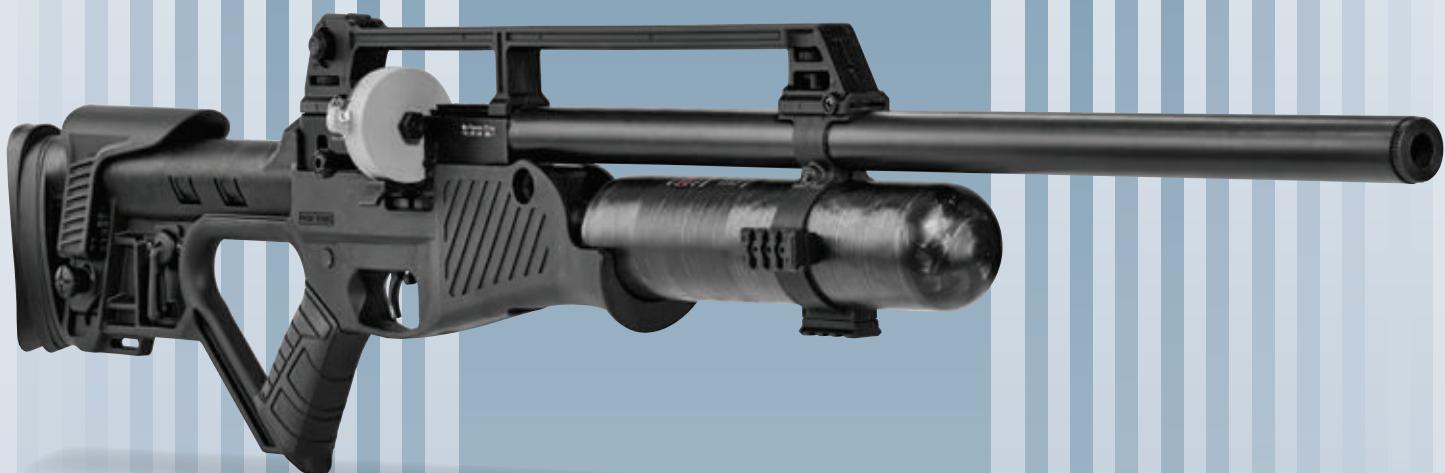

AIRGUNS

HATSAN.COM.TR



The Hatsan Difference

What sets Hatsan Airguns



More Power

Even though velocity rates may appear the same from brand to brand, in most instances that is not the case. Hatsan establishes its velocity rating using heavier lead pellets, while most competitors use lighter aluminum pellets to market their velocities. What this means for you is that a Hatsan airgun delivers **OVER 30% MORE IMPACT ENERGY** than an alloy-tested airgun with the same velocity.



Unique Features

Many of our airguns offer specialty features that come standard within our product line to provide shooters with a better experience, including the Quattro Trigger, SAS-Shock Absorber System, QuietEnergy, XRS – Recoil Reduction System, Barrel Release System, TruGlo® fiber optics, the Triopad® butt system, patented "Antidouble pellet feed mechanism" preventing more than one pellet loading into barrel and "anti-knock system" preventing gas wastage when rifle is knocked or bounced.



Family Ownership

It all started in 1976 with one young man hoping to replicate an air dart gun in his parents' garage.

Since that time, Hatsan has become one of the world's most recognized brands in the shooting sports, airgun and firearm industry – delivering its products to more than 95 countries.

This family owned and operated manufacturer maintains a hands - on approach - producing all designs and components in - house to ensure that each product deserves to bear the Hatsan name.

In fact, the original founder is still very involved in new product development and design.

Serious. Solid. Impact.

www.hatsan.com.tr

apart from The Competition?



Custom Designs

While other manufacturers work from widely used templates, all Hatsan designs are conceived and developed in-house. This means your Hatsan airgun is an original, not a reproduction.



100% Vertically Integrated

Complete vertical integration ensures the high quality you expect from Hatsan. Every part of every airgun is produced right in our facilities to guarantee a wellmade finished product. And only the highest-grade raw materials are used, including fine Turkish walnut and durable German steel.



Blitz
Full-Auto

72 joules POWER!



NEW



FULL AUTO & SemiAutoAction



24-shot magazine in .177 (4.5mm), 21-shot magazine in .22 (5.5mm), 19-shot magazine in .25 (6.35mm) and 16-shot magazine in .30 (7.62mm) caliber



580cc Carbon Fiber Air Bottle

**FULLY SHROUDED
BARREL**

Model		Blitz		
Caliber		5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal
Max. Muzzle Velocity (*)		320m/s(1050fps)	295m/s(970fps)	221m/s(730fps)
Energy (*)	Joules ft.lbs	49 36	56 41	71.8 53
Magazine Capacity		21	19	16
Air Tube Volume		580cc		
Fill Pressure		250 BAR		
Number of Semi Auto or Full Auto Shots at Optimal Velocity		130	110	100
Stock		Tactical Synthetic Stock. Ergonomic Pistol Grip. Elevation adjustable Cheek-Rest.		
Overall Length		1150mm (45.2")		
Barrel	Length Weight		585mm (23")	4kg (8.8lbs)

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

** Minimum 100 bar pressure necessary for full auto or semi auto action.

- Full-Auto and Semi-Auto firing mode pre-charged pneumatic (PCP) air rifle.
- Selectable firing mode switch.
- Patented efficient air-operated system
- Available in .22 (5.5mm), .25 (6.35mm) and .30 (7.62mm) caliber.
- Detachable 24-shot magazine in .177 (4.5mm), 21-shot magazine in .22 (5.5mm), 19-shot magazine in .25 (6.35mm) and 16-shot magazine in .30 (7.62mm) caliber
- Fully shrouded, precision rifled and choked barrel for accuracy.
- 580cc carbon fiber air bottle mounted in the forearm.
- Includes 3 magazines.
- Includes quick-fill nozzle.
- All weather advanced polymer and tactical style ambidextrous stock with thumbhole & elevation adjustable cheek rest.
- Soft rubber pistol grip.
- Texturing on grip surfaces for better control and feel.
- 3 Picatinny accessory rails – beneath and on the sides of the forearm.
- Elevation and fit angle & adjustable rubber butt pad.
- Built-in pressure gauge to monitor the cylinder pressure.
- Picatinny rail milled receiver for both 11 mm and 22 mm scope mounts.
- Overall blued finish, black anodized aluminum receiver.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual safety.
- Detachable carry handle.
- Elevation & windage adjustable fiber optic rear sight built into the carry handle.
- Elevation adjustable fiber optic front sight built into the carry handle.
- Black metal trigger.
- Sling swivels.

- Elevation and fit angle & adjustable rubber butt pad.
- Tactical style ambidextrous stock with thumbhole
- Elevation adjustable cheek rest.
- Elevation & windage adjustable fiber optic rear sight built into the carry handle.





Invader



1070fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**



QuietEnergy Version

QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

- Manual loading, bolt action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**.
- Precision rifled and choked barrel for accuracy.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 3 magazines.
- Picatinny rail along the receiver & forend for both 11mm and 22mm scope mounts.
- Tactical style ambidextrous stock with thumbhole and elevation adjustable cheek rest.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- 3 Picatinny accessory rails – beneath and on the sides of the forearm.
- Rubber butt pad.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual safety.
- Detachable carry handle.
- Elevation & windage adjustable fiber optic rear sight built into the carry handle.
- Elevation adjustable fiber optic front sight built into the carry handle.
- Black metal trigger.
- Sling swivels.

Model	Invader		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules	30	42
	ft.lbs	22	31
Magazine Capacity		14	12
Air Tube Volume		255cc	
Fill Pressure		200 BAR	
Number of Shots per fill		110	105
Number of Shots at Optimal Velocity		52	50
Stock	Tactical Synthetic Stock Ergonomic Pistol Grip Adjustable Cheek Rest		
Overall Length	1030 mm (40.5")		
Barrel	Length	500mm (19.7")	
	Weight	3.7kg (8.2lbs)	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Invader OD

OD Green Color Stock version.



Invader FDE

Flat Dark Earth Color Stock version.

1020fps POWER!
with Lead Pellets

SemiAutoAction

Invader Auto



FULLY SHROUDED
BARREL

Model			
Invader Auto			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	310m/s (1020fps)	288m/s (950fps)	265m/s (870fps)
Energy (*)	Joules	27	39.8
	ft.lbs	20	29
Magazine Capacity		14	12
Air Tube Volume		255cc	
Fill Pressure		200 BAR	
Number of Semi Automatic Shots at Optimal Velocity		50	50
Stock	Tactical Synthetic Stock Ergonomic Pistol Grip Adjustable Cheek Rest		
Overall Length	1030 mm (40.5")		
Barrel	Length	500mm (19.7")	
	Weight	3.7kg (8.2lbs)	

- Semi Auto Action pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 3 magazines.
- Picatinny rail along the receiver & forend for both 11mm and 22mm scope mounts.
- Tactical style ambidextrous stock with thumbhole and elevation adjustable cheek rest.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- 3 Picatinny accessory rails – beneath and on the sides of the forearm.
- Rubber butt pad.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual safety.
- Detachable carry handle.
- Elevation & windage adjustable fiber optic rear sight built into the carry handle.
- Elevation adjustable fiber optic front sight built into the carry handle.
- Black metal trigger.
- Sling swivels.

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

** Minimum 100 bar pressure necessary for semi auto action.

NEW



Invader Auto OD
OD Green Color Stock version.



Invader Auto FDE
Flat Dark Earth Color Stock version.



Hydra

Multi-Caliber

1070fps POWER!

with Lead Pellets



Model		Hydra		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules	30	42	46
	ft.lbs	22	31	34
Magazine Capacity		14	12	10
Air Tube Volume		165cc		
Fill Pressure		200 BAR		
Number of Shots per fill		100	95	90
Number of Shots at Optimal Velocity		48	40	38
Stock	Turkish Walnut. Elevation and fit angle adjustable butt pad.			
Overall Length		945 mm (37")		
Barrel	Length	450mm (17.7")		
	Weight	2.99 kg (6.6lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- Multi caliber interchangeable, multi-shot, bolt action pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Caliber-specific Barrel/Receiver module easily removed/installed with a single thumb screw.
- Fully shrouded, precision rifled and choked barrel for accuracy
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 2 magazines and a quick-fill nozzle.
- Black anodized aluminum receiver.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Genuine Turkish walnut ambidextrous & ergonomic stock with Monte Carlo cheek piece.
- Checkering on grip & forend for better control & feel.
- Elevation and fit angle adjustable rubber butt pad
- 165cc volume steel air cylinder tube (not detachable) in forend fills to 200bar.
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Additional caliber-specific barrel/receiver modules are available separately.

NEW



.22 (5.5mm) caliber



.25 (6.35mm) caliber



Hydra's patented Versi-Cal Technology (VCT) system couples a caliber-specific receiver and barrel into a single interchangeable module. It allows for quick and simple multi caliber interchangeability. Unscrew the convenient upper receiver bolt to switch between .177, .22, or .25 caliber variants. This allows a scope to remain mounted and zeroed with each caliber barrel/receiver module, eliminating the need to re-zero each time the barrel is interchanged.
(*Additional caliber-specific barrel/receiver modules are available separately.)



- Genuine Turkish walnut ambidextrous & ergonomic stock with Monte Carlo cheek piece.
- Checkering on grip & forend for better control & feel.
- Elevation and fit angle adjustable rubber butt pad.

1070fps POWER!

with Lead Pellets

Hydra QE



**FULLY SHROUDED
BARREL**

Multi-Caliber



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model			
Hydra QE			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	30 Joules 22 ft.lbs	42 31	46 34
Magazine Capacity	14	12	10
Air Tube Volume	165cc		
Fill Pressure	200 BAR		
Number of Shots per fill	100	95	90
Number of Shots at Optimal Velocity	48	40	38
Stock	Turkish Walnut. Elevation and fit angle adjustable butt pad.		
Overall Length	1085mm (42.7")		
Barrel	Length Weight	450mm (17.7") 3.09 kg (6.8lbs)	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- Multi caliber interchangeable, multi-shot, bolt action pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Caliber-specific Barrel/Receiver module easily removed/installed with a single thumb screw.
- QuietEnergy Fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**.
- Precision rifled and choked barrel for accuracy
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 2 magazines and a quick-fill nozzle.
- Black anodized aluminum receiver.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Genuine Turkish walnut ambidextrous & ergonomic stock with Monte Carlo cheek piece.
- Checkering on grip & forend for better control & feel.
- Elevation and fit angle adjustable rubber butt pad
- 165cc volume steel air cylinder tube (not detachable) in forend fills to 200bar.
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Additional caliber-specific barrel/receiver modules are available separately.

NEW

.177 (4.5mm) caliber



.22 (5.5mm) caliber



Versi-Cal Technology

Hydra's patented Versi-Cal Technology (VCT) system couples a caliber-specific receiver and barrel into a single interchangeable module. It allows for quick and simple multi caliber interchangeability. Unscrew the convenient upper receiver bolt to switch between .177, .22, or .25 caliber variants. This allows a scope to remain mounted and zeroed with each caliber barrel/receiver module, eliminating the need to re-zero each time the barrel is interchanged.
(*Additional caliber-specific barrel/receiver modules are available separately.)





NovaStar

1220fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**



- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy.
- 1/2" UNF threaded muzzle for sound moderator.
- Genuine Turkish high grade walnut ambidextrous stock with thumbhole.
- Elevation adjustable cheek rest and picatinny rail beneath the forearm.
- Elevation & cast adjustable rubber butt pad.

- 480cc carbon fiber air bottle.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- Includes 2 magazines and quick fill nozzle.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.

Model		NovaStar			NovaStar QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)	370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)
Energy (*)	Joules	39	53,5	63	39	53,5	63
	ft.lbs	29	39,5	46	29	39,5	46
Magazine Capacity		14	12	10	14	12	10
Air Tube Volume		480cc			480cc		
Fill Pressure		250 BAR			250 BAR		
Number of Shots per fill		320	300	280	320	300	280
Number of Shots at Optimal Velocity		110	100	90	110	100	90
Stock		Genuine Turkish High Grade walnut, Thumbhole, Adjustable Cheek Rest. Adjustable Butt Pad.			Genuine Turkish High Grade walnut, Thumbhole, Adjustable Cheek Rest. Adjustable Butt Pad.		
Overall Length		1095mm (43.1")			1240mm (48.8")		
Barrel Length		585mm (23")			585mm (23")		
Weight		3.8kg (8.4lbs)			3.8kg (8.4lbs)		




Includes 2 magazines and quick fill nozzle.

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

**FULLY SHROUDED
BARREL**

NovaStar QE



(*) Scope sold separately



1070fps POWER!
with Lead Pellets

Vectis



Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise

- Manual loading, lever action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber
- Fully shrouded, precision rifled and choked barrel for accuracy.
- Integrated sound moderator.
- Picatinny rail along the receiver & barrel for both 11mm and 22mm scope mounts.
- Ambidextrous, all weather, tactical style thumbhole synthetic stock with Monte Carlo cheek piece.
- Picatinny rail beneath the forearm.
- Checkering on grip & forend for better control & feel.
- Ventilated rubber butt pad.
- 165cc volume steel air cylinder tube (not detachable)
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Foldable design adjustable rear sight with Truglo fiber optics. Rear sight can also be detached from the picatinny rail.
- Foldable design front sight with Truglo fiber optics. Front sight can also be detached from the picatinny rail.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.

Model		Vectis		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules ft.lbs	30 22	42 31	46 34
Magazine Capacity		14	12	10
Air Tube Volume			165cc	
Fill Pressure			200 BAR	
Number of Shots per fill		100	95	90
Number of Shots at Optimal Velocity		48	40	38
Stock		Advanced polymer, montecarlo cheekpiece.		
Overall Length		1050mm (41.3")		
Barrel Length		450mm (17.7")		
Weight		3.2kg (7.1lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



(*) Scope sold separately



Flash

1070fps POWER!

with Lead Pellets



QUATTRO
TRIGGER

- Manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for ½ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 2 magazine and a quick-fill nozzle
- Black anodized aluminum receiver.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Ambidextrous, all weather, tactical style thumbhole synthetic stock with Monte Carlo

- cheek piece.
- Picatinny rail beneath the forearm.
- Checkering on grip & forend for better control & feel.
- Rubber butt pad.
- 165cc volume aluminum air cylinder tube (not detachable)
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.

Model	Flash			Flash QE		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules	30	42	46	30	42
	ft.lbs	22	31	34	22	31
Magazine Capacity		14	12	10	14	12
Air Tube Volume		165cc			165cc	
Fill Pressure		200 BAR			200 BAR	
Number of Shots per fill	100	95	90	100	95	90
Number of Shots at Optimal Velocity	48	40	38	48	40	38
Stock	Advanced polymer			Advanced Polymer		
Overall Length	915mm (36")			1075mm (42.3")		
Barrel Length	450mm (17.7")			450mm (17.7")		
Weight	2.5kg (5.5lbs)			2.68kg (5.9lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Single shot adapter is included.



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Flash QE



(*) Scope sold separately

1070fps POWER!

with Lead Pellets

Flash W



**FULLY SHROUDED
BARREL**



**QUATTRO
TRIGGER**

- Manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 2 magazine and a quick-fill nozzle
- Black anodized aluminum receiver.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Genuine Turkish walnut ambidextrous stock with thumbhole and Monte Carlo cheek piece

- Picatinny rail beneath the forearm.
- Checkering on grip & forend for better control & feel.
- Rubber butt pad
- 165cc volume steel air cylinder tube (not detachable)
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.

Model		Flash W			Flash W-QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules	30	42	46	30	42	46
	ft.lbs	22	31	34	22	31	34
Magazine Capacity		14	12	10	14	12	10
Air Tube Volume		165cc			165cc		
Fill Pressure		200 BAR			200 BAR		
Number of Shots per fill		100	95	90	100	95	90
Number of Shots at Optimal Velocity		48	40	38	48	40	38
Stock		Turkish walnut			Turkish walnut		
Overall Length		915mm (36")			1075mm (42.3")		
Barrel Length		450mm (17.7")			450mm (17.7")		
Weight		2.82kg (6.2lbs)			3.00kg (6.6lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Single shot adapter is included.



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Flash W-QE



(*) Scope sold separately



FlashPup

1070fps POWER!

with Lead Pellets



**FULLY SHROUDED
BARREL**



- Bullpup design, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 2 magazine and a quick-fill nozzle.
- Black anodized aluminum receiver.
- Picatinny rail for both 11mm and 22mm scope mounts.
- Ambidextrous bullpup wooden stock. Picatinny rail beneath the forearm.

- "EasyAdjust" Elevation Comb - Stock equipped with integrated elevation adjustment button.
- Ventilated rubber butt pad. Picatinny rail beneath the forearm.
- Checkering on grip & forend for better control & feel.
- 165cc volume aluminum air cylinder tube (not detachable)
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Black metal trigger.

Model	FlashPup			FlashPupQE		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules	30	42	46	30	42
	ft.lbs	22	31	34	22	31
Magazine Capacity		14	12	10	14	12
Air Tube Volume	165cc			165cc		
Fill Pressure	200 BAR			200 BAR		
Number of Shots per fill	100	95	90	100	95	90
Number of Shots at Optimal Velocity	48	40	38	48	40	38
Stock	Ambidextrous bullpup wooden stock. Elevation adjustable comb.			Ambidextrous bullpup wooden stock. Elevation adjustable comb.		
Overall Length	645mm (25.4")			815mm (32")		
Barrel Length	450mm (17.7")			450mm (17.7")		
Weight	2.73kg (6lbs)			2.9kg (6.4lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Single shot adapter is included.



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

FlashPup QE

1070fps POWER!

with Lead Pellets

FlashPup S



- Bullpup design, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 2 magazines and a quick-fill nozzle
- Black anodized aluminum receiver.
- Picatinny rail for both 11mm and 22mm scope mounts.
- Ambidextrous bullpup synthetic stock. Picatinny rail beneath the forearm.
- "EasyAdjust" Elevation Comb - Stock equipped with integrated elevation adjustment button.

- Elevation & cast adjustable rubber butt pad.
- Picatinny rail beneath the forearm.
- Checkering on grip & forend for better control & feel.
- 165cc volume steel air cylinder tube (not detachable)
- Built-in pressure gauge in the forearm to monitor the cylinder pressure.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Manual safety.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Black metal trigger.

Model		FlashPup-S			FlashPup-S QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules	30	42	46	30	42	46
	ft.lbs	22	31	34	22	31	34
Magazine Capacity		14	12	10	14	12	10
Air Tube Volume		165cc			165cc		
Fill Pressure		200 BAR			200 BAR		
Number of Shots per fill		100	95	90	100	95	90
Number of Shots at Optimal Velocity		48	40	38	48	40	38
Stock	Ambidextrous bullpup synthetic stock. Elevation adjustable comb.			Ambidextrous bullpup synthetic stock. Elevation adjustable comb.			
Overall Length	645mm (25.4")			815mm (32")			
Barrel Length	450mm (17.7")			450mm (17.7")			
Weight	3 kg (6.6lbs)			3.19kg (7lbs)			



Single shot adapter is included.



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

FlashPup S-QE



Galatian 5 Auto



- Semi auto action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Includes 3 magazines.
- Ambidextrous & ergonomic design walnut stock with rubber butt pad.
- Checkering on grip & forend for better control & feel.
- Picatinny rail beneath the forearm.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Aircraft aluminum alloy receiver in white nickel finish.
- Overall blued finish on air tube and barrel.
- Manual Safety.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Detachable front sight with Truglo fiber optics.
- Gold plated metal trigger & synthetic trigger guard.
- Fitted sling swivels.
- Hard case and sling included.

Galatian 5 Auto			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	310m/s (1020fps)	288m/s (950fps)	265m/s (870fps)
Energy (*)	Joules	27	39.8
	ft.lbs	20	29
Magazine Capacity		14	12
Air Tube Volume	255cc		
Fill Pressure	200 BAR		
Number of Semi Automatic Shots at Optimal Velocity (**)	50		
Stock	High Quality Turkish Walnut		
Overall Length	1068mm (42")		
Barrel Length	500mm (19.7")		
Weight	3.7kg (8.1lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green	
	Front Sight	1.5mm (.060") red	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.



Carrying case included.



Sights are easily detachable which allows to mount optics on the receiver.



(*) Scope sold separately



1020fps POWER!

with Lead Pellets

Galatian 6 Auto



SemiAutoAction

**FULLY SHROUDED
BARREL**



- Semi auto action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber
- Includes 3 magazines.
- Ambidextrous & ergonomic design synthetic stock with rubber butt pad.
- Checkering on grip & forend for better control & feel.
- 3 Picatinny accessory rails – beneath and on the sides of the forearm.

Model		Galatian 6 Auto		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		310m/s (1020fps)	288m/s (950fps)	265m/s (870fps)
Energy (*)	Joules	27	39,8	45
	ft.lbs	20	29	33,5
Magazine Capacity		14	12	10
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Number of Semi Automatic Shots at Optimal Velocity		50		
Stock		Advanced Polymer		
Overall Length		1068mm (42")		
Barrel Length		500mm (19.7")		
Weight		3.85kg (8.5lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.

- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Black anodized aircraft aluminum alloy receiver.
- Overall blued finish on air tube and barrel.
- Manual Safety.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Detachable front sight with Truglo fiber optics.
- Black metal trigger & synthetic trigger guard.
- Fitted sling swivels.
- Hard case and sling included.



Sights are easily detachable which allows to mount optics on the receiver.



Carrying case included.



SemiAutoAction

Galatian Tact Auto

Tactical telescopic stock version.
Comes with a foregrip bipod.

Model		Galatian Tact Auto		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		310m/s (1020fps)	288m/s (950fps)	265m/s (870fps)
Energy (*)	Joules	27	39,8	45
	ft.lbs	20	29	33,5
Magazine Capacity		14	12	10
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Number of Semi Automatic Shots at Optimal Velocity		50		
Stock		Tactical Telescopic Stock Adjustable Comb Advanced Polymer Grip		
Overall Length		Butt Shortened: 970mm (38.1") Butt Extended: 1075mm (42.3")		
Barrel Length		500mm (19.7")		
Weight		4.15kg (9.1lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

- Telescopic stock. Can be shortened / extended by 10cm (4").
- Stock can be removed easily and you can use it with pistol grip only.
- Elevation adjustable comb.



* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.
** Minimum 100 bar pressure necessary for semi auto action.



Barrage



1050fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**

Model		Barrage		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		320m/s (1050fps)	295m/s (970fps)	270m/s (900fps)
Energy (*)	Joules	27	42	48,5
	ft.lbs	21	31	36
Magazine Capacity		14	12	10
Air Tube Volume		500cc		
Fill Pressure		250 BAR		
Number of Semi Automatic Shots at Optimal Velocity (**)		100	120	120
Stock		Advanced polymer, thumbhole, elevation adjustable comb, adjustable butt pad		
Overall Length		1040mm (40.9")		
Barrel Length		500mm (19.7")		
Weight		4.62kg (10.1lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.



Barrage W
Wooden Stock version



Carrying case included.

Model		Barrage W		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		320m/s (1050fps)	295 m/s (970 fps)	270m/s (900fps)
Energy (*)	Joules	27	42	48,5
	ft.lbs	21	31	36
Magazine Capacity		14	12	10
Air Tube Volume		500cc		
Fill Pressure		250 BAR		
Number of Semi Automatic Shots at Optimal Velocity (**)		100	120	120
Stock		Wooden stock with thumbhole. Elevation adjustable comb.		
Overall Length		1035mm (40.9")		
Barrel Length		500mm (19.7")		
Weight		4.6 kg (10.1lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		



Barrage OD
OD Green Stock version.



Barrage DZ
DZ Color Stock version.



Barrage FDE
Flat Dark Earth Color Stock version.



Barrage M1
M1 Camo Stock version.



Barrage M2
M2 Camo Stock version.

1050fps POWER!

with Lead Pellets

SemiAutoAction



BullMaster

**FULLY SHROUDED
BARREL**



Model		BullMaster		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		320m/s (1050fps)	295 m/s (970 fps)	270m/s (900fps)
Energy (*)	Joules	27	42	48,5
	ft.lbs	21	31	36
Magazine Capacity		14	12	10
Air Tube Volume		500+30cc	500+30cc	500+30cc
Fill Pressure		250 BAR	250 BAR	200 BAR
Number of Semi Automatic Shots at Optimal Velocity (**)		100	120	120
Stock	Bullpup, advanced polymer, thumbhole, elevation adjustable combo, adjustable butt pad			
Overall Length	785mm (30.9")			
Barrel Length	500mm (19.7")			
Weight	4.7kg (10.3lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.

- Genuine bullpup design, Semi auto action pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy
- 500cc volume air bottle mounted in the forearm.
- Includes 3 magazines.
- Includes quick-fill nozzle.
- Tactical style ambidextrous stock with thumbhole
- 2 spare magazine carrying slots in the stock
- Accessory picatinny rail beneath the forearm.
- "EasyAdjust" Elevation Comb - Stock equipped with integrated elevation adjustment button
- Ventilated rubber butt pad
- Built-in pressure gauge to monitor the cylinder pressure.
- Picatinny rail for both 11 mm and 22 mm scope mounts.
- Overall blued finish, black anodized receiver.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual safety.
- Black metal trigger.
- Fitted sling swivels.
- Hard case is included.



BullMaster FDE
Flat Dark Earth Color Stock version.



BullMaster OD
OD Green Stock version.



BullMaster DZ
DZ Color Stock version.



Sortie

800fps POWER!

with Lead Pellets

SemiAutoAction

FULLY SHROUDED
BARREL



Carrying case included.

Model		Sortie		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		245m/s (800fps)	215 m/s (700 fps)	200m/s (660fps)
Energy (*)	Joules	16,5	21,5	26
	ft.lbs	12	16	19
Magazine Capacity		14	12	10
Air Tube Volume		62cc	62cc	62cc
Fill Pressure		200 BAR	200 BAR	200 BAR
Number of Semi Automatic Shots at Optimal Velocity (**)		28	36	30
Stock		Ergonomic design synthetic grip with checkering Collapsible and removable butt		
Overall Length	Butt Folded	460mm (18.1")		
	Butt Extended	635mm (25")		
Barrel Length		200mm (7.9")		
Weight		2.16kg (4.7lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.

- Semi auto action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy.
- 62cc volume air bottle mounted in the forearm.
- Includes 3 magazines.
- Includes quick-fill nozzle.
- Ergonomic design synthetic grip with checkering.
- Built-in pressure gauge to monitor the cylinder pressure.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual safety.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.
- Black metal trigger.
- Hard case is included.



Stock can be removed.



Tactical side folding stock is included.

800fps POWER!

with Lead Pellets

Sortie W



SemiAutoAction

**FULLY SHROUDED
BARREL**



Carrying case included.

Model		Sortie-W		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		245m/s (800fps)	215 m/s (700 fps)	200m/s (660fps)
Energy (*)	Joules	16,5	21,5	26
	ft.lbs	12	16	19
Magazine Capacity		14	12	10
Air Tube Volume		62cc	62cc	62cc
Fill Pressure		200 BAR	200 BAR	200 BAR
Number of Semi Automatic Shots at Optimal Velocity (**)		28	36	30
Stock	Ergonomic design wooden grip with checkering			
Overall Length	420mm (15.5")			
Barrel Length	200mm (7.9")			
Weight	2kg (4.4lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors. ** Minimum 100 bar pressure necessary for semi auto action.

- Semi auto action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 14-shot magazine in .177 (4.5mm), 12-shot magazine in .22 (5.5mm) and 10-shot magazine in .25 (6.35mm) caliber.
- Fully shrouded, precision rifled and choked barrel for accuracy.
- 62cc volume air bottle mounted in the forearm.
- Includes 3 magazines.
- Includes quick-fill nozzle.
- Ergonomic design wooden grip with checkering.
- Built-in pressure gauge to monitor the cylinder pressure.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Patented anti-knock system to prevent discharge of the rifle when rifle is knocked or bounced.
- Manual safety.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.
- Black metal trigger.
- Hard case is included.



Left side view



Predator

1200fps POWER!

with Lead Pellets



- Manual loading, bolt action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 17-shot magazine in .177 (4.5mm), 14-shot magazine in .22 (5.5mm) and 13-shot magazine in .25 (6.35mm), caliber.
- 200 bar fill pressure 400cc air tube bottle + 50cc air tube.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap. QE shrouded barrel version available.
- Includes 3 magazines.
- Includes quick-fill nozzle.
- Advanced polymer, tactical stock with integrated pistol grip and integrated picatinny rail beneath the forearm.
- Stock mounted on rear air cylinder bottle.

- Elevation & fit angle adjustable rubber butt pad and elastic material cheek piece.
- Built-in pressure gauge to monitor the cylinder pressure.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Elevation adjustable front sight with Truglo fiber optics.
- 2-stage adjustable trigger for trigger travel and trigger load.
- Black metal trigger.
- Fitted sling swivels.

Model		Predator		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		365m/s (1200fps)		350 m/s (1150 fps)
Energy (*)	Joules	37,5	58	68
	ft.lbs	28	43	50
Magazine Capacity		17	14	13
Air Tube Volume				
400cc+165cc				
Fill Pressure				
200 BAR				
Number of Shots per fill		135	130	130
Number of Shots at Optimal Velocity		50	48	44
Stock				
Advanced polymer, tactical stock with integrated pistol grip				
Overall Length				
1100mm (43.3")				
Barrel Length				
585mm (23")				
Weight				
5,1 kg (11.2lbs)				
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Elevation & fit angle adjustable rubber butt pad and elastic cheek piece.

Built-in pressure gauge

(*) Scope sold separately



1170fps POWER!

with Lead Pellets

AirMax



FULLY SHROUDED
BARREL



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Model			AirMax		
Caliber			4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)			355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules		36	51	57
	ft.lbs		27	38	42
Magazine Capacity			10	10	9
Air Tube Volume	400cc+90cc				
Fill Pressure	200 BAR				
Number of Shots per fill	470	450	400		
Number of Shots at Optimal Velocity	120	95	85		
Stock	Ambidextrous bullpup wooden stock. Elevation adjustable comb.				
Overall Length	940mm (37")				
Barrel Length	585mm (23")				
Weight	4.9 kg (10.8lbs)				

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- Genuine bullpup design, 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- 200 bar fill pressure 400cc air tube bottle + 90cc air tube.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator – Approximately 50% Quieter.
- Precision rifled and choked barrel for accuracy.
- Ambidextrous bullpup wooden stock. Picatinny rail beneath the forearm.
- “EasyAdjust” Elevation Comb - Stock equipped with integrated elevation adjustment button.
- Ventilated rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes 2 magazine.
- Built-in pressure gauge to monitor the pressure.
- Includes quick-fill nozzle supplied in the box.
- Picatinny rail for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- “Anti-double pellet feed” mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Metal trigger.
- Fitted sling swivels.



(*) Scope sold separately



Nova

FULLY SHROUDED
BARREL

1220fps POWER!

with Lead Pellets



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Nova			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)
Energy (*)	39 Joules	53,5 ft.lbs	63 ft.lbs
Magazine Capacity	10	10	9
Air Tube Volume	500cc		
Fill Pressure	250 BAR		
Number of Shots Per Fill	325	300	280
Number of Shots at Optimal Velocity	150	130	115
Stock	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.		
Overall Length	1245 mm (49")		
Barrel Length	585mm (23")		
Weight	4.4 kg (9.7lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10- shot, manual loading, side-lever action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Precision rifled and choked barrel for accuracy.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece and with picantiny rail beneath the forearm.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in 25 (6.35 mm) caliber.
- Includes 2 magazines.
- 500cc air tube.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.



Nova Compact

Compact version without sound moderator.
Shrouded barrel and 1/2" UNF threaded muzzle for detachable sound moderator.

Nova Compact			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	370m/s (1220fps)	335m/s (1100fps)	310m/s (1020fps)
Energy (*)	39 Joules	53,5 ft.lbs	63 ft.lbs
Magazine Capacity	10	10	9
Air Tube Volume	500cc		
Fill Pressure	250 BAR		
Number of Shots Per Fill	325	300	280
Number of Shots at Optimal Velocity	150	130	115
Stock	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.		
Overall Length	1105mm (43.5")		
Barrel Length	585mm (23")		
Weight	4.4 kg (9.7lbs)		



(*) Scope sold separately

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

QuietEnergy Series

1220fps POWER!

with Lead Pellets

NovaTact



**FULLY SHROUDED
BARREL**



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Model		NovaTact		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		370m/s (1220fps)	335 m/s (1100 fps)	310 m/s (1020 fps)
Energy (*)	Joules	39	53,5	63
	ft.lbs	29	39,5	46
Magazine Capacity		10	10	9
Air Tube Volume		500cc		
Fill Pressure		250 BAR		
Number of Shots Per Fill		325	300	280
Number of Shots at Optimal Velocity		150	130	115
Stock		Tactical Telescopic Stock Adjustable Comb Advanced Polymer Grip		
Overall Length	Butt Shortened	1173mm (46.1")		
	Butt Extended	1273mm (50.1")		
Barrel Length		585mm (23")		
Weight		4.8kg (10.6lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10-shot, manual loading, side-lever action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Precision rifled and choked barrel for accuracy.
- Tactical telescopic stock with elevation adjustable comb
- Ambidextrous & ergonomic design pistol grip synthetic stock with picatinny rail beneath the forearm.
- Spare magazine carrying slot in the stock for 1 spare magazines.
- Ventilated rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in .25 (6.35 mm) caliber.
- Includes 2 magazines.
- 500cc air tube.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.



NovaTact Compact

Compact version without QE sound moderator. Shrouded barrel and $\frac{1}{2}$ " UNF threaded muzzle for detachable sound moderator.

Model		NovaTact Compact		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		340m/s (1120fps)	315 m/s (1030 fps)	280 m/s (920 fps)
Energy (*)	Joules	39	53,5	63
	ft.lbs	29	39,5	46
Magazine Capacity		10	10	9
Air Tube Volume		500cc		
Fill Pressure		250 BAR		
Number of Shots Per Fill		330	320	290
Number of Shots at Optimal Velocity		160	150	130
Stock		Tactical Telescopic Stock Adjustable Comb Advanced Polymer Grip		
Overall Length	Butt Shortened	940mm (37")		
	Butt Extended	1045mm (41")		
Barrel Length		495mm (23")		
Weight		4.43kg (9.8lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



(* Scope and bipod sold separately)



Gladius



1170fps POWER!

with Lead Pellets

FULLY SHROUDED
BARREL



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

- Genuine bullpup design, 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- 6 level power adjustment. Power setting can be done at a turn of the power adjustment knob.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator – **Approximately 50% Quieter**
- Precision rifled and choked barrel for accuracy.
- Thumbhole synthetic ambidextrous bullpup stock. 3 Picatinny accessory rails – beneath and on the sides of the forearm.
- Checkering on grip and forearm for better control and feel.
- “EasyAdjust” Cheek Comb - Stock equipped with integrated elevation adjustment wheel.
- 3 spare magazine carrying slots in the stock
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in 25 (6.35 mm) caliber.

Model		Gladius			Gladius Long		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules	30	42	46	36	51	57
	ft.lbs	22	31	34	27	38	42
Magazine Capacity		10	10	9	10	10	9
Air Tube Volume		255cc			255cc		
Fill Pressure		200 BAR			200 BAR		
Number of Shots Per Fill		120	115	105	120	110	100
Number of Shots at Optimal Velocity		65	60	50	60	50	45
Stock		Bullpup, advanced polymer, thumbhole, elevation adjustable comb, adjustable butt bad			Bullpup, advanced polymer, thumbhole, elevation adjustable comb, adjustable butt bad		
Overall Length		875mm (34,4")			965mm (38")		
Barrel Length		495mm (19.4")			585mm (23")		
Weight		4.65kg (10.2lbs)			4.8kg (10.6lbs)		

Power Setting	Gladius Average Energy 4.5mm / .177cal	Gladius Long Average Energy 4.5mm / .177cal
6	30 Joule	36 Joule
5	26 Joule	30 Joule
4	22 Joule	26,5 Joule
3	17 Joule	21,5 Joule
2	12 Joule	15 Joule
1	7 Joule	8,5 Joule

Power Setting	Gladius Average Energy 5.5mm / .22cal	Gladius Long Average Energy 5.5mm / .22cal
6	42 Joule	51 Joule
5	36 Joule	42 Joule
4	31 Joule	36 Joule
3	24 Joule	28 Joule
2	16 Joule	19 Joule
1	10 Joule	11.5 Joule

Power Setting	Gladius Average Energy 6.35mm / .25cal	Gladius Long Average Energy 6.35mm / .25cal
6	46 Joule	57 Joule
5	39 Joule	46 Joule
4	33 Joule	39 Joule
3	25 Joule	29 Joule
2	17,5 Joule	20 Joule
1	10 Joule	12 Joule



Gladius OD

OD Green Stock version.



Gladius DZ

DZ Color Stock version.



Gladius FDE

Flat Dark Earth Color Stock version.



Gladius M1

M1 Camo Stock version.



Gladius M2

M2 Camo Stock version.



Custom hard case included.

QuietEnergy Series

1170fps POWER!

with Lead Pellets

BullBoss



**FULLY SHROUDED
BARREL**



QUATTRO
TRIGGER



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Model		BullBoss		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules	36	51	57
	ft.lbs	27	38	42
Magazine Capacity		10	10	9
Air Tube Volume		230cc		
Fill Pressure		200 BAR		
Number of Shots Per Fill		160	150	135
Number of Shots at Optimal Velocity		55	45	45
Stock	Bullpup, advanced polymer, thumbhole, elevation adjustable comb			
Overall Length	935mm (36.8")			
Barrel Length	585 mm (23")			
Weight	4.3 kg (9.5lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- Genuine bullpup design, 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator – **Approximately 50% Quieter**
- Precision rifled and choked barrel for accuracy.
- Synthetic ambidextrous bullpup stock. Picatinny rail beneath the forearm. Checkering on grip and forearm for better control and feel.
- “EasyAdjust” Elevation Comb - Stock equipped with integrated elevation adjustment button.
- Ventilated rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in 25 (6.35 mm) caliber.
- Includes 1 magazine.
- Detachable steel air cylinder tube (230cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Picatinny rail for both 11 mm and 22 mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- “Anti-double pellet feed” mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Metal trigger.
- Fitted sling swivels.
- Spare air cylinders with regulator are available.



BullBoss W
Wooden Stock version.



BullBoss OD
OD Green Stock version.



BullBoss DZ
DZ Color Stock version.



BullBoss FDE
Flat Dark Earth Color Stock version.



BullBoss M1
M1 Camo Stock version.



BullBoss M2
M2 Camo Stock version.

- Side lever action.
- Picatinny rail for both 11 mm and 22 mm scope mounts.
- Quattro Trigger
- Detachable 10-shot magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot magazine in 25 (6.35 mm) caliber.





Hercules

1300fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**

Available in **45 cal.**



- Manual loading, side-lever action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**.
- Available in .177 (4.5 mm), .22 (5.5 mm), .25 (6.35 mm), .30 (7.62mm) and .35 (9mm) caliber.
- Detachable 17-shot magazine in .177 (4.5mm), 14-shot magazine in .22 (5.5mm), 13-shot magazine in .25 (6.35mm), 10-shot magazine in .30 (7.62mm) and 9-shot magazine in .35 (9mm)caliber.
- Precision rifled choked barrel for accuracy.

- 2 air tube bottles of each 500cc.
- Includes 2 magazines.
- Includes quick-fill nozzle.
- Advanced polymer, tactical stock with integrated pistol grip and integrated picatinny rail beneath the forearm.
- Stock mounted on rear air cylinder tube.
- Elevation & fit angle adjustable rubber butt pad and elastic material cheek piece.
- Built-in pressure gauge to monitor the cylinder pressure.
- Picatinny rail milled receiver for both 11 mm and 22 mm scope mounts.


- Overall blued finish, black anodized receiver.
- Manual safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- 2-stage adjustable trigger for trigger travel and trigger load.
- Black metal trigger.
- Fitted sling swivels.



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Model		Hercules					
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal	9mm / .35cal	11.43mm / .45cal
Max. Muzzle Velocity (*)		396m/s (1300fps)	375m/s (1230fps)	365m/s (1200fps)	300m/s (990fps)	271m/s (890fps)	224m/s (741fps)
Energy (*)	Joules	44	67	87	132	193	396
	ft.lbs	32,5	49	64	97	142,5	292
Magazine Capacity		17	14	13	10	9	7
Air Tube Volume		2 x 500cc					
Fill Pressure		250 BAR					
Number of Shots Per Fill		140	120	120	85	72	37
Number of Shots at Optimal Velocity		70	65	62	51	48	15
Stock		Advanced polymer, tactical stock with integrated pistol grip					
Overall Length		1230mm (48.4")					
Barrel Length		585mm (23")					
Weight		5.9kg (13lbs)					

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



- Side lever action.
- Picatinny rail milled receiver for both 11mm and 22mm scope mounts.
- 2-stage adjustable trigger for trigger travel and trigger load
- Detachable 17-shot magazine in .177 (4.5mm), 14-shot magazine in .22 (5.5mm), 13-shot magazine in .25 (6.35mm), 10-shot magazine in .30 (7.62mm) and 9-shot magazine in .35 (9mm) caliber.



(*) Scope sold separately

1300fps POWER!

with Lead Pellets

Available in **.45 cal.**

**FULLY SHROUDED
BARREL**



Hercules Bully



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

- Genuine bullpup design, manual loading, side-lever action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.
- Precision rifled choked barrel for accuracy.
- Available in .177 (4.5 mm), .22 (5.5 mm), .25 (6.35 mm), .30 (7.62mm), .35 (9mm) and .45 (11.43mm) caliber.
- Detachable 17-shot magazine in .177 (4.5mm), 14-shot magazine in .22 (5.5mm), 13-shot magazine in .25 (6.35mm), 10-shot magazine in .30 (7.62mm), 9-shot magazine in .35 (9mm) and 7-shot magazine in .45 (11.43mm) caliber.

- 500cc volume air bottle mounted in the forearm.
- 2 spare magazine carrying slots in the stock
- Includes 3 magazines.
- Includes quick-fill nozzle.
- Thumbhole synthetic ambidextrous bullpup stock.
- "EasyAdjust" Cheek Comb - Stock equipped with integrated elevation adjustment button
- Picatinny rail beneath the forearm.
- Checkering on grip and forearm for better control and feel.
- Built-in pressure gauge to monitor the cylinder pressure.
- Long picatinny rail for both 11 mm and 22 mm scope mounts.

- Black anodized aluminum receiver.
- Manual safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Foldable design adjustable rear sight with Truglo fiber optics. Rear sight can also be detached from the picatinny rail.
- Foldable design front sight with Truglo fiber optics. Front sight can also be detached from the picatinny rail.
- 2-stage adjustable trigger for trigger travel and trigger load.
- Black metal trigger.
- Fitted sling swivels.



(*) Scope sold separately

Hercules Bully						
Model	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal	9mm / .35cal	11.43mm / .45cal
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal	9mm / .35cal	11.43mm / .45cal
Max. Muzzle Velocity (*)	396m/s (1300fps)	375m/s (1230fps)	365m/s (1200fps)	300m/s (990fps)	271m/s (890fps)	224m/s (741fps)
Energy (*)	44 Joules	67	87	132	193	396 ft.lbs
Magazine Capacity	17	14	13	10	9	7
Air Tube Volume	500cc					
Fill Pressure	250 BAR					
Number of Shots Per Fill	95	85	80	50	45	19
Number of Shots at Optimal Velocity	45	40	36	15	13	8
Stock	Advanced polymer, tactical bullpup stock with integrated pistol grip					
Overall Length	920mm (36.2")					
Barrel Length	585mm (23")					
Weight	4.65kg (10.3lbs)					
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green				
	Front Sight	1.5mm (.060") red				

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.





BT65 Carnivore

7.62mm & 9mm



141 joules POWER!

**FULLY SHROUDED
BARREL**

BT65SL Carnivore




QuietEnergy Version


QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

- Pre Charged Pneumatic (PCP), side lever action, multi shot air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Precision rifled barrel for accuracy.
- Available in .30 (7.62mm) and .35 (9mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Soft rubber inlays on forearm for better control and feel.
- Elevation adjustable comb.
- Adjustable rubber butt pad for length of pull as well as elevation and fit angle.
- Detachable 7-shot rotary magazine in .30 (7.62 mm) and 6-shot rotary magazine in .35 (9mm) caliber.
- Comes with 2 magazines.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.

- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Heavy-duty secure 11mm / 22mm Weaver style scope mount.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented Anti-Knock System to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- HATSAN sling included.

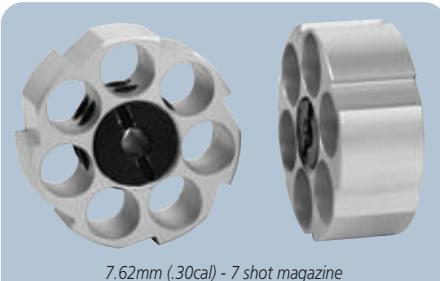

7.62mm (.30cal) - 7 shot magazine

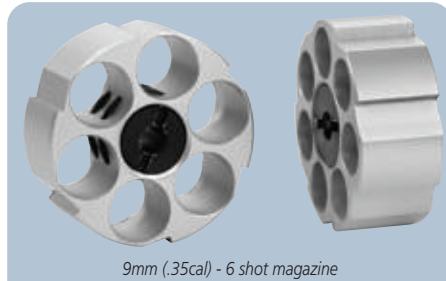

9mm (.35cal) - 6 shot magazine



BT65SL-W Carnivore

Side bolt walnut stock version

Model			BT65SL Carnivore	
Caliber			7.62mm / .30cal	9mm / .35cal
Max. Muzzle Velocity (*)			278m/s (920fps)	230m/s (760fps)
Energy	Joules	ft.lbs	114	141
			84	104
Magazine Capacity			7	6
Air Tube Volume			255cc	
Fill Pressure			200 BAR	
Shots Per Fill			55	50
Number of Shots at Optimal Velocity			19	17
Stock	Advanced Polymer or Walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb			
Overall Length	1240mm (48.8")			
Barrel Length	585mm (23")			
Weight	4.20kg (9.3lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

1250fps POWER!

with Lead Pellets

BT65SB-W



BT65SB-W

Side bolt version

QUATTRO
TRIGGER

- 10-shot, manual loading, side bolt (SB) or rear bolt (RB) action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.

Model		BT65 SB-W (Side Bolt) / BT65 RB-W (Rear Bolt)		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)
Energy (*)	Joules	40	61	71
	ft.lbs	30	45	52
Magazine Capacity		10	10	9
Air Tube Volume				
Fill Pressure				
Shots Per Fill		70	70	65
Shots at Optimal Velocity		30	28	25
Stock				
Overall Length				
Barrel Length				
Weight				
Fiber Optic Sights	Rear Sight	0.9mm (.035") green		
Sights Diameters	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



- Side bolt action or rear bolt action.
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 / 6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade

- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling.



1/2" UNF threaded muzzle
and fitted muzzle cap.
Detachable 255cc air
cylinder for 200 bar fill
pressure with built in
pressure gauge.



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



Sling included.



BT65RB-W

Rear bolt version



BT65SB Elite QE

QuietEnergy Series



1250fps POWER!

with Lead Pellets

FULLY SHROUDED BARREL



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model		BT65SB Elite -QE (Side Bolt)			BT65RB Elite -QE (Rear Bolt)		
Caliber		4.5mm / .177cal			5.5mm / .22cal		
Max. Muzzle Velocity (*)		380m/s (1250fps)			360m/s (1180fps)		
Energy	Joules	40	61	71			
	ft.lbs	30	45	52			
Magazine Capacity		10	10	9			
Air Tube Volume		255cc					
Fill Pressure		200 BAR					
Shots Per Fill		70	70	65			
Shots at Optimal Velocity		30	28	25			
Stock		Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad & adjustable comb					
Overall Length		1240mm (48.8")					
Barrel Length		585mm (23")					
Weight		4.4kg (9.7lbs)					

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10- shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Precision rifled choked barrel for accuracy.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock with thumbhole.
- Spare magazine carrying slot in the stock for 2 spare magazines.
- 3 picatinny rails beneath and on the sides of the forearm.
- Soft rubber inlays on forearm for better control and feel.
- Checkering on grip.
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Comes with 3 magazines.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Comes with a sling, bipod, flashlight and Optima 3-12x44AOE scope.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.




BT65RB Elite QE

Rear Bolt version



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.

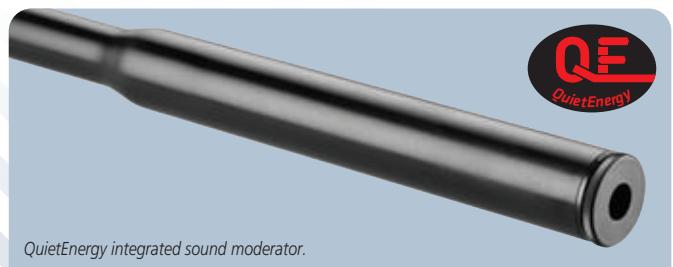

QuietEnergy integrated sound moderator.

1250fps POWER!

with Lead Pellets

BT65SB Elite



BT65SB-Elite

Side Bolt version



Model		BT65SB-Elite (Side Bolt)		
		BT65RB-Elite (Rear Bolt)		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)
Energy (*)	Joules	40	61	71
	ft.lbs	30	45	52
Magazine Capacity		10	10	9
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Shots Per Fill		70	70	65
Shots at Optimal Velocity		30	28	25
Stock		Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad & adjustable comb		
Overall Length		1080mm (42.5")		
Barrel Length		585mm (23")		
Weight		4.23kg (9.3lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Carrying case included.

- 10- shot, manual loading, side bolt (SB) or rear bolt (RB) action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock with thumbhole.
- Spare magazine carrying slot in the stock for 2 spare magazines
- 3 picatinny rails beneath and on the sides of the forearm.
- Soft rubber inlays on forearm for better control and feel.
- Checkering on grip
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Comes with 3 magazines.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Packed in its hard case with a sling, bipod, flashlight and Optima 3-12x44AOE scope.



BT65RB-Elite

Rear Bolt version



Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.



Includes a sling, bipod, flashlight and Optima 3-12x44AOE scope.

TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap. Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



3 picatinny rails beneath and on the sides the forearm.



- Side bolt action or rear bolt action.
- Spare magazine carrying slot for 2 spare magazine
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



BT65SB QE



QUATTRO
TRIGGER

QuietEnergy Series

1250fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model	BT65SB-QE (Side Bolt) BT65RB-QE (Rear Bolt)		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)
Energy	Joules	40	61
	ft.lbs	30	45
Magazine Capacity		10	9
Air Tube Volume		255cc	
Fill Pressure		200 BAR	
Shots Per Fill		70	65
Shots at Optimal Velocity		30	28
Stock	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad & adjustable comb		
Overall Length	1240mm (48.8")		
Barrel Length	585mm (23")		
Weight	4.4kg (9.7lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Sling included.

- 10-shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Precision rifled choked & shrouded barrel for accuracy.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Integrated picatinny rail beneath the forearm.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling & bipod.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.




BT65RB QE
Rear Bolt version



- Side bolt action or rear bolt action.
- Manual Safety
- Scope mount rail for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 / 6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade
- Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.

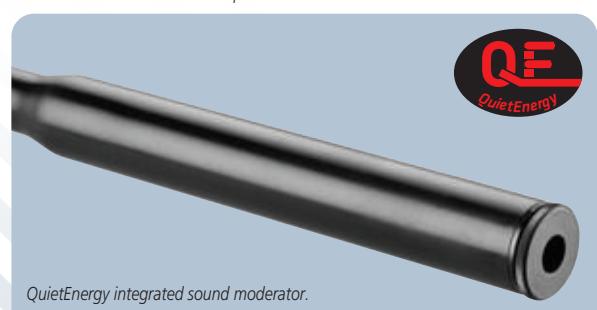

QuietEnergy integrated sound moderator.

1250fps POWER!

with Lead Pellets

BT65SB



BT65 SB

Side Bolt version

Model		BT65 SB (Side Bolt) BT65 RB (Rear Bolt)		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		380m/s (1250fps)	360m/s (1180fps)	330m/s (1090fps)
Energy (*)	Joules ft.lbs	40 30	61 45	71 52
Magazine Capacity		10	10	9
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Shots Per Fill		70	70	65
Shots at Optimal Velocity		30	28	25
Stock		Advanced polymer, montecarlo cheekpiece, adjustable butt pad & adjustable comb		
Overall Length		1080mm (42.5")		
Barrel Length		585mm (23")		
Weight		4.1kg (9lbs)		
Fiber Optic Sights Diameters	Rear Sight Front Sight	0.9mm (.035") green 1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10-shot, manual loading, side bolt (SB) or rear bolt (RB) action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Integrated picatinny rail beneath the forearm.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling & bipod.



BT65 SB - CAMO

Mossy Oak Break Up Camo version



BT65 SB - MW

Luxurious Walnut Woodgrain Camo version



BT65 RB

Rear Bolt version



AT44-10 Tact QE

QuietEnergy Series

1070fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**



QuietEnergy Version

QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model			AT44-10 Tact QE			AT44-10 Tact Long QE		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)		
Energy	Joules	30	42	46	36	51	57	
	ft.lbs	22	31	34	27	38	42	
Magazine Capacity		10	10	9	10	10	9	
Air Tube Volume		180cc			230cc			
Fill Pressure		200 BAR			200 BAR			
Shots Per Fill		115	110	95	115	110	95	
Shots at Optimal Velocity		60	55	45	55	50	40	
Stock	Tactical Telescopic Stock / Adjustable Comb Advanced Polymer Grip			Tactical Telescopic Stock / Adjustable Comb Advanced Polymer Grip				
Overall Length	Butt Shortened	1045mm (41")			1135 (44.6")			
	Butt Extended	1145mm (45")			1235 (48.6")			
Barrel Length		495mm (19.4")			585mm (23")			
Weight		4.3kg (9.5lbs)			4.7kg (10.4lbs)			

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10-shot, Pre-Charged Pneumatic (PCP) side-lever action, multi shot air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**.
- Tactical telescopic stock. Telescopic stock can be removed allowing the use with pistol grip only.
- Precision rifled choked barrel for accuracy.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design pistol grip synthetic stock.
- Spare magazine carrying slot in the stock for 2 spare magazines.
- 3 Picatinny accessory rails beneath and on the sides of the forearm.


- Soft rubber inlays with checkering on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Comes with 3 magazines.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety & Auto Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling & bipod.
- Long version (AT44-10 Tact Long QE) is available with 230cc air cylinder tube, 58cm barrel and 1000fps (30m/s) more muzzle velocity.



Fitted detachable telescopic stock. Stock can be shortened / extended by 10cm (4"). Elevation adjustable comb.



Telescopic stock can be removed, allowing the use with pistol grip only.

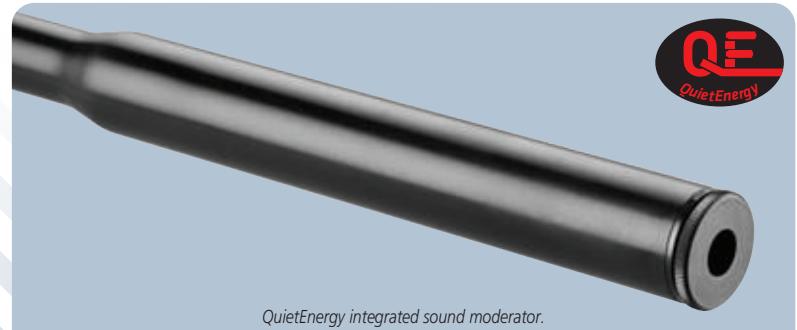

QuietEnergy integrated sound moderator.

1070fps POWER!

with Lead Pellets

AT44-10 Tact



Model		AT44-10 Tact			AT44-10 Tact Long		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy	Joules	30	42	46	36	51	57
	ft.lbs	22	31	34	27	38	42
Magazine Capacity		10	10	9	10		
Air Tube Volume		180cc			230cc		
Fill Pressure		200 BAR			200 BAR		
Shots Per Fill		115	110	95	115	110	95
Shots at Optimal Velocity		60	55	45	55	50	40
Stock	Tactical Telescopic Stock / Adjustable Comb / Advanced Polymer Grip						
Overall Length	Butt Shortened	885mm (34.8")			980mm (38.6")		
	Butt Extended	985mm (38.8")			1080mm (42.5")		
Barrel Length		495mm (19.4")			585mm (23")		
Weight		3.9kg (8.6lbs)			4.3kg (9.5lbs)		
Fiber Optic Sights	Rear Sight	0.9mm (.035") green					
Diameters	Front Sight	1.5mm (.060") red					

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Fitted detachable telescopic stock. Stock can be shortened/extended by 10cm (4").
Elevation adjustable comb - easily adjusted by a coin.



Telescopic stock can be removed, allowing the use with pistol grip only.

- Elevation adjustable comb which can be easily adjusted by a coin.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Comes with 3 magazines.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual Safety & Auto Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Includes a sling & bipod.
- Long version (AT44-10 Tact Long) is available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.



- Manual & Auto Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



AT-P1 QE

870fps POWER!

with Lead Pellets

FULLY SHROUDED
BARREL

QuietEnergy Series



QuietEnergy Version

QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.



Model		AT-P1 QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		264m/s (870fps)	236m/s (780fps)	255m/s (710fps)
Energy	Joules	20	27	30
	ft.lbs	14,5	19,8	22,0
Magazine Capacity		10	10	9
Air Tube Volume		50cc		
Fill Pressure		200 BAR		
Shots Per fill		55		
Shots at Optimal Velocity		25		
Stock		Advanced polymer		
Overall Length		590mm (23.2")		
Barrel Length		265mm (10.4")		
Weight		2.15kg (4.7lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.


- 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air pistol.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Precision rifled choked barrel for accuracy.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ergonomic design synthetic grip.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (50cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail grooved receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger.
- Includes plastic case.



Carrying case included.



- Side lever action
- Scope mount rail for both 11mm and 22mm mounts
- 10-shot magazine (9-shot in .25/.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger

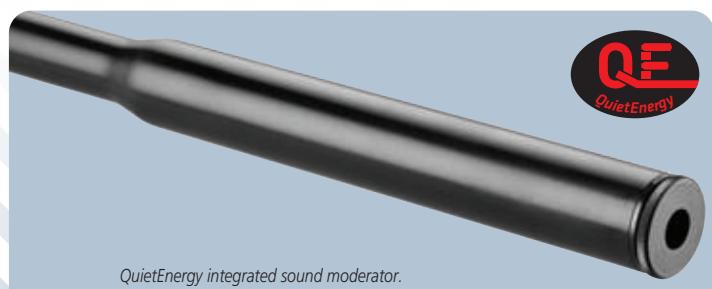

QuietEnergy integrated sound moderator.

870fps POWER!

with Lead Pellets

AT-P1



Right side view

AT-P1			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	264m/s (870fps)	236m/s (780fps)	216m/s (710fps)
Energy (*)	Joules	20	27
	ft.lbs	14,5	19,8
Magazine Capacity		10	9
Air Tube Volume	50cc		
Fill Pressure	200 BAR		
Shots Per Fill	55		
Shots at Optimal Velocity	25		
Stock	Advanced polymer		
Overall Length	415mm (16.3")		
Barrel Length	265mm (10.4")		
Weight	2.05kg (4.5lbs)		
Fiber Optic Sights	Rear Sight	0.9mm (.035") green	
Diameters	Front Sight	1.5mm (.060") red	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Carrying case included.

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air pistol.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ergonomic design synthetic grip.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (50cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail grooved receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger.
- Includes plastic case.



TRUGLO
Adjustable front sight

- $\frac{1}{2}$ " UNF threaded muzzle and fitted muzzle cap.
- Detachable 50cc air cylinder for 200 bar fill pressure with built in pressure gauge.



- Side lever action
- Scope mount rail for both 11mm and 22mm mounts
- 10-shot magazine (9-shot in .25/.6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger



AT-P2 QE

FULLY SHROUDED
BARREL

870fps POWER!

with Lead Pellets

QuietEnergy Series



QuietEnergy Version


QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.



Model		AT-P2 QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		264m/s (870fps)	236m/s (780fps)	255m/s (710fps)
Energy	Joules	20	27	30
	ft.lbs	14,5	19,8	22,0
Magazine Capacity		10	10	9
Air Tube Volume		50cc		
Fill Pressure		200 BAR		
Shots Per Fill		55		
Shots at Optimal Velocity		25		
Stock		Tactical Telescopic Stock Adjustable Comb Advanced Polymer Grip		
Overall Length	Butt Shortened	815mm (32")		
	Butt Extended	915mm (36")		
Barrel Length		265mm (10.4")		
Weight		3kg (6.6lbs)		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air pistol + carbine air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Precision rifled choked barrel for accuracy.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ergonomic design synthetic grip.
- Detachable / adjustable tactical telescopic rifle stock conversion kit included.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable aluminum air cylinder tube (50cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail grooved receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage fully adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger.
- Includes plastic case.

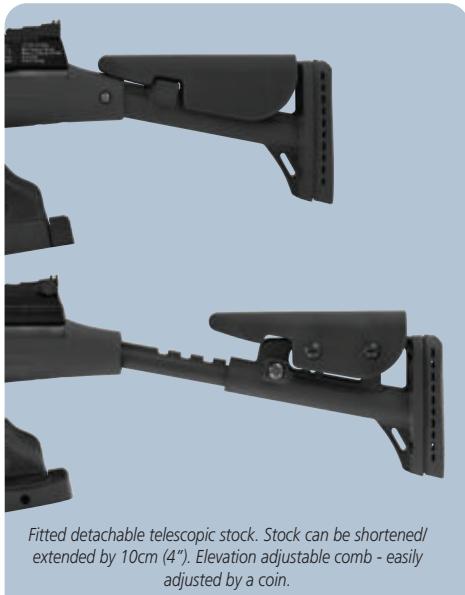

Fitted detachable telescopic stock. Stock can be shortened/extended by 10cm (4"). Elevation adjustable comb - easily adjusted by a coin.




Right side view.



Carrying case included.



Telescopic stock can be removed, allowing the use with pistol grip only.

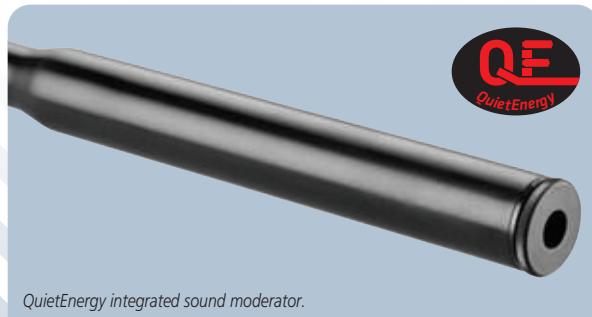

QuietEnergy integrated sound moderator.

870fps POWER!

with Lead Pellets


AT-P2



QUATTRO
TRIGGER

Model		AT-P2		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		264m/s (870fps)	236m/s (780fps)	255m/s (710fps)
Energy (*)	Joules	20	27	30
	ft.lbs	14,5	19,8	22
Magazine Capacity		10	10	9
Air Tube Volume		50cc		
Fill Pressure		200 BAR		
Shots Per Fill		55		
Shots at Optimal Velocity		25		
Stock		Tactical Telescopic Stock / Advanced Polymer Grip		
Overall Length	Butt Shortened	640mm (25.2")		
	Butt Extended	740mm (29.1")		
Barrel Length		265mm (10.4")		
Weight		2.9kg (6.4lbs)		
Fiber OpticSights	Rear Sight	0.9mm (.035") green		
Diameters	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

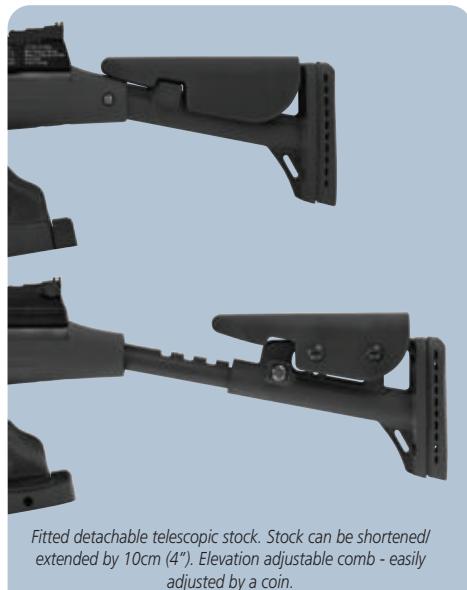

Fitted detachable telescopic stock. Stock can be shortened/extended by 10cm (4"). Elevation adjustable comb - easily adjusted by a coin.



Telescopic stock can be removed, allowing the use with pistol grip only.



TRUGLO
Adjustable front sight

- ½" UNF threaded muzzle and fitted muzzle cap.
- Detachable 50cc air cylinder for 200 bar fill pressure with built in pressure gauge.



Galatian I



Model		Galatian I		
Caliber		4.5mm /.177cal	5.5mm /.22cal	6.35mm /.25cal
Max. Muzzle Velocity (*)		360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)
Energy	Joules	37	53	60
	ft.lbs	27	39	44
Magazine Capacity		16	14	13
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Shots Per Fill		100	90	80
Shots at Optimal Velocity		45	40	36
Stock		High Quality Turkish Walnut Thumbhole, Adjustable Butt Pad & Adjustable Comb		
Overall Length		1075mm (42.3")		
Barrel Length		585mm (23")		
Weight		4kg (8.8lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



- Quattro trigger
 - Engraving on the left side of the receiver



- Elevation adjustable comb. Stock length of pull, elevation & fit angle adjustable rubber butt pad.
 - Spare magazine carrying slot in the stock



- Side lever action
 - Cocking indicator
 - Dovetail grooved receiver for 11mm or 22mm scope mounts
 - Quattro trigger
 - Micro adjustable rear sight with Truglo fiber optics.
 - Detachable 16-shot magazine in .177 caliber,
14-shot magazine in .22 and
13-shot magazine in .25



1190fps POWER!

with Lead Pellets



- Manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Detachable 16-shot magazine in .177 (4.5mm) caliber, 14-shot magazine in .22 (5.5mm) and 13-shot magazine in .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design walnut stock with thumbhole.
- Checkering on grip & forend for better control & feel.
- Elevation adjustable comb.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Spare magazine carrying slot in the stock for 1 spare magazine.
- Detachable aluminum air cylinder tube (255cc). Spare cylinders are available.
- Rotating dust cover for the air filling hole on air cylinder.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.

- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Cocking indicator.
- Aircraft aluminum alloy receiver in white nickel finish and with engraving
- Overall blued finish on air tube and barrel.
- Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Detachable & adjustable rear sight with Truglo fiber optics.
- Elevation adjustable front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & synthetic trigger guard.
- Fitted sling swivels.
- Hard case, sling, and a trigger lock included.
- Spare air cylinders with regulator are available.



Carrying case included.

FULLY SHROUDED BARREL



Galatian I-Carbine

Shorter (carbine) barrel version. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.
(50-60fps less velocity due to carbine barrel)



Galatian I Carbine			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)
Energy	Joules	33	49
	ft.lbs	24	36
Magazine Capacity		16	14
Air Tube Volume	255cc		
Fill Pressure	200 BAR		
Shots Per Fill	100	90	80
Shots at Optimal Velocity	45	40	36
Stock	High Quality Turkish Walnut Thumbhole, Adjustable Butt Pad & Adjustable Comb		
Overall Length	1100mm (43.3")		
Barrel Length	450mm (17.7")		
Weight	3.9kg (8.6lbs)		
Fiber Optic Sights Diameters	Rear Sight	No sights	
	Front Sight	No sights	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Galatian II - III - IV



1190fps POWER!

with Lead Pellets



Galatian II

Galatian III

Galatian IV

Model		Galatian II		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)
Energy	Joules	37	53	60
	ft.lbs	27	39	44
Magazine Capacity		16	14	13
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Shots Per Fill		100	90	80
Shots at Optimal Velocity		45	40	36
Stock		High Quality Turkish Walnut Adjustable Butt Pad & Adjustable Comb		
Overall Length		1075mm (42.3")		
Barrel Length		585mm (23")		
Weight		3.9kg (8.6lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

Model		Galatian III		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)
Energy	Joules	37	53	60
	ft.lbs	27	39	44
Magazine Capacity		16	14	13
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Shots Per Fill		100	90	80
Shots at Optimal Velocity		45	40	36
Stock		Advanced Polymer, Thumbhole, Adjustable Butt Pad & Adjustable Comb		
Overall Length		1075mm (42.3")		
Barrel Length		585mm (23")		
Weight		4.2kg (9.2lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

Model		Galatian IV		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		360m/s (1190fps)	333m/s (1100fps)	303m/s (1000fps)
Energy	Joules	37	53	60
	ft.lbs	27	39	44
Magazine Capacity		16	14	13
Air Tube Volume		255cc		
Fill Pressure		200 BAR		
Shots Per Fill		100	90	80
Shots at Optimal Velocity		45	40	36
Stock		Advanced Polymer, Adjustable Butt Pad & Adjustable Comb		
Overall Length		1075mm (42.3")		
Barrel Length		585mm (23")		
Weight		4.15kg (9.1lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

Galatian II-Carbine

Shorter (carbine) barrel version. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.
(50-60fps less velocity due to carbine barrel)



Galatian III-Carbine

Shorter (carbine) barrel version. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.
(50-60fps less velocity due to carbine barrel)



Galatian IV-Carbine

Shorter (carbine) barrel version. QuietEnergy fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.
(50-60fps less velocity due to carbine barrel)



QuietEnergy Series

Galatian II Carbine			
Model			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)
Energy	Joules	33	49
	ft.lbs	24	36
Magazine Capacity		16	14
Air Tube Volume		255cc	
Fill Pressure		200 BAR	
Shots Per Fill		100	90
Shots at Optimal Velocity		45	40
Stock	High Quality Turkish Walnut Adjustable Butt Pad & Adjustable Comb		
Overall Length	1100mm (43.3")		
Barrel Length	450mm (17.7")		
Weight	3.8kg (8.4lbs)		
Fiber Optic Sights Diameters	Rear Sight	No Sights	
	Front Sight	No Sights	

Galatian III Carbine			
Model			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)
Energy	Joules	33	49
	ft.lbs	24	36
Magazine Capacity		16	14
Air Tube Volume	255cc		
Fill Pressure	200 BAR		
Shots Per Fill		100	90
Shots at Optimal Velocity		45	40
Stock	Advanced Polymer, Thumbhole, Adjustable Butt Pad & Adjustable Comb		
Overall Length	1100mm (43.3")		
Barrel Length	450mm (17.7")		
Weight	4.1kg (9lbs)		
Fiber Optic Sights Diameters	Rear Sight	No Sights	
	Front Sight	No Sights	

Galatian IV Carbine			
Model			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	342m/s (1130fps)	318m/s (1050fps)	287m/s (950fps)
Energy	Joules	33	49
	ft.lbs	24	36
Magazine Capacity		16	14
Air Tube Volume	255cc		
Fill Pressure	200 BAR		
Shots Per Fill		100	90
Shots at Optimal Velocity		45	40
Stock	Advanced Polymer, Adjustable Butt Pad & Adjustable Comb		
Overall Length	1100mm (43.3")		
Barrel Length	450mm (17.7")		
Weight	4.05kg (8.9lbs)		
Fiber Optic Sights Diameters	Rear Sight	No Sights	
	Front Sight	No Sights	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



AT44W-10 QE

QuietEnergy Series

1070fps POWER!

with Lead Pellets




Model			
AT44-W10 QE			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy	Joules	30	42
	ft.lbs	22	31
Magazine Capacity		10	9
Air Tube Volume		180cc	
Fill Pressure		200 BAR	
Shots Per Fill		115	110
Shots at Optimal Velocity		60	55
Stock		Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	
Overall Length		1155mm (45.5")	
Barrel Length		495mm (19.4")	
Weight		3.7kg (8.1lbs)	

Model			
AT44-W10 Long QE			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy	Joules	36	51
	ft.lbs	27	38
Magazine Capacity		10	10
Air Tube Volume		230cc	
Fill Pressure		200 BAR	
Shots Per Fill		115	110
Shots at Optimal Velocity		55	50
Stock		Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	
Overall Length		1245mm (49")	
Barrel Length		585mm (23")	
Weight		4.10kg (9lbs)	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Elevation & fit angle adjustable rubber butt pad.

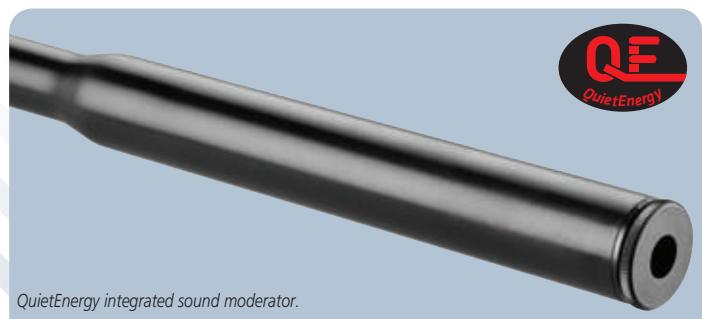

QuietEnergy integrated sound moderator.



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

1070fps POWER!
with Lead Pellets

AT44W-10



Model		AT44W-10		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy (*)	Joules ft.lbs	30 22	42 31	46 34
Magazine Capacity		10	10	9
Air Tube Volume		180cc		
Fill Pressure		200 BAR		
Shots Per Fill		115	110	95
Shots at Optimal Velocity		60	55	45
Stock		Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.		
Overall Length		990mm (39")		
Barrel Length		490mm (19.3")		
Weight		3.6kg (7.9lbs)		
Fiber Optic Sights Diameters	Rear Sight Front Sight	0.9mm (.035") green 1.5mm (.060") red		

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in 25 (6.35 mm) caliber.
- Includes 2 magazines.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11 mm and 22 mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Long version available (AT44W-10 Long) with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.



AT44W-10 Long

Long version with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.



Model		AT44W-10 Long		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules ft.lbs	36 27	51 38	57 42
Magazine Capacity		10	10	9
Air Tube Volume		230cc		
Fill Pressure		200 BAR		
Shots Per Fill		115	110	95
Shots at Optimal Velocity		55	50	40
Stock		Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.		
Overall Length		1085mm (42.7")		
Barrel Length		585mm (23")		
Weight		4kg (8.8lbs)		
Fiber Optic Sights Diameters	Rear Sight Front Sight	0.9mm (.035") green 1.5mm (.060") red		

- Manual & Auto Safety.
- Scope mount rail for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25/.35mm caliber)
- Micro adjustable rear sight.





AT44-10 QE

QuietEnergy Series

1070fps POWER!

with Lead Pellets

FULLY SHROUDED
BARREL



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model			
AT44-10 QE			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)
Energy	Joules	30	42
	ft.lbs	22	31
Magazine Capacity		10	10
Air Tube Volume		180cc	
Fill Pressure		200 BAR	
Shots Per Fill		115	110
Shots at Optimal Velocity		60	55
Stock	Advanced polymer, thumbhole, elevation adjustable comb adjustable butt pad.		
Overall Length		1155mm (39.4")	
Barrel Length		495mm (19.4")	
Weight		3.7kg (8.1lbs)	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

- 10- shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Precision rifled choked & shrouded barrel for accuracy.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock.
- Elevation adjustable comb.
- Integrated picatinny rail beneath the forearm.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes 2 magazines.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.




AT44-10 Long QE

Long version with 230cc air cylinder tube,
58cm barrel and 100fps (30m/s) more muzzle velocity

Model			
AT44-10 Long QE			
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy	Joules	36	51
	ft.lbs	27	38
Magazine Capacity		10	10
Air Tube Volume		230cc	
Fill Pressure		200 BAR	
Shots Per Fill		115	110
Shots at Optimal Velocity		55	50
Stock	Advanced polymer, thumbhole, elevation adjustable comb adjustable butt pad.		
Overall Length		1245mm (42.7")	
Barrel Length		585mm (23")	
Weight		4.10kg (9lbs)	

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

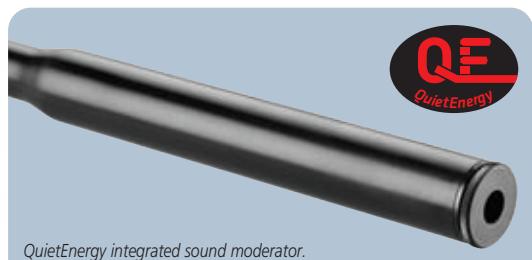

QuietEnergy integrated sound moderator.



- Elevation adjustable comb
- Elevation and fit angle adjustable rubber butt pad

1070fps POWER!

with Lead Pellets

AT44-10



- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for ½" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock.
- Elevation adjustable comb.
- Integrated picatinny rail beneath the forearm.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.

QUATTRO
TRIGGER

- Includes 2 magazines.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Long version (AT44-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.

Model	AT44-10			AT44-10 Long		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules ft.lbs	30 22	42 31	46 34	36 27	51 38
Magazine Capacity	10	10	9	10	10	9
Air Tube Volume	180cc			230cc		
Fill Pressure	200 BAR					
Shots Per Fill	115	110	95	115	110	95
Shots at Optimal Velocity	60	55	45	55	50	40
Stock	Advanced polymer, thumbhole, elevation adjustable comb, adjustable butt pad.					
Overall Length	990mm(39")			1085mm (42.7")		
Barrel Length	490mm (19.3")			585mm (23")		
Weight	3.3kg (7.3lbs)			3.70kg (8.1lbs)		
Fiber Optic Sights	Rear Sight Front Sight	0.9mm (.035") green 1.5mm (.060") red				

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



- ½" UNF threaded muzzle and fitted muzzle cap.
- Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44-10 CAMO

Mossy Oak New Break Up camo version.



AT44-10 MW

Stock luxurious walnut woodgrain camo version.



AT44-10 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.



AT44S-10

1070fps POWER!

with Lead Pellets



QUATTRO
TRIGGER

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for $\frac{1}{2}$ " UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Stylish and ergonomic design ambidextrous synthetic stock with montecarlo cheekpiece.
- Integrated picatinny rail beneath the forearm.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in .25 (6.35mm) caliber.
- Includes one additional magazine.
- Detachable steel air cylinder tube (180cc). Spare cylinders are available.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Includes quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Manual & Automatic Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Long version (AT44S-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.

Model	AT44S-10			AT44S-10 Long		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	325m/s (1070fps)	295m/s (970fps)	265m/s (870fps)	355m/s (1170fps)	325m/s (1070fps)	295m/s (970fps)
Energy (*)	Joules ft.lbs	30 22	42 31	46 34	36 27	51 38
Magazine Capacity	10	10	9	10	10	9
Air Tube Volume	180cc			230cc		
Fill Pressure	200 BAR					
Shots Per Fill	115	110	95	115	110	95
Shots at Optimal Velocity	60	55	45	55	50	40
Stock	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.					
Overall Length	990mm (39")			1085mm (42.7")		
Barrel Length	490mm (19.3")			585mm (23")		
Weight	3.2kg (7lbs)			3.6kg (7.9lbs)		
Fiber Optic Sights	Rear Sight Front Sight	0.9mm (.035") green 1.5mm (.060") red				

* Velocity results may vary as much as 20% due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



- Elevation adjustable comb which can be easily adjusted by a coin.
- Elevation & fit angle adjustable rubber butt pad.



AT44S-10 CAMO
Mossy Oak New Break Up camo version.



AT44S-10 MW
Stock luxurious walnut woodgrain camo version.



AT44S-10 Long
Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.
Available in Camo and MW finish versions.

PCP Accessories



Sound Moderator

- Reduces the sound significantly.
- 1/2" UNF threaded and easily mountable on the muzzle.
- Made of aluminum alloy and light in weight.



Extended Muzzle Break

- Extended & ported muzzle break for a different look.
- 1/2" UNF threaded and easily mountable on the muzzle.




Air Stripper

Air stripper helps to get better accuracy and grouping by decreasing the air turbulence at the muzzle as the pellet leaves the muzzle.



Hatsan Hand Pump

- The most convenient and affordable way to charge your PCP air rifle.
- Maximum 200 bar fill pressure.
- Ergonomically designed handle with synthetic cover.
- Built-in moisture trap embedded in the handle which traps the moisture and protects your pump & air rifle.
- Built-in particle filter embedded in the handle which traps the dust & dirt and protects your pump & air rifle.
- Additional compartment in the other handle where you can put spare parts and O-rings of the pump or small belongings.
- Built-in precise pressure gauge embedded in the frame which protects it from external impacts.
- Easily demountable design.
- Specialist design wide foot plate with adjustable pumping angle.
- Comes with hose and connector.

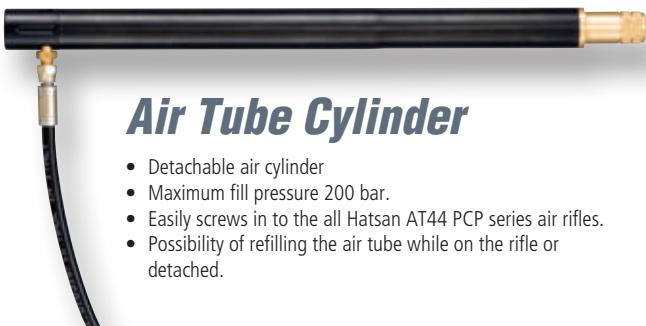

Air Tube Cylinder

- Detachable air cylinder
- Maximum fill pressure 200 bar.
- Easily screws in to the all Hatsan AT44 PCP series air rifles.
- Possibility of refilling the air tube while on the rifle or detached.



Hatsan PCP Bag

Special design bag fitting all Hatsan PCP air rifles.
Made of quality and waterproof material and can carry your air rifle with scope mounted.



Hatsan Plastic Case

Designed for Hatsan PCP air rifles.

Hatsan Charging Kit

Designed to fill air into the air cylinder of your PCP from scuba tanks. The quickest method to fill your PCP.



PCP Bipod

- Elevation adjustable legs
- Integrated picatinny rail mount
- Fits all Hatsan PCP air rifles having picatinny rail beneath the forearm

10-shot Magazine

- Easily mounts to all AT44 & BT65 10-shot PCP series air rifles.
- Light in weight and made of aluminum.
- Spare 10-shot magazines are available in .177 (4.5mm) and .22 (5.5mm) calibers.
- Spare 9-shot magazines are available in .25 (6.35mm) caliber



Galatian Magazine

Spare magazines for Galatian PCP air rifles are available in 16 shot in .177 (4.5mm), 14 shot in .22 (5.5mm) and 13 shot in .25 (6.35mm) caliber.



Foregrip with expandable bipod



Unique Features from HATSAN



Quattro Trigger

This advanced two-stage match trigger is only available from Hatsan. It offers three-point adjustment to control the trigger load, the position of the first and second stages of the firing cycle, and the length of trigger travel—all while maintaining full sear engagement. The custom trigger also allows you to release finger pressure if the shot cannot be taken after engaging in the first stage of the firing cycle, automatically returning the trigger to full engagement. And a drop safety interlock device has been incorporated to eliminate the possibility of the airgun accidentally firing if it's dropped (whether or not the safety is on).



The proprietary Shock Absorber System reduces vibration and increases the life of the gun, optics, and accessories.



QuietEnergy Sound moderator in fully shrouded barrel for reduced down-range noise—Approximately 50% Quieter.



TRUGLO Fiber Optics

Fiber-optic technology has been integrated into a microadjustable rear sight and front sight to lend more accuracy to your shot.



XRS - Recoil Reduction System

Hatsan air pistols are equipped with Hatsan's "XRS-Recoil Reduction System" for a noticeably smooth shot. Recoil is absorbed during the shot by the design of the sliding action. This makes for a more accurate and comfortable shooting experience.



TRIPAD® Butt System

Maximum recoil absorption provides added comfort, and three stock spacers allow adjustments for appropriate length of pull.

Vortex



VORTEX GAS PISTON



WHY HATSAN VORTEX GAS PISTONS?

Benefits of Gas Piston Airguns

- Gas piston powered airguns can remain cocked for long periods of time without causing any spring stress or damage to the gun.
- Gas piston powered airguns produce more steady and consistent power between consecutive shots versus spring powered airguns.
- Gas Piston powered airguns eliminate most of the vibration caused by the oscillation of the heavy springs used in spring powered airguns. Gas Piston models oscillate much less and finish the action cycle in less time than spring powered models making for a more comfortable confident shooting experience.
- Gas piston powered airguns' lifecycle is significantly greater than its spring action counterparts. There is no risk of spring fatigue or spring breakage. Fewer moving parts result in a much more efficient and reliable operating system.
- Gas piston powered airguns provide higher, consistent velocities over their lifetime when compared to spring action models. Springs get weaker over time causing decreases in velocity.
- Gas piston powered airguns provide a much smoother and quieter shooting experience than their spring action counterparts. With gas powered models, the cocking action is much smoother. Also, spring grinding noises are eliminated during the cocking and firing sequence.

Unlike our competitors, Hatsan Vortex Gas Pistons technology is developed and manufactured by Hatsan to be specifically used in most Hatsan Break Barrel and Under Lever airguns.

Hatsan Vortex Gas Pistons utilize regular air instead of any other type of gas.

Hatsan offers 6 different types of Hatsan Vortex Gas Pistons – encompassing the majority of Hatsan's line of Break Barrel and Underlever spring action guns. The following models are offered:

Type 1 : Mod 55-60-70-75-80-85-90

Type 1-B : Mod 88-95-99

Type 2 : Mod 125-125TH-125 Sniper-135 -Torpedo 150-150TH-155

Type 3 : Striker 1000S-1000X-Edge

Type 4 : Dominator under lever series

Type 5 : Torpedo 100X-105X under lever series

Type 6 : Mod25 SuperCharger / SuperTact

Type 7 : Proxima

VORTEX
GAS PISTON

- More steady and consistent power between consecutive shots.
- Eliminates most vibration caused by oscillation of heavy springs.
- Much smoother and quieter shooting experience.

VORTEX
GAS PISTON





SpeedFire

1000fps POWER!

with Lead Pellets



- Break barrel 12 shot repeater in .177 (4.5mm) and 10 shot repeater in .22 (5.5mm) caliber.
- Includes 2 detachable Rapid Performance Mag (RPM) magazines.
- With a single motion, Hatsan's "EZ-Load Action System" quickly cocks and loads the gun.
- Vortex gas piston power source.
- Integrated Sound Moderator in muzzle break for reduced down-range noise.
- Precision rifled steel barrel with synthetic shroud.
- Picatinny rail for both 11 mm and 22 mm scope mounts.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS- Shock Absorber System significantly reduces vibration.
- Manual safety & automatic cocking safety.
- Anti bear-trap cocking arm safety.
- Stylish design ambidextrous synthetic stock.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Foldable front sight with Truglo fiber optics.



Includes 2 detachable Rapid Performance Mag (RPM) magazines.
12-shot RPM magazine in .177 (4.5mm) and 10 shot RPM magazine in .22 (5.5mm) caliber



Foldable front sight with Truglo fiber optics

SpeedFire		
Caliber	4.5mm / .177cal	5.5mm / .22cal
Max. Muzzle Velocity-Lead Pellet (*)	305 m/s (1000 fps)	245 m/s (800 fps)
Energy	24 Joule (18 ft/lbs)	27 Joule (20 ft/lbs)
Magazine Capacity	12	10
Stock	Advanced Polymer	
Length	1190mm (46.85")	
Barrel Length	370mm (14.5")	
Weight	3kg (6.6lbs)	
Fiber Optic Sights	Rear Sight	0.9mm (.035") green
	Front Sight	1.5mm (.060") red



* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

Rapid Performance Mag (RPM) magazines are easily detachable with a touch of button.

With a single motion, Hatsan's EZ-Load Action System quickly cocks and loads the gun.

Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.

1000fps POWER!
with Lead Pellets

SpeedFire W



Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise



- Break barrel 12 shot repeater in .177 (4.5mm) and 10 shot repeater in .22 (5.5mm) caliber.
- Includes 2 detachable Rapid Performance Mag (RPM) magazines.
- With a single motion, Hatsan's EZ-Load Action System quickly cocks and loads the gun.
- Vortex gas piston power source.
- Integrated Sound Moderator in muzzle break for reduced downrange noise.
- Precision rifled steel barrel with synthetic shroud.
- Picatinny rail for both 11 mm and 22 mm scope mounts.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system


- SAS- Shock Absorber System significantly reduces vibration
- Manual safety & automatic cocking safety
- Anti bear-trap cocking arm safety
- Stylish design ambidextrous Turkish walnut stock
- Checkering on forearm and grip for better control & feel.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics
- Foldable front sight with Truglo fiber optics.



Includes 2 detachable Rapid Performance Mag (RPM) magazines.
12-shot RPM magazine in .177 (4.5mm) and 10 shot RPM magazine in .22 (5.5mm) caliber



Foldable front sight with Truglo fiber optics

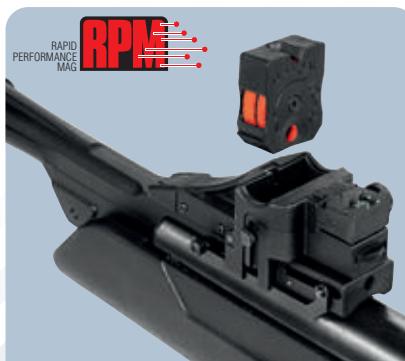

Model			SpeedFire W	
Caliber	4.5mm / .177cal	5.5mm / .22cal	Energy	24 Joule (18 ft/lbs)
Max. Muzzle Velocity-Lead Pellet (*)	305 m/s (1000 fps)	245 m/s (800 fps)	Magazine Capacity	12
Stock	Walnut		Length	1195mm (47")
Barrel Length	370mm (14.5")		Weight	3.4kg (7.5lbs)
Fiber Optic Sights	Rear Sight Front Sight	0.9mm (.035") green 1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

Rapid Performance Mag (RPM) magazines are easily detachable with a touch of button.
With a single motion, Hatsan's EZ-Load Action System quickly cocks and loads the gun.
Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.



Proxima

820fps POWER!

with Lead Pellets



- 14 shot repeater in .177 (4.5mm), 12 shot repeater in .22 (5.5mm) and 10 shot repeater in .25 (6.35mm) calibers.
- Includes 2 detachable clip magazines.
- Vortex gas piston power source.
- Black chrome finish barrel and cylinder provides maximum corrosion resistance.
- Fixed barrel / under lever cocking system.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS - Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel for accuracy.
- Manual safety & automatic cocking safety.

- Anti bear-trap cocking arm safety.
- Stylish design genuine Turkish walnut ambidextrous stock.
- Elevation adjustable comb.
- Scope mount rail & shock absorber scope stop.
- Gold plated trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.
- Fitted sling swivels.
- Includes 3 stock spacers to extend to stock length.

WORLD'S FIRST
14 SHOT
Underlever repeater available in 3 calibers!



(*) Scope sold separately



Model			Proxima		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal		
Max. Muzzle Velocity (*)	250m/s (820fps)	220m/s (720fps)	190m/s (620fps)		
Magazine Capacity	14	12	10		
Stock	Genueine Turkish walnut. Ambidextrous and ergonomic design with thumbhole. Elevation adjustable comb.				
Overall Length	1153mm (45.4")				
Barrel Length	420mm (15.5")				
Weight	4.25kg (9.3lbs)				
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green			
	Front Sight	1.5mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

45 Joule Power!

QuietEnergy Series

7.62mm caliber (.30cal) big bore



QUATTRO
Trigger

SaS
Shock Absorber System

Available in **30cal.**

QuietEnergy Version

QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.



7.62mm caliber (.30cal) big bore

- Single shot break barrel action.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- High quality and genuine Turkish walnut stock-hunting style, ergonomic and stylish design and montecarlo cheekpiece.
- Elevation adjustable comb.
- Checkering on grip and forearm for better control and feel.


Scope mount rail for both 11mm & 22mm mounts.

- Shock absorber scope stop.
- Gold plated trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open metal front sight with Truglo fiber optics.



Model	Carnivore 135	
Caliber	7.62mm / .30cal	
Max. Muzzle Velocity (*)	170 m/s (550 fps)	
Stock	Genuine Turkish walnut elevation adjustable comb	
Length	1200mm (47.2")	
Barrel Length	270mm (10.6")	
Weight	4.35kg (9.6lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green
	Front Sight	1.5mm (.060") red

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
 The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

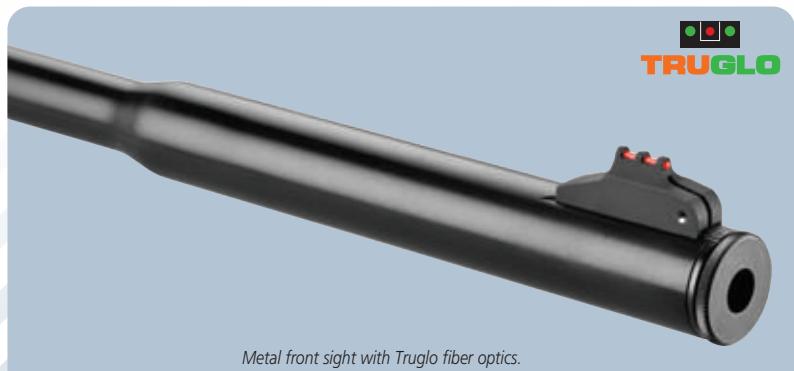



MOD 130 QE

QuietEnergy Series

1250fps POWER!

with Lead Pellets

**FULLY SHROUDED
BARREL**



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model		Mod130QE			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	170 m/s (550 fps)
Stock	Advanced Polymer, thumbhole elevation adjustable comb				
Length		1180mm (46.4")			
Barrel Length		270 mm (10.6")			
Weight		4.26kg (9.4lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green			
	Front Sight	1.5mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Micro adjustable rear sight.

Metal front sight with Truglo fiber optics.

Available in 30 cal.

- Single shot break barrel action.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter**.
- Available in .177 (4.5mm), .22 (5.5mm), .25 (6.35mm) and .30 (7.62mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Ergonomic and stylish design ambidextrous synthetic thumbhole stock.
- Elevation adjustable comb
- DynaPad recoil pad system for maximum recoil absorption.
- 3 stock spacers to change stock length of pull.
- Scope mount rail for both 11mm & 22mm mounts.
- Shock absorber scope stop.
- Metal trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open metal front sight with Truglo fiber optics



MOD 130

Unshrouded barrel with front sight.
(No sound moderator)

Available in 30 cal.

- Single shot break barrel action.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Ergonomic and stylish design ambidextrous synthetic thumbhole stock.
- Elevation adjustable comb
- DynaPad recoil pad system for maximum recoil absorption.
- 3 stock spacers to change stock length of pull.
- Scope mount rail for both 11mm & 22mm mounts.
- Shock absorber scope stop.
- Metal trigger blade.

- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Large muzzle break for easy cocking of the rifle.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.

Model		Mod130			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	170 m/s (550 fps)
Stock	Advanced Polymer, thumbhole elevation adjustable comb				
Length		1238mm (48.7")			
Barrel Length		415mm (16.3")			
Weight		4.36kg (9.6lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green			
	Front Sight	1.5mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Micro adjustable rear sight.



Large muzzle break with open front sight.

1250fps POWER!
with Lead Pellets

QuietEnergy Series

MOD 135QE Sniper



FULLY SHROUDED
BARREL



QUATTRO
Trigger

SaS
Shock Absorber System

VORTEX
Vortex Gas Piston Upgrade Available



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

MOD 135QE Sniper

Model		Mod135QE Sniper			
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal	7.62mm / .30cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)	170 m/s (550 fps)
Stock	Advanced Polymer elevation adjustable comb				
Length	1182mm (46.5")				
Barrel Length	270mm (10.6")				
Weight	4.15kg (9.15lbs)				
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green			
	Front Sight	1.5mm (.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- QuietEnergy fully shrouded barrel and Integrated SoundModerator - **Approximately 50% Quieter**.
- Available in .177 (4.5mm), .22 (5.5mm), .25 (6.35mm) and .30 (7.62mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.

- Ambidextrous & ergonomic design synthetic stock.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb.
- Includes 3 stock spacers to extend to stock length
- Scope mount rail for both 11mm & 22mm mounts.
- Shock absorber scope stop.
- Metal trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open metal front sight with Truglo fiber optics.
- Includes a free sling.



(*) Scope sold separately



Includes 3 stock spacers to extend to stock length.



MOD 135QE

Genuine walnut stock version.

Model		Mod135QE		
Caliber		4.5mm/.177cal	5.5mm/.22cal	6.35mm/.25cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock	Genuine Turkish walnut elevation adjustable comb			
Length	1200mm (47.2")			
Barrel Length	270mm (10.6")			
Weight	4.35kg (9.6lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		



QUATTRO
Trigger

Gold plated metal trigger blade.



Elevation adjustable comb



Metal front sight with Truglo fiber optics.



Micro adjustable rear sight.

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



MOD 87W QE

QuietEnergy Series

1000fps POWER!

with Lead Pellets




QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Model	
Caliber	4.5mm / .177cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)
Stock	Genuine Turkish walnut elevation adjustable comb
Length	1142mm (45")
Barrel Length	270mm (10.6")
Weight	4.07kg (8.9lbs)
Fiber Optic Sights Diameters	Rear Sight 0.9mm (.035") green Front Sight 1.5mm (.060") red

Mod87W-QE

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- "EasyAdjust" Elevation Comb - Stock equipped with integrated elevation adjustment wheel- eliminating need for wrenches.
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design walnut stock.
- Rubber butt pad for recoil absorption.
- Checkering on grip & forend for better control and feel.
- Metal trigger blade.
- Grooved cylinder for 11mm scope mounts & mounted scope stop.
- Micro adjustable rear sight for both windage and elevation.
- Open metal front sight with Truglo fiber optics.
- TRUGLO fiber optic sights with contrasting fiber colors

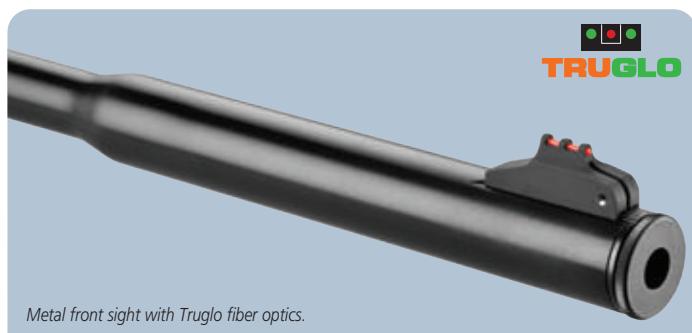

Metal front sight with Truglo fiber optics.



Micro adjustable rear sight.



Gold plated metal trigger blade.

1000fps POWER!
with Lead Pellets

QuietEnergy Series

MOD 87QE



**FULLY SHROUDED
BARREL**



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model	Mod87QE		
Caliber	4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced Polymer elevation adjustable comb		
Length	1132mm (44.5")		
Barrel Length	270mm (10.6")		
Weight	3.35kg (7.4lbs)		
Fiber Optic Sights Diameters	Rear Sight Front Sight	0.9mm (.035") green	1.5mm (.060") red

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



"EasyAdjust" Elevation Comb - Stock equipped with integrated elevation adjustment wheel - eliminating need for wrenches.



QUATTRO TRIGGER
Metal trigger blade



Micro adjustable rear sight.



Metal front sight with Truglo fiber optics.



MOD 87

Unshrouded barrel with hooded front sight.
(No sound moderator)

Model	Mod87		
Caliber	4.5mm / .177cal	5.5mm /.22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Stock Advanced Polymer elevation adjustable comb		
Length	1150 mm (45.3")		
Barrel Length	450 mm (17.7")		
Weight	3.7kg (8.1lbs)		
Fiber Optic Sights Diameters	Rear Sight Front Sight	0.9mm (.035") green	1.5mm (.060") red

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Barrel release system.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Integrated sound moderator inside the muzzle break.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design synthetic stock.
- Elevation adjustable comb.
- Rubber butt pad for recoil absorption.
- Checkering on grip & forend for better control and feel.
- Metal trigger blade.
- Grooved cylinder for 11mm scope mounts & mounted scope stop.
- Micro adjustable rear sight for both windage and elevation.
- Open metal front sight with Truglo fiber optics.
- TRUGLO fiber optic sights with contrasting fiber colors



Mod 87 Camo

A-Tacs Tactical camo version

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Dominator 200W

1000fps POWER!

with Lead Pellets



Model	
Caliber	4.5 mm / .177 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)
Stock	Turkish Walnut with adjustable comb and adjustable butt
Length	1156mm (45.5")
Barrel Length	450mm (17.7")
Weight	4.5kg (9.9 lbs)
Fiber Optic Sights Diameters	Rear Sight 0.9mm (.035") green Front Sight 1.5mm (.060") red

Dominator 200W

4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
305 m/s (1000 fps)	245 m/s (800fps)	200 m/s (650 fps)

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Fixed barrel / under lever cocking system with break open loading port.
- Available in .177 (4.5 mm) , .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel for accuracy.
- Manual safety & automatic cocking safety.
- Anti bear-trap cocking safety.
- Cocking arm safety
- Genuine Turkish walnut ambidextrous stock
- Elevation adjustable comb.
- Checkering on grip and forearm for better control and feel.
- Scope mount rail & shock absorber scope stop.
- Gold plated trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod and sling.
- Includes 3 stock spacers to extend to stock length



Sling included.



Three stock length of pull spacers are included. The stock length of pull can be extended by increments of 5mm (1/5") by simply inserting one or more of these spacers. With these spacers any shooter can perfectly fit the suitable stock length of pull.



Bipod included.



Large muzzle break with open front sight.



Elevation adjustable comb.



Dominator 200W Carbine

Shorter barrel and no-sights version.

Model	
Caliber	4.5 mm / .177 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)
Stock	Turkish Walnut with adjustable comb and adjustable butt
Length	1098mm (43.2")
Barrel Length	400mm (15.7")
Weight	4.4kg (9.7 lbs)



Dominator 200W Carbine is equipped with 1/2" UNF threaded muzzle for sound moderator & with muzzle cap.

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

1000fps POWER!
with Lead Pellets

Dominator 200S



Vortex Gas Piston Upgrade Available

Model		Dominator 200S		
Caliber		4.5mm / .177 cal	5.5mm / .22 cal	6.35mm / .25 cal
Max. Muzzle Velocity (*)		305m/s (1000 fps)	245m/s (800fps)	200m/s (650 fps)
Stock	Advanced Polymer with adjustable comb and adjustable butt			
Length	1156mm (45.5")			
Barrel Length	450mm (17.7")			
Weight	4.5kg (9.9 lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Sling included.



Three stock length of pull spacers are included. The stock length of pull can be extended by increments of 5mm (1/5") by simply inserting one or more of these spacers. With these spacers any shooter can perfectly fit the suitable stock length of pull.



Bipod included.



Large muzzle break with open front sight.

Elevation adjustable comb.



Dominator 200S Carbine

Shorter barrel and no-sights version.

Model		Dominator 200S Carbine		
Caliber	4.5 mm / .177 cal	5.5mm / .22 cal	6.35mm / .25 cal	
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800fps)	200 m/s (650 fps)	
Stock	Advanced Polymer with adjustable comb and adjustable butt			
Length	1098 mm (43.2")			
Barrel Length	400 mm (15.7")			
Weight	4.4 kg (9.7 lbs)			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Dominator 200S Carbine is equipped with
1/2" UNF threaded muzzle for sound moderator & with muzzle cap.



Torpedo 155

1250fps POWER!

with Lead Pellets



Model		Torpedo 155		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock		Turkish Walnut with montecarlo cheekpiece		
Length			1210 mm (47.6")	
Barrel Length			430 mm (17")	
Weight			4.8 kg (11 lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Under lever cocking system with bolt-action loading mechanism.
- Available in .177 (4.5 mm) , .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- High quality and genuine Turkish walnut stock. Ergonomic and stylish design and montecarlo cheekpiece.
- Checkering on grip and forearm for better control and feel.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Scope mount rail & shock absorber scope stop.
- Gold plated trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod.
- Sling swivels on the butt & forearm.



Open front sight.



Fixed barrel & under lever cocking system.



Bolt action loading system providing maximum power.



Gold plated metal trigger blade.



Shock absorber scope stop.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.

1250fps POWER!
with Lead Pellets

Torpedo 150 Sniper





Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise

Model		Torpedo 150 Sniper		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock	Advanced Polymer thumbhole ambidextrous stock with adjustable comb and adjustable butt			
Length	1230 (48.4")			
Barrel Length	330 mm (13")			
Weight	4.2 kg (9.2 lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Under lever cocking system with bolt-action loading mechanism.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic and stylish design ambidextrous synthetic thumbhole stock
- Elevation adjustable comb
- DynaPad recoil pad system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Scope mount rail & shock absorber scope stop.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod.
- Sling swivels on the butt & forearm.

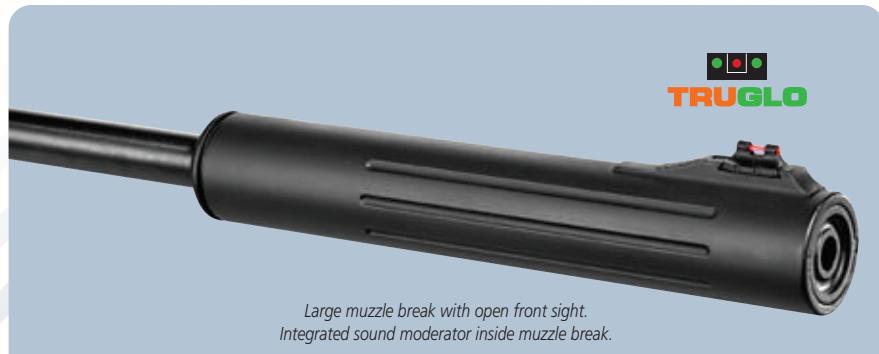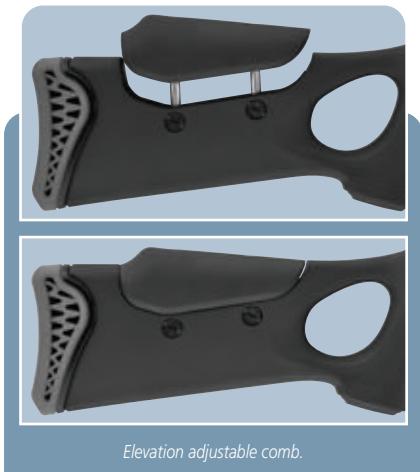



Torpedo 150

1250fps POWER!

with Lead Pellets



Model	Torpedo 150		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock	Advanced Polymer with montecarlo cheekpiece		
Length	1210 mm (47.6")		
Barrel Length	430 mm (17")		
Weight	4.3 kg (9.4lbs)		
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Under lever cocking system with bolt-action loading mechanism.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic and stylish design synthetic stock with montecarlo cheekpiece.
- Checkering on grip and forearm for better control and feel.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Scope mount rail & shock absorber scope stop.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod.
- Sling swivels on the butt & forearm



Torpedo 150 OD

OD green stock version.



Torpedo 150 Camo

Mossy Oak Break-Up camo version.



Torpedo 150 MW

Luxurious walnut woodgrain camo version.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



Micro adjustable rear sight.



Open front sight.

1250fps POWER!

with Lead Pellets

Torpedo 150TH



Model		Torpedo 150TH		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock	Advanced Polymer with thumbhole & montecarlo cheekpiece			
Length	1170 mm (46")			
Barrel Length	430 mm (17")			
Weight	4.6 kg (10 lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Under lever cocking system with bolt-action loading mechanism.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic and stylish design synthetic thumbhole stock with montecarlo cheekpiece.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Scope mount rail & shock absorber scope stop.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod.
- Sling swivels on the butt & forearm.



Metal trigger blade



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



Micro adjustable rear sight.



Open front sight.



Torpedo 150TH OD

OD green stock version.



Torpedo 150TH Camo

Mossy Oak Break-Up camo version.



Torpedo 150TH MW

Luxurious walnut woodgrain camo version.



Torpedo 100X



Vortex Gas Piston Upgrade Available

Model	
Caliber	4.5 mm / .177 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)
Stock	Turkish Walnut with montecarlo cheekpiece
Length	1200 mm (47.2")
Barrel Length	430 mm (17")
Weight	4.2 kg (9.2 lbs)
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green Front Sight 1.5 mm (.060") red

Torpedo 100X

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Under lever cocking system with bolt-action loading mechanism.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- High quality and genuine Turkish walnut stock. Ergonomic and stylish design and montecarlo cheekpiece.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Scope mount rail & shock absorber scope stop.
- Gold plated trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod.
- Sling swivels on the butt & forearm.



Torpedo 105X

Model	
Caliber	4.5 mm / .177 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)
Stock	Advanced Polymer with montecarlo cheekpiece
Length	1200 mm (47.2")
Barrel Length	430 mm (17")
Weight	3.9 kg (8.6 lbs)
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green Front Sight 1.5 mm (.060") red

Torpedo 105X

with Lead Pellets



Vortex Gas Piston Upgrade Available

- Under lever cocking system with bolt-action loading mechanism.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) calibers.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic and stylish design synthetic stock with montecarlo cheekpiece.
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Scope mount rail & shock absorber scope stop.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Includes a free bipod.
- Sling swivels on the butt & forearm



Torpedo 105X Camo

Mossy Oak Break-Up camo version.



Torpedo 105X MW

Luxurious walnut woodgrain camo version.

1250fps POWER!

with Lead Pellets

MOD 135



Vortex Gas Piston Upgrade Available

Model	
Caliber	4.5 mm / .177 cal
Max. Muzzle Velocity (*)	380 m/s (1250 fps)
Stock	Turkish Walnut with montecarlo cheekpiece
Length	1200 mm (47.2")
Barrel Length	450 mm (17.7")
Weight	4.2 kg (9.2 lbs)
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green Front Sight 1.5 mm (.060") red

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- High quality and genuine Turkish walnut stock-hunting style, ergonomic and stylish design and montecarlo cheekpiece.
- Checkering on grip and forearm for better control and feel.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Scope mount rail & shock absorber scope stop.
- Gold plated trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



MOD 135 XRD

Optima 1x40 Red Dot Sight & Aluminum Sound Moderator equipped version. (No sights)
430mm (17") barrel length.



Open front sight with Truglo fiber optics.



MOD 135 SP

Optima 3-9x32 Scope & Ported Muzzle Break equipped version. (No sights)
405mm (15.9") barrel length.



Combo scope mount rail good for both
11 mm and 22 mm mounts.

Shock absorber scope stop.

Manual Safety.
Automatic Safety.
Anti Bear-Trap.



TRIPAD® Butt System

The Hatsan TRIPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



MOD 125 Sniper



Model	MOD 125 Sniper		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock	Advanced Polymer with elevation adjustable comb		
Length	1240 mm (48.8")		
Barrel Length	360mm (14.2")		
Weight	4.1 kg (9 lbs)		
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap cocking safety.
- Ambidextrous & ergonomic design synthetic stock.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Large muzzle break for easy cocking of the rifle.
- Integrated sound moderator inside muzzle break.
- Scope mount rail & mounted scope stop.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Sling swivels on the butt and forearm
- Includes a free bipod and sling.



Mod 125 Sniper Camo
Mossy Oak Break-Up camo version.



MOD 125 Sniper MW

Luxurious walnut woodgrain camo version.



Bipod included.



Sling included.



QUATTRO TRIGGER
Metal trigger blade



TRUGLO
Micro adjustable rear sight.



TRUGLO
Large muzzle break with open front sight.
Integrated sound moderator inside muzzle break.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers.
This allows for maximum recoil absorption and up to 4 different length of pull options.

1000fps POWER!
with Lead Pellets

MOD 85 Sniper



Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise

Model		MOD 85 Sniper		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800fps)	200 m/s (650 fps)
Stock	Advanced Polymer with montecarlo cheekpiece			
Length	1135 mm (44.7")			
Barrel Length	320mm (12.6")			
Weight	3.3 kg (7.2 lbs)			
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Includes 3-9x32 Fully / Multi Coated Optima Scope.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration..
- Integrated sound moderator inside the muzzle break.
- Comes with a free Optima 3-9x32 scope.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap cocking safety.
- Ergonomically designed synthetic stock with montecarlo cheek piece and raised forearm grip.
- Grooves on grip and forearm for better control and feel.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Large muzzle break for easy cocking of the rifle.
- Scope mount rail & mounted scope stop.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.
- Sling swivels on the butt and forearm
- Includes free bipod and sling.



MOD 85 Sniper CAMO

Mossy Oak Break-Up finish version.



MOD 85 Sniper MW

Luxurious walnut woodgrain camo version.



Micro adjustable rear sight.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



Includes free bipod, sling and 3-9x32 Fully / Multi Coated Optima Scope.



Large muzzle break with open front sight.
Integrated sound moderator inside muzzle break.



MOD 125

1250fps POWER!

with Lead Pellets



Model		MOD 125		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		380 m/s (1250 fps)	305 m/s (1000 fps)	230 m/s (750 fps)
Stock		Advanced Polymer with montecarlo cheekpiece & Triopad butt system		
Length		1240 mm (48.8")		
Barrel Length		450mm (17.7")		
Weight		3.8 kg (8.4 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design synthetic stock with montecarlo cheekpiece.
- Checkering on grip and forearm for better control and feel.
- Scope mount rail & mounted scope stop.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Large muzzle break for easy cocking of the rifle.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



MOD 125 OD

OD green stock version.



MOD 125 Camo

Mossy Oak Break-Up camo version.



MOD 125 MW

Luxurious walnut woodgrain camo version.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



Micro adjustable rear sight.



Large muzzle break with open front sight.

1250fps POWER!

with Lead Pellets

MOD 125TH



Vortex Gas Piston Upgrade Available

MOD 125TH		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal
Max. Muzzle Velocity (*)	380 m/s (1250 fps)	305 m/s (1000 fps)
Stock	Advanced Polymer with thumbhole & montecarlo cheekpiece	
Length	1205 mm (47.4")	
Barrel Length	450mm (17.7")	
Weight	4.1 kg (9 lbs)	
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic safety.
- Anti bear-trap safety.
- Ergonomic design synthetic thumbhole stock with montecarlo cheekpiece.
- Scope mount rail & mounted scope stop.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Large muzzle break for easy cocking of the rifle.
- Metal trigger blade.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



MOD 125TH OD

OD green stock version.



MOD 125TH Camo

Mossy Oak Break-Up camo version.



MOD 125TH MW

Luxurious walnut woodgrain camo version.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



Micro adjustable rear sight.



Large muzzle break with open front sight.



MOD 99



Model		MOD 99		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Turkish Walnut with montecarlo cheekpiece			
Length		1145 mm (45")		
Barrel Length		405mm (15.9")		
Weight		3.8 kg (8.4 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Barrel Release System.
- High quality and genuine Turkish walnut stock - hunting style, ambidextrous, ergonomic and stylish design with montecarlo cheekpiece.
- Checkering on grip and forearm for better control and feel.
- Rubber ventilated butt pad for recoil absorption.
- Scope mount rail good for both 11 mm & 22 mm scope mounts & mounted scope stop.
- Large muzzle break for easy cocking.
- Gold plated trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



Large muzzle break with open front sight.



Micro adjustable rear sight.



QUATTRO TRIGGER

Gold plated metal trigger blade.



Scope stop.

Manual Safety.
Automatic Safety.
Anti Bear-Trap.



BARREL RELEASE SYSTEM

Barrel Release provides easier breaking of the barrel with less cocking effort, while also serving as an additional safety feature. The breach locking tab is easily released by simply pushing forward the barrel release button.

1000fps POWER!

with Lead Pellets

MOD 95



Model		MOD 95		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock		Turkish Walnut		
Length		1125 mm (44.3")		
Barrel Length		405mm (15.9")		
Weight		3.8 kg (8.4 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- High quality and genuine Turkish walnut stock - hunting style, ambidextrous, ergonomic and stylish design.
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Scope mount rail good for both 11 mm & 22 mm scope mounts & mounted scope stop.
- Large muzzle break for easy cocking.
- Gold plated trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



QuietEnergy Series

FULLY SHROUDED BARREL

MOD 95QE



QuietEnergy Version
QE fully shrouded barrel and
Integrated Sound Moderator -
Approximately 50% Quieter.

Model		Mod95 QE		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock		Genuine Turkish walnut		
Length		1132mm (44.5")		
Barrel Length		270mm (10.6")		
Weight		3.45kg (7.6lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





MOD 88



Model		MOD 88		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock		Advanced polymer		
Length		1120 mm (44")		
Barrel Length		450 mm (17.7")		
Weight		3.1 kg (6.8 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green		
	Front Sight	1.5 mm (.060") red		

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Barrel Release System.
- ½" UNF threaded muzzle for fitting sound moderator and fitted metal muzzle cap.
- Ergonomic & slim design grey color synthetic stock with checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Grooved cylinder for 11 mm scope mounts & mounted scope stop.
- Metal trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.



MOD 88 Camo

Mossy Oak Break-Up camo version.



MOD 88 MW

Luxurious walnut woodgrain camo version.



Hooded front sight with Truglo fiber optics. ½" UNF threaded muzzle for fitting sound moderator and fitted metal muzzle cap.



Micro adjustable rear sight.

BARREL RELEASE SYSTEM

Barrel Release provides easier breaking of the barrel with less cocking effort, while also serving as an additional safety feature. The breach locking tab is easily released by simply pushing forward the barrel release button.



1000fps POWER!

with Lead Pellets

MOD 88TH



Vortex Gas Piston Upgrade Available

MOD 88TH			
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced polymer with thumbhole & montecarlo cheekpiece		
Length	1120 mm (44")		
Barrel Length	405mm (15.9")		
Weight	3.5 kg (7.7 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green	
	Front Sight	1.5 mm (.060") red	

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Barrel Release System.
- Ergonomic and stylish design, grey color synthetic thumbhole stock.
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Grooved cylinder for 11 mm scope mounts & mounted scope stop.
- Large muzzle break for easy cocking.
- Metal trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



MOD 88TH Camo

Mossy Oak Break-Up camo version



MOD 88TH MW

Luxurious walnut woodgrain camo version



QUATTRO
TRIGGER

Metal trigger blade



Micro adjustable rear sight.



Large muzzle break with open front sight.



MOD 85

1000fps POWER!

with Lead Pellets



Vortex Gas Piston Upgrade Available

MOD 85			
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced Polymer with montecarlo cheekpiece & Triopad butt system		
Length	1125 mm (44")		
Barrel Length	450 mm (17.7")		
Weight	3.3 kg (7.2 lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green	
	Front Sight	1.5 mm (.060") red	

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic and stylish design synthetic stock with montecarlo cheekpiece and raised forearm grip.
- Grooves on grip and forearm for better control and feel.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Metal trigger blade.
- Grooved cylinder for scope & mounted scope stop.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open front sight with Truglo fiber optics.



MOD 85 Camo

Mossy Oak Break-Up camo version.



MOD 85 MW

Luxurious walnut woodgrain camo version.



Quattro Trigger
Metal trigger blade



Micro adjustable rear sight.



Open front sight
with Truglo fiber optics.

1000fps POWER!

with Lead Pellets

MOD 85X



Model	MOD 85X		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced Polymer with montecarlo cheekpiece & Triopad butt system		
Length	1125 mm (44")		
Barrel Length	275mm (10.8")		
Weight	3.3 kg (7.2 lbs)		
Sight	Optima 3-9x32 Scope		

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Includes Optima 3-9x32 scope.
- Aluminum Sound moderator on the muzzle.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Metal trigger blade.
- Ergonomic and stylish design synthetic stock with montecarlo cheekpiece and raised forearm grip.
- Grooves on grip and forearm for better control and feel.
- TRIOPAD® butt system for maximum recoil absorption.
- Comes with 3 TRIOPAD® stock spacers to change stock length of pull.
- Grooved cylinder for scope & mounted scope stop.



MOD 85X Camo

Mossy Oak Break-Up camo version.



MOD 85X MW

Luxurious walnut woodgrain camo version.



TRIOPAD® Butt System

The Hatsan TRIOPAD® Butt System utilizes a heavy duty rubber recoil pad and 3 stock spacers. This allows for maximum recoil absorption and up to 4 different length of pull options.



Grooved cylinder for 11mm mounts mounted scope stop.

Manual Safety.
Automatic Safety.
Anti Bear-Trap.



MOD 90



Model	
Caliber	4.5 mm / .177 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)
Stock	Advanced Polymer with montecarlo cheekpiece
Length	1135 mm (44.6")
Barrel Length	450 mm (17.7")
Weight	3.2 kg (7 lbs)
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green Front Sight 1.5 mm (.060") red

MOD 90

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design synthetic stock with montecarlo cheekpiece.
- Rubber butt pad for recoil absorption.
- Checkering on grip for better control and feel.
- Metal trigger blade.
- Grooved cylinder for scope & mounted scope stop.
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.



MOD 90 Camo

Mossy Oak Break-Up camo version.



MOD 90 MW

Luxurious walnut woodgrain camo version.



Metal trigger blade



Micro adjustable rear sight.



Hooded front sight.

1000fps POWER!

with Lead Pellets

1000fps POWER!

with Lead Pellets

MOD 80



MOD 80		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)
Stock		
Advanced Polymer with montecarlo cheekpiece		
Length		
1135 mm (44")		
Barrel Length		
450 mm (17.7")		
Weight		
3.2 kg (7.2 lbs)		
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration. Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design synthetic stock with montecarlo cheekpiece.
- Rubber butt pad for recoil absorption.
- Grooves on grip and forearm for better control and feel.
- Metal trigger blade.
- Grooved cylinder for scope & mounted scope stop.
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.



MOD 80 Camo

Mossy Oak Break-Up camo version.



MOD 80 MW

Luxurious walnut woodgrain camo version.





MOD 70



QUATTRO
TRIGGER

SAS
Shock Absorber System

VORTEX
GAS PISTON
Vortex Gas Piston Upgrade Available

Model	MOD 70		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced Polymer with montecarlo cheekpiece		
Length	1130 mm (44.5")		
Barrel Length	450 mm (17.7")		
Weight	3.2 kg (7 lbs)		
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red	

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration.Precision rifled steel barrel. Precision rifled steel barrel.
- Manual safety & automatic safety.
- Anti bear-trap safety.
- Ergonomic design synthetic stock with montecarlo cheekpiece.
- Rubber butt pad for recoil absorption.
- Checkering on grip for better control and feel.
- Metal trigger blade.
- Grooved cylinder for scope & mounted scope stop.
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.



MOD 70 Camo

Mossy Oak Break-Up camo version.



MOD 70 MW

Luxurious walnut woodgrain camo version.



QUATTRO
TRIGGER

Metal trigger blade



Micro adjustable rear sight.



Hooded front sight.

1000fps POWER!
with Lead Pellets

MOD 55S



Vortex Gas Piston Upgrade Available

Model		MOD 55S	
Caliber		4.5mm / .177 cal	6.35mm / .25 cal
Max. Muzzle Velocity (*)		305m/s (1000 fps)	200m/s (650 fps)
Stock		Wooden	
Length		1140mm (45")	
Barrel Length		450mm (17.7")	
Weight		3.4kg (7.5 lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green	
	Front Sight	1.5mm (.060") red	

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Mod 55S in .177 (4.5mm) or .25 (6.35mm) caliber
- Mod 60S in .22 (5.5mm) caliber
- Single shot break barrel action.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- SAS Shock Absorber System significantly reduces vibration. Precision rifled steel barrel. Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design wooden stock with raised comb.
- Checkering on grip and forearm for better control and feel.
- Rubber ventilated butt pad for recoil absorption.
- Metal trigger blade.
- Grooved cylinder for scope & mounted scope stop.
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.



MOD 60S

5.5mm / .22cal version



Vortex Gas Piston Upgrade Available

Model		MOD 60S	
Caliber		5.5mm / .22 cal	
Max. Muzzle Velocity (*)		245m/s (800 fps)	
Stock		Wooden	
Length		1140mm (45")	
Barrel Length		450mm (17.7")	
Weight		3.4kg (7.5 lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green	
	Front Sight	1.5mm (.060") red	

*Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

*The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.





Edge

1000fps POWER!

with Lead Pellets



VORTEX
GAS PISTON

Vortex Gas Piston Upgrade Available

Model		Edge		
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock		Advanced Polymer, Thumbhole		
Length			1100mm (43.3")	
Barrel Length			420mm (16.5")	
Weight			3kg (6.6lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber
- Ambidextrous, all weather, tactical style thumbhole synthetic stock with montecarlo cheek piece
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Grooved cylinder for 11 mm scope mounts & mounted scope stop.
- Adjustable trigger pull & trigger travel
- Metal trigger blade.
- Rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with integrated hooded front sight with Truglo fiber optics.



Edge Moonshine
Harvest moon camouflage version



Edge Camo
Mossy Oak Break-Up Infinity camo version



Edge MW

Luxurious walnut woodgrain camo version



Micro adjustable rear sight.



Large muzzle break.
Hooded front sight with
truglo fiber optics.

1000fps POWER!
with Lead Pellets

Striker 1000S



VORTEX
GAS PISTON

Vortex Gas Piston Upgrade Available

Model			
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced polymer with montecarlo cheekpiece		
Length	1095 mm (43")		
Barrel Length	420mm (16.5")		
Weight	2.9 kg (6.4 lbs)		
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Ambidextrous stylish synthetic stock with montecarlo cheekpiece on both sides.
- Soft rubber inlays on grip and forearm for better control and feel. Grey, dark grey, yellow and orange color inlays are available.
- Rubber butt pad for recoil absorption.
- Grooved cylinder for 11 mm scope mounts & mounted scope stop.
- Adjustable trigger pull & trigger travel
- Metal trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with integrated hooded front sight with Truglo fiber optics.



Striker 1000S

Dark Grey



Striker 1000S

Orange



Striker 1000S

Yellow

Soft rubber inlays are available in grey, dark grey, yellow and orange colors upon request



(*) Scope sold separately



Micro adjustable rear sight.



Large muzzle break.
Hooded front sight with
truglo fiber optics.



Striker 1000X

1000fps POWER!

with Lead Pellets



VORTEX
GAS PISTON

Vortex Gas Piston Upgrade Available

Model			Striker 1000X		
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal	6.35 mm / .25 cal		
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)		
Stock	Wood with montecarlo cheekpiece				
Length	1095 mm (43")				
Barrel Length	420mm (16.5")				
Weight	2.9 kg (6.4 lbs)				
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green			
	Front Sight	1.5 mm(.060") red			

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.
The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Ambidextrous stylish wood stock with montecarlo cheekpiece on both sides.
- Checkering on grip and forearm for better control and feel.
- Rubber ventilated butt pad for recoil absorption.
- Grooved cylinder for 11 mm scope mounts & mounted scope stop.
- Adjustable trigger pull & trigger travel.
- Metal trigger blade.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with integrated hooded front sight with Truglo fiber optics.



1000fps POWER!

with Lead Pellets



VORTEX
GAS PISTON
Vortex Gas Piston Upgrade Available

Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise

Model	AirTact		
Caliber	4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)	305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock	Advanced Polymer. Integrated Pistol Grip.		
Length	1135mm (44.7")		
Barrel Length	370mm (14.5")		
Weight	2.75kg (6lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green	
	Front Sight	1.5mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Rifled steel barrel with synthetic shroud and sound moderator
- Ambidextrous, all weather, tactical style pistol grip synthetic stock.
- Grooves on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Grooved cylinder for 11 mm scope mounts & mounted scope stop.
- Adjustable trigger pull & trigger travel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with front sight with Truglo fiber optics.

(*) Scope sold separately





AirTact ED

1000fps POWER!

with Lead Pellets



VORTEX
GAS PISTON
Vortex Gas Piston Upgrade Available

Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise

Model		AirTact ED		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock		Advanced Polymer.		
Length		1140mm (45")		
Barrel Length		370mm (14.5")		
Weight		2.6kg (5.7lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Rifled steel barrel with synthetic shroud and integrated sound moderator
- Ambidextrous, all weather, tactical style thumbhole synthetic stock with montecarlo cheek piece
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Tactical picatinny rail for both 11mm and 22mm scope mounts
- Adjustable trigger pull & trigger travel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with front sight with Truglo fiber optics



(*) Scope sold separately



AirTact PD

Unshrouded barrel version with large muzzle break (no sound moderator)

Model		AirTact PD		
Caliber		4.5mm / .177cal	5.5mm / .22cal	6.35mm / .25cal
Max. Muzzle Velocity (*)		305 m/s (1000 fps)	245 m/s (800 fps)	200 m/s (650 fps)
Stock		Advanced Polymer.		
Length		1104mm (43.5")		
Barrel Length		420mm (16.5")		
Weight		2.8kg (6.2lbs)		
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green		
	Front Sight	1.5mm (.060") red		

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Rifled steel barrel with synthetic shroud and integrated sound moderator
- Ambidextrous, all weather, tactical style thumbhole synthetic stock with montecarlo cheek piece
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Tactical picatinny rail for both 11mm and 22mm scope mounts
- Adjustable trigger pull & trigger travel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with front sight with Truglo fiber optics



Micro adjustable rear sight.



Large muzzle break.
Hooded front sight with truglo fiber optics.

Alpha



Integrated Sound Moderator
Sound moderator in muzzle break for reduced down-range noise

Model		Alpha	
Caliber		4.5mm / .177cal	5.5mm / .22cal
Max. Muzzle Velocity (*)		195m/s (640 fps)	170 m/s (550fps)
Stock		Advanced Polymer.	
Length		1057mm (41.6")	
Barrel Length		370mm (14.5")	
Weight		2.3kg (5lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green	
	Front Sight	1.5mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

- Lightweight design for children and beginners. Very easy in breaking the barrel and cocking.
- Single shot break barrel action.
- Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
- Rifled steel barrel with synthetic shroud and integrated sound moderator
- Ambidextrous, all weather, synthetic stock with montecarlo cheek piece
- Checkering on grip and forearm for better control and feel.
- Rubber butt pad for recoil absorption.
- Tactical picatinny rail for both 11mm and 22mm scope mounts
- Adjustable trigger pull & trigger travel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Large muzzle break for easy cocking with front sight with Truglo fiber optics.



Alpha Camo
Mossy Oak Break-Up camo version.



Alpha MW
Luxurious walnut woodgrain camo version



Alpha W
Wood stock version.
Unshrouded steel barrel without sound moderator.

NEW



SuperCharger QE

700fps POWER!

with Lead Pellets



QuietEnergy Version

QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.



XRS - Recoil Reduction System

Equipped with Hatsan's "XRS-Recoil Reduction System" for a noticeably smooth shot. Recoil is absorbed during the shot by the design of the sliding action. This makes for a more accurate and comfortable shooting experience.

Model	SuperCharger QE	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Max. Muzzle Velocity (*)	215 m/s (700 fps)	180 m/s (600 fps)
Stock	Advanced Polymer Grip	
Length	475 mm (18.7")	
Barrel Length	184 mm (7.2")	
Weight	1.6kg (3.5lbs)	
Fiber Optic Sights Diameters	Rear Sight 0.9mm (.035") green	Front Sight 1.5mm (.060") red

- Single shot break barrel action air pistol
- QuietEnergy fully shrouded steel barrel and Integrated Sound Moderator - **Approximately 50% Quieter.**
- Equipped with Hatsan's XRS Recoil Reduction System for a noticeably smooth shot.
- 4.5 mm (.177) or 5.5 mm (.22) caliber.
- Quattro Trigger is a 2-Stage fully adjustable trigger system.
- Manual & Automatic safety.
- Anti bear-trap safety.
- Grooved cylinder for scope mounts.
- Micro adjustable rear sight for both windage and elevation
- Adjustable front sight with Truglo fiber optics.



MOD 25 SuperCharger

700fps POWER!
with Lead Pellets

Mod25 SuperCharger air pistol is designed for high power. It can shoot 700fps. in 177cal (4.5mm) and 600fps in .22cal (5.5mm) all rated with lead pellets. You have the power of an air rifle from the Mod25 Supercharger air pistol. It's well balanced design fits perfect in your hands. The grip is sporting style and ergonomically shaped. Left hand version grip is available upon request. Muzzle cap fitted muzzle is 1/2" UNF threaded for silencer or muzzle break mounts. The included aluminum cocking aid assists in cocking and also provides a more stylish look.



Model	Mod 25 SuperCharger	
Caliber	4.5 mm / .177 cal	5.5 mm / .22 cal
Max. Muzzle Velocity (*)	215 m/s (700 fps)	180 m/s (600 fps)
Stock	Advanced Polymer	
Length	508 mm (20")	
Barrel Length	230 mm (9.05")	
Weight	1.7 kg (3.9 lbs)	
Fiber Optic Sights Diameters	Rear Sight 0.9 mm (.035") green	Front Sight 1.5 mm (.060") red

- Single shot break barrel action air pistol.
- Equipped with Hatsan's XRS Recoil Reduction System for a noticeably smooth shot.
- 4.5 mm (.177) or 5.5 mm (.22) caliber.
- Ergonomically designed rugged synthetic grip with checkering for better control & feel. Left hand pistol grip available upon request.
- Precision rifled steel barrel.
- 1/2" UNF threaded muzzle and fitted muzzle cap.
- Includes aluminum cocking aid.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- Manual & Automatic safety.
- Anti bear-trap safety.

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



Aluminum cocking aid.

700fpsPOWER!

with Lead Pellets

QuietEnergy Series

MOD 25 SuperTact QE



**FULLY SHROUDED
BARREL**



QuietEnergy Version
QE fully shrouded barrel and Integrated Sound Moderator - Approximately 50% Quieter.

Model		Mod 25 SuperTact QE	
Caliber		4.5mm / .177cal	5.5mm /.22cal
Max. Muzzle Velocity (*)		215 m/s (700 fps)	180 m/s (600 fps)
Stock		Tactical Telescopic Stock / Adjustable Comb / Advanced Polymer Grip	
Length	Butt Shortened	837mm (32.9")	
	Butt Extended	937mm (36.9")	
Barrel Length		230mm (9")	
Weight		2.6kg (5.7lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9mm (.035") green	
	Front Sight	1.5mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action air pistol + carbine air rifle
- QuietEnergy fully shrouded barrel and Integrated Sound Moderator -**Approximately 50% Quieter.**
- 4.5 mm (.177) or 5.5 mm (.22) caliber.
- Detachable / adjustable tactical telescopic rifle stock conversion kit included.
- Ergonomically designed rugged synthetic grip with checkering for better control & feel. Left hand pistol grips available upon request.
- Rifled steel barrel.
- Quattro Trigger is a 2-Stage fully adjustable trigger system.
- Manual & Automatic safety.
- Anti bear-trap safety.
- Grooved cylinder for scope mounts.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Open metal front sight with Truglo fiber optics.



Mod 25 SuperTact QE Camo

Mossy Oak Break-Up camo version.



MOD 25 SuperTact



700fpsPOWER!

with Lead Pellets

Model		Mod 25 SuperTact	
Caliber		4.5 mm / .177 cal	5.5 mm / .22 cal
Max. Muzzle Velocity (*)		215 m/s (700 fps)	180 m/s (600 fps)
Stock		Tactical Telescopic Stock / Advanced Polymer Grip	
Length	Butt Shortened	670mm (26.3")	
	Butt Extended	770mm (30.3")	
Barrel Length		230mm (9.05")	
Weight		2.5kg (5.5lbs)	
Fiber Optic Sights Diameters	Rear Sight	0.9 mm (.035") green	
	Front Sight	1.5 mm (.060") red	

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity.

The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action air pistol + carbine air rifle
- 4.5 mm (.177) or 5.5 mm (.22) caliber.
- Detachable / adjustable tactical telescopic rifle stock conversion kit included.
- Ergonomically designed rugged synthetic grip with checkering for better control & feel. Left hand pistol grips available upon request.
- Rifled steel barrel.
- 1/2" UNF threaded muzzle and fitted muzzle cap.
- Includes aluminum cocking aid
- Quattro Trigger is a 2-Stage fully adjustable trigger system.
- Manual & Automatic safety.
- Anti bear-trap safety.
- Grooved cylinder for scope mounts.
- Micro adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Elevation micro adjustable front sight with Truglo fiber optics.



MOD 35S & MOD 33



MOD 35S

Model	MOD 35S	
Caliber	4.5mm / .177 cal	
Max. Muzzle Velocity (*)	200m/s (650 fps)	
Stock	Wooden	
Length	1070mm (42.1")	
Barrel Length	450mm (17.7")	
Weight	3kg (6.6 lbs)	
Fiber Optic Sights Diameters	Rear Sight 0.9mm (.035") green Front Sight 1.5mm (.060") red	

- Single shot break barrel action.
- .177 (4.5 mm) caliber.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Wooden stock - english style.
- Rubber ventilated butt pad.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- Grooved cylinder for scope & mounted scope stop.
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



MOD 33

Model	MOD 33	
Caliber	4.5mm / .177 cal	
Max. Muzzle Velocity (*)	200m/s (650 fps)	
Stock	Advanced Polymer	
Length	1060mm (41.7")	
Barrel Length	450mm (17.7")	
Weight	3kg (6.6 lbs)	
Fiber Optic Sights Diameters	Rear Sight 0.9mm (.035") green Front Sight 1.5mm (.060") red	

- Single shot break barrel action.
- .177 (4.5 mm) caliber.
- Precision rifled steel barrel.
- Manual safety & automatic cocking safety.
- Anti bear-trap safety.
- Ergonomic design synthetic stock with cheekpiece.
- Rubber butt pad.
- Quattro Trigger is a 2-Stage fully adjustable match trigger system.
- Checkering on grip for better control and feel.
- Grooved cylinder for scope & mounted scope stop.
- Adjustable rear sight for both windage and elevation with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.



MOD 33 PINK

Mossy Oak Pink camo version.



MOD 33 Camo

Mossy Oak Break-Up camo version.



MOD 33 MW

Luxurious walnut woodgrain camo version.

MOD 25



Model	MOD 25	
Caliber	4.5mm / .177cal	5.5mm / .22cal
Max. Muzzle Velocity (*)	150m/s (500fps)	120m/s (400fps)
Stock	Advanced Polymer	Advanced Polymer
Length	370mm (14.5")	370mm (14.5")
Barrel Length	165mm (6.5")	165mm (6.5")
Weight	1.24kg (2.7 lbs)	1.24kg (2.7 lbs)

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.


* The energy restrictions of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle.

- Single shot break barrel action.
- 4.5 mm (.177) or 5.5 mm (.22) caliber.
- Ergonomically designed, rugged & compact design synthetic pistol grip.
- Precision rifled steel barrel-outside covered with synthetic.
- Manual safety.
- Cocking safety (anti bear-trap).
- Grooved cylinder for scope mounts.
- Micro adjustable rear sight with Truglo fiber optics.
- Hooded front sight with Truglo fiber optics.



MOD 25 MW

Luxurious walnut woodgrain camo version.

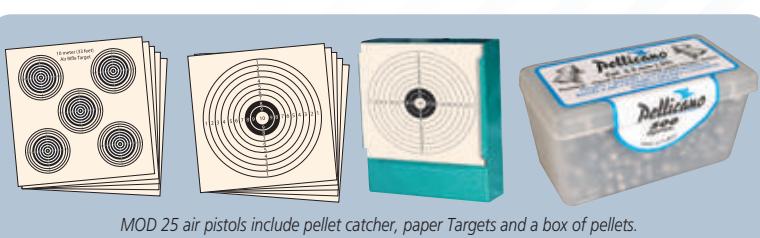

MOD 25 pistols include pellet catcher, paper Targets and a box of pellets.



Cocking Aid

Easily mounts in the muzzle which provides an easier cocking.



Optima Scopes



OPTiMA 2.5-10x50E SFT Scope

Red illuminated reticle, aluminum frame scope. Comes with scope mounts.



OPTiMA 3-12x44AOE Scope

Red illuminated reticle, aluminum frame scope. Comes with scope mounts.



OPTiMA 3-9x44E Scope

Red illuminated reticle, aluminum frame scope. Come with scope mounts.



OPTiMA 3-9x32 Scope

Aluminum frame scope. Comes with scope mounts.



OPTiMA 3-7x20 Scope

Aluminum frame scope. Comes with scope mounts.



OPTiMA 4x20 Scope

Aluminum frame scope. Comes with scope mounts.



OPTiMA 1x40 Red-Dot Sight

Aluminum frame red dot sight. Comes with integrated mounts.

Model	Magnification	Objective Diameter	Tube Diameter	Exit Pupil	Eye Relief	Length	Weight
Optima 2.5-10x50E SFT	2.5x-10x	50mm	30mm	5-20mm	86-90mm	322mm	805grams
Optima 1x40 Red Dot Sight	1X	40mm	47mm	40mm	unlimited	9.5cm	190grams
Optima 3-12x44AOE Scope	3X-12X	44mm	25.4mm	14.6 - 3.67mm	82-87mm	33cm	500grams
Optima 3-9x44E Scope	3X-9X	44mm	25.4mm	4.9-14.67mm	82-85mm	32cm	410grams
Optima 3-9x32 Scope	3-9x32	32mm	25.4mm	3.56- 10.67mm	70-85mm	29.5cm	395grams
Optima 3-7x20 Scope	3-7x20	20mm	19mm	6.7- 2.9mm	75mm	29.5cm	235grams
Optima 4x20 Scope	4x20	20mm	19mm	5mm	75mm	29.5cm	207grams

Accessories



Optima Protector Scope Mount

- Eliminates almost all recoil force on the rifle scopes and hence provides repeated accuracy.
- Suitable with 1" (25.4mm) tube diameter rifles scopes.
- Fits 11mm dovetail. 22mm picatinny rail version is available.
- 4 screws per ring secure optics and 3 screws fasten the base of the mount. Includes hex wrench.
- Vertical scope stop pin.
- Dimensions (L x H x W): 120 x 50 x 40mm.
- Weight: 205grams.
- Material: Aluminum.

Air Rifle Pellet Catcher



- Designed to use with Hatsan Air Rifles.
- Special design which traps the pellets and lever lets them out...
- Superb-all-steel construction.
- Galvanized finish assuring durability and total protection against corrosion.
- Comes in its box with 20 pieces Hatsan targets.
- Suitable for shooting with all Hatsan air guns with velocities even up to 1250 fps (375 m/s).
- Intended for use with lead air-gun pellets. Steel BBs should never be used with pellet catchers because of danger of ricochets.

Optima Long Range Scope Mount

- Elevation and angle adjustable rings provides more setting needed for long range accuracy.
- 0.16" (4.0mm) elevation adjustable and +/- 1.5 degrees angle adjustable.
- Suitable with 30mm tube diameter rifles scopes.
- Fits 22mm picatinny rails. 11mm dovetail version is available.
- Weight (of 2 rings) : 126grams.
- Material: Aluminum.

Hatsan Air Rifle Bag



Special design air rifle bag fitting all Hatsan air rifles. Made of quality and waterproof material and can carry your air rifle with scope mounted.




**Hatsan
Bipod**

Air Pistol Pellet Catcher




Designed to use with
Hatsan Air Pistol.



Hatsan Target #1 for short distance shots

Hatsan Targets

- Designed to use with Hatsan pellet catchers.
- Worldwide considered shooting target dimensions. Supplied in 100 pieces packages: 50pcs target #1 & 50pcs target #2



Hatsan Target #2 for long distance shots

Hatsan Pointed Head Pellets

High performance, accurate and precise for pest control and precision shooting at larger distances. Pointed head & waisted design lead pellets providing maximum penetration on the target. Recommended to use on Hatsan products.

Hatsan pointed head pellets are available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) calibers.



- .177 (4.5mm) caliber Hatsan pointed head pellets. 200 pellets per tin.
- Weight: 0.545grams / 8.41grains.



- .22 (5.5mm) caliber Hatsan pointed head pellets. 300 pellets per tin.
- Weight: 0.910 grams / 14grains.



- .25 (6.35mm) caliber Hatsan pointed head pellets. 200 pellets per tin.
- Weight: 1,61grams / 24,85 grains.



NovaStar



FlashPup-S QE



SpeedFire



Serious. Solid. Impact.

HATSAN ARMS COMPANY

Factory: Kemalpasa O.S.B. Mahallesi, Ansizca Sanayi Sitesi No: 303,
Kemalpasa, 35730, Izmir - TURKEY

Office: Kemalpasa O.S.B. Mahallesi, Izmir - Ankara Karayolu No: 365, Ic Kapi No: 1,
Kemalpasa, 35730, Izmir - TURKEY

Tel: +90 (232) 878 91 00 Fax: +90 (232) 878 91 02 - 878 97 23

Tel: +90 (232) 878 91 00 Fax: +90 (232) 878 91 02 - 878 97 23

info@hatsan.com.tr



www.hatsan.com.tr