

DESIGN OF A WEBSITE

EXIT POLL

A MINOR/MAJOR PROJECT REPORT

**SUBMITTED IN PARTIAL FULFILLMENT OF THE REQUIREMENTS FOR THE
AWARD OF THE DEGREE OF**

MASTERS OF COMPUTER SCIENCE (2017-2018)

SUBMITTED TO

MAHARAJA GANGA SINGH UNIVERSITY BIKANER (RAJASTHAN)



SUBMITTED BY

Project Team: -

Ankur Grower

Arjun Bhati

Guided By: -

Prof. Mr. Fauja Singh Sir

MGSU, Bikaner

Certificate

This is to certify that this project entitled “Exit Poll “ by Ankur Growar is the bonafide work of him submitted to the Department of Computer Science, Maharaja Ganga Singh University, Bikaner for consideration in partial fulfillment of the requirement for the award of degree in M.Sc.(Computer Science) academic year 2017-18.

On the basis of the declaration made by him/her, I recommend this project report for evaluation.

Jyoti Lakhani

Certificate

This is to certify that this project entitled “Exit Poll “ by Arjun Bhati is the bonafide work of him submitted to the Department of Computer Science, Maharaja Ganga Singh University, Bikaner for consideration in partial fulfillment of the requirement for the award of degree in M.Sc.(Computer Science) academic year 2017-18.

On the basis of the declaration made by him/her, I recommend this project report for evaluation.

Jyoti Lakhani

Acknowledgement

We would like to thank to our supervisor of this project **Mr. Fauja Singh Sir** for the valuable guidance and advice.

He inspired us to work in this project. His willingness to motivate us to our project. We also would like to thank him for showing and giving us some examples that related to the topic of our project.

Besides, we would like to thank to our HOD mam for providing us with a good environment and facilities to complete this project. Also, we would like to take this opportunity to than to our **HOD: Mrs. Jyoti Lakhani**. In addition, we would also like to thank all of them who provide us valuable information as the guidance of our project.

Finally, an honorable mention goes to our families and friends for their understandings and supports on us in completing this project.

Index

S .no	Particular	Page no	Signature
1.	Master.aspx i. Master.aspx.cs		
2.	About.aspx		
3.	Admin.aspx i. Admin.aspx.cs		
4.	Adminpanel.aspx i. Adminpanel.aspx.cs		
5.	Contact.aspx		
6.	Createpoll.aspx i. Createpoll.aspx.cs		
7.	Forget.aspx i. Forget.aspx.cs		
8.	Insertcandidate.aspx i. Insertcandidate.aspx.cs		
9.	Login.aspx i. Login.aspx.cs		
10.	Mail.aspx i. Mail.aspx.cs		
11.	Message.aspx		
12.	Register.aspx i. Register.aspx.cs		
13.	Result.aspx i. Result.aspx.cs		
14.	Timelin.aspx i. Timeline.aspx.cs		
15.	Web.config		
16.	Database (exitpoll.mdf) a. Table i. City ii. Comment iii. Country iv. Message v. Pollid vi. Polling vii. Register_table viii. State ix. Upload b. Store Procedures i. City_SELECT_BY_SID ii. COUNTRY_SELECT iii. FOR_GRID iv. POLLING_COND v. SELECT_FID vi. SID_UPLOAD vii. STATE_SELECT_BY_CID viii. UPLOAD_SELECT_BY_POLLING		
17.	Image folder		
18.	Message folder		
19.	Pics folder		
20.	Outputs		

1. MasterPage.master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeFile="MasterPage.master.cs" Inherits="MasterPage"
%>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-
transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
    <asp:ContentPlaceHolder id="head" runat="server">
        </asp:ContentPlaceHolder>
</head>
<style type="text/css">
    .x
    {
        line-height:15px;
        padding-bottom:auto;
        padding-top:auto;
    }
    .style11
    {
        height: 300px;
        width: 203px;
    }
    .style12
    {
        height: 300px;
        width: 571px;
    }
    .style14
    {
        width: 200px;
        height: 461px;
        margin-top: 0px;
    }
    .style15
    {
        height: 300px;
        width: 193px;
    }
    .style16
    {
        width: 669px;
    }
</style>
<body background="pics/bg.jpg" style="background-repeat: repeat;">
<form id="form1" runat="server">

    <div style="background-color:black; margin-left:auto; margin-right:auto; width:977px; line-
height:30px; height:26px; padding-right:10px; text-align:right;">
</div>

    <div style="background-color:#C8F2FF; margin-left:auto; margin-right:auto; width:977px; line-
height:30px; height:159px; padding-right:10px;">
        <table>
            <tr>
                <td>
                    <asp:ImageButton ID="ImageButton1" runat="server" src="pics/exitpoll.JPG"
style="height: 141px; width: 180px; margin-left:10px; margin-top:10px" align="middle"
onclick="ImageButton1_Click" />
                </td>
                <td class="style16">
```

```

        </td>
        <td>
            <asp:ScriptManager ID="timer" runat="server"></asp:ScriptManager>
            <asp:Timer ID="arresult" runat="server" Interval="1000"
onTick="arresult_Tick" EnableViewState="False"></asp:Timer>
            <asp:UpdatePanel ID="up" runat="server">
                <ContentTemplate>
                    <asp:Literal ID="lit" runat="server"></asp:Literal>

                </ContentTemplate>
                <Triggers>
                    <asp:AsyncPostBackTrigger ControlID="arresult" EventName="tick" />
                </Triggers>
            </asp:UpdatePanel>
        </td>
    </tr>
</table>
</div>
<div style="background-color:black; margin-left:auto; margin-right:auto; width:988px;
height:468px;">

<table style="width: 987px; margin-right: 3px; height: 350px;">

<tr>
<td class="style15">
    </td>
<td class="style12" >
    <div style="background-color:RED; background-color:#FFFFFF; margin-left:auto; margin-
left:auto; display:inline-table; float:left; width:100%; height:459px; background-image: inherit;">
        <asp:ContentPlaceHolder ID="ContentPlaceHolder1" runat="server">
        </asp:ContentPlaceHolder></div>
    </td>
<td class="style11">
    <asp:ContentPlaceHolder ID="ContentPlaceHolder2" runat="server" >
    </asp:ContentPlaceHolder>
</td>
</tr>
</table>  </div>




<div style="background-color:#414141; padding-left:15px; padding-top:15px; margin-left:auto;
margin-right:auto; width:973px; height:81px; text-align: center;" >

<table align="center">
<tr>
<td align="center" colspan="3">
    <asp:HyperLink ID="MGSU" runat="server" NavigateUrl="www.mgsu.edu.in" ForeColor="white"
Font-Size="X-Large"> MAHARAJA GANAGA SINGH UNIVERSITY, BIKANER</asp:HyperLink>
    </td>
</tr>
<tr>
<td align="center" colspan="3" >
    <asp:Label ID="l1" runat="server" ForeColor="white">©2018 Exit Poll (Email:<a
href="mailto:pollingarea@gmail.com">pollingarea@gmail.com</a>)</asp:Label>
    </td>
</tr>
<tr>
<td align="right"><asp:HyperLink ID="hylcontact" runat="server" ForeColor="white"
NavigateUrl="~/contact.aspx">Contact Us</asp:HyperLink></td>
    <td></td>
    <td align="left"><asp:HyperLink ID="hy1about" runat="server" ForeColor="white"
NavigateUrl="~/About.aspx">About Us</asp:HyperLink></td>
    </tr>
</table>
</div>

```

```

<div style="background-color:black; margin-left:auto; margin-right:auto; width:977px; line-
height:30px; height:21px; padding-right:10px; text-align:right;">
</div>
</form>
</body>
</html>

```

i. MasterPage.master.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class MasterPage : System.Web.UI.MasterPage
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (!IsPostBack)
        {
            Session["Timer"] = DateTime.Now.AddMinutes(2).ToString();
        }
    }
    protected void ImageButton1_Click(object sender, ImageClickEventArgs e)
    {
        if(Session["Name"]==null)
        {
            Response.Redirect("login.aspx");
        }
        else
        {
            Response.Redirect("Timeline.aspx");
        }
    }
    protected void arresult_Tick(object sender, EventArgs e)
    {
        if (DateTime.Compare(DateTime.Now, DateTime.Parse(Session["Timer"].ToString())) < 0)
        {
            lit.Text = "Time Left For Result" +
((Int32)DateTime.Parse(Session["Timer"].ToString()).Subtract(DateTime.Now).TotalMinutes).ToString() +
"Min" + (((Int32)DateTime.Parse(Session["Timer"].ToString()).Subtract(DateTime.Now).TotalSeconds) %
60).ToString() + "Secound";
        }
        else
        {
            lit.Text = "Now That Result time click get result button and show who is win ";
            Response.Redirect("result.aspx");
        }
    }
}

```

2. about.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="about.aspx.cs" Inherits="about" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
    <style type="text/css">
        .style17
        {
            width: 334px;
        }
        .style18
        {
            width: 203px;
            height: 445px;
        }
    </style>
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
<table style="background-color:#C8F2FF">
<tr>
    <td colspan="3" style="font-family: Algerian; font-size: xx-large; color: #FF6600" >
        About Us:
    </td>
</tr>
<tr>
    <td>
        
    </td>
    <td colspan="2" style="font-family: 'Times New Roman', Times, serif; font-size:large; align=justify">
        EXIT POLL is an online social media and specially a election vote website. Its is a simple
        voteing website and result show after 24 hrs.An
        election exit poll is a poll of voters taken immediately after they have exited
        the polling stations.Unlike an opinion poll, which asks for whom the voter plans
        to vote, or some similar formulation, an exit poll asks for whom the voter
        actually voted.
    </td>
</tr>
<tr style="background-color:White">
    <td rowspan="2" style="background-color:White" >
        
    </td>
    <td class="style17" style="background-color:White" >
        Arjun Bhati </td>
    <td rowspan="2" style="background-color:White" >
        
    </td>
</tr>
<tr>
    <td align="right" class="style17" style="background-color:White" >
        Ankur Grower
    </td>
</tr>
<tr>
    <td colspan="3" align="center" style=" font-size:large;" >
        Thank you!! Spend your important time in our Website
    </td>
</tr>
<tr>
    <td align="right" colspan="3" style="background-color:White" >
        Special Thank to :
    </td>
</tr>
```

```

<asp:Label ID="ownername" runat="server" Font-Names="Kunstler Script" Font-Size="Xx-Large"> Prof.
Fauja Singh </asp:Label>
</td>
</tr>
</table>
</asp:Content>
<asp:Content ID="Content3" ContentPlaceHolderID="ContentPlaceHolder2" Runat="Server">

    </p>
</asp:Content>

```

3. admin.aspx

```

<%@ Page Language="C#" AutoEventWireup="true" MasterPageFile="~/MasterPage.master"
CodeFile="admin.aspx.cs" Inherits="admin" %>
<asp:Content ID="admin" runat="server" ContentPlaceHolderID="ContentPlaceHolder1">
    <h1 align="center">Admin Log In</h1>
    <table align="center" style="height: 238px; width: 402px;">
        <tr>
            <td align="center" colspan="3">
                <asp:Label ID="getresult" runat="server" Text="Admin first enter your keywords after
get result"></asp:Label>
            </td>
        </tr>
        <tr>
            <td>
                ARJUN
            </td>
            <td>
                <asp:TextBox ID="tbkeywordab" runat="server" TextMode="Password" Height="29px"
Width="161px"></asp:TextBox>
            </td>
            <td>
                &nbsp;
            </td>
        </tr>
        <tr>
            <td>
                ANKUR
            </td>
            <td>
                <asp:TextBox ID="tbkeywordag" runat="server" TextMode="Password" Height="29px"
Width="161px"></asp:TextBox>
            </td>
            <td>
                &nbsp;
            </td>
        </tr>
        <tr>
            <td>
                <asp:Label ID="codeweb" runat="server"></asp:Label>
            </td>
            <td>
                <asp:TextBox ID="tbcodeweb" runat="server" Width="161px"></asp:TextBox>
                <asp:Label ID="larjun" runat="server"></asp:Label>
            </td>
        </tr>
        <tr>
            <td colspan="3" align="center">
                <asp:Button ID="bresult" runat="server" Text="Please Verify Yourself"
onclick="bresult_Click" />
            </td>
        </tr>
    </table>
</asp:Content>

```

```

        </tr>
    </table>
</asp:Content>
<asp:Content ID="content2" runat="server" ContentPlaceHolderID="ContentPlaceHolder2">
    <table style=" background-color:White; height: 451px; width: 200px;">
        <tr>
            <td>
                <asp:Label ID="lsession" runat="server" Text='<%Session["Name"] %>'></asp:Label>
            </td>
        </tr>
        <tr>
            <td>
                <asp:Image ID="imgadmin" runat="server" Height="401px" Width="213px"/>
                <asp:HyperLink ID="logout" runat="server" NavigateUrl="~/login.aspx"
Text="Logout"></asp:HyperLink>
            </td>
        </tr>
    </table>
</asp:Content>

```

i. admin.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class admin : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Name"] == null)
        {
            Response.Redirect("login.aspx");
        }
        lsession.Text = Session["Name"].ToString();

        if (Page.IsPostBack)
        {
            larjun.Text = "Re-Enter Password";
        }
        else
        {

            Random r = new Random();
            int x = r.Next(1000, 9999);
            codeweb.Text = x.ToString();

        }
        if (Session["Name"].ToString() == "arjunbhati180@gmail.com")
        {
            getresult.Text = ("Arjun verify yourself ");
            //imgadmin.ImageUrl = "http://localhost:49675/My Project/pics/arjun.jpg";
            imgadmin.ImageUrl = "~/pics/arjun.jpg";
        }
        else if (Session["Name"].ToString() == "ankungrover054@gmail.com")
        {
            getresult.Text = ("Ankur verify yourself ");
            imgadmin.ImageUrl = "~/pics/ankur.jpg";
        }
    }

    protected void bresult_Click(object sender, EventArgs e)

```

```

{
    if (tbcodeweb.Text == codeweb.Text)
    {
        if (Session["Name"].ToString() == "arjunbhati180@gmail.com")
        {
            if (tbkeywordab.Text == "1432")
            {
                Response.Redirect("adminpanel.aspx");
            }
            else
            {
                Response.Redirect("login.aspx");
            }
        }
        else if (Session["Name"].ToString() == "ankurgrover054@gmail.com")
        {
            if (tbkeywordag.Text == "7976")
            {
                Response.Redirect("adminpanel.aspx");
            }
            else
            {
                Response.Redirect("login.aspx");
            }
        }
    }
    else
    {
        larjun.Text = ("Re-enter your captcha and your password");
    }
}
}
}

```

4. adminpanel.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="adminpanel.aspx.cs" Inherits="adminpanel" %>
```

```
<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
```

```

<style type="text/css">
    .style23
    {
        height: 96px;
    }
    .style24
    {
        height: 72px;
    }
    .style25
    {
        height: 47px;
    }
    .style26
    {
        height: 50px;
    }
    .style27
    {
        height: 44px;
    }
    .style28
    {
        height: 48px;
    }

```

```

        }
    </style>

</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
    <table align="center"

        style="background-image: url('pics/dssds.jpg'); background-repeat: no-repeat; background-
position: center; height: 444px; width: 521px;">
        <tr>
            <td class="style23"></td></tr>
            <tr>
                <th style="font-size:x-large" class="style24"><u>Welcome to Admin Panel</u>
                </th>
            </tr>
            <tr>
                <td align="center" class="style26">
                    <asp:HyperLink ID="HyperLink1" runat="server" NavigateUrl="~/createpoll.aspx"
                        ForeColor="Black" Font-Size="Large">Create Poll</asp:HyperLink>
                </td>
            </tr>
            <tr>
                <td align="center" class="style25">
                    <asp:HyperLink ID="HyperLink2" runat="server"
                        NavigateUrl="~/insertcandidate.aspx" ForeColor="Black" Font-Size="Large">Insert
                Candidate</asp:HyperLink>
                </td>
            </tr>
            <tr>
                <td align="center" class="style27">
                    <asp:HyperLink ID="HyperLink3" runat="server" NavigateUrl="~/Result.aspx"
                        ForeColor="Black" Font-Size="Large">Result</asp:HyperLink>
                </td>
            </tr>
            <tr>
                <td align="center" class="style28">
                    <asp:HyperLink ID="HyperLink4" runat="server" NavigateUrl="~/message.aspx"
                        ForeColor="Black" Font-Size="Large">Message</asp:HyperLink>
                </td>
            </tr>
            <td>
        </td></tr>

    </table>
</asp:Content>

<asp:Content ID="Content3" runat="server"
    contentplaceholderid="ContentPlaceHolder2">
    <asp:Image ID="Image1" runat="server" ImageUrl="~/pics/vip.JPG" />
</asp:Content>

5. contact.aspx
<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="contact.aspx.cs" Inherits="contact" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
    <style type="text/css">
        .style15
    {
        height: 45px;

```

```

        }
        .style16
        {
            height: 37px;
        }
        .style17
        {
            width: 193px;
        }
    </style>
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
    <table style="height:429px; width:450px;" align="center">
        <tr align="center"><th colspan="2" style="font-size:x-large">Contanct Us</th></tr>
        <tr>
            <td class="style17" align="right">Owner's Name:</td>
            <td>
                Ankur Growar & Arjun Bhati
            </td>
        </tr>
        <tr>
            <td colspan="2" style="font-size:x-large" align="center">Email:</td>
        </tr>
        <tr>
            <td align="right">Ankur Growar:</td>
            <td><a href="mailto:ankurgrover054@gmail.com">ankurgrover054@gmail.com</a></td>
        </tr>
        <tr>
            <td align="right">Arjun Bhati:</td>
            <td><a href="mailto:arjunbhati180@gmail.com">arjunbhati180@gmail.com</a></td>
        </tr>
        <tr>
            <td colspan="2" style="font-size:x-large" align="center">Call & Whats app</td>
        </tr>
        <tr>
            <td align="right">Ankur Growar:</td><td>8302461063</td>
        </tr>
        <tr>
            <td align="right">Arjun Bhati:</td><td>8823908641</td>
        </tr>
        <tr>
            <td colspan="2" style="font-size:x-large" align="center"> Design, Developing, Idea & Coding by</td>
        <tr><td align="right" colspan="2" class="style16"><asp:Label ID="ownername" runat="server" Font-Names="Kunstler Script" Font-Size="Xx-Large" ><b>Ankur Growar & Arjun Bhati</b></asp:Label></td></tr>
    </table>
</asp:Content>

<asp:Content ID="Content3" runat="server"
    contentplaceholderid="ContentPlaceHolder2">
    <table style="background-color:White;widht:220px;height:461px" width="220">
        <tr>
            <td>Like & Follow us on</td><td align="right">
                <asp:HyperLink ID="i2" runat="server" NavigateUrl="https://www.facebook.com/ankur.grover.77" Width="80px"> </asp:HyperLink></td></tr>
            <tr>
                <td>Contact us on</td>
                <td>
                    <asp:HyperLink ID="HyperLink4" runat="server" NavigateUrl="https://web.whatsapp.com/"> </asp:HyperLink></td></tr>
                <tr><td>Like & Follow us on</td>
                <td><asp:HyperLink ID="HyperLink5" runat="server"
                    NavigateUrl="https://www.instagram.com/your_buddy_ab/"> </asp:HyperLink></td></tr>
<tr><td>Contact us on</td>
<td> <asp:HyperLink ID="HyperLink6" runat="server" NavigateUrl="https://www.gmail.com"> </asp:HyperLink></td></tr>
</tr></table>
</asp:Content>

```

6. createpoll.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="createpoll.aspx.cs" Inherits="createpoll" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
    <table align="center" >
        <tr>
            <td align="center">
                <asp:DropDownList ID="DropDownList1" runat="server" AutoPostBack="true"
                    onselectedindexchanged="DropDownList1_SelectedIndexChanged">
            </asp:DropDownList>
            </td>
            <td>
                <asp:Label ID="lvs" runat="server" Text="VS"></asp:Label>
            </td>
            <td align="center">
                <asp:DropDownList ID="DropDownList2" runat="server" AutoPostBack="true"
                    onselectedindexchanged="DropDownList2_SelectedIndexChanged">
            </asp:DropDownList>
            </td>
        </tr>
        <tr>
            <td colspan="3" align="center">
                <asp:Label ID="same" runat="server"></asp:Label></td>
            </tr>
            <tr>
                <td align="center">
                    First Candidate
                </td>
                <td></td>
                <td align="center">
                    Second Candidate
                </td>
            </tr>
            <tr align="center">
                <td>
                    <asp:Image ID="fcon" runat="server" ImageUrl="" height="321px" Width="200px"/>
                </td>
                <td>
                    VS
                </td>
                <td align="center">
                    <asp:Image ID="scon" runat="server" ImageUrl="" Width="200px" Height="319px"/>
                </td>
            </tr>
            <tr>
                <td colspan="3" align="center">
                    <asp:Button ID="bvs" runat="server" Text="submit" onclick="bvs_Click"
                        Width="100px" />
                    <asp:Button ID="Bnot" runat="server" Text="Poll Cancel" Width="100px"
                        onclick="Bnot_Click" />
                </td>
            </tr>
    </table>

```

```

</asp:Content>

<asp:Content ID="Content3" runat="server"
    contentplaceholderid="ContentPlaceHolder2">
    <asp:Image ID="Image1" runat="server" Height="461px" ImageUrl("~/pics/go_copy.jpg"
    Width="220px" />
</asp:Content>

```

i. createpoll.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
using System.IO;
using System.Data;
using System.Data.Sql;
using System.Configuration;

public partial class createpoll : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (!Page.IsPostBack)
        {

            SqlConnection add = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nnectionString);
            SqlCommand addcom = new SqlCommand("SELECT_FID", add);
            addcom.CommandType = CommandType.StoredProcedure;
            //addcom.Parameters.AddWithValue("@ID", Convert.ToInt32(DropDownList1.SelectedValue));

            SqlDataAdapter ad = new SqlDataAdapter(addcom);
            DataSet dt = new DataSet();
            ad.Fill(dt);
            DropDownList1.DataSource = dt.Tables[0];
            DropDownList1.DataTextField = "Name";
            DropDownList1.DataValueField = "ID";
            DropDownList1.DataBind();
            DropDownList1.Items.Insert(0, "Selct Candidate");
            DropDownList2.DataSource = dt.Tables[0];
            DropDownList2.DataTextField = "Name";
            DropDownList2.DataValueField = "ID";
            DropDownList2.DataBind();
            DropDownList2.Items.Insert(0, "Selct Candidate");
        }
    }

    protected void bvs_Click(object sender, EventArgs e)
    {
        SqlConnection you = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nnectionString);
        string query = "select max(pid) from polling";
        SqlCommand me = new SqlCommand(query, you);
        you.Open();
        SqlDataReader him = me.ExecuteReader();
    }
}

```

```

        int id = 1;
        if (him.Read())
        {
            // Response.Write(him[0].ToString());
            // bvs.Text = him[0].ToString();
            if(him[0].ToString().Trim()!="")
                id = Int32.Parse(him[0].ToString()) + 1;
        }
        him.Close();
        me.CommandText = "update polling set status='Close'";
        me.ExecuteNonQuery();
        me.CommandText = "insert into polling values(" + id.ToString() + "," +
DropDownList1.SelectedValue + ",0," + DropDownList2.SelectedValue + ",0,'Active')";
        me.ExecuteNonQuery();
        you.Close();
    }

protected void DropDownList1_SelectedIndexChanged(object sender, EventArgs e)
{
    fcon.ImageUrl = "~/image/" + DropDownList1.SelectedValue + ".jpg";
}

protected void DropDownList2_SelectedIndexChanged(object sender, EventArgs e)
{
    scon.ImageUrl = "~/image/" + DropDownList2.SelectedValue + ".jpg";
}

protected void Bnot_Click(object sender, EventArgs e)
{
    Response.Redirect("adminpanel.aspx");
}
}

```

7. forget.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="forget.aspx.cs" Inherits="forget" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
    <style type="text/css">
        .style16
        {
            height: 39px;
        }
    </style>
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
    <h1 align="center">Forget your Password</h1>
    <h5 align="center">Don't worry We help for forget password</h5>
    <table align="center" frame="vsides" bgcolor="White">
        <tr>
            <td></td>
        </tr>
        <tr>
            <td>
                Gmail
            </td>
            <td>
                <asp:TextBox ID="forgmail" runat="server" Width="236px"></asp:TextBox>
            </td>
        </tr>
        <tr>
            <td align="center" colspan="2">
                <h4> OR </h4>
            </td>
            <td><asp:Button ID="forbutton" runat="server" Text="Check Userid" onclick="forbutton_Click" /></td>

```

```

</tr>
<tr>
<td>
Pincode No
</td>
<td>
<asp:TextBox ID="forpin" runat="server" Width="236px"></asp:TextBox>
</td>
</tr>
<tr>
<td align="center" colspan="3" style="color: #0000FF" class="style16">
<asp:Label ID="heading" runat="server" Text="Enter your new password"
Visible="false"></asp:Label>
</td>
</tr>
<tr>
<td>
<asp:Label ID="forl" runat="server"></asp:Label>
<asp:Label ID="Name" runat="server"></asp:Label>
</td>
<td>
<asp:TextBox ID="forpass" runat="server" TextMode="Password" Visible="false"></asp:TextBox>
</td>
</tr>

<tr>
<td>
<asp:Label ID="lreenter" runat="server" Text="Re-enter Password"
Visible="false"></asp:Label>
</td>
<td colspan="3">
<asp:TextBox ID="tbreepass" runat="server" TextMode="Password"
Visible="false"></asp:TextBox>

<asp:CompareValidator ID="cvrepassword" runat="server" ControlToValidate="tbreepass"
ControlToCompare="forpass" Operator="Equal" Type="String" ErrorMessage="Please Enter Same
Password"></asp:CompareValidator>
</td>
</tr>
<tr>
<td>
<asp:Button ID="forconform" runat="server" Text="Forget Password" onclick="forconform_Click"
Visible="false"/>
</td>
</tr>
<tr>
<td colspan="3" align="center">
<asp:label ID="newpass" runat="server"></asp:label>
</td>
</tr>
</table>

</asp:Content>
<asp:Content ID="Content3" ContentPlaceHolderID="ContentPlaceHolder2" Runat="Server">
</asp:Content>

```

i. forget.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;

```

```

using System.Web.UI.WebControls;
using System.Data.SqlClient;

public partial class forget : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }
    protected void forbutton_Click(object sender, EventArgs e)
    {
        if (forgmail.Text == "" || forpin.Text=="")
        {
            heading.Visible = true;
            heading.Text = ("Please Enter Your Email and Pincode");
        }
        else
        {

            SqlConnection sir = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].ConnectionString);
            string query = "select * from Register_table where email='" + forgmail.Text + "' and
pincode= '" + forpin.Text + "'";
            SqlCommand jmk = new SqlCommand(query, sir);
            sir.Open();
            SqlDataReader fr = jmk.ExecuteReader();
            heading.Visible = true;
            forl.Text = ("what is your New Password");
            forpass.Visible = true;
            forconform.Visible = true;
            lreenter.Visible = true;
            tbreepass.Visible = true;
            fr.Close();
            jmk.CommandText = "select fname from Register_table where email='" + forgmail + "'";
            Name.Text = jmk.ExecuteNonQuery().ToString();

            sir.Close();
        }
    }
    protected void forconform_Click(object sender, EventArgs e)
    {
        SqlConnection sir = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].ConnectionString);
        string query = "update Register_table set password='" + forpass.Text + "'where email='" +
forgmail.Text + "'";
        SqlCommand jmk = new SqlCommand(query, sir);
        sir.Open();
        jmk.ExecuteNonQuery();
        newpass.Text = ("your Password has been change. Try login ");
        // Response.Redirect("Homepage.aspx");
    }
}

```

8. insertcandidate.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile "~/MasterPage.master" AutoEventWireup="true"
CodeFile="insertcandidate.aspx.cs" Inherits="Voting" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
<style type="text/css">
    .style15

```

```

        {
            width: 222px;
        }
        .style17
    {
        height: 366px;
    }
    .style18
    {
        width: 193px;
    }
    .style19
    {
        width: 193px;
        height: 28px;
    }
    .style20
    {
        height: 28px;
    }
    .style21
    {
        height: 35px;
    }

```

</style>

</asp:Content>

<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">

<asp:Label ID="lsession" runat="server" Text='<%=Session["Name"]%>' Visible="true" align="right"></asp:Label>

<table align="center" width="450px" height="150px">

<tr><td colspan="2"><h1 align="center">Insert Data</h1></td></tr>

<tr>

<td align="right" class="style19">ID for Candidate:</td>

<td class="style20"><asp:TextBox ID="TextBox1" runat="server" Width="219px"></asp:TextBox></td></tr>

<tr><td align="right" class="style18">Name of Candidate:</td>

<td colspan="2">

<asp:TextBox ID="TextBox2" runat="server" Width="220px" Height="26px"></asp:TextBox></td></tr>

<tr>

<td align="right">

Upload Candidate Image:

</td>

<td align="center">

<asp:FileUpload ID="FileUpload1" runat="server" Height="22px" Width="233px" /></td></tr>

<tr><td colspan="2" align="center">

<asp:Label ID="Label1" runat="server"></asp:Label>

</td></tr>

<tr><td colspan="2" align="center" class="style21">

<asp:Button ID="Button1" runat="server" Text="Insert" onclick="Button1_Click" Width="81px" Height="30px" />

</td></tr>

<tr >

<td align="center" colspan="2">

<asp:Label ID="letram" runat="server" Text="Terms and Condition" ForeColor="ActiveCaptionText" Font-Size="X-Large"></asp:Label>

- All candidates have a unique ID.

- Admin please upload clear photo.

Note:ID fields is Unique. NO Repetation Allowed

</td>

</tr>

<tr>

<td colspan="2" align="center">

<asp:HyperLink ID="hyback" runat="server" NavigateUrl="~/adminpanel.aspx">Admin Panel</asp:HyperLink>

```

                <asp:HyperLink ID="hlTimeline" runat="server"
NavigateUrl="~/timeline.aspx">Click Here For Timeline</asp:HyperLink>&nbsp;
                <asp:HyperLink ID="hycp" runat="server" NavigateUrl="~/createpoll.aspx">Create
Poll</asp:HyperLink>&nbsp;
                <asp:HyperLink ID="hyr" runat="server"
NavigateUrl="~/Result.aspx">Result</asp:HyperLink>&nbsp;
            </td>
        </tr>
    </table>
</asp:Content>
<asp:Content ID="content2insert" runat="server" ContentPlaceHolderID="ContentPlaceHolder2">

    <div style="overflow:scroll">
        <table style="height: 450px">
            <tr>
                <td bgcolor="#CCFFCC" align="center">Previous ID's</td></tr>
            <tr>
                <td class="style17">
                    <asp:GridView ID="GridView1" runat="server" Height="316px" Width="202px"
                        BackColor="#FFFFCC" AutoGenerateColumns="False" DataKeyNames="ID"
                        DataSourceID="SqlDataSource1">
                        <Columns>
                            <asp:BoundField DataField="ID" HeaderText="ID" ReadOnly="True"
                                SortExpression="ID" />
                            <asp:BoundField DataField="Name" HeaderText="Name" SortExpression="Name" />
                        </Columns>
                    </asp:GridView>
                    <asp:SqlDataSource ID="SqlDataSource1" runat="server"
                        ConnectionString="<%$ ConnectionStrings:exitpolConnectionString %>" 
                        SelectCommand="SELECT [ID], [Name] FROM [upload]"></asp:SqlDataSource>
                </td>
            </tr>
        </table>
    </div>
</asp:Content>

```

i. insertcandidate.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
using System.IO;

public partial class Voting : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Name"] == null)
        {
            Response.Redirect("login.aspx");
        }
        else
        {
            lsession.Text = "Hello Admin " + Session["Name"].ToString();
        }
    }
    protected void Button1_Click(object sender, EventArgs e)
    {
        Label1.Text = "";
    }
}

```

```

        SqlConnection con = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nnectionString);
        if (FileUpload1.HasFile)
        {
            string strname = FileUpload1.FileName;
            string path = "~/image/" + TextBox1.Text + strname.Substring(strname.Length-4);
            string query = "insert into upload values('" + TextBox1.Text + "','" + TextBox2.Text +
"', '" + path + "')";
            SqlCommand cmd = new SqlCommand(query, con);
            con.Open();
            try
            {
                cmd.ExecuteNonQuery();
                FileUpload1.SaveAs(Server.MapPath(path));
            }
            catch (Exception ex)
            {
                if(ex.Message.Substring(13,11)=="PRIMARY KEY")
                    Label1.Text = "ID already exists";
                else
                    Label1.Text = "ERROR while uploading";
            }
            con.Close();

            if(Label1.Text.Length==0)
                Label1.Text = "Image Uploaded successfully";
            TextBox1.Text = "";
            TextBox2.Text = "";
        }
        else
        {
            // Label1.Visible = true;
            Label1.Text = "Plz upload the image!!!!";
        }
    }
}

```

9. login.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="login.aspx.cs" Inherits="login" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">

    <style type="text/css">
        .style17
        {
            width: 397px;
        }
    </style>

</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
    <table style="height:410px; width:512px;" align="center">
        <tr>
            <td align="center" colspan="3" class="style2">
                <h2 style="text-decoration: underline">_____ Login _____ </h2>
            </td>
        </tr>
        <tr>
            <td align="justify" class="style17">

```

```

User Name
</td>
</tr>
<tr>
    <td align="right" class="style17">
        <asp:TextBox ID="tbUser" runat="server" Width="283px" Height="31px"></asp:TextBox>
    </td>
    <td>
        <asp:RequiredFieldValidator ID="rqvtbUser" runat="server" ControlToValidate="tbUser"
ErrorMessage="Enter your User Name"></asp:RequiredFieldValidator>
    </td>
</tr>
<tr>
    <td align="justify" class="style17">

Password
</td>
</tr>
<tr>
    <td align="right" class="style17">
        <asp:TextBox ID="tbpassword" runat="server" Width="283px" Height="31px"
TextMode="Password"></asp:TextBox>
    </td>
    <td>
        <asp:RequiredFieldValidator ID="rfvpasstb" runat="server"
ControlToValidate="tbpassword" ErrorMessage="Enter your Password"></asp:RequiredFieldValidator>
    </td>
</tr>
<tr>
    <td align="center" class="style17">
        <asp:CheckBox ID="cbPassword" runat="server" Text="Remember me" />
        <asp:Button ID="blogin" runat="server" Text="Login" BorderStyle="Ridge"
BackColor="AliceBlue" Height="32px" Width="86px" onclick="blogin_Click"/>
    </td>
</tr>
<tr>
    <td colspan="2" align="center" class="style17">
        <asp:Label ID="idinfo" runat="server" Font-Bold="true" ForeColor="Red"></asp:Label>
    </td>
</tr>
<tr><td colspan="2" align="center" >
    First time here ??
    <asp:HyperLink ID="HyperLink27" runat="server" NavigateUrl="~/Register.aspx"></asp:HyperLink>
    </td></tr></table>
</asp:Content>

<asp:Content ID="Content3" runat="server" contentplaceholderid="ContentPlaceHolder2">
    <asp:Image ID="Image1" runat="server" Height="461px"
ImageUrl="~/pics/cast .JPG" Width="220px" />
</asp:Content>

```

i. login.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;

```

```

using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;

public partial class login : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        //
        // Response.Write(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].ConnectionString);
        Session["Name"] = tbUser.Text;
    }

    protected void blogin_Click(object sender, EventArgs e)
    {
        SqlConnection you = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].ConnectionString);
        string query = "select * from Register_table where email='" + tbUser.Text + "' and password='"
+ tbpassword.Text + "'";
        SqlCommand me = new SqlCommand(query, you);
        you.Open();
        SqlDataReader him = me.ExecuteReader();

        if(him.Read())
        {
            Session["Name"] = tbUser.Text;
            Session["id"] = him["email"].ToString();
            you.Close();
            if (tbUser.Text == "arjunbhati180@gmail.com" || tbUser.Text == "ankurgrover054@gmail.com")
            {
                Response.Redirect("admin.aspx");
            }
            else
            {
                Response.Redirect("timeline.aspx");
            }
        }
        else
        {
            idinfo.Text = "Your E-mail is wrong please check your Email and Password";
        }
    }
}

```

10. mail.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="mail.aspx.cs" Inherits="mail" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
    <style type="text/css">
        .style15
        {
            width: 378px;
        }
        .style17

```

```

        {
            width: 193px;
        }
        .style18
        {
            height: 36px;
        }
        .style19
        {
            width: 193px;
            height: 36px;
        }
        .style20
        {
            height: 25px;
        }
        .style21
        {
            width: 193px;
            height: 25px;
        }
    
```

</style>

</asp:Content>

<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">

<table style="height: 375px" align="center">

- <tr>
- <td colspan="2" align="center" align="center" style=" font-size: x-large;">
- Message to Admin for create Exit Poll
- </td>
- </tr>
- <tr>
- <td colspan="2" align="center">
- Hello <asp:Label ID="userid" runat="server" Text='<%Session["Name"]%>'></asp:Label>
- </td>
- </tr>
- <tr>
- <td class="style18">
- To:
- </td>
- <td class="style19">
- <asp:DropDownList ID="ddlmail" runat="server">
- <asp:ListItem>Choose a Admin</asp:ListItem>
- <asp:ListItem>Ankur</asp:ListItem>
- <asp:ListItem>Arjun</asp:ListItem>
- </asp:DropDownList>
- </td>
- </tr>
- <tr>
- <td>
- Cc:
- </td>
- <td class="style17">
- <asp:DropDownList ID="ddlcc" runat="server">
- <asp:ListItem>Choose a Admin</asp:ListItem>
- <asp:ListItem>Ankur</asp:ListItem>
- <asp:ListItem>Arjun</asp:ListItem>
- </asp:DropDownList>
- </td>
- </tr>
- <tr>
- <td class="style20">
- Message:
- </td>
- <td class="style21">
- <asp:TextBox ID="tbmsg" runat="server" TextMode="MultiLine" placeholder="Enter Your Message" Height="51px" Width="217px"></asp:TextBox>
- </td>

```

</tr>
<tr>

    <td>
        First Candidate Image:

        </td>
        <td class="style17">
            <asp:TextBox ID="tbfirst" runat="server" placeholder="Enter First Candidate Name" Width="217px"></asp:TextBox>
            <asp:FileUpload ID="FileUpload1" runat="server" />
        </td>
    </tr>
    <tr>

        <td>
            Second Candidate Image:
        </td>
        <td class="style17">
            <asp:TextBox ID="tbsecond" runat="server" placeholder="Enter Second Candidate Name" Width="217px"></asp:TextBox><asp:FileUpload ID="FileUpload2" runat="server" />
        </td>
    </tr>
    <tr>
        <td colspan="2" align="center">
            <asp:Label ID="Label1" runat="server"></asp:Label>
            <asp:Button ID="bsend" runat="server" Text="Send Message" onclick="bsend_Click" />
        </td>
    </tr>
    <tr>
        <td colspan="2" align="center">
            <asp:Label ID="sendmsg" runat="server"></asp:Label>
        </td>
    </tr>
</table>
</asp:Content>
<asp:Content ID="Content3" ContentPlaceHolderID="ContentPlaceHolder2" Runat="Server">
    <asp:Image ID="Image1" runat="server" Height="461px" ImageUrl="~/pics/message.jpg" Width="220px" />
</asp:Content>

```

i. mail.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
public partial class mail : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Name"] == null)
        {
            Response.Redirect("login.aspx");
        }
        userid.Text = Session["Name"].ToString();
    }
    protected void bsend_Click(object sender, EventArgs e)
    {

```

```

Label1.Text = "";
SqlConnection con = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nectionString);
if (FileUpload1.HasFile || FileUpload2.HasFile)
{
    string strname = FileUpload1.FileName;
    string str = FileUpload2.FileName;
    string path = "~/message/" + tbfirst.Text + strname.Substring(strname.Length - 4);
    string img = "~/message/" + tbsecond.Text + str.Substring(str.Length - 4);
    string query = "insert into message values('" + ddlmail.Text + "','" + ddlcc.Text + "','" +
+tbmsg.Text+ "','" + tbfirst.Text+ "','" + path + "','" + tbsecond.Text+ "','" + img + "','" +
Session["Name"].ToString() + "')";
    SqlCommand cmd = new SqlCommand(query, con);
    con.Open();
    try
    {
        cmd.ExecuteNonQuery();
        FileUpload1.SaveAs(Server.MapPath(path));
        cmd.ExecuteNonQuery();
        FileUpload2.SaveAs(Server.MapPath(img));
    }
    catch
    {
        Label1.Text = "Uploading error!!";
    }
    con.Close();
    ddlmail.Text = "";
    ddlcc.Text = "";
}
else
{
    Label1.Text = "Plz upload the image!!!!";
}
sendmsg.Text = "Your message send to admin. Admin Never reply you !! <br> Thank you";
}
}

```

11. message.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile("~/MasterPage.master" AutoEventWireup="true"
CodeFile="message.aspx.cs" Inherits="message" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">
<div style="overflow:scroll; height: 440px;">
    <asp:GridView ID="GridView1" runat="server" AutoGenerateColumns="False"
        Width="535px" DataSourceID="SqlDataSource1" Height="124px">
        <Columns>
            <asp:BoundField DataField="main_reciever" HeaderText="To"
                SortExpression="main_reciever" />
            <asp:BoundField DataField="s_reciver" HeaderText="Bcc"
                SortExpression="s_reciver" />
            <asp:BoundField DataField="message" HeaderText="Message"
                SortExpression="message" />
            <asp:BoundField DataField="sender_name" HeaderText="Sender By"
                SortExpression="sender_name" />
        </Columns>
    </asp:GridView>
    <asp:SqlDataSource ID="SqlDataSource1" runat="server"
        ConnectionString="<%$ ConnectionStrings:exitpolConnectionString %>">
        SelectCommand="SELECT [main_reciever], [s_reciver], [message], [sender_name] FROM [Message]
ORDER BY [id] DESC"
    </asp:SqlDataSource>
</div>

```

```

</asp:Content>
<asp:Content ID="Content3" ContentPlaceHolderID="ContentPlaceHolder2" Runat="Server">
    <asp:Image ID="Image1" runat="server" Height="461px" ImageUrl="~/pics/admin.jpg"
        Width="220px" />
</asp:Content>

```

12. Register.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile="~/MasterPage.master" AutoEventWireup="true"
CodeFile="Register.aspx.cs" Inherits="Register" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">

    <style type="text/css">
        .style17
        {
            height: 44px;
            width: 203px;
        }
    </style>

</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server" >
    <table align="center" class="style9" border="5"
        style="height: 454px; width: 531px">
        <tr>
            <td class="style17" colspan="3" align="center">
                <asp:Label ID="lregister" runat="server" Font-Size="X-Large" Text="Register to
vote"></asp:Label>
            </td>
        </tr>
        <tr>
            <td>
                Name
            </td>
            <td>
                <asp:TextBox ID="tbnamef" runat="server" placeholder="First"></asp:TextBox>
                <asp:TextBox ID="tbnamel" runat="server" placeholder="Last"
Width="128px"></asp:TextBox>
                <br />
                <asp:RequiredFieldValidator ID="rfvname" runat="server" ControlToValidate="tbnamef"
ErrorMessage="Please Enter your Name" ></asp:RequiredFieldValidator>
            </td>
        </tr>
        <tr>
            <td>
                Email ID
            </td>
            <td>
                <asp:TextBox ID="tbmailid" runat="server" Width="307px"></asp:TextBox>
                <br />
                <asp:RegularExpressionValidator ID="revmail" runat="server"
ControlToValidate="tbmailid" ErrorMessage="Enter Vaild E-mail Address"
ValidationExpression="\w+\S+@\+.+"></asp:RegularExpressionValidator>
            </td>
        </tr>
        <tr>
            <td>
                Gender
            </td>
            <td>
                <asp:RadioButtonList ID="rblgender" runat="server" RepeatDirection="Horizontal"
Width="254px">

```

```

        <asp:ListItem Selected=True>Male</asp:ListItem>
        <asp:ListItem>Female</asp:ListItem>
        <asp:ListItem>Other</asp:ListItem>
    </asp:RadioButtonList>
</td>
</tr>
<tr>
    <td>
        Date of Birth
    </td>
    <td>

        <asp:DropDownList ID="ddlyear" runat="server" AutoPostBack="true">
            <asp:ListItem Selected="True">Select year</asp:ListItem>
        </asp:DropDownList>
        <asp:DropDownList ID="ddlmonth" runat="server"
onselectedindexchanged="ddlmonth_SelectedIndexChanged" AutoPostBack="true">
            <asp:ListItem Selected="True">Select Month</asp:ListItem>
            <asp:ListItem Value=1>Jan</asp:ListItem>
            <asp:ListItem Value=2>Feb</asp:ListItem>
            <asp:ListItem Value=3>March</asp:ListItem>
            <asp:ListItem Value=4>April</asp:ListItem>
            <asp:ListItem Value=5>May</asp:ListItem>
            <asp:ListItem Value=6>June</asp:ListItem>
            <asp:ListItem Value=7>July</asp:ListItem>
            <asp:ListItem Value=8>Aug</asp:ListItem>
            <asp:ListItem Value=9>Sept</asp:ListItem>
            <asp:ListItem Value=10>Oct</asp:ListItem>
            <asp:ListItem Value=11>Nov</asp:ListItem>
            <asp:ListItem Value=12>Dec</asp:ListItem>
        </asp:DropDownList>
        <asp:DropDownList ID="ddldob" runat="server" AutoPostBack="true">
            <asp:ListItem>Select day</asp:ListItem>
        </asp:DropDownList>
    </td>
</tr>
<tr>
    <td rowspan="2">
        Address
    </td>
    <td>
        <asp:TextBox ID="tbaddress" runat="server"></asp:TextBox>
        <asp:TextBox ID="tbpincode" runat="server" placeholder="PinCode"></asp:TextBox>
    </td>
</tr>
<tr>
    <td>
        <asp:DropDownList ID="ddlcountry" runat="server"
            onselectedindexchanged="ddlcountry_SelectedIndexChanged" AutoPostBack="true">
            <asp:ListItem Selected="True">Country</asp:ListItem>
            <asp:ListItem>India</asp:ListItem>
            <asp:ListItem>USA</asp:ListItem>
            <asp:ListItem>England</asp:ListItem>
            <asp:ListItem>Australia</asp:ListItem>
            <asp:ListItem>China</asp:ListItem>
            <asp:ListItem>Japan</asp:ListItem>
            <asp:ListItem>Other</asp:ListItem>
        </asp:DropDownList>
        <asp:DropDownList ID="ddlstate" runat="server"
            onselectedindexchanged="ddlstate_SelectedIndexChanged" AutoPostBack="true">
            <asp:ListItem Selected="True">State</asp:ListItem>
        </asp:DropDownList>
        <asp:DropDownList ID="ddlcity" runat="server" AutoPostBack="true">
            <asp:ListItem Selected="True">City</asp:ListItem>
        </asp:DropDownList>
    </td>

```

```

        </td>
    </tr>
    <tr>
        <td>
            Contact No.
        </td>
        <td>
            <asp:Label ID="lccode" runat="server"></asp:Label><asp:TextBox ID="tbcontactno" runat="server"></asp:TextBox>
            <asp:RegularExpressionValidator ID="revcon" runat="server" ControlToValidate="tbcontactno" ErrorMessage="Please Enter 10 digit" ValidationExpression="[0-9]{10}"></asp:RegularExpressionValidator>
        </td>
    </tr>
    <tr>
        <td>
            Password
        </td>
        <td>
            <asp:TextBox ID="tbpassword" runat="server" TextMode="Password"></asp:TextBox>
        </td>
    </tr>
    <tr>
        <td>
            Re-enter Password
        </td>
        <td>
            <asp:TextBox ID="tbreepass" runat="server" TextMode="Password"></asp:TextBox>
            <asp:CompareValidator ID="cvrepassword" runat="server" ControlToValidate="tbreepass" ControlToCompare="tbpassword" Operator="Equal" Type="String" ErrorMessage="Please Enter Same Password"></asp:CompareValidator>
        </td>
    </tr>
    <tr>
        <td colspan="2" align="center">
            <asp:Button ID="brighters" runat="server" Text="Register" onclick="brighters_Click" style="height: 26px" />
        </td>
    </tr>
</table>
</asp:Content>
<asp:Content ContentPlaceHolderID="ContentPlaceHolder2" ID="cid" runat="server">
    <asp:Image ID="Image1" runat="server" Height="461px" ImageUrl="~/pics/print.jpg" Width="220px" />
</asp:Content>

```

i. Register.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
using System.Data.Sql;
using System.Data;
public partial class Register : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

```

```

if (!Page.IsPostBack)
{
    for (int y = 1990; y <= 2010; y++)
        ddlyear.Items.Add(y.ToString());


    // SqlConnection add = new SqlConnection("Data
Source=.\\SQLEXPRESS;AttachDbFilename=C:\\Users\\Arjun Bhati\\Documents\\exitpol.mdf;Integrated
Security=True;Connect Timeout=30;User Instance=True");
    SqlConnection add = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nectionString);
    SqlCommand addcom = new SqlCommand("COUNTRY_SELECT", add);
    addcom.CommandType = CommandType.StoredProcedure;

    SqlDataAdapter ad = new SqlDataAdapter(addcom);
    DataSet dt = new DataSet();
    ad.Fill(dt);
    ddlcountry.DataSource = dt.Tables[0];
    ddlcountry.DataTextField = "Country_name";
    ddlcountry.DataValueField = "CID";
    ddlcountry.DataBind();
    ddlcountry.Items.Insert(0,"Select your country");

}

}

protected void brighters_Click(object sender, EventArgs e)
{
    // SqlConnection con = new SqlConnection("Data
Source=.\\SQLEXPRESS;AttachDbFilename=C:\\Users\\Arjun Bhati\\Documents\\exitpol.mdf;Integrated
Security=True;Connect Timeout=30;User Instance=True");
    SqlConnection con = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nectionString);
    string query = "insert into Register_table values('"+ tbnamef.Text + "','" + tbnamel.Text +
"', '" + tbmailid.Text + "','" + rblgender.Text + "','" + ddldob.Text + "','" + ddmonth.Text + "','" +
ddlyear.Text+ "','" + tbaddress.Text + "','" + tbpincode.Text + "','" + ddlcountry.Text + "','" +
ddlstate.Text + "','" + ddlcity.Text + "','" + tbcontactno.Text + "','" + tbpassword.Text + "')";

    SqlCommand com = new SqlCommand(query, con);
    con.Open();
    com.ExecuteNonQuery();
    con.Close();
    Response.Redirect("login.aspx");
}

protected void ddlcountry_SelectedIndexChanged(object sender, EventArgs e)
{
    if (ddlcountry.SelectedIndex != 0)
    {
        // SqlConnection add = new SqlConnection("Data
Source=.\\SQLEXPRESS;AttachDbFilename=C:\\Users\\Arjun Bhati\\Documents\\exitpol.mdf;Integrated
Security=True;Connect Timeout=30;User Instance=True");
        SqlConnection add = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nectionString);
        SqlCommand addcom = new SqlCommand("STATE_SELECT_BY_CID", add);
        addcom.CommandType = CommandType.StoredProcedure;
        addcom.Parameters.AddWithValue("@CID", Convert.ToInt32(ddlcountry.SelectedValue));

        SqlDataAdapter ad = new SqlDataAdapter(addcom);
        DataSet dt = new DataSet();
        ad.Fill(dt);
        ddlstate.DataSource = dt.Tables[0];
        ddlstate.DataTextField = "State_name";
    }
}

```

```

        ddlstate.DataValueField = "SID";
        ddlstate.DataBind();
        ddlstate.Items.Insert(0,"Selct your state");
        //ddlcity.Items.Clear();
    }
    if (ddlcountry.SelectedItem.Text == "INDIA")
    {
        lccode.Text = ("+91");
    }
    else if (ddlcountry.SelectedItem.Text == "USA")
    {
        lccode.Text = ("+1");
    }
    else if (ddlcountry.SelectedItem.Text == "England")
    {
        lccode.Text = ("+44");
    }
    else if (ddlcountry.SelectedItem.Text == "Australia")
    {
        lccode.Text = ("+61");
    }
    else if (ddlcountry.SelectedItem.Text == "Japan")
    {
        lccode.Text = ("+81");
    }
    else if (ddlcountry.SelectedItem.Text == "Chaina")
    {
        lccode.Text = ("+86");
    }
    else
    {
        lccode.Text = ("Enter with country Code");
    }
}

protected void ddlstate_SelectedIndexChanged(object sender, EventArgs e)
{
    if (ddlcountry.SelectedIndex != 0)
    {
        SqlConnection add = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nectionString);
        SqlCommand addcom = new SqlCommand("CITY_SELECT_BY_SID", add);
        addcom.CommandType = CommandType.StoredProcedure;
        addcom.Parameters.AddWithValue("@SID", Convert.ToInt32(ddlstate.SelectedValue));

        SqlDataAdapter ad = new SqlDataAdapter(addcom);
        DataSet dt = new DataSet();
        ad.Fill(dt);
        ddlcity.DataSource = dt.Tables[0];
        ddlcity.DataTextField = "City_name";
        ddlcity.DataValueField = "CityID";
        ddlcity.DataBind();
        ddlcity.Items.Insert(0, "Selct your City");
    }
}
protected void ddmonth_SelectedIndexChanged(object sender, EventArgs e)
{
    int m = Int32.Parse(ddmonth.SelectedValue);
}

```

```

        if (m == 1 || m == 3 || m == 5 || m == 7 || m == 8 || m == 10 || m == 12)
            fill(31);
        else if (m == 2)
            fill(28);
        //else if (ddlyear.SelectedValue / 4)
        //    fill(29);
        else
            fill(30);

    }
    void fill(int n)
    {
        ddlob.Items.Clear();
        for (int i=1;i<=n;i++)
            ddlob.Items.Add(i.ToString());
    }

    public object convert { get; set; }
}

```

13. Result.aspx

```

<%@ Page Title="" Language="C#" MasterPageFile "~/MasterPage.master" AutoEventWireup="true"
CodeFile="Result.aspx.cs" Inherits="Result" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">






```

```
</asp:Content>
<asp:Content ID="Content3" ContentPlaceHolderID="ContentPlaceHolder2" Runat="Server">
    <asp:Image ID="Image1" runat="server" Height="386px" ImageUrl="~/pics/re.jpg"
        Width="220px" />
    &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp; <asp:Label ID="wincandidate" runat="server"
        ForeColor="White"></asp:Label>
    &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;
    <asp:Label ID="losscandidate" runat="server" ForeColor="White"></asp:Label>
</asp:Content>
```

i. Result.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
using System.Data;
using System.Timers;

public partial class Result : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Name"] == null)
        {
            Response.Redirect("login.aspx");
        }
    }
    protected void bresult_Click(object sender, EventArgs e)
    {
        SqlConnection you = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nectionString);
        SqlCommand addcom = new SqlCommand("UPLOAD_SELECT_BY_POLLING", you);
        addcom.CommandType = CommandType.StoredProcedure;
        you.Open();
        SqlDataAdapter ad = new SqlDataAdapter(addcom);
        DataSet dta = new DataSet();
        ad.Fill(dta);
        {
            lid.Text = dta.Tables[0].Rows[0]["fname"].ToString();
            lid1.Text = dta.Tables[0].Rows[0]["sname"].ToString();
            lvote.Text = dta.Tables[0].Rows[0]["fvote"].ToString();
            lvote2.Text = dta.Tables[0].Rows[0]["svote"].ToString();

            int a = Convert.ToInt32(lvote.Text.ToString());
            int b = Convert.ToInt32(lvote2.Text.ToString());
            if(a>b)
            {
                lcong.Text = "Congratulation " + lid.Text.ToString();
                wincandidate.Text = dta.Tables[0].Rows[0]["fname"].ToString();
                losscandidate.Text = dta.Tables[0].Rows[0]["sname"].ToString();
            }
            else if (a == b)
        }
```

```

        {
            lcong.Text = "Sorry " + lid.Text.ToString() + " And " + lid1.Text.ToString() + " Its a
TIE";
            wincandidate.Text = "No one";
            losscandidate.Text = "No one";
        }
        else
        {
            lcong.Text = "Congratulation " + lid1.Text.ToString();
            wincandidate.Text = dta.Tables[0].Rows[0]["sname"].ToString();
            losscandidate.Text = dta.Tables[0].Rows[0]["fname"].ToString();
        }
        you.Close();
    }
}
}
}

```

14. Timeline.aspx

```

<%@ Page Language="C#" AutoEventWireup="true" CodeFile="timeline.aspx.cs"
MasterPageFile "~/MasterPage.master" Inherits="timeline" %>
<asp:Content ID="content" runat="server" ContentPlaceHolderID="ContentPlaceHolder1">
    <div align="center" style="font-size:x-large; height: 454px;">EXIT POLL
    <table align="center"
        style="background-position: center; height: 380px; width: 534px; background-image:
url('pics/maxresdefault%20-%20Copy2.jpg'); background-repeat: no-repeat; background-attachment:scroll;
overflow: scroll;
        bgcolor="#ffffff">

        <tr>
            <td class="style17" align="center">
                <h1 align="center"> <asp:Label ID="lone" runat="server" ForeColor="White" Font-Size="X-Large"
Font-Italic="true"></asp:Label> </h1>
                <asp:Image ID="Ib1" runat="server" Height="230px" Width="195px"
                    BorderStyle="Groove"/>
            </td>
            <td class="style18">
                </td>
            <td class="style15" align="center">
                <asp:Image ID="Ib2" runat="server" Height="230px" Width="190px"
                    BorderStyle="Groove" style="margin-left: 0px" />
                <h1 align="center"> <asp:Label ID="Label1" runat="server" ForeColor="#FCC493" Font-
Size="X-Large" Font-Italic="true"></asp:Label> </h1>
            </td>
        </tr>

        </table>
        <table align="center">
            <tr>
                <td colspan="1" align="center">
                    <asp:RadioButtonList ID="RadioButtonList1" runat="server" AutoPostBack="true"
                        RepeatDirection="Horizontal" Height="16px" Width="313px">
                        <asp:ListItem Value=0></asp:ListItem>
                        <asp:ListItem Value=1></asp:ListItem>
                    </asp:RadioButtonList>
                </td>
                <td>
                    <asp:Image ID="Image1" runat="server" Height="16px" ImageUrl="~/pics/aro.png"
                        Width="84px" />
                    <asp:Button ID="Button1" Text="Vote" runat="server"
                        onclick="Button1_Click" Height="24px" Width="108px" />
                </td>
            </tr>
        </table>
    </div>
</asp:Content>

```

```

<tr>
    <td>
        <asp:Label ID="lid" runat="server"></asp:Label>
    </td>
</tr>
</table>
</div>
</asp:Content>
<asp:Content ID="contendtime" ContentPlaceHolderID="ContentPlaceHolder2" runat="server">
    <table style="background-color:White; height: 460px; width: 200px; ">
        <tr>
            <td colspan="3"><asp:Label ID="userid" runat="server"
Text='<%Session["Name"]%>'></asp:Label><asp:HyperLink ID="lmail" runat="server"
NavigateUrl="~/mail.aspx"></asp:HyperLink><br />
<br />
                <asp:LinkButton ID="logout" runat="server" Text="Logout"
onclick="logout_Click"></asp:LinkButton>
                <asp:HyperLink ID="hlresult" runat="server"
NavigateUrl="~/Result.aspx">Result</asp:HyperLink>
                <br />
                <asp:HyperLink ID="hadmin" runat="server" NavigateUrl="~/adminpanel.aspx" Text="Admin Panel"
Visible="false"></asp:HyperLink>
            </td>
        </tr>
        <tr>
            <td colspan="3" align="center">
                <asp:Label ID="lthanks" runat="server" Font-Bold="true" Font-Size="X-Large"></asp:Label>
            </td>
        </tr>
        <tr>
            <th align="center" colspan="3" style="font-size:x-large">
                <asp:Label ID="lcs" runat="server">Current status</asp:Label>
            </th></tr>
        <tr><td colspan="3" style="overflow:scroll">
            <asp:GridView ID="GridView1" runat="server" AutoGenerateColumns="False"
DataSourceID="SqlDataSource2" Width="200px">
                <Columns>
                    <asp:BoundField DataField="fname" HeaderText="1st Name"
SortExpression="fname" />
                    <asp:BoundField DataField="fvote" HeaderText="Vote" SortExpression="fvote" />
                    <asp:BoundField DataField="sname" HeaderText="2nd Name"
SortExpression="sname" />
                    <asp:BoundField DataField="svote" HeaderText="Vote" SortExpression="svote" />
                </Columns>
            </asp:GridView>
            <asp:SqlDataSource ID="SqlDataSource2" runat="server"
ConnectionString="<%$ ConnectionStrings:exitpolConnectionString %>">
                SelectCommand="FOR_GRID" Select CommandType="StoredProcedure">
            </asp:SqlDataSource>
            <asp:SqlDataSource ID="SqlDataSource1" runat="server"
ConnectionString="<%$ ConnectionStrings:exitpolConnectionString %>">
                SelectCommand="SELECT * FROM [polling]"></asp:SqlDataSource>
        </td></tr>
    </table>
</asp:Content>
<asp:Content ID="Content1" runat="server" contentplaceholderid="head">
    <style type="text/css">
        .style15
        {
            width: 200px;
            height: 283px;
        }
    </style>
</asp:Content>

```

```

.style17
{
    width: 209px;
    height: 283px;
}
.style18
{
    height: 283px;
}
.style19
{
    height: 21px;
}

```

</style>

</asp:Content>

i. Timeline.aspx.cs

```

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data.SqlClient;
using System.Data;
using System.Configuration;
using System.Configuration.Internal;
public partial class timeline : System.Web.UI.Page
{

    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Name"] == null)
        {
            Response.Redirect("login.aspx");
        }

        userid.Text = "Hello " + Session["Name"].ToString();

        if (Session["Name"].ToString() == "arjunbhati180@gmail.com" || Session["Name"].ToString() ==
"ankurgrover054@gmail.com")
        {
            hladmin.Visible = true;
        }

        SqlConnection add = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nnectionString);
        SqlCommand addcom = new SqlCommand("POLLING_COND", add);
        addcom.CommandType = CommandType.StoredProcedure;
        SqlDataAdapter ad = new SqlDataAdapter(addcom);
        DataSet dt = new DataSet();
        ad.Fill(dt);

        lone.Text = dt.Tables[0].Rows[0]["fname"].ToString();
        Label1.Text = dt.Tables[0].Rows[0]["sname"].ToString();
        RadioButtonList1.Items[0].Text = dt.Tables[0].Rows[0]["fname"].ToString();
        RadioButtonList1.Items[1].Text = dt.Tables[0].Rows[0]["sname"].ToString();
        Ib1.ImageUrl = "~/image/" + dt.Tables[0].Rows[0]["fid"].ToString() + ".jpg";
        Ib2.ImageUrl = "~/image/" + dt.Tables[0].Rows[0]["sid"].ToString() + ".jpg";
    }

    protected void Button1_Click(object sender, EventArgs e)
    {

```

```

        SqlConnection con = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nnectionString);
        string query="";
        if (RadioButtonList1.SelectedIndex == 0)
        {
            query = "update polling set fvote=fvote+1 where status='Active'";
        }
        else
        {
            query = "update polling set svote=svote+1 where status='Active'";
        }
        SqlConnection add = new
SqlConnection(System.Configuration.ConfigurationManager.ConnectionStrings["exitpolConnectionString"].Co
nnectionString);
        SqlCommand addcom = new SqlCommand(query, add);
        add.Open();
        addcom.ExecuteNonQuery();
        add.Close();
        Response.Redirect("timeline.aspx");
        Button1.Visible = false;
        Image1.Visible = false;
        lthanks.Text = "Thanks for voting";

    }

protected void logout_Click(object sender, EventArgs e)
{
    Session.Clear();
    Response.Redirect("login.aspx");
}
}

```


15. web.config

```

<?xml version="1.0"?>
<!--
For more information on how to configure your ASP.NET application, please visit
http://go.microsoft.com/fwlink/?LinkId=169433
-->
<configuration>
    <connectionStrings>
        <add name="exitpolConnectionString" connectionString='Data
Source=.\SQLEXPRESS;AttachDbFilename="D:\My Project\exitpol.mdf";Integrated Security=True;Connect
Timeout=30;User Instance=True'
            providerName="System.Data.SqlClient" />
    </connectionStrings>
    <system.web>
        <compilation debug="true" strict="false" explicit="true" targetFramework="4.0"/>
    </system.web>
</configuration>

```

16. Database (exitpoll.mdf)

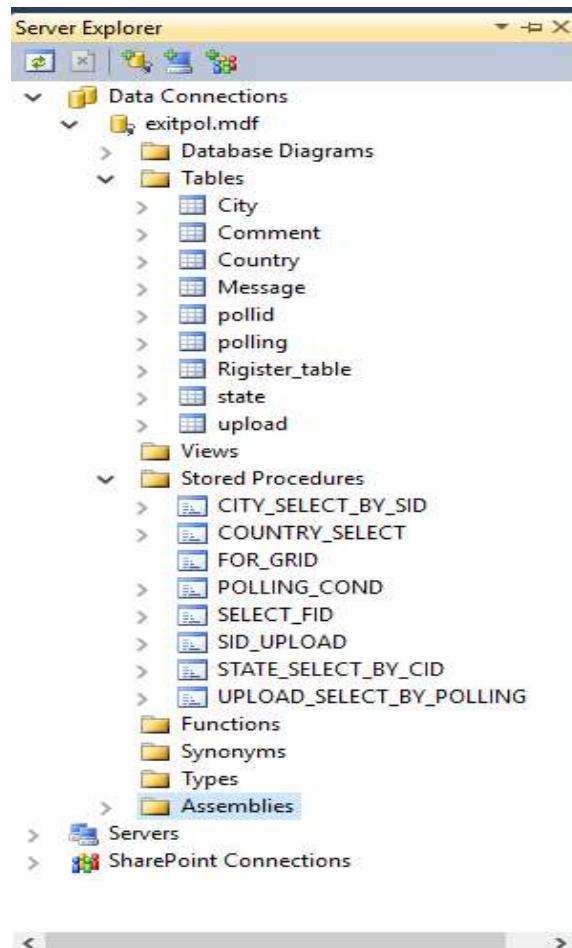

a. Tables

i. City

Column Name	Data Type	Allow Nulls
CityID	numeric(18, 0)	<input type="checkbox"/>
city_name	varchar(50)	<input type="checkbox"/>
SID	numeric(18, 0)	<input type="checkbox"/>
		<input type="checkbox"/>

ii. Comments

Column Name	Data Type	Allow Nulls
ID	numeric(18, 0)	<input type="checkbox"/>
Name	varchar(50)	<input type="checkbox"/>
Comment	varchar(MAX)	<input type="checkbox"/>
		<input type="checkbox"/>

iii. Country

Column Name	Data Type	Allow Nulls
CID	varchar(50)	<input type="checkbox"/>
Country_name	varchar(50)	<input type="checkbox"/>
		<input type="checkbox"/>

iv. Message

Column Name	Data Type	Allow Nulls
mainto	varchar(50)	<input type="checkbox"/>
maincc	varchar(50)	<input checked="" type="checkbox"/>
message	varchar(MAX)	<input type="checkbox"/>
img1name	varchar(50)	<input checked="" type="checkbox"/>
img	image	<input checked="" type="checkbox"/>
img2name	varchar(50)	<input checked="" type="checkbox"/>
img2	image	<input checked="" type="checkbox"/>
session	varchar(50)	<input type="checkbox"/>
		<input type="checkbox"/>

v. Pollid

Column Name	Data Type	Allow Nulls
ID	int	<input type="checkbox"/>
pid	int	<input type="checkbox"/>
polledby	varchar(50)	<input type="checkbox"/>
		<input type="checkbox"/>

vi. Polling

Column Name	Data Type	Allow Nulls
pid	int	<input type="checkbox"/>
fid	int	<input type="checkbox"/>
fvote	int	<input type="checkbox"/>
sid	int	<input type="checkbox"/>
svote	int	<input type="checkbox"/>
status	varchar(50)	<input type="checkbox"/>
		<input type="checkbox"/>

vii. Register

Column Name	Data Type	Allow Nulls
► fname	varchar(50)	<input type="checkbox"/>
Iname	varchar(50)	<input type="checkbox"/>
email	varchar(50)	<input type="checkbox"/>
gander	varchar(50)	<input type="checkbox"/>
bodate	numeric(18, 0)	<input type="checkbox"/>
dobmonth	varchar(50)	<input type="checkbox"/>
dobyear	varchar(50)	<input type="checkbox"/>
address	varchar(MAX)	<input type="checkbox"/>
pincode	varchar(50)	<input type="checkbox"/>
countey	varchar(50)	<input type="checkbox"/>
state	varchar(50)	<input type="checkbox"/>
city	varchar(50)	<input type="checkbox"/>
phone	numeric(18, 0)	<input type="checkbox"/>
password	varchar(50)	<input type="checkbox"/>
		<input type="checkbox"/>

viii. State

Column Name	Data Type	Allow Nulls
SID	numeric(18, 0)	<input type="checkbox"/>
State_Name	varchar(50)	<input type="checkbox"/>
CID	varchar(50)	<input type="checkbox"/>
		<input type="checkbox"/>

ix. Upload

Column Name	Data Type	Allow Nulls
ID	int	<input type="checkbox"/>
Name	varchar(50)	<input type="checkbox"/>
path	image	<input type="checkbox"/>
		<input type="checkbox"/>

b. Store Procedures

i. City_SELECT_BY_SID

```
dbo.CITY_SELECT...JECT\EXITPOL.MDF) X
ALTER PROCEDURE dbo.CITY_SELECT_BY_SID
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
@SID AS INT
AS
BEGIN
SELECT * FROM City WHERE SID=@SID
/* SET NOCOUNT ON */
END
```

ii. COUNTRY_SELECT

```
dbo.FOR_GRID: St...JECT\EXITPOL.MDF) X
ALTER PROCEDURE dbo.FOR_GRID
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
AS
BEGIN
SELECT fvote, svote,a.name as "fname", b.name as "sname" FROM POLLING p,upload a, upload b WHERE fid=a.id and sid=b.id
END
/* SET NOCOUNT ON */
RETURN
```

iii. FOR_GRID

```
ALTER PROCEDURE dbo.FOR_GRID
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
AS
BEGIN
SELECT fvote, svote,a.name as "fname", b.name as "sname" FROM POLLING p,upload a, upload b WHERE fid=a.id and sid=b.id
END
/* SET NOCOUNT ON */
RETURN
```

iv. POLLING_COND

```
ALTER PROCEDURE dbo.POLLING_COND
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
AS
BEGIN
SELECT pid,fid, sid,a.name as "fname", b.name as "sname" FROM POLLING p,upload a, upload b WHERE fid=a.id and sid=b.id and status='Active'
END
/* SET NOCOUNT ON */
RETURN
```

v. SELECT_FID

```
dbo.SELECT_FID: St...JECT\EXITPOL.MDF) X
ALTER PROCEDURE dbo.SELECT_FID
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
AS
BEGIN
SELECT * FROM upload
END
/* SET NOCOUNT ON */
RETURN
```

vi. SID_UPLOAD

```
dbo.SID_UPLOAD...JECT\EXTPOL.MDF) X
ALTER PROCEDURE dbo.SID_UPLOAD
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
AS
BEGIN
SELECT fvote, svote,a.name as "fname", b.name as "sname" FROM POLLING p,upload a, upload b WHERE fid=a.id and sid=b.id and status='Active'
END
/* SET NOCOUNT ON */
RETURN
```

vii. STATE_SELECT_BY_CID

```
dbo.STATE_SELECT...ECT\EXTPOL.MDF) X
ALTER PROCEDURE dbo.STATE_SELECT_BY_CID
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/@CID AS INT
AS
BEGIN
SELECT * FROM state WHERE CID=@CID
/* SET NOCOUNT ON */
END
```

viii. UPLOAD_SELECT_BY_POLLING

```
dbo.UPLOAD_SELE...ECT\EXTPOL.MDF) X dbo.STATE_SELECT...ECT\EXTPOL.MDF)
ALTER PROCEDURE dbo.UPLOAD_SELECT_BY_POLLING
/*
(
@parameter1 int = 5,
@parameter2 datatype OUTPUT
)
*/
AS
BEGIN
SELECT *,a.name as "fname", b.name as "sname" FROM POLLING p,upload a, upload b WHERE fid=a.id and sid=b.id and status='Active'
END
/* SET NOCOUNT ON */
RETURN
```

21. Output

"Waiting for response fr X + V localhost:49677/My%20Project/login.aspx

Exit Poll



Login

User Name

Password

Remember me

First time here ??



Cast Your Vote

Type here to search 03:37 PM 10-07-2018

"Waiting for response fr X + V localhost:49677/My%20Project/admin.aspx

Exit Poll



Admin Log In

Arjun verify yourself

ARJUN

ANKUR

8972

arjunbhati180@gmail.com



Type here to search 03:38 PM 10-07-2018

"Waiting for response fr X +

localhost:49677/My%20Project/admin.aspx



Exit Poll



Admin Log In

Ankur verify yourself

ARJUN

ANKUR

3145

[Please Verify Yourself](#)



ankurgrover054@gmail.com

Windows Type here to search 03:38 PM 10-07-2018

"Waiting for response fr X +

localhost:49677/My%20Project/adminpanel.aspx



Welcome to Admin Panel

[Create Poll](#)

[Insert Candidate](#)

[Result](#)


[Message](#)



MAHARAJA GANAGA SINGH UNIVERSITY,BIKANER


©2018 Exit Poll (Email: nallamrajan@gmail.com)

Windows Type here to search 03:39 PM 10-07-2018

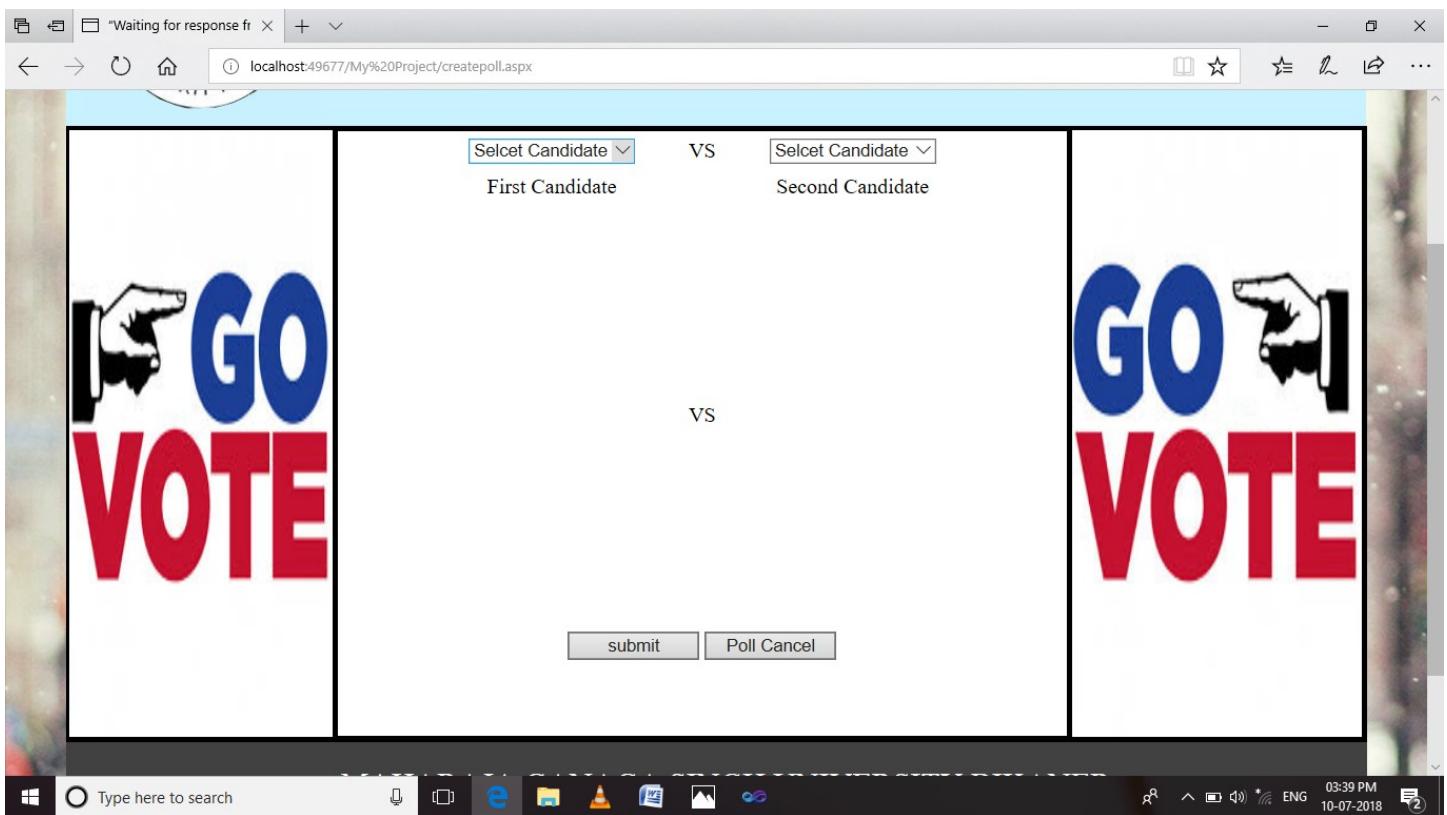

The screenshot shows a web application for inserting a new candidate. The title bar says "Hello Admin arjunbhati180@gmail.com". The main content area has a heading "Insert Data". It contains fields for "ID for Candidate" (input type="text"), "Name of Candidate" (input type="text"), and "Upload Candidate Image" (input type="file" with a "Browse..." button). Below these is an "Insert" button. To the right, there is a sidebar titled "Previous ID's" containing a table with 14 rows of candidate data. The table has columns for "ID" and "Name". The data includes names like Arjun, Karan, me, Arjun Bhati, Bhawana, Pari shahi, Ankur, surya, Jitendra, arjun, Arjun Bhati, ankur, dasfdf, and madhu.

ID	Name
1	ARJUN
2	KARAN
3	me
4	Arjun Bhati
5	Bhawana
6	Pari shahi
7	Ankur
8	surya
9	Jitendra
10	arjun
11	Arjun Bhati
12	ankur
13	dasfdf
14	madhu

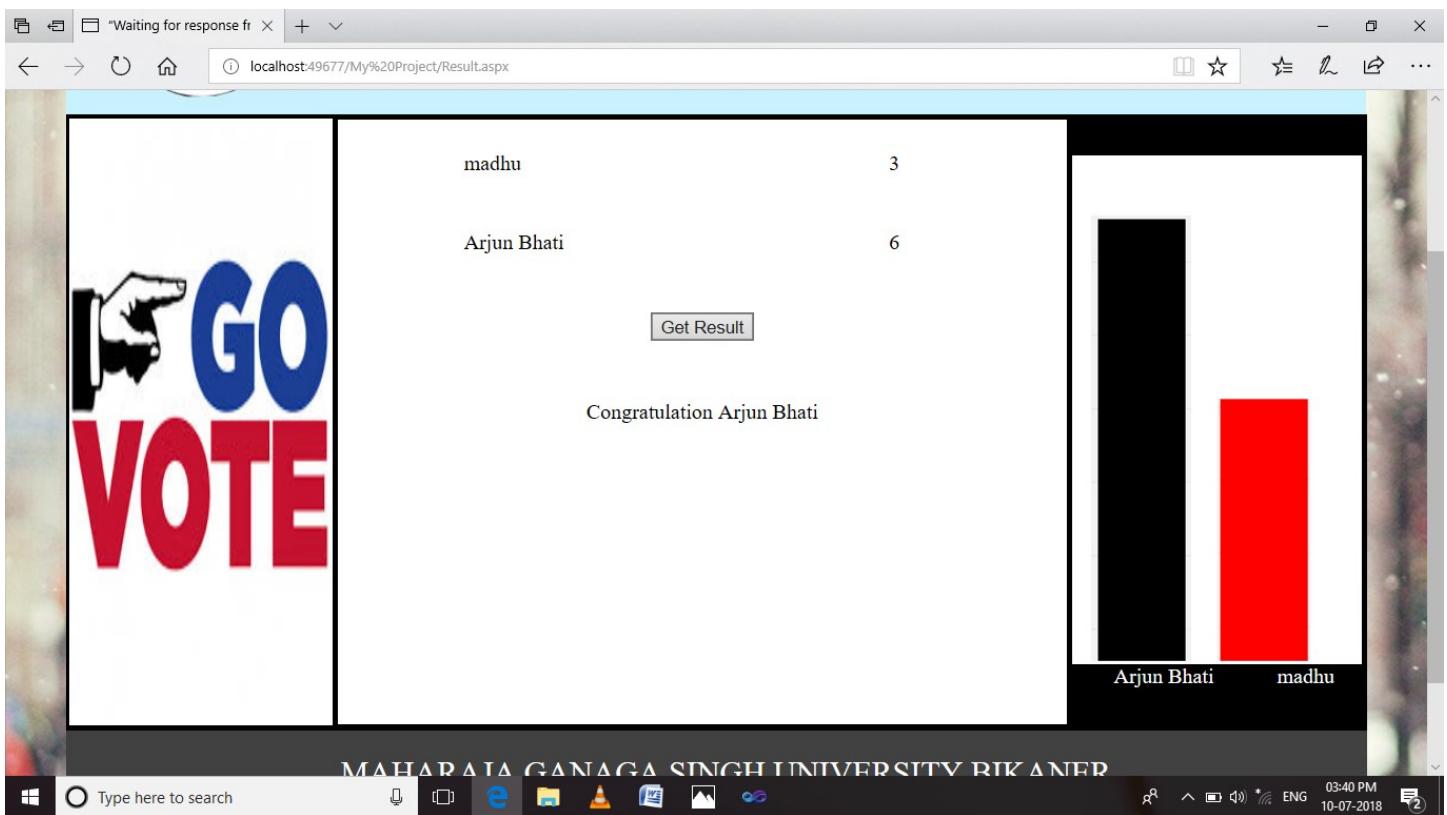

A screenshot of a web browser window titled "Waiting for response fr" showing the URL "localhost:49677/My%20Project/mail.aspx". The page features a header "MAHARASHTRA GANAGA SINGH UNIVERSITY RIK ANERI" and "EXIT POLL" branding. The main content is a form titled "Message to Admin for create Exit Poll" addressed to "Hello arjunbhati180@gmail.com". The form fields include:

- To: Choose a Admin
- Cc: Choose a Admin
- Message: Enter Your Message
- First Candidate Image: Enter First Candidate Name (with a Browse... button)
- Second Candidate Image: Enter Second Candidate Name (with a Browse... button)

At the bottom is a "Send Message" button. To the right of the form is a cartoon illustration of two people talking, with the "Storyblocks" logo.

"Waiting for response fr" +

localhost:49677/My%20Project/Timeline.aspx

EXIT POLL

EXIT POLL

EXIT POLL

Ankur

Arjun Bhati

Hello arjunbhati180@gmail.com

[Logout](#) [Result](#) [Admin Panel](#)

Current status

1st Name	Vote	2nd Name	Vote
ARJUN	9	Ankur	8
madhu	3	Arjun Bhati	6
Ankur	0	Arjun Bhati	0

03:48 PM 10-07-2018

"Waiting for response fr" +

localhost:49677/My%20Project/message.aspx

EXIT POLL

EXIT POLL

TO	CC	Message	From
Arjun	Ankur	hy	exitpoll@gmail.com
Arjun	Ankur	hy	exitpoll@gmail.com
Ankur	Ankur	fgeffdg	exitpoll@gmail.com
Ankur	Ankur	fgeffdg	exitpoll@gmail.com
Ankur	Arjun	lo	exitpoll@gmail.com
Ankur	Arjun	lo	exitpoll@gmail.com
Ankur	Ankur	hy	exitpoll@gmail.com
Ankur	Ankur	hy	exitpoll@gmail.com
Ankur	Arjun	artjun	exitpoll@gmail.com
Ankur	Arjun	artjun	exitpoll@gmail.com

Hey

Admin

You Have Some Message's

03:57 PM 10-07-2018



Contanct Us

Owner's Name: Ankur Growar & Arjun Bhati

Email:

Ankur Growar: ankurgrover054@gmail.com

Arjun Bhati: arjunbhati180@gmail.com

Call & Whats app

Ankur Growar: 8302461063

Arjun Bhati: [8823908641](tel:8823908641)

Design, Developing, Idea & Coding by

Ankur Growar & Arjun Bhati

Like & Follow us on 

Contact us on 

Like & Follow us on 

Contact us on 

MAHARAJA GANAGA SINGH UNIVERSITY,BIKANER



Forget your Password

Don't worry We help for forget password

Gmail

OR

Pincode No

03:46 PM 10-07-2018

