


Canonical BFS KG-RAG vs HRG-guided executable retrieval



Baseline KG-RAG

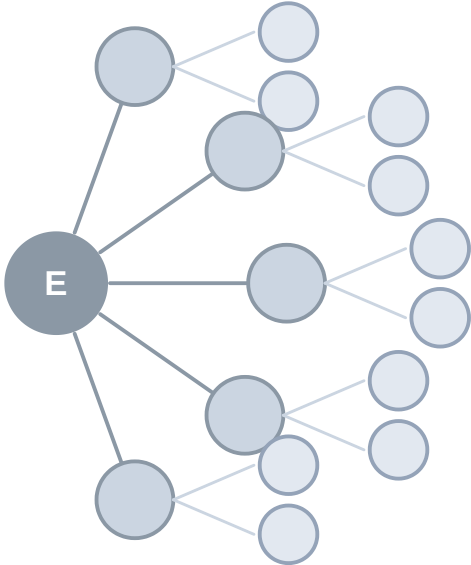

Failure mode

Token explosion
Answer may be present but buried
No explicit verified path

This work

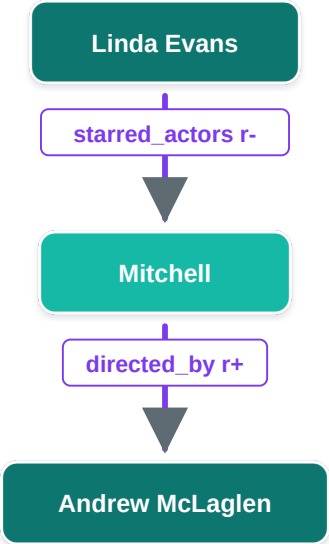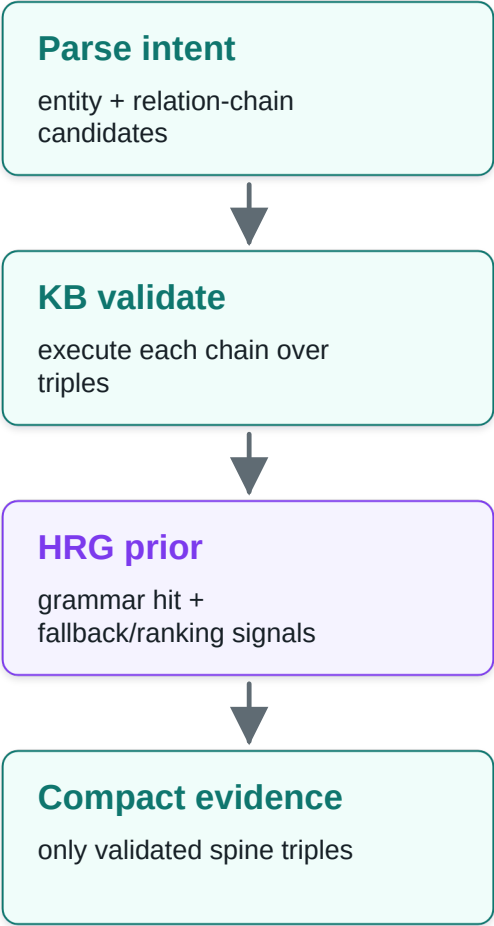

What is added?

Per-hop validation
Printable evidence path
Grammar-aware diagnostics

BFS maximizes local coverage; HRG-guided retrieval constrains the context to executable, inspectable evidence.