

Example retrieval: BFS neighborhood vs HRG-guided evidence


Question: which person directed the movies starred by [John Krasinski]

Baseline-BFS context

Collects all nearby facts under BFS depth

86 edges

1092 ctx tokens

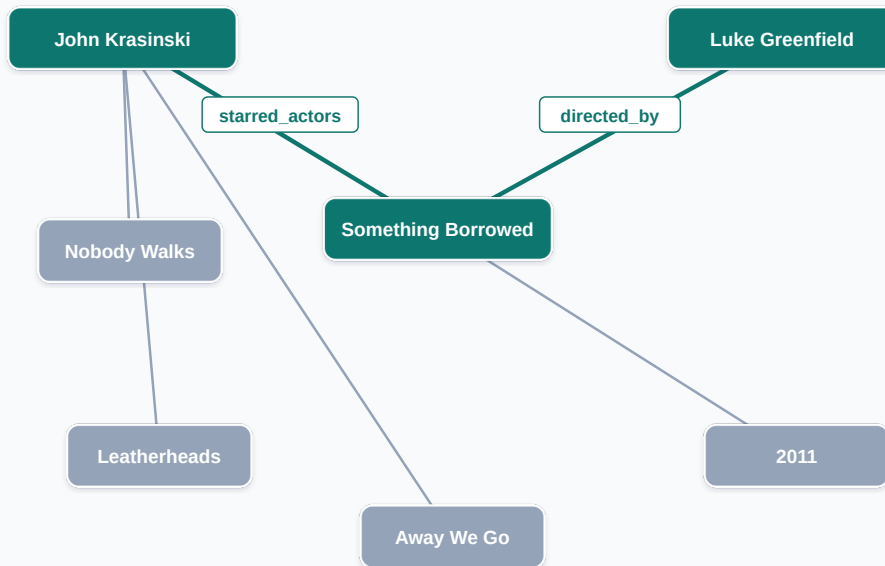


HRG-Proposed context

Keeps compact evidence triples selected by KB + HRG signals

11 edges

257 ctx tokens

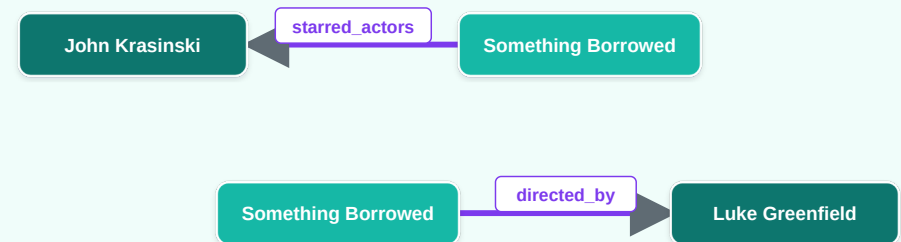

Printable structure

selected_entity = John Krasinski

relation labels = starred_actors, directed_by

answers from directed_by evidence

Same question, compact context, explicit KB triples