


All Submissions

Accepted 102 / 102 testcases passed

yousab21 submitted at Feb 23, 2026 18:28

Editorial Solution

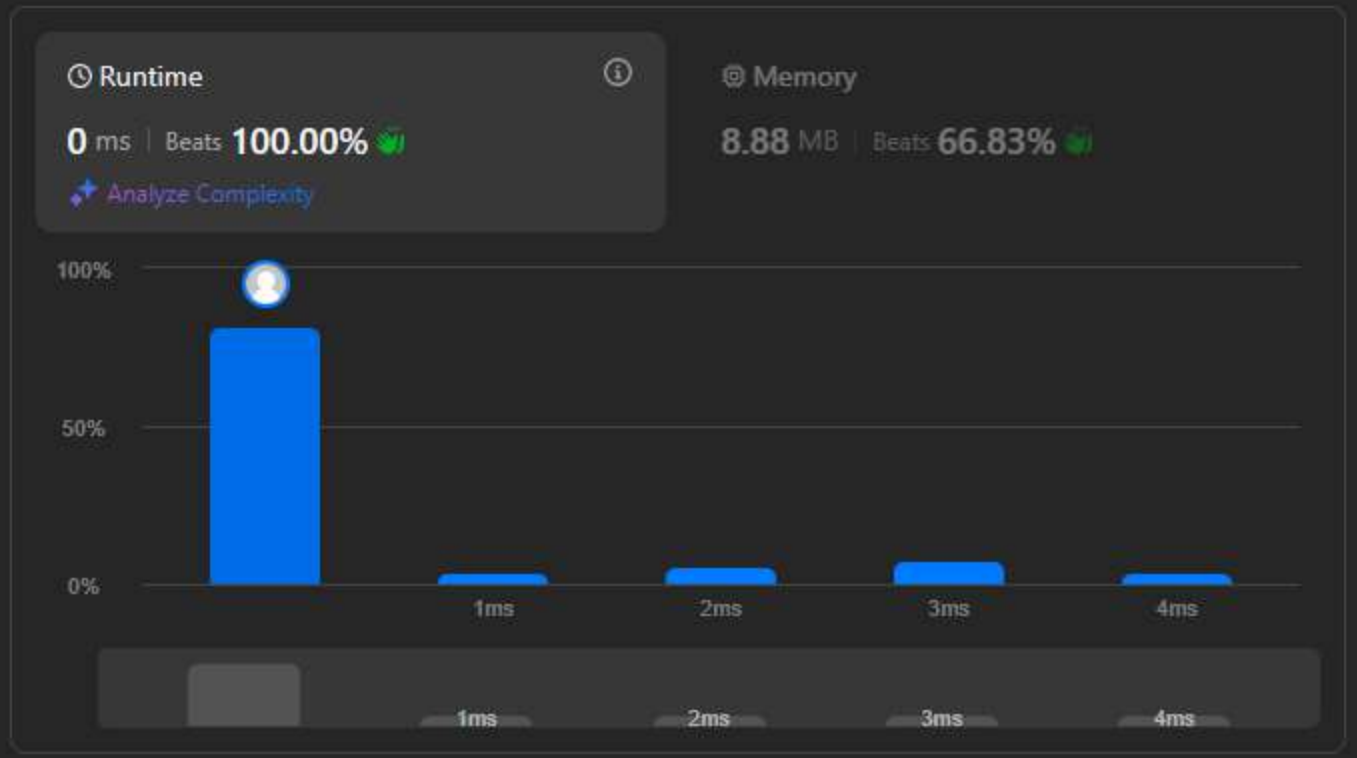

Code C++

```
1 #include <vector>
2 #include<string>
3 class Stack{
4     private:
5     vector<char> stack;
6     int top = -1;
7
8     public:
```

View more


- More challenges
- 22. Generate Parentheses
 - 301. Remove Invalid Parentheses
 - 2337. Move Pieces to Obtain a String

Write your notes here

```
1 #include <vector>
2 #include<string>
3 class Stack{
4     private:
5     vector<char> stack;
6     int top = -1;
7
8     public:
9     bool isEmpty(){
10         return stack.empty();
11     }
12     void push(char element){
13         stack.push_back(element);
14         top++;
15     }
16     void pop(){
17         if(isEmpty()){
18             cout << "stack is empty";
19             return;
20         }
21         stack.pop_back();
22         top--;
23     }
24     char getTop(){
25         if (isEmpty()){return 0;}
26         return stack[top];
27     }
28 };
29 class Solution {
30 public:
31     bool isValid(string s) {
32         Stack stack;
33         for(int i = 0; i < s.size();i++){
34             switch (s[i]){
35                 case '(':
36                     stack.push('(');
37                     break;
38                 case '{':
39                     stack.push('{');
40                     break;
41                 case '[':
42                     stack.push('[');
43                     break;
44                 case ')':
45                     if (stack.getTop() == '('){stack.pop();}
46                     else{stack.push(')');}
47                     break;
48                 case '}':
49                     if (stack.getTop() == '{'){stack.pop();}
50                     else{stack.push('}');}
51                     break;
52                 case ']':
53                     if (stack.getTop() == '['){stack.pop();}
54                     else{stack.push(']');}
55                     break;
56             }
57         }
58         return stack.empty();
59     }
60 };
61 
```

Accepted 102 / 102 testcases passed
yousab21 submitted at Feb 23, 2026 18:28

Editorial Solution

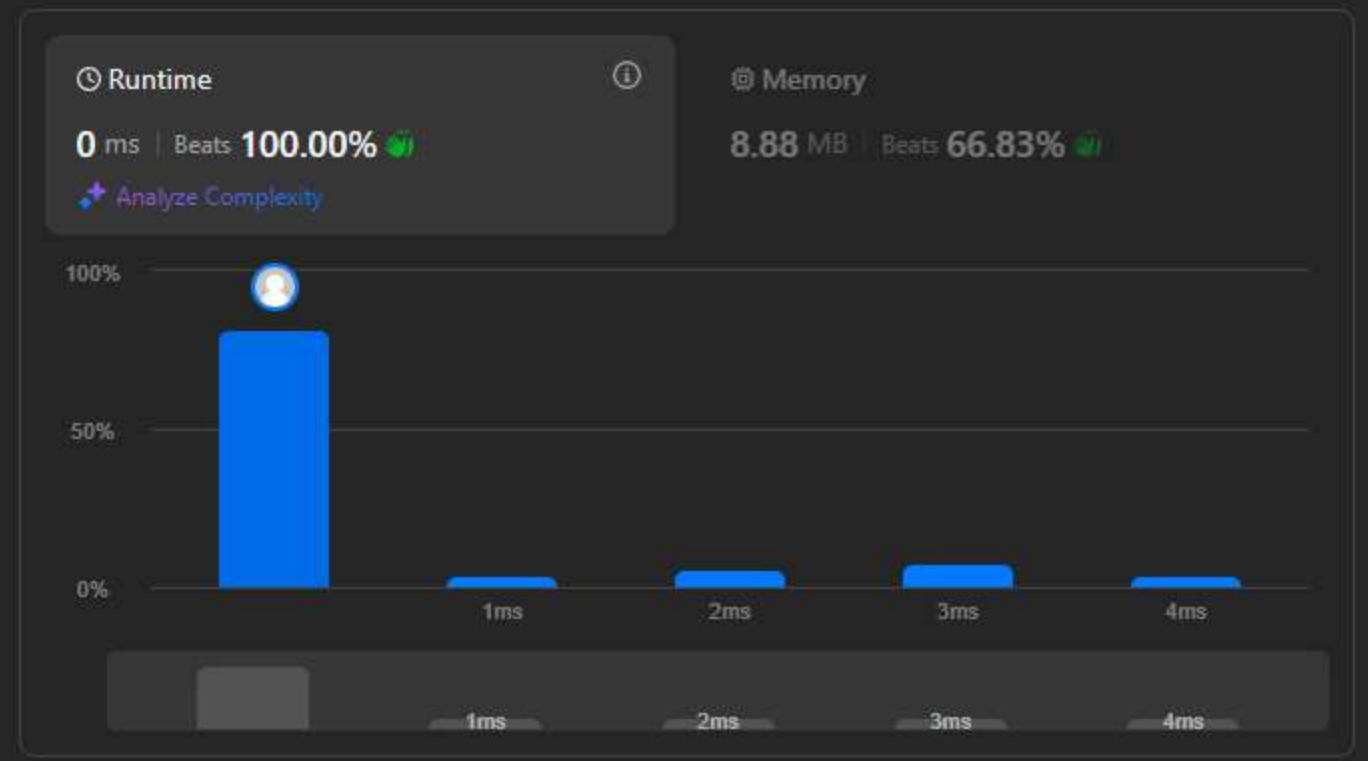

Code | C++

```
1 #include <vector>
2 #include<string>
3 class Stack{
4     private:
5         vector<char> stack;
6         int top = -1;
7     public:
```

View more

More challenges

- 22. Generate Parentheses
- 301. Remove Invalid Parentheses
- 2337. Move Pieces to Obtain a String

Write your notes here

```
19         return;
20     }
21     stack.pop_back();
22     top--;
23 }
24 char getTop(){
25     if (isEmpty()){return 0;}
26     return stack[top];
27 }
28 };
29 class Solution {
30 public:
31     bool isValid(string s) {
32         Stack stack;
33         for(int i = 0; i < s.size();i++){
34             switch (s[i]){
35                 case '(':
36                     stack.push('(');
37                     break;
38                 case '{':
39                     stack.push('{');
40                     break;
41                 case '[':
42                     stack.push('[');
43                     break;
44                 case ')':
45                     if (stack.getTop() == '('){stack.pop();}
46                     else{stack.push(')');}
47                     break;
48                 case '}':
49                     if (stack.getTop() == '{'){stack.pop();}
50                     else{stack.push('}');}
51                     break;
52                 case ']':
53                     if (stack.getTop() == '['){stack.pop();}
54                     else{stack.push(']');}
55                     break;
56                 default:
57                     continue;
58             }
59         }
60         if(stack.isEmpty()){return true;}
61         else {return false;}
62     }
63 };
```


DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted 33 / 33 testcases passed
yousab21 submitted at Feb 23, 2026 19:29

EditorialSolution

Runtime

0 ms | Beats 100.00%

Analyze Complexity

Memory

23.26 MB | Beats 83.24%



Test Case	Runtime (ms)
1	~25
2	~5
3	~6
4	~18
5	~15
6	~5
7	~4
8	~7
9	~3
10	~1

Code | C++

```
1 //here to get the minimaim value with o(n) which means i cant just loop over
2 // i used another helper stack to track the values as elements came in and o
3 //i just copied the calss stack i designed for the last problem
4 class helpStack{
5     private:
6         vector<int> stack;
7         int top = -1;
8
```

View more

More challenges

239. Sliding Window Maximum

716. Max Stack

Write your notes here

Select related tags

0/5

Code

C++ v Auto

```
1 //here to get the minimaim value with o(1) which means i cant just loop over the elements
2 // i used another helper stack to track the values as elements came in and out
3 //i just copied the calss stack i designed for the last problem
4 class helpStack{
5     private:
6         vector<int> stack;
7         int top = -1;
8
9     public:
10    bool isEmpty(){
11        return stack.empty();
12    }
13    void push(int element){
14        stack.push_back(element);
15        top++;
16    }
17    void pop(){
18        if(isEmpty()){
19            cout << "stack is empty";
20            return;
21        }
22        stack.pop_back();
23        top--;
24    }
25    int getTop(){
26        if (isEmpty()){return 0;}
27        return stack[top];
28    }
29 };
30 class MinStack {
31     private:
32         helpStack min;
33         vector<int> stack;
34         int topIndex = -1;
35     public:
36         MinStack() {
37
38         }
39
40     //it took me about 20 mins to solve a bug here:
41     //in the helper stack scince i copied it from the last problem
42     //with the stack is empty calling getTop() just retuens a 0 which was ok in the last problem
43     //here scince we are dealing with numbers it is obviosly bad
44     //the solotion was i have to switch the order of the OR statment as the compiler
45     //dosnt run the second part if the first one was true so min.getTop() never gets run if the stack is empty
46     void push(int val) {
47         stack.push_back(val);
48         topIndex++;
49         if(min.isEmpty() || val <= min.getTop() ){
50
51         }
52     }
53 }
```

Testcase

Test Result

Saving...

Ln 1, Col 42

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted33 / 33 testcases passed

EditorialSolution

yousab21 submitted at Feb 23, 2026 19:29


🕒 Runtime

0 ms | Beats 100.00%

Analyze Complexity

💾 Memory

23.26 MB | Beats 83.24%

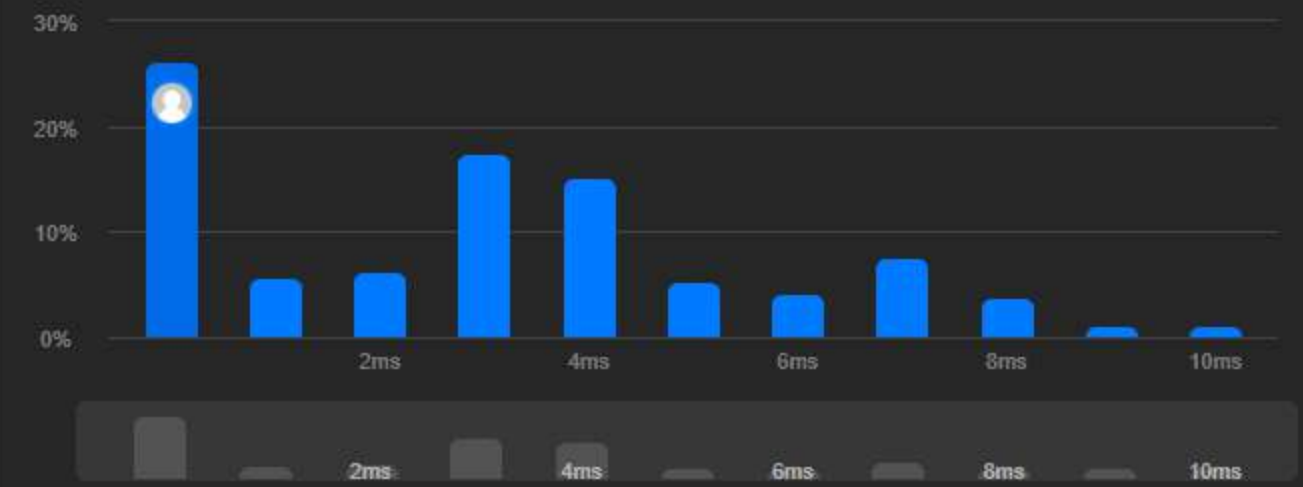

CodeC++

```
1 //here to get the minimaim value with o(n) which means i cant just loop over
2 // i used another helper stack to track the values as elements came in and o
3 //i just copied the calss stack i designed for the last problem
4 class helpStack{
5     private:
6     vector<int> stack;
7     int top = -1;
8 }
```

View more

More challenges

239. Sliding Window Maximum716. Max Stack

Write your notes here

Select related tags0/5

Code

C++Auto

```
36 //MinStack, {
37
38 }
39
40 //it took me about 20 mins to solve a bug here:
41 //in the helper stack scince i copied it from the last problem
42 //with the stack is empty calling getTop() just retuens a 0 which was ok in the last problem
43 //here scince we are dealing with numbers it is obviosly bad
44 //the solotion was i have to switch the order of the OR statment as the compiler
45 //dosnt run the second part if the first one was true so min.getTop() never gets run if the stack is empty
46 void push(int val) {
47     stack.push_back(val);
48     topIndex++;
49     if(min.isEmpty() || val <= min.getTop() ){
50         min.push(val);
51     }
52 }
53
54 void pop() {
55     //no need to check if the stack is empty as the probelem Constraints
56     //say that this will always be called on a nonempty stack
57     if(top() == min.getTop()){
58         min.pop();
59     }
60     stack.pop_back();
61     topIndex--;
62 }
63
64 int top() {
65     //same here as pop()
66     return stack[topIndex];
67 }
68
69 int getMin() {
70     return min.getTop();
71 }
72 };
73
74 /**
75  * Your MinStack object will be instantiated and called as such:
76  * MinStack* obj = new MinStack();
77  * obj->push(val);
78  * obj->pop();
79  * int param_3 = obj->top();
80  * int param_4 = obj->getMin();
81  */
```

Saved

Ln 3, Col 66

TestcaseTest Result

 **Solution**

①



» View more


- 2454. Next Greater Element IV

C++   Auto

Saved

Ln 34, Col 51

Testcase | Test Result

[2 Offers Ending](#)
Courses ▾

Tutorials ▾

Interview Prep ▾

[Problem](#)[Editorial](#)[Submissions](#)[Comments](#)

Output Window

[Compilation Results](#)[Custom Input](#)[Y.O.G.I. \(AI Bot\)](#)

Problem Solved Successfully

[Suggest Feedback](#)

Test Cases Passed

300 / 300

Attempts : Correct / Total

1 / 1Accuracy : **100%**

Points Scored

2 / 2Your Total Score: **2**

Time Taken

0.01

Solve Next

[Reverse Words](#)[Reverse alternate words](#)[Reversing the equation](#)

Stay Ahead With:

**Build 21 Projects in 21 Days**

Build real-world ML, Deep Learning & Gen AI projects

[Register Now](#)

C++ (17) ▾

[Start Timer](#) 

```
1 class Stack{
2     private:
3     vector<char> stack;
4     int top = -1;
5
6     public:
7     bool isEmpty(){
8         return stack.empty();
9     }
10    void push(char element){
11        stack.push_back(element);
12        top++;
13    }
14    void pop(){
15        if(isEmpty()){
16            cout << "stack is empty";
17            return;
18        }
19        stack.pop_back();
20        top--;
21    }
22    char getTop(){
23        if (isEmpty()){return 0;}
24        return stack[top];
25    }
26 };
27
28 class Solution {
29     public:
30     string reverse(const string& S) {
31         Stack stack;
32         for(int i = 0 ; i < S.size();i++){
33             stack.push(S[i]);
34         }
35
36         string ans;
37         while(!stack.isEmpty()){
38             ans = ans + stack.getTop();
39             stack.pop();
40         }
41         return ans;
42     }
43 };
```

[Custom Input](#)[Compile & Run](#)[Submit](#)

2 Offers Ending

Courses

Tutorials

Interview Prep

Search...

Y

Problem

Editorial

Submissions

Comments

Output Window

Compilation Results

Custom Input

Y.O.G.I. (AI Bot)

Problem Solved Successfully

Test Cases Passed

1115 / 1115

Attempts : Correct / Total

1 / 1

Accuracy : 100%

Points Scored

2 / 2

Your Total Score: 4

Time Taken

0.09

Suggest Feedback

Solve Next

Mountain Subarray Problem

Java ArrayList Operation

Even and odd elements at even and odd positions

Stay Ahead With:

Build 21 Projects in 21 Days

Build real-world ML, Deep Learning & Gen AI projects

Register Now

C++ (17)

Start Timer

```
1 class Stack{
2     private:
3     vector<int> stack;
4     int top = -1;
5
6     public:
7     bool isEmpty(){
8         return stack.empty();
9     }
10    void push(int element){
11        stack.push_back(element);
12        top++;
13    }
14    void pop(){
15        if(isEmpty()){
16            cout << "stack is empty";
17            return;
18        }
19        stack.pop_back();
20        top--;
21    }
22    int getTop(){
23        if (isEmpty()){return 0;}
24        return stack[top];
25    }
26 };
27
28 class Solution {
29     public:
30     void reverseArray(vector<int> &arr) {
31         Stack stack;
32         for(int i = 0 ; i < arr.size();i++){
33             stack.push(arr[i]);
34         }
35
36         vector<int> ans;
37         while(!stack.isEmpty()){
38             ans.push_back(stack.getTop());
39             stack.pop();
40         }
41         arr = ans;
42     }
43
44 };
```

Custom Input

Compile & Run

Submit