

Prefix Sum

DescriptionAcceptedEditorialSolutionsSubmissions

All Submissions

Accepted15 / 15 testcases passed

yousab21 submitted at Apr 20, 2026 19:57

Analysis


Solution

Runtime

0 msBeats 100.00%

Memory

23.98 MBBeats 61.35%

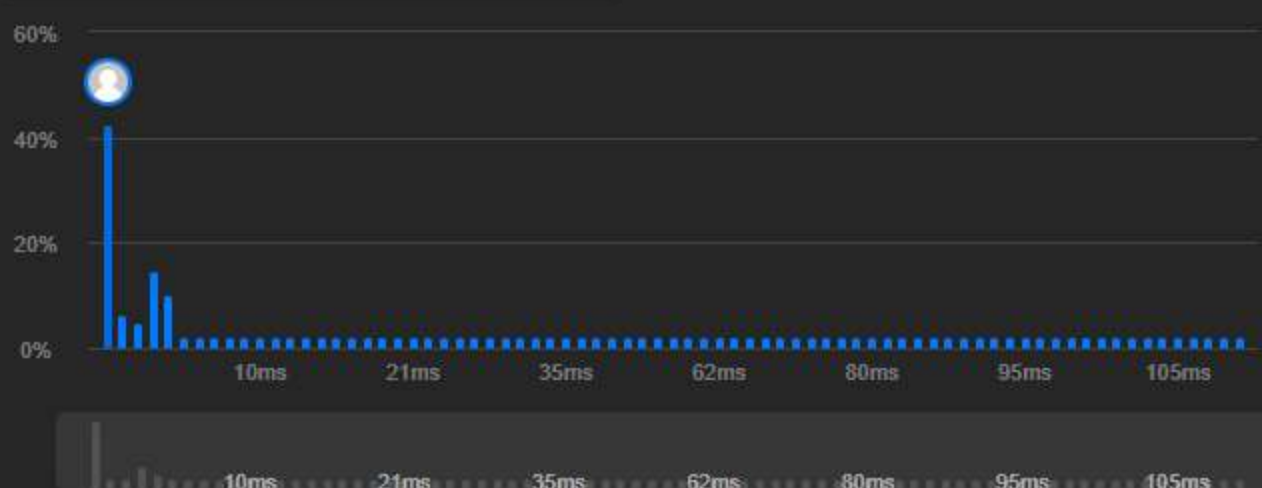

CodeC++

```
1 //by the book "ues prefix technic here" problem
2
3 class NumArray {
4 public:
5     vector<int> prefix;
6
7     //insted of copying the i just handel the prefix logic in the constructo
8     //this is fine cause i dont need to interact with the original array aga
```

View more

More challenges

307. Range Sum Query - Mutable

325. Maximum Size Subarray Sum Equals k

3427. Sum of Variable Length Subarrays

Write your notes here

Select related tags0/5

Code

SubmitCtrlEnter

C++Auto

```
34 //by the book "ues prefix technic here" problem
33
32 class NumArray {
31 public:
30     vector<int> prefix;
29
28     //insted of copying the i just handel the prefix logic in the constructor
27     //this is fine cause i dont need to interact with the original array again
26     NumArray(vector<int>& nums) {
25         //i just make the first index manually to avoid prefix[-1]
24         prefix.push_back(nums[0]);
23
22         // then i use standard prefix logic
21         for(int i = 1; i < nums.size() ;i++ ){
20             prefix.push_back(prefix[i-1] + nums[i]);
19         }
18     }
17
16     int sumRange(int left, int right) {
15         //iam using a 0 index prefix array so i need to handle this edge case manually
14         if (left == 0){
13             return prefix[right];
12         }
11
10         //the resone i do prefix[left-1] is because he wants to include the left element in the sum
9         // so i substract the sum of elemetnts before it
8         return prefix[right] - prefix[left-1] ;
7     }
6 };
5
4 /**
3  * Your NumArray object will be instantiated and called as such:
2  * NumArray* obj = new NumArray(nums);
1  * int param_1 = obj->sumRange(left,right);
35 */
```

Saved

Ln 35, Col 4

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1

Input

["NumArray", "sumRange", "sumRange", "sumRange"]

Description

Accepted

Editorial

Solutions

Submissions

← All Submissions

🔗

Accepted 747 / 747 testcases passed

🔍 Analysis

📄 Solution


👤 yousab21 submitted at Apr 20, 2026 20:24

🕒 Runtime

0 ms | Beats 100.00%

💾 Memory

37.25 MB | Beats 10.13%

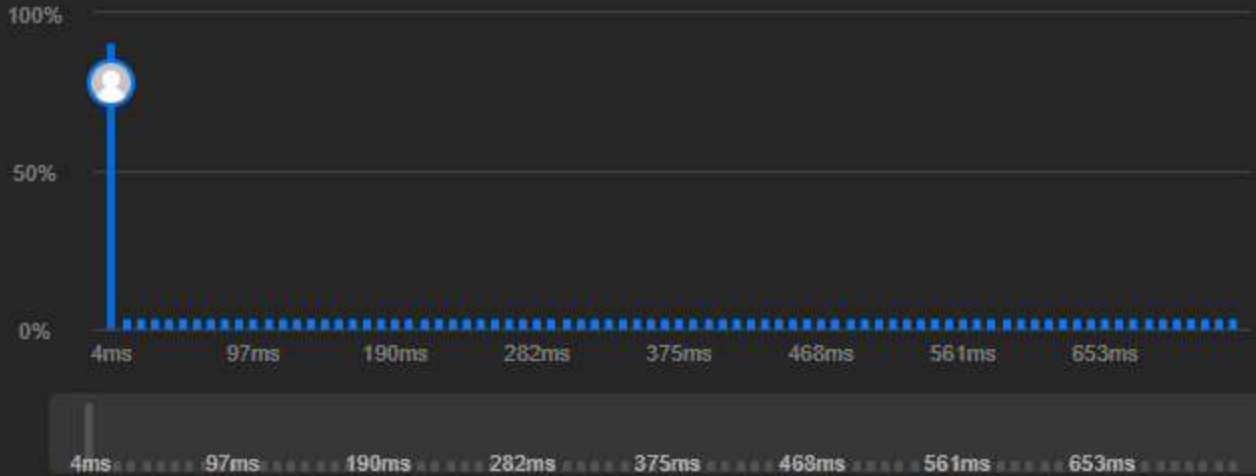

Code

C++

```
1 class Solution {
2 public:
3     int pivotIndex(vector<int>& nums) {
4         // here i will map prefix to be 1-index and will put 0 in the 0-th i
5         //i will explain why i do this in a bit
6         vector<int> prefix = {0};
7
8         //here i make the i-indexed prefix array
```

📄 View more

More challenges

• 560. Subarray Sum Equals K

• 2270. Number of Ways to Split Array

• 2574. Left and Right Sum Differences

Write your notes here

Select related tags 0/5

</> Code

C++

🔒 Auto

☰

🔖

🔗

🔄

🔗

```
21 class Solution {
20 public:
19     int pivotIndex(vector<int>& nums) {
18         // here i will map prefix to be 1-index and will put 0 in the 0-th index
17         //i will explain why i do this in a bit
16         vector<int> prefix = {0};
15
14         //here i make the i-indexed prefix array
13         for(int i = 0; i < nums.size() ; i++){
12             prefix.push_back(nums[i] + prefix[i]);
11         }
10
9
8         for(int i = 1; i < prefix.size() ; i++){
7             //this is the reason why i added a 0 in the beggining of the prifix array
6             //the way i find a pivot is by comparing the sum of elemets befor it (the prefix of the elemet before it)
5             //and the sum of elements after it (the prefix of the last elemt - the prefix of the elemet iam on)
4             //adding 0 in the begging handels an excption were the pivot of the first element and if the prefix ww as
3             //0-indexed my code wil try to access prefix[-1] in such case
2             if(prefix[i-1] == prefix[prefix.size()-1] - prefix[i]){
1                 int pivot = i - 1;
2                 return pivot;
3             }
4
5             //if no solution is found the proplem stated i return -1
6             return -1;
7         }
8     };
```

Saved

Ln 22, Col 30

📄 Testcase

🔍 Test Result

Prefix Sum

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions

Accepted57 / 57 testcases passed

AnalysisSolution

yousab21 submitted at Apr 20, 2026 21:03

Runtime

0 ms | Beats 100.00%

Memory

10.06 MB | Beats 19.89%

Runtime (ms)	Beats (%)
0	100.00%
1	~0%
2	~0%
3	~0%
4	~0%

CodeC++

```
1 class Solution {
2 public:
3     int minStartValue(vector<int>& nums) {
4         //here i make the prefix array and intialize the first element as th
5         vector<int> prefix = {nums[0]};
6
7         //i calculate the prefix array
8         for(int i = 1; i< nums.size(); i++){
```

View more

More challenges

2148. Count Elements With Strictly Smaller and Greater Elements

2639. Find the Width of Columns of a Grid

3255. Find the Power of K-Size Subarrays II

Write your notes here

Select related tags0/5

Code

C++Auto

```
28 class Solution {
29 public:
26     int minStartValue(vector<int>& nums) {
25         //here i make the prefix array and intialize the first element as the first element of the nums array
24         vector<int> prefix = {nums[0]};
23
22         //i calculate the prefix array
21         for(int i = 1; i< nums.size(); i++){
20             prefix.push_back(nums[i] + prefix[i-1]);
19         }
18
17         //here i find the minimum value of the prefix array this acts as the value of lowest
16         // "dip" in the step by step sum proccess if it was negative
15         int minimum = prefix[0];
14         for(int i = 0; i < prefix.size(); i++){
13             minimum = min(minimum , prefix[i]);
12         }
11
10         // if this is value of negative then we have found the maximum value that we will substract from
9         // the startValue so to keep a positive sum we need to start with a value bigger than the absolute of that
8         // negative "dip"
7         if(minimum < 1){
6             return (-1 * minimum) + 1;
5         }
4
3         //if that value wasnt negative that means that the sum never dips we just return 1 (minimum positive value)
2         return 1;
1     }
29 };
```

Saved

Ln 29, Col 3

TestcaseTest Result

DescriptionAccepted ×EditorialSolutionsSubmissions

All Submissions

Accepted95 / 95 testcases passed

yousab21 submitted at Apr 21, 2026 18:27


AnalysisSolution

Runtime

99 ms | Beats 25.12%

Memory

12.66 MB | Beats 19.92%

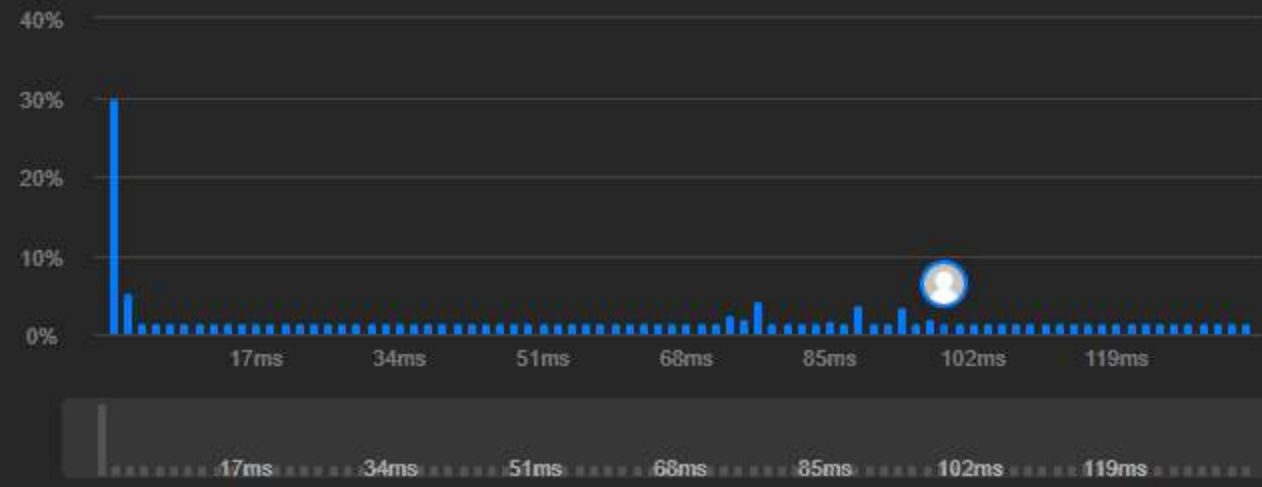

Code | C++

```
1 // after submitting looks like i found the brute force solution i cant think
2 // prefix of partial sum tbh
3 class Solution {
4
5 public:
6 // lets simplify ans say i want to calculate the moves to move one ball from
7 // that is just the distance between i and j
8     int movesBetween(int i , int j){
```

View more

More challenges

1217. Minimum Cost to Move Chips to The Same Position

2850. Minimum Moves to Spread Stones Over Grid

Write your notes here

Select related tags0/5

Code

C++Auto

```
1 // after submitting looks like i found the brute force solution i cant think how this is related to
2 // prefix of partial sum tbh
3 class Solution {
4 public:
5 // lets simplify ans say i want to calculate the moves to move one ball from i to j
6 // that is just the distance between i and j
7     int movesBetween(int i , int j){
8         // i used absolute to not have to woory to pass positions right to left
9         // it doesnt matter if i just want to calculate distance
10        return abs(i - j);
11    }
12
13 // here we start building up to the main problem i calculate the the moves needed to move
14 // all balls in to one box using the function i made
15     int movesToMoveAllTo(string &boxes , int position){
16         int totalMoves = 0;
17         for(int i = 0 ; i < boxes.size() ; i++ ){
18             // i dont have to check if the box iam checking for is the
19             // one iam at because the distance will be 0 any ways
20             // also '1' here is s char not an int (i got really confused on why it wasnt working here XD)
21             if(boxes[i] == '1'){
22                 totalMoves = totalMoves + movesBetween(i , position );
23             }
24         }
25         return totalMoves;
26     }
27
28 // here i finally use the functions i made to calculate for every box in the array
29     vector<int> minOperations(string boxes) {
30         vector<int> moves;
31         for(int i = 0 ; i < boxes.size() ; i++){
32             moves.push_back(movesToMoveAllTo(boxes , i));
33         }
34         return moves;
35     }
36 };
```

SavedLn 1, Col 46

Testcase> Test Result

AcceptedRuntime: 0 ms

Description Accepted x Editorial Solutions Submissions

All Submissions

Accepted 74 / 74 testcases passed
yousab21 submitted at Apr 21, 2026 19:11

Analysis Solution

Runtime 0 ms | Beats 100.00%
Memory 78.36 MB | Beats 25.14%



Code C++

```
1 class Solution {
2 public:
3     int chalkReplacer(vector<int>& chalk, int k) {
4         //here isnted if simulating the whole thing i can just
5         //calculate the chalk being usen each cycle and elemente redundant c
6         // this can also be done with a prefix array but ill just do it with
7         //there is also some big cases here so chalkPerCycle can overflow so
8         long long chalkPerCycle = 0;
```

View more

More challenges
2582. Pass the Pillow

Write your notes here

Select related tags 0/5



Code

C++ Auto

```
28 class Solution {
29 public:
26     int chalkReplacer(vector<int>& chalk, int k) {
25         //here isnted if simulating the whole thing i can just
24         //calculate the chalk being usen each cycle and elemente redundant cycles
23         // this can also be done with a prefix array but ill just do it with this variable to save memory
22         //there is also some big cases here so chalkPerCycle can overflow so i made it a long long
21         long long chalkPerCycle = 0;
20         for(int i = 0 ; i < chalk.size() ; i++){
19             chalkPerCycle = chalkPerCycle + chalk[i];
18         }
17
16         //here we actually eleminate cycles until the the last one which is the one that actually matter
15         //i can do this with a loop but we already leanrt this modules trick in a previos week
14         int remainingChalk = k % chalkPerCycle;
13
12         // then i only simulate the last cycle until i find the student that dont have enough chalk
11         // to do his turn and return it
10         //also we have to make the condition with ">=" not jusy ">" to account if ther is enough
9         // chalk for a student to do exacly his turn then he doenst need to replace the chalk
8         int i = 0 ;
7         while(remainingChalk >= chalk[i]){
6             remainingChalk = remainingChalk - chalk[i];
5             i++;
4         }
3
2         return i;
1     }
29 };
```

Saved

Ln 29, Col 3

Testcase Test Result