

Description Accepted Editorial Solutions Submissions


All Submissions

Accepted 12 / 12 testcases passed
yousab21 submitted at May 07, 2026 13:19

Solution

Runtime

481 ms Beats 63.43%

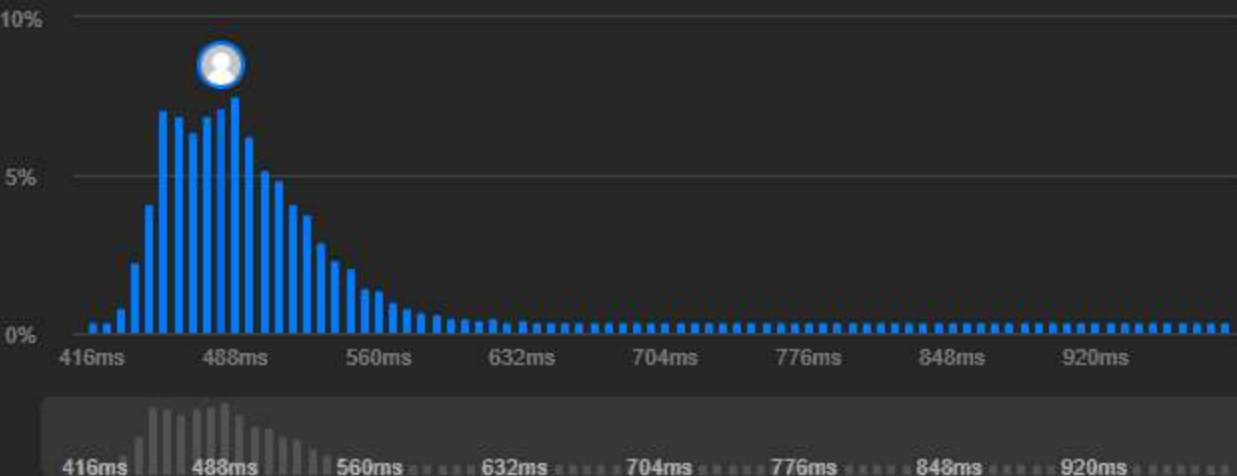

Code MySQL

```
1 # Write your MySQL query statement below
2
3 SELECT player_id, MIN(event_date) AS first_login FROM Activity
4 GROUP BY player_id;
```

More challenges

512. Game Play Analysis II

Write your notes here

Select related tags 0/5



Code

MySQL Auto

```
3 # Write your MySQL query statement below
2
1 SELECT player_id, MIN(event_date) AS first_login FROM Activity
4 GROUP BY player_id;
```

Saved Upgrade to Cloud Saving

Ln 4, Col 20

Testcase Test Result

Accepted Runtime: 68 ms

Case 1

Description Accepted Editorial Solutions Submissions

All Submissions


Accepted 14 / 14 testcases passed

yousab21 submitted at May 07, 2026 13:50

Solution

Runtime

1041 ms | Beats 16.74%

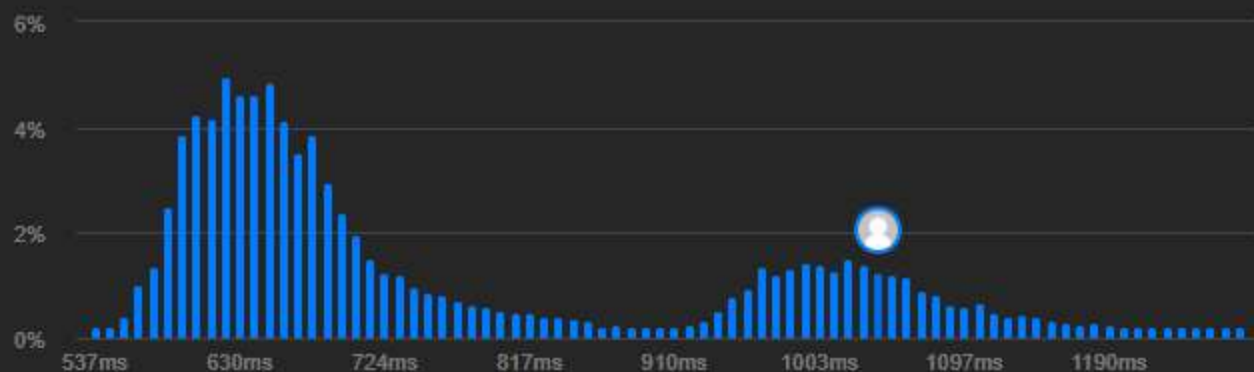

Code | MySQL

```
1 # Write your MySQL query statement below
2
3 # here i do a join between the employee table and the department table to get
4 SELECT Department.name AS Department , Employee.name AS Employee, Employee.sal
5 FROM Employee INNER JOIN Department
6 ON Employee.departmentId = Department.id
7 # the subquery here gets the max salary between employees in the having the sa
8 # i cant just group them by department id because many employees may have the
```

View more

More challenges

1112. Highest Grade For Each Student

Write your notes here

Select related tags

0/5

Code

MySQL Auto

```
8 # Write your MySQL query statement below
7
6 # here i do a join between the employee table and the department table to get the names of bi=oth entities in the result
5 SELECT Department.name AS Department , Employee.name AS Employee, Employee.salary AS Salary
4 FROM Employee INNER JOIN Department
3 ON Employee.departmentId = Department.id
2 # the subquery here gets the max salary between employees in the having the same departemtID as the row we are on during execution
1 # i cant just group them by department id because many employees may have the same salary in one department
9 # i also cant pull this into a cte because i need to refrence the outer table's Employee.departmentId
1 WHERE Employee.salary = (
2     SELECT MAX(temp.salary) FROM Employee temp
3     WHERE temp.departmentId = Employee.departmentId
4 )
```

Saved

Ln 9, Col 80

Testcase Test Result

Accepted Runtime: 89 ms

Case 1

Input


Description Accepted Editorial Solutions Submissions

All Submissions

Accepted 12 / 12 testcases passed
yousab21 submitted at May 07, 2026 13:58

Solution

Runtime
564 ms Beats 44.10%

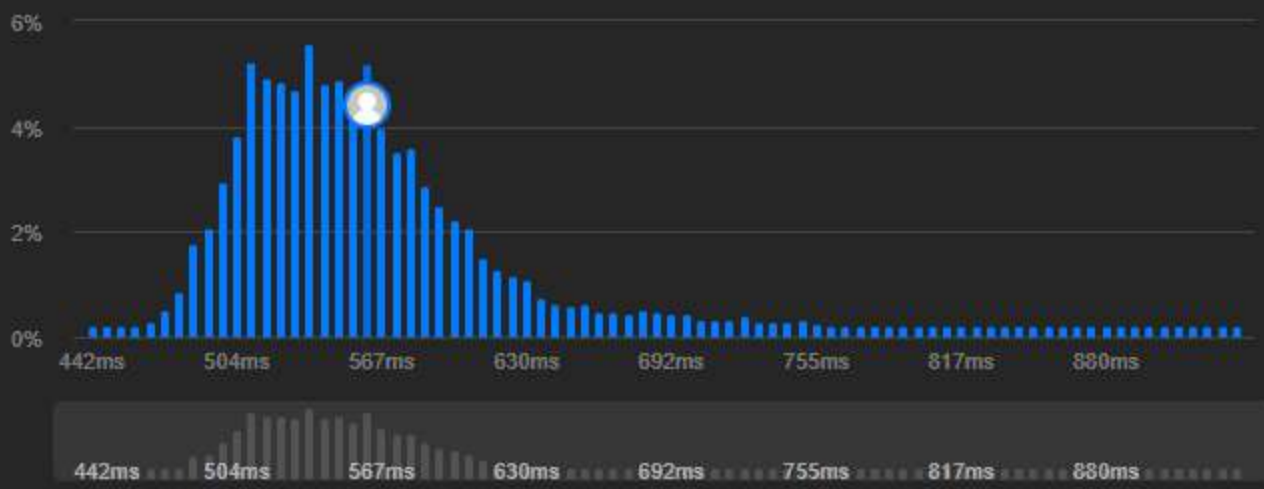

Code MySQL

```
1 # Write your MySQL query statement below
2
3 SELECT Customers.name AS Customers FROM Customers
4 WHERE Customers.id NOT IN (
5     SELECT customerId FROM Orders
6 )
```

More challenges

- 1571. Warehouse Manager
- 1867. Orders With Maximum Quantity Above Average
- 2893. Calculate Orders Within Each Interval

Write your notes here

Select related tags 0/5

✓

Code

MySQL Auto

```
2 # Write your MySQL query statement below
1
3 SELECT Customers.name AS Customers FROM Customers
1 WHERE Customers.id NOT IN (
2     SELECT customerId FROM Orders
3 )
```

Saved

Ln 3, Col 35

Testcase Test Result

DescriptionAccepted xEditorialSolutionsSubmissions

All Submissions


Accepted15 / 15 testcases passed

yousab21 submitted at May 07, 2026 14:30

Solution

Runtime

1162 ms | Beats 5.01%

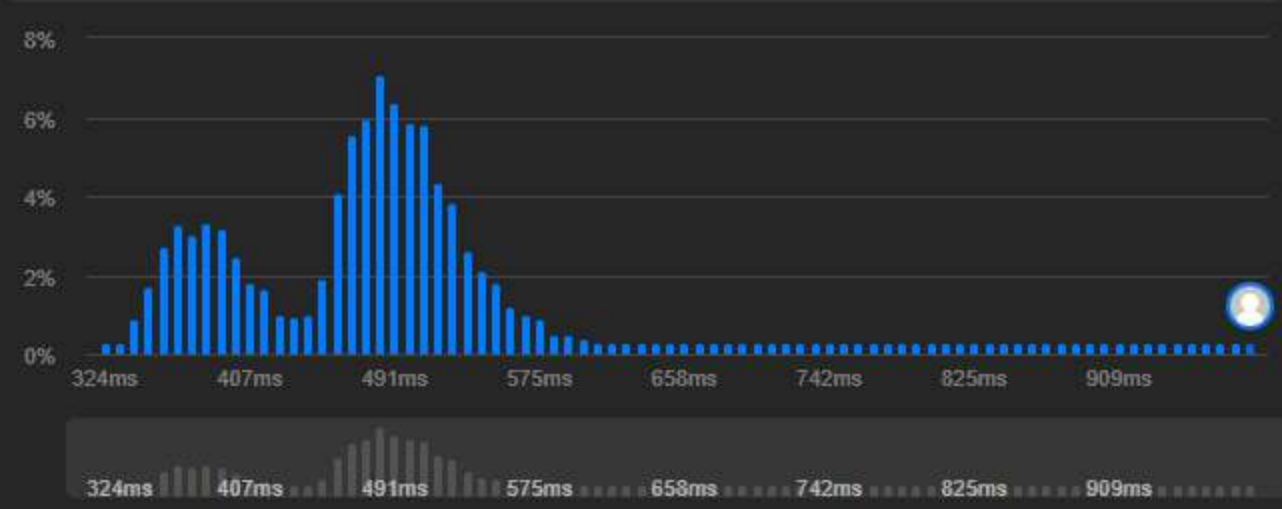

CodeMySQL

```
1 # Write your MySQL query statement below
2
3 SELECT id AS Id FROM Weather
4 WHERE temperature > (
5     # this subquery gets the temprature of the day before the one in the tabl
6     # i had to do this because ids dont match dates
7     SELECT temp.temperature From Weather temp
8     WHERE temp.recordDate < Weather.recordDate
9 )
```

View more

More challenges

1715. Count Apples and Oranges

2199. Finding the Topic of Each Post

2686. Immediate Food Delivery III

Write your notes here

Select related tags0/5

Code

MySQL Auto

```
9 # Write your MySQL query statement below
8
7 SELECT id AS Id FROM Weather
6 WHERE temperature > (
5     # this subquery gets the temprature of the day before the one in the table
4     # i had to do this because ids dont match dates
3     SELECT temp.temperature From Weather temp
2     WHERE temp.recordDate < Weather.recordDate
1     # this datediff function is not standard sql, it is a feature in mysql and sql server
10    # it returns the diffrance between 2 dats in nuber of day
1    AND DATEDIFF(Weather.recordDate , temp.recordDate) = 1
2 )
3
```

SavedLn 10, Col 62

Testcase

Test Result

Description Accepted Editorial Solutions Submissions


All Submissions

Accepted 14 / 14 testcases passed
yousab21 submitted at May 07, 2026 14:57

Solution

Runtime

670 ms Beats 44.73%

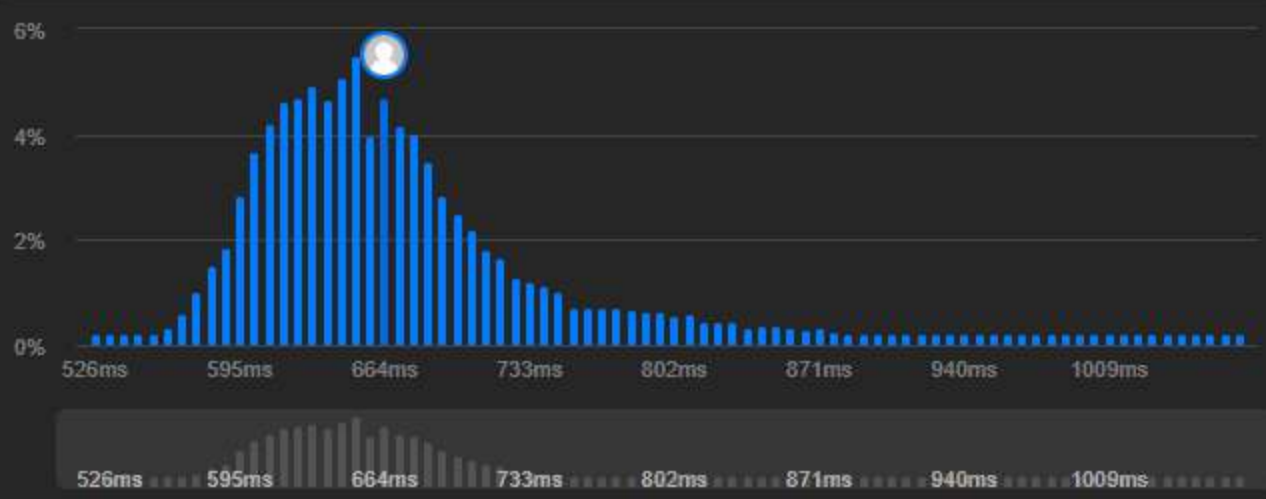

Code MySQL

```
1 # Write your MySQL query statement below
2
3 # this was a bit tricky here i discovered that count doesn't work with sub queries
4 # so i had to use sum instead this works because Confirmations.action = 'confirmed' is a binary expression
5 # and sum treats binary 1 as int 1 when summing
6 SELECT Signups.user_id , (
7     # the problem stated i should set confirmation rate if there were no attempts
8     IFNULL(
9         # this rounds to 2 decimals as required
10        ROUND(
11            SUM(Confirmations.action = 'confirmed') / COUNT(Confirmations.action), 2
12        ), 0
13    )
14 ) AS confirmation_rate
15
16 # since people who haven't done any confirmation won't show up in the confirmations table
17 # so i have to do an outer join with the signups table to get ids of those people
18 FROM Signups LEFT JOIN Confirmations ON Signups.user_id = Confirmations.user_id
19 GROUP BY Signups.user_id
```

View more

More challenges

- 577. Employee Bonus
- 1747. Leetflex Banned Accounts
- 3374. First Letter Capitalization II

Write your notes here

Select related tags 0/5

Code

MySQL Auto

```
16 # Write your MySQL query statement below
17
18 # this was a bit tricky here i discovered that count doesn't work with sub queries
19 # so i had to use sum instead this works because Confirmations.action = 'confirmed' is a binary expression
20 # and sum treats binary 1 as int 1 when summing
21 SELECT Signups.user_id , (
22     # the problem stated i should set confirmation rate if there were no attempts
23     IFNULL(
24         # this rounds to 2 decimals as required
25        ROUND(
26            SUM(Confirmations.action = 'confirmed') / COUNT(Confirmations.action), 2
27        ), 0
28    )
29 ) AS confirmation_rate
30
31 # since people who haven't done any confirmation won't show up in the confirmations table
32 # so i have to do an outer join with the signups table to get ids of those people
33 FROM Signups LEFT JOIN Confirmations ON Signups.user_id = Confirmations.user_id
34 GROUP BY Signups.user_id
```

Saved

Ln 17, Col 80

Testcase Test Result

```
1  # to simplfy logic i pulled out the joi logic as a cte
2  # all it does is it maps each student with thir grade using the between arregatet function
3  # this just returns return a map between student and grades and doesnt do any filtering or ordreing
4  WITH map AS(
5  ✓ SELECT
6      Students.Name AS Name ,
7      Grades.Grade AS Grade,
8      Students.Marks AS Marks
9  FROM Students LEFT JOIN Grades ON (Students.Marks BETWEEN Grades.Min_Mark AND Grades.Max_Mark)
10 )
11
12 # this is the actual logic for the problem
13 ✓ SELECT
14     # first i check for grade if it less that 8 i insert null into this coloum
15     # other wise i insert the student name
16     CASE WHEN Grade < 8 THEN NULL ELSE Name END AS Name,
17     Grade,
18     Marks
19 FROM map
20 # here i do the ordering in the priority requested ny the problem
21 ✓ ORDER BY
22     Grade DESC,
23     CASE WHEN Grade >= 8 THEN Name END ASC,
24     CASE WHEN Grade < 8 THEN Marks END ASC
25
```