



Query all columns for all American cities in the **CITY** table with populations larger than 100000. The **CountryCode** for America is USA.

The **CITY** table is described as follows:

CITY	
Field	Type
ID	NUMBER
NAME	VARCHAR2(17)
COUNTRYCODE	VARCHAR2(3)
DISTRICT	VARCHAR2(20)
POPULATION	NUMBER

Author [PRASHANTB1984](#)

Difficulty [Easy](#)

Max Score 10

Submitted By [2849568](#)

NEED HELP?

[View discussions](#)

[View editorial](#)

[View top submissions](#)

RATE THIS CHALLENGE



MORE DETAILS

[Download problem statement](#)

[Download sample test cases](#)

[Suggest Edits](#)

[Change Theme](#)

Language

DB2



```
1
2 ✓ /*
3     Enter your query here and follow these instructions:
4     1. Please append a semicolon ";" at the end of the query and enter your query in a single line to avoid error.
5     2. The AS keyword causes errors, so follow this convention: "Select t.Field From table1 t" instead of "select t.Fie
6     3. Type your code immediately after comment. Don't leave any blank line.
7 */
8 SELECT * From CITY
9 WHERE COUNTRYCODE = 'USA'
10 AND POPULATION > 100000;
```

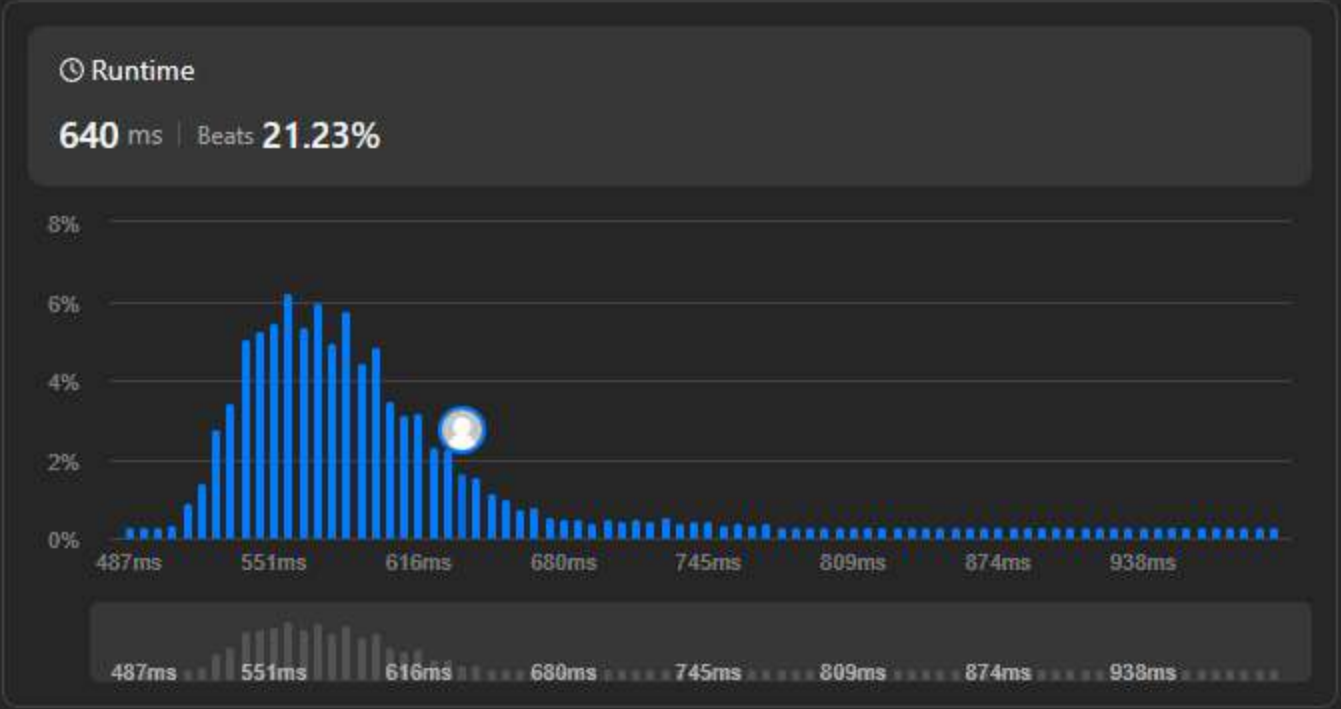

[Description](#) | [Accepted](#) [✕](#) | [Editorial](#) | [Solutions](#) | [Submissions](#)

[← All Submissions](#) [🔗](#)

Accepted 22 / 22 testcases passed

 **yousab21** submitted at Apr 27, 2026 19:10

[🔗 Solution](#)



Code | MySQL

```
1 # Write your MySQL query statement below
2 SELECT tweet_id FROM Tweets
3 WHERE LENGTH(content) > 15;
```

More challenges

• **1350. Students With Invalid Departments**

• **1667. Fix Names in a Table**

• **3058. Friends With No Mutual Friends**

Write your notes here

Select related tags 0/5

✓

</> Code

MySQL [v](#) [🔒](#) Auto

2 # Write your MySQL query statement below

1 SELECT tweet_id FROM Tweets

3 WHERE LENGTH(content) > 15;

Saved

Ln 3, Col 21

Description

Accepted x

Editorial

Solutions

Submissions

All Submissions

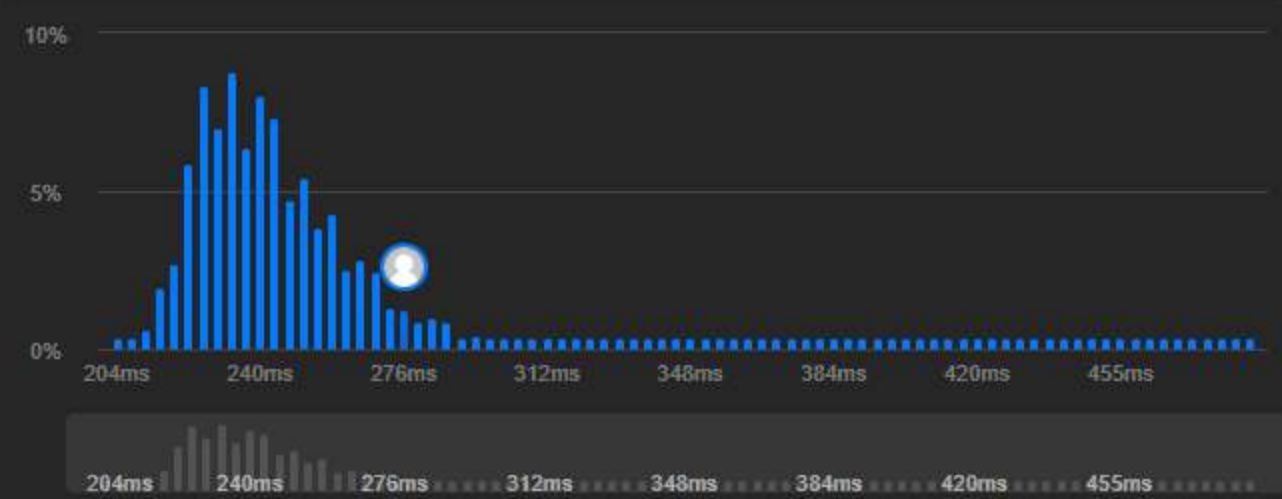
Accepted 8 / 8 testcases passed

yousab21 submitted at Apr 27, 2026 19:18

Solution

Runtime

278 ms Beats 14.31%



Code

MySQL

```
1 # Write your MySQL query statement below
2
3 # i cant use muliple sets in one update statment
4 # so i found the "CASE" syntax that acts as an if/else-if statment in normal p
5 UPDATE Salary
6 SET sex = CASE
7     WHEN sex = 'f' THEN 'm'
8     Else 'f'
```

View more

More challenges

579. Find Cumulative Salary of an Employee

3087. Find Trending Hashtags

3497. Analyze Subscription Conversion

Write your notes here

Select related tags 0/5

Code

MySQL Auto

```
3 # Write your MySQL query statement below
2
1 # i cant use muliple sets in one update statment
4 # so i found the "CASE" syntax that acts as an if/else-if statment in normal programing languages
1 UPDATE Salary
2 SET sex = CASE
3     WHEN sex = 'f' THEN 'm'
4     Else 'f'
5 END
6 ;
```

Saved Ln 4, Col 98

Testcase

Test Result

Accepted Runtime: 437 ms

Case 1

Input

Salary =

id	name	sex	salary
1	A	m	2500
2	B	f	1500
3	C	m	5500
4	D	f	500

Output

id	name	sex	salary
1	A	f	2500
2	B	m	1500
3	C	f	5500
4	D	m	500