

Penetration Testing Finding Report

Finding 04 — SNMP Default Community Name (public)

Target	192.168.116.137
Service	SNMP / UDP 161
Finding	Default SNMP community string: public
Severity	High (as reported by Nessus)
Authentication	No application credentials required; SNMP community string is the shared access value
Impact	Unauthorized SNMP enumeration and disclosure of system information

Description

The target exposes an SNMP service on UDP/161 using the default community string **public**. This allows an unauthenticated SNMP client that knows the community string to query management information from the host. In the lab, SNMP enumeration disclosed the Windows version/build, hostname, hardware description, uptime, and user-account names.

Technical Evidence

Nmap confirmed UDP/161 as open. Direct SNMP queries using SNMPv2c and the community **public** successfully returned system information. Metasploit's **auxiliary/scanner/snmp/snmp_enum** also connected successfully and enumerated system and user-account information.

Observed Impact

The exposed community string enables information disclosure that can assist further reconnaissance and attack-path development. The evidence demonstrates successful enumeration of a Windows Server 2008 R2 host and multiple local account names.

Reproduction

1. Confirm SNMP:

```
nmap -sU -p 161 192.168.116.137
```

2. Query the SNMP system tree:

```
snmpwalk -v2c -c public 192.168.116.137 1.3.6.1.2.1.1
```

3. Enumerate with Metasploit:

```
use auxiliary/scanner/snmp/snmp_enum
set RHOSTS 192.168.116.137
set RPORT 161
set COMMUNITY public
run
```

Evidence

Nmap — UDP/161 confirmed open

```
(root@kali)-[~]
# nmap -sU -p 161 192.168.116.137
Starting Nmap 7.95 ( https://nmap.org ) at 2026-09-04 15:09 EEST
Nmap scan report for 192.168.116.137
Host is up (0.0049s latency).


PORT      STATE SERVICE
161/udp   open  snmp
MAC Address: 00:0C:29:AF:34:62 (VMware)

Nmap done: 1 IP address (1 host up) scanned in 3.21 seconds

(root@kali)-[~]
# snmpwalk -v2c -c public 192.168.116.137 1.3.6.1.2.1.1
Created directory: /var/lib/snmp/cert_indexes
iso.3.6.1.2.1.1.1.0 = STRING: "Hardware: Intel64 Family 6 Model 142 Stepping 9 AT/AT COMPATIBLE - Software: Windows Version 6.1 (Build 7601 Multiprocessor Free)"
iso.3.6.1.2.1.1.2.0 = OID: iso.3.6.1.4.1.311.1.1.3.1.2
iso.3.6.1.2.1.1.3.0 = Timeticks: (32748) 0:05:27.48
iso.3.6.1.2.1.1.4.0 = ""
iso.3.6.1.2.1.1.5.0 = STRING: "vagrant-2008R2"
iso.3.6.1.2.1.1.6.0 = ""
iso.3.6.1.2.1.1.7.0 = INTEGER: 76

(root@kali)-[~]
#
```

Metasploit SNMP Enumeration Evidence

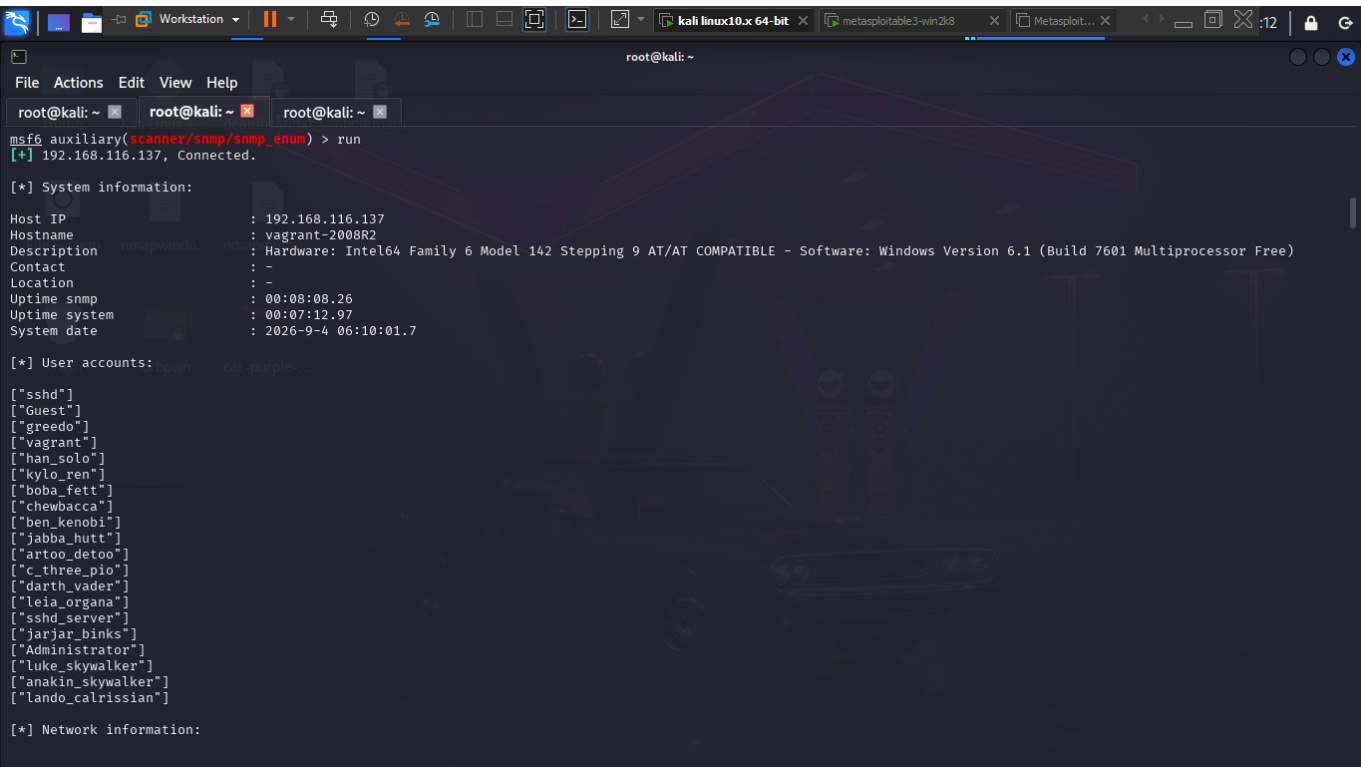

```
msf6 auxiliary(scanner/snmp/snmp_enum) > run
[+] 192.168.116.137, Connected.

[*] System information:
Host IP           : 192.168.116.137
Hostname          : vagrant-2008R2
Description       : Hardware: Intel64 Family 6 Model 142 Stepping 9 AT/AT COMPATIBLE - Software: Windows Version 6.1 (Build 7601 Multiprocessor Free)
Contact           : -
Location          : -
Uptime snmp       : 00:08:08.26
Uptime system     : 00:07:12.97
System date       : 2026-9-4 06:10:01.7

[*] User accounts:
["sshd"]
["Guest"]
["greedo"]
["vagrant"]
["han_solo"]
["kylo_ren"]
["boba_fett"]
["chewbacca"]
["ben_kenobi"]
["jabba_hutt"]
["artoo_detoo"]
["c_three_pio"]
["darth_vader"]
["leia_organa"]
["sshd_server"]
["jarjar_binks"]
["Administrator"]
["luke_skywalker"]
["anakin_skywalker"]
["lando_calrissian"]

[*] Network information:
```

Remediation

If SNMP is not required, disable the SNMP service. If SNMP is required, replace the default community string, restrict SNMP access to trusted management hosts using network ACLs/firewall rules, and prefer SNMPv3 with authentication and privacy where supported.

Assessment Note

This finding is an information-disclosure / configuration weakness rather than a direct remote-code-execution finding. The evidence confirms successful SNMP enumeration, but does not demonstrate a shell or Meterpreter session.