HAYAH TAYEBA

الحياة الطيبة

Software Requirements & UML Specification

Client review draft | Version 0.3 | 29 September 2026

A child-only learning app for ages 10-14, featuring one complete Dhikr door and an extensible admin content-management workflow.

Review status	Purpose
Draft for review	Confirm scope and behavioral requirements before UI design and detailed implementation.
Confirmed and proposed items	Confirmed product direction is distinguished from proposed mechanisms and unresolved decisions.

Includes the SRS, ten active use cases and two retired identifiers, logical architecture, ten UML diagrams, and requirements-to-acceptance traceability.

Contents

Contents 2

01 Executive brief 3

02 Client revision and Dhikr scope 4

03 Decisions and open questions 7

04 Software requirements specification 11

05 Detailed use cases 21

06 Logical architecture 25

07 UML models 29

08 Requirements traceability 40

09 Review and document control 44

How to read this document

Start with the executive brief and decision register. Review the SRS and use cases before treating the models as an implementation baseline. The UML section uses larger pages where necessary to keep technical labels readable.

Status notation

D - derived: operationalizes a confirmed product decision. **P - proposed:** mechanism or scope awaits agreement. **Must / Should:** priority within the proposed MVP. Normative wording makes a draft requirement testable; it does not mean it has already been approved.

01 Executive brief

Product direction

Hayah Tayeba helps children aged 10-14 understand a value, explore responses through a story, and try a small action in everyday life. The child is the only learner-facing role. Content administrators operate a separate authoring interface. The mobile client will use Expo React Native.

The first and only complete MVP door is «باب الذكر», replacing the former good-character/anger journey. The full route introduces meaning, practical entry, continuing practice, and reflection. Children create their character before entering «خريطة الحياة الطيبة». Arabic is the release language, with a locale-neutral structure for reviewed English editions later. Completion does not certify worship, emotional change, or spiritual growth.

MVP boundary

- One complete Dhikr door with multiple learning stages for the child.
- Independent child progression after the proposed account setup.
- Saved learning progress and recovery from ordinary connection interruptions.
- An admin workflow for adding content using supported templates.
- Explicit content review, publication, revisions, and withdrawal.

Decisions required before implementation

- Child setup, guest versus account access, and recovery of saved progress.
- Reflection modes, learner-data storage, and privacy.
- Child curriculum authorship, review, and asset-production ownership.
- Launch platforms, distribution countries, and connectivity expectations.
- Data-retention policy, operating ownership, and release quality targets.

Delivery status

This document specifies a proposed solution. Application development, final curriculum production, religious-source verification, and product acceptance testing have not been completed. The supplied presentation, expanded project notes, and revised Dhikr concept are conceptual inputs rather than an approved finished curriculum.

Review approach

Agree the behavioral scope first, then select backend technologies and physical data/API designs. UI prototyping can still reveal issues that require revisions to the specification. No price, delivery date, hosting provider, or launch commitment is established by this draft.

02 Client revision and Dhikr scope

Change summary

The client changes the audience to **10-14**, expands the first release to **one complete door**, confirms **Arabic first with an English-ready content structure**, and places **character creation before the locked-door map**. The product owner has explicitly confirmed **«باب الذكر»** as the first door, replacing the former anger journey inside the good-character door.

The latest correction makes the app exclusively for children aged 10-14. The mother role, curriculum, monitoring, shared activities, and family/device linking are removed. Content admins remain operational users. Expo React Native and periodic admin content updates remain in scope.

Source interpretation

The new Dhikr note is a content/design proposal. Its English dialogue is reference copy to adapt into Arabic, not a bilingual-launch instruction. Its example XP amounts, seven-day window, ten-second practice, and ten-minute opening are not finalized engineering targets. Written and voice reflection modes require an explicit scope and data-handling decision. Religious wording and learning-effectiveness claims still require editorial review.

The written/voice-reflection choice has been raised with the product owner and remains pending. v0.3 documents that request instead of silently retaining the previous fixed-choice-only proposal or automatically introducing audio uploads.

Full door structure proposed for the MVP

Stage	Child experience	Completion meaning
1. Character and entry	Select avatar, nickname, appearance, color, and badge; enter «خريطة الحياة الطيبة»; open the Dhikr introduction.	Setup and entry participation, not an assessment.
2. Discover meaning	A familiar distracted-study situation leads into choices, explanation, and an editorially reviewed religious source.	Explore the meaning through authored scenes and feedback.
3. Try a practice	A short guided pause and approved Dhikr example; feedback may include little or no change in feeling.	Participation, never emotional success or worship quantity.
4. Choose a moment	Discover everyday contexts and create one when/then plan.	A chosen practical intention; no proof of real-world worship.
5. Continue	Suggested seven-day journal with optional tried/remembered/remembered-independently check-ins.	Practice history distinct from digital learning completion; pauses do not erase progress.
6. Pause and reflect	Consider when it was easiest, hardest, and where to continue.	Optional response, explicit end of the learning route, and invitation to continue.

Each stage must contain real reviewed content in the MVP. “Complete door” does not mean unlocking every future door or proving lifelong habit formation. Final stage count, mission count, duration, and content-production ownership require editorial sign-off.

Disposition of the supplied concepts

Concept	Treatment in v0.3	Engineering consequence
Child as hero / custom avatar	Confirmed setup direction	Persist preset appearance/color/badge choices; use the selected child access model.
Map and locked doors	Confirmed direction	Separate progression locks from unavailable future previews; only Dhikr has a complete curriculum.
Door, Discover, Missions, Garden, Quiet Place	Proposed regions inside Dhikr	Governed stage/region metadata and reachable prerequisites; art/names remain editable.
Notification story and choices	Included as a content pattern	Authored branching feedback; no punitive right/wrong framing.
Religious text introduced through story	Included with editorial review	Record sources and translation review; no unverified quotation auto-publication.
Short practice and emotional check-in	Included as a proposed interaction	No required improvement in mood; feedback does not claim treatment or guaranteed calm.
Find three moments, choose one	Proposed practice activity	Approved context catalog and when/then plan; three is an editable instruction, not a universal system constraint.
Seven-day journal and pauses	Proposed continuation design	Calendar-aware, duplicate-safe check-ins; mandatory seven-day gating remains OQ-13.
Learning XP	Proposed, optional MVP capability	Reward ledger, one eligible award per event, no worship-count or emotion scoring.
Growing tree / discovery-to-practice progression	Proposed visual representation	Derived from participation states; no claim to measure faith or prove a habit.
Omar, Mariam, Youssef, Lina	Illustrative characters	Names, personalities, scenes, and translations are authored content, not hard-coded accounts.
Secret heart/gratitude/difficult-moment doors	Proposed Dhikr subregions	They do not add complete independent curriculum doors to the MVP. Only reachable learning prerequisites may unlock them.
End-of-journey reflection in text or voice	Requested concept; modality decision pending	Storage, privacy, microphone handling, retention, and deletion depend on selected modes. No transcription/AI interpretation implied.
First ten minutes	Suggested opening storyboard	Not a fixed session-duration requirement; final pacing is tested with ages 10-14.
Remembering moments map	Proposed practice feature	Save personally chosen contexts without GPS, passive sensing, or worship surveillance.

Concept	Treatment in v0.3	Engineering consequence
English wording in the note	Reference only	Arabic release copy; later reviewed English editions share canonical content/progress IDs.

Arabic copy direction - illustrative, not final curriculum

- Map: «خريطة الحياة الطيبة».
- Main door: «باب الذكر».
- Example practice intention: «لما أستعد للنوم، هفتكر الذكر اللي اخترته».
- After a pause: «تقدر تكمل من هنا. الرحلة فيها وقفات».
- Future preview: «هذا الباب سيضاف لاحقا».
- Reflection can be skipped: «مش حابب أجاوب دلوقتي».

Dialect, exact devotional wording, religious explanation, and age suitability require review by the project's appointed content owner. Ordinary anger and distraction may appear as situations inside Dhikr; that does not restore the former good-character door as a second MVP door.

Main unresolved choices

1. Written/voice/fixed-choice reflection modes and storage/access policy (OQ-14).
2. Whether seven days is only an invitation or a compulsory completion condition (OQ-13).
3. Exact reward values and unlock rules (OQ-15).
4. Editorial review and asset-production responsibilities for the child curriculum (OQ-03).

Earlier open decisions about authentication, launch platforms, offline access, distribution, and retention also remain active. The earlier PDFs are preserved as v0.1 and v0.2; this revision replaces it for current review.

Scope removed in v0.3

The mother is no longer a product actor. There is no account for that role, no second learning track, no monitoring report, no shared-activity workflow, and no mother-approved pairing. These features are removed rather than merely hidden in the interface. The architecture, data model, authorization paths, use cases, and acceptance mapping are revised accordingly.

The exact child access and recovery mechanism remains open. Removing a role does not silently choose guest access, passwords, email, or automatic cross-device restoration.

03 Decisions and open questions

Confirmed product direction

ID	Confirmed decision
C-01	Children are aged 10-14.
C-03	Children start and complete their learning independently.
C-04	The only complete MVP door is «باب الذكر». The previous good-character/anger journey is superseded as the first release.
C-05	Light fantasy setting with everyday situations and dialogue.
C-06	Mobile client uses Expo React Native.
C-08	Admins can periodically add new content.
C-09	Deliver one complete door: meaning, entry, practical application, continuation, reflection, and a clear end to its learning route.
C-10	Existing inputs are the presentation, original notes, and the new Dhikr concept. Final production content and application code are not supplied.
C-11	Hold UI design and prepare SRS/UML first.
C-12	Arabic is the release language; the content structure must permit English later without redesign.
C-13	The child creates a character before entering the map, choosing avatar, name, appearance, color, and a personal badge.
C-14	Present «خريطة الحياة الطيبة» with doors and visible locks; examples include Dhikr and Allah's companionship.
C-15	The app is exclusively for children aged 10-14; the mother role and every associated workflow are removed. Content admins remain operational users.

Proposed defaults - awaiting confirmation

ID	Proposal	Reason and limit
P-01	Child-scoped identity/session and separate admin authentication. Exact child sign-in, guest access, and recovery method remain open.	No family account, account owner, or linked adult device is assumed.
P-02	Retired: mother-approved temporary-code pairing.	Removed by C-15; not part of current access design.
P-03	Retired: one mother account owns multiple children.	Child identity has no family ownership relationship.
P-04	Learner records remain private to the learner; content admins manage content, not child records.	Adult monitoring/summary projections are removed. Reflection storage still awaits OQ-14.

ID	Proposal	Reason and limit
P-05	Reflection input mode is being revised: the client concept requests writing or voice; the user has not yet selected MVP modalities.	The old fixed-choice-only proposal is no longer treated as settled. Text/voice retention, backup, and access need a decision before implementation.
P-06	Templates support stories, video/animation, choices with feedback, short challenges, real-life practice plans, check-ins, and reflection prompts.	Dhikr is the first authored door; no general-purpose game engine is implied.
P-07	Admin console is a separate desktop web application.	Easier authoring and preview. Framework is undecided.
P-08	One admin role initially; review and publication are explicit actions, possibly by the same authorized person.	No unrequested multi-role approval bureaucracy. Independent editorial review can be added if the team requires it.
P-09	Immutable published content revisions; attempts bind to a revision.	Protects in-progress sessions and historical completion. Withdrawals need explicit handling.
P-10	Online content access, with durable local progress and a retry queue; no full offline catalog/download manager.	Handles ordinary interruptions without claiming complete offline operation.
P-11	No punitive streaks, leaderboards, spirituality scores, or another-person sign-off to advance. Optional learning XP and visual growth acknowledge participation only.	Exact XP values and reward rules in the source are examples, not finalized acceptance thresholds.
P-12	Locale-neutral IDs and versioned Arabic/English language editions; Arabic is complete for launch. Child copy can use accessible Arabic appropriate to ages 10-14.	Arabic-first and future bilingual structure are confirmed; dialect and translation workflow are proposed.
P-13	One backend deployment with modular responsibilities, transactional data, and separate media storage.	A starting architecture, not a selected provider or mandatory infrastructure stack.
P-14	Use supported illustrated scenes and media for the complete Dhikr route. Rich custom mini-games and full animation production are separately scoped.	The supplied concepts do not imply that all media assets or game mechanics already exist.
P-15	Simultaneous-device policy and replacement-session behavior remain proposed decisions under the selected child access model.	No separate mother/child device relationship exists. Cross-device recovery requires an approved mechanism.

Open decisions

The timing column identifies when each decision is needed for the next delivery stage.

ID	Question	Needed before	Working treatment
OQ-01	How does the child start, sign in, and recover progress: guest/device session, account, or a defined combination?	Identity and recovery implementation	No sign-in provider, email requirement, password, or recovery-code mechanism is selected yet.
OQ-02	What learner data is retained, synchronized, and visible within the child's own experience?	Data/API baseline	Private learner scope; no adult-monitoring views. Reflection modalities/storage remain OQ-14.
OQ-03	Who authors and reviews educational/religious material and media usage rights?	Production content publication	Review fields exist; no reviewer authority is invented.
OQ-04	Is Android first, iOS first, or both at launch? Minimum OS/device/browser support?	Build and QA plan	Expo chosen; platform release scope remains open.
OQ-05	Must complete journeys work offline, or is interruption recovery enough?	Storage/media design	P-10 is the draft scope.
OQ-06	Is the first release private pilot or public distribution, and in which countries?	Launch/privacy policy	No legal compliance determination made.
OQ-07	Closed as removed: separate adult curriculum.	Not applicable	No content production, screens, or workflow required for that role.
OQ-08	Separate content adaptations for 10-11 and 12-14, or one initial journey tested across both?	Content production	One initial version proposed; usability reviewed across ages.
OQ-09	Can a child try the experience before account creation, and when must character setup occur?	Onboarding baseline	Character creation before the map is confirmed; guest access versus account-first setup remains open.
OQ-10	Monetization, budget, expected pilot size, media volume, and availability target?	Hosting and operating plan	No ads, payments, or subscription system included in draft MVP.
OQ-11	Account deletion, retention periods, backup retention, consent notices, and support owner?	Public release	Draft deletion behavior is specified; periods remain TBD.
OQ-12	How should editorial safety withdrawals affect unfinished sessions?	Content lifecycle implementation	Stop withdrawn content, preserve records, offer another available route.
OQ-13	Is seven days a suggested practice window or a compulsory completion period?	Progress rules	Proposed: seven-day invitation, no consecutive-day requirement or lost progress. Digital completion and ongoing practice remain separate.

ID	Question	Needed before	Working treatment
OQ-14	Which reflection modes launch: fixed choices, written text, and/or voice? Where are they stored?	Reflection implementation	Pending user response. No text or audio storage mechanism is approved by the source alone.
OQ-15	Which events award XP and unlock regions, and what are the reward values?	Reward implementation	Proposed: participation only, idempotent grants, no worship-count or emotion scoring.
OQ-16	Which future-door previews appear, and when is a lock actually unlockable?	Catalog baseline	Dhikr is the only full door; «الله معية» may be a clearly labeled future preview.

Items not yet adopted as requirements

“بلدة طيبة” as a world name; exact palette; a particular mascot; unrestricted avatar uploads or a full character editor; a fixed lesson duration; collectible artwork; push notifications; punitive streak rules; automatic content personalization; any AI tutor; any named backend/database/cloud vendor. Exploratory visual concepts do not constitute approved product requirements.

Tradeoffs to revisit

- A curated route is easier to author than arbitrary branching. The initial editor should allow bounded choices and explicit feedback, not a general game engine.
- Reflection collection needs a clear storage, access, and erasure policy before implementation; removing the monitoring role does not automatically resolve those data choices.
- Dynamic content reduces app releases only for supported templates and schema versions. New client capabilities need a client update.
- One shared age range lowers production cost, but usability testing may show that reading level, pacing, and visual style need variants.
- Pausing UI design is a sequencing choice. A small flow prototype may still be needed to validate access recovery and child comprehension before finalizing requirements.

04 Software requirements specification

1. Purpose and interpretation

Specify the behavior of the first usable product and its content-management capability before visual design and backend technology selection. This is a tailored SRS, not a claim of conformance to a particular standard.

D (derived) means a requirement directly operationalizes a confirmed product decision. **P (proposed)** means its mechanism or scope needs product approval. Both remain part of a draft. “Shall” makes the proposed baseline testable; it does not imply approval. Sources C-xx and P-xx are defined in Section 03.

Priority: **Must** = required for the proposed MVP; **Should** = desirable but negotiable. Items explicitly deferred are not MVP commitments.

2. Product purpose, scope, and success

Help children aged 10-14 explore a value, practice a response, and try a small action in everyday life. The child is the only learner-facing role; the content admin remains an operational role. The first and only complete MVP door is «باب الذكر». It covers meaning, entry, practical application, continued practice, and a closing reflection. The former good-character/anger journey is superseded as the initial release.

The product shall represent learning participation and practice, not certify spiritual growth, moral worth, or emotional health. Completion is not evidence that a child has changed behavior outside the app.

Proposed MVP includes

- One child-facing learning experience using Expo React Native.
- Child profile setup, scoped session access, and a recovery approach to be selected before implementation.
- One complete Dhikr door with several learning stages for the child.
- A lightly fantastical map with locked doors and everyday situations, preceded by child character creation; Arabic at launch and English-ready content structure.
- Supported content templates and an admin authoring/publication workflow.
- Persisted progress, resumption, duplicate-safe synchronization, and basic recovery states.
- Authorization, accessibility, editorial provenance, and operational controls appropriate to this scope.

Deferred

Custom game builder, free-roaming 3D world, generative AI/chat, social messaging, public child profiles, public user uploads, competitive rankings, payments/ads, full offline media library, teacher/school roles, push campaigns, and automated adaptive learning.

Acceptance outcomes

- A child can create their character and complete the published learning route independently.
- No family link, second learner role, or companion workflow is required.
- An admin can publish a second journey using supported templates without changing the client binary.
- Existing completion and in-progress sessions remain interpretable after a routine content revision.
- A network interruption does not silently erase acknowledged progress or cause duplicate completion.

Pilot engagement and learning effectiveness need observation and a separate evaluation plan. This SRS sets no invented adoption or efficacy targets.

3. Actors and boundaries

Actor	Allowed capability	Boundary
Child	Access their published journey, make choices, complete activities, resume progress.	No admin controls, other children's records, or public profile.
Admin	Author, preview, review, publish, revise, and withdraw content.	Content role alone grants no access to private learner records.

Authentication and media services are external technical dependencies, not additional human roles. A support/operator role is not specified for MVP; production ownership must be resolved before launch.

4. Functional requirements

Child profile and access

FR-01 | P / Must / C-15, P-01

The system shall establish a child-scoped learning session and authenticate content admins separately; protected operations shall enforce learner scope and role on the server.

Acceptance: one child cannot retrieve another child's data, a child cannot publish content, and anonymous requests cannot access private progress. The exact guest/account sign-in method remains OQ-01.

FR-02 | D / Must / C-01, C-13, C-15

The child shall complete their own profile setup for the 10-14 age range and create their character through FR-29.

Acceptance: no second-person account or device approval is required; age handling is appropriate to the supported range. Exact birth date, email, and phone are not mandatory fields until the access model is selected.

FR-04 | P / Must / P-01, OQ-01

The selected child access model shall define session expiration, logout, recovery, and access on a replacement device without creating duplicate learner identities.

Acceptance: revoked/expired credentials cannot access protected data; restored access retrieves only that learner's server-confirmed progress. Guest/local-only limitations must be explicit, and cross-device recovery is not promised until a mechanism is approved.

Child learning and progress

FR-06 | D / Must / C-04, C-05, C-09, C-14

The child shall see «خريطة الحياة الطيبة» with the full Dhikr door and explicitly labeled published previews of selected future doors.

Acceptance: the full Dhikr route is startable; teaser metadata may be visible, but draft lessons/media never leak through preview doors. A future door cannot falsely promise that more XP will open unavailable content.

FR-07 | P / Must / P-06, P-09

The client shall fetch a validated, versioned content manifest and render only supported schema/template versions.

Acceptance: unsupported content does not crash the client or advance progress; a suitable update/unavailable message appears. Existing supported content remains accessible.

FR-08 | P / Must / P-06, P-14

Story steps shall display illustrated scenes, short dialogue, and optional narration with accessible playback controls.

Acceptance: essential meaning remains available as text when audio is muted/unavailable; navigation does not depend on audio completing.

FR-09 | P / Must / P-06, P-11

Choice steps shall provide authored feedback or a consequence and permit another attempt.

Acceptance: each choice has a valid destination or feedback; no score of faith/character is inferred; trying another response does not erase existing completion. A required choice step completes after exploring at least one choice and its feedback, not after guessing an approved answer.

FR-10 | D / Must / C-03, C-15

The child shall complete every required learning step independently.

Acceptance: progression never requires another person's account, attendance, approval, linked device, or participation.

FR-11 | P / Must / P-06, P-11

Real-life activities and reflections shall support deferral or skipping.

Acceptance: "أجربها بعدين" and "مش حابب أجاوب" do not block the next step or completion. No proof of a real-world event is required.

FR-12 | P / Must / P-09, P-10

The system shall persist the last checkpoint and required-step completion for each attempt, queue unsent progress durably, and retry safely.

Acceptance: force-closing after a local save resumes at that checkpoint on the same device; duplicate event submission has one effect; the UI distinguishes pending synchronization from confirmed synchronization.

FR-13 | P / Must / P-09, P-11, OQ-13

Required digital learning steps shall produce version-bound journey completion. Completion of all required stages produces door learning completion; continued practice remains separate.

Acceptance: a missed day, unchanged emotion, optional reflection skip does not remove completed learning. A mandatory seven-day completion gate is not assumed.

Admin content management

FR-17 | D / Must / C-08

An authorized admin shall add/edit doors and journeys and order their content.

Acceptance: a second supported journey can be created, published, and retrieved by an existing client without a code change.

FR-18 | P / Must / P-06, C-09, C-12

The editor shall support stories, video/animation media, choice/feedback, short guided challenges, practice plans, check-ins, reflection prompts.

Acceptance: stable locale-neutral IDs, stage/path, type, completion rule, and valid template data exist for every step; unsupported game mechanics are rejected.

FR-19 | P / Must / P-06

Admins shall associate images/audio/video with usage-rights notes, meaningful accessibility text/captions, and processing status.

Acceptance: unsafe or unsupported file types, unfinished uploads, and missing required assets cannot be published; upload alone never makes media public.

FR-20 | P / Must / P-08

Admins shall preview the child journey and supported language editions and record an editorial review before publication.

Acceptance: unresolved references, unreachable required steps, missing essential alternatives, unreviewed religious quotations, and unsupported schemas block publication with specific errors. A second distinct reviewer is not required by this draft.

FR-21 | P / Must / P-09

Publishing shall atomically expose an immutable revision and update the catalog pointer.

Acceptance: editing live content creates a draft; a failed publish exposes no partial journey; concurrent stale edits/publishes are rejected rather than overwriting newer work.

FR-22 | P / Must / P-09

Routine revisions shall preserve attempts bound to older available revisions and historical completion.

Acceptance: new attempts use the current revision; existing attempts resume their revision unless withdrawn; a future optional second journey does not undo completion of the first.

FR-23 | P / Must / P-09

An admin shall withdraw a published revision with a reason and explicit confirmation.

Acceptance: it disappears from new-start catalog results; the next online access check blocks further delivery for bound attempts and offers an explanation; historical progress remains. The app cannot guarantee immediate revocation of already-delivered offline bytes.

FR-24 | P / Must / P-08, P-09

The system shall audit authoring lifecycle changes, review, publish, and withdrawal with actor, timestamp, revision, action, and reason where needed.

Acceptance: failed actions are distinguishable from successful publication; secrets and child answers are absent from audit payloads.

Recovery and account lifecycle

FR-25 | P / Must / P-10

The client shall recover gracefully from network and media failures.

Acceptance: a visible retry and saved checkpoint remain; it does not claim that unfetched media works offline; a failed optional media load does not permanently trap a user.

FR-26 | P / Must / OQ-14

Reflection prompts shall be optional and nonjudgmental. Fixed choices are currently supported; written and voice modes remain conditional pending an explicit MVP decision and storage/access policy.

Acceptance: skipping does not block completion; no reflection payload enters progress, other-user views, admin tools, or telemetry. No microphone permission or upload is introduced merely because the source suggests voice notes.

FR-27 | P / Must / OQ-01, OQ-11

The system shall provide a clear, confirmed process to reset local data or request deletion of the child's own profile, as appropriate to the selected access model.

Acceptance: authorization binds the action to that learner, the scope is explained, associated sessions are revoked, and remote data follows the agreed erasure policy; one child cannot delete another's data. Recovery, retention, and backup-purge timing remain open.

Client revision: complete door, language, and practice

FR-28 | D / Must / C-12

The system shall ship with complete Arabic UI/content and a locale-neutral content model capable of English editions later.

Acceptance: translating a test journey changes localized text/audio/captions without duplicating door, step, choice, or progress IDs; no English authoring placeholders leak into Arabic release screens. The later English launch still requires translation, review, and LTR UI testing.

FR-29 | D / Must / C-13

The child's first personal setup shall offer avatar, nickname, appearance, color, and badge before showing the map.

Acceptance: each choice persists after restart/authorized recovery, can be edited later, and belongs to that child. Approved presets are proposed; public profiles and personal-photo uploads are not implied.

FR-30 | D / Must / C-14

Map nodes shall distinguish available, progression-locked, completed, withdrawn, and future-preview states.

Acceptance: a progression lock states its reachable learning prerequisite; a future-preview lock states that content is not yet available; withdrawal cannot be bypassed by an unlock record. The entry experience opens the only available MVP door without requiring another unreleased door.

FR-31 | D / Must / C-09

The MVP shall cover the whole Dhikr learning route: discover meaning, explore contextual stories, try a small practice, choose a daily moment, continue practice, and reach a closing reflection/end state.

Acceptance: no required stage is an empty placeholder; admins can author and order these stages, and digital door completion is distinct from an ongoing habit.

FR-32 | P / Must / Dhikr source

The child shall select a daily context and associate an approved practice using a when/then plan, and collect discovered remembering moments.

Acceptance: the plan survives resume, the same moment is not duplicated by retries, and no real-world location, microphone, or background surveillance is used to infer worship.

FR-33 | P / Must / Dhikr source, OQ-13

A practice journal shall accept optional self-reports such as tried, remembered, or remembered without a reminder.

Acceptance: a missed day is a neutral pause, not a reset; duplicate check-ins for the same plan/day update one record. Proposed seven-day windows use the chosen plan timezone; calendar/timezone rules are documented before implementation.

FR-34 | P / Should / Dhikr source, OQ-15

Optional XP and visual growth shall reward defined learning/participation events only.

Acceptance: retry/replay cannot farm the same reward; emotion changes and worship repetition counts never determine XP. Discovery/practice/habit labels describe participation, not verified spirituality; exact values remain to be agreed.

FR-35 | P / Must / C-08, C-12, C-14

Admins shall edit localized editions, stage prerequisites, preview-door metadata, and approved practice/reward configurations through validated content tools.

Acceptance: translation publication cannot alter progression IDs; missing required Arabic copy blocks release; cyclic/impossible prerequisites and unavailable-door unlock rules fail validation; user reflection content is not exposed in this editor.

Retired requirements retained for traceability

These identifiers are historical records, not current scope. They are not reused for unrelated functionality.

FR-03 | Retired in v0.3

Two-person device pairing removed. Child access is specified by FR-01, FR-02, and FR-04.

FR-05 | Retired in v0.3

Separate adult/child learning contexts removed. Only the child learns in the app.

FR-14 | Retired in v0.3

Adult personal learning path removed.

FR-15 | Retired in v0.3

Adult monitoring/child-summary feature removed.

FR-16 | Retired in v0.3

Shared family-activity workflow removed.

5. Business rules

ID	Rule
BR-01	The child is the only learner-facing role. There is no companion account, family link, or another-person approval gate.
BR-02	Anger/sadness may be acknowledged without labeling the child's character. Completion reflects interaction with learning material.
BR-03	New content uses supported templates and schemas. A new engine or game mechanic may require a new client release.
BR-04	Published revisions are immutable. A draft can be rejected for review without affecting the currently live revision.
BR-05	A completion record identifies learner, journey, and content revision. It remains historical after revision or withdrawal, except deliberate account erasure.

ID	Rule
BR-06	Required digital steps must be reachable. Optional/reflection/real-world steps cannot be prerequisites for required progression.
BR-07	A child profile represents one learner; content admins do not inherit access to learner records.
BR-08	A device credential authorizes only its scoped learner and capabilities. Nickname or avatar selection is never proof of identity.
BR-09	A withdrawn revision cannot be resumed after the client learns it was withdrawn. Historical records are retained with an unavailable-content explanation.
BR-10	Resume cursor and completion are different: revisiting an earlier scene can change the cursor but cannot undo completed steps.
BR-11	Repeating a request with the same event identifier and payload returns the same outcome; reusing that identifier with a different payload is rejected.
BR-12	Language editions share canonical step/choice IDs and completion. Translating text never resets progress or silently changes learning logic.
BR-13	A locked future preview is not a progression-locked available door. All actual unlock prerequisites must be reachable in published content.
BR-14	Worship counts, emotional improvement, and perfect consecutive days do not determine moral status or learning rewards.
BR-15	Reward and check-in writes are idempotent. Replay cannot duplicate an award; timezone changes cannot create extra daily rewards.

6. Data requirements and visibility

Conceptual entities are modeled in UML. Physical tables and a database vendor are not selected.

Data	Minimum content	Visibility / lifecycle
Child profile	Learner ID, nickname, age or age band, avatar/appearance/color/badge references	Own learner only; credential or guest-session association follows OQ-01. No family owner foreign key.
Device session	Session ID, learner scope, expiry/revocation metadata	Scoped learner access; credentials in secure storage. Issuance/recovery method TBD.
Door / journey	Stable ID, age-target metadata, order, current published revision	Admin drafts private; published eligible metadata to learners.
Content revision / step / choice	Immutable revision ID, schema version, ordered step graph, assets, per-step rules	Readable to authorized learners only when available.
Attempt / checkpoint / completion	Learner, revision, cursor, completed step IDs, sequence, sync metadata	Own learner only. No raw answer history stored as progress.

Data	Minimum content	Visibility / lifecycle
Reflection	Optional fixed choices; text/voice modes unresolved	No other-user/admin/telemetry disclosure by default; final modality, storage, export, and erasure behavior await OQ-14.
Locale edition	Canonical revision ID, locale, edition version, localized copy/media, review state	Arabic required for release; English optional later; immutable published editions.
Practice plan / moment / check-in	Learner, approved context/practice, timezone, date, self-report	Learner-private by proposed default; no external monitoring view.
Reward ledger / unlock	Learner, stable reward rule/event identity, value or target	Learning participation only; no raw reflection payload.
Editorial review / audit event	Reviewer/admin, revision, action, time, source/rights notes	Authorized admin operations. Not a general learner activity log.

Server progress accepts only fields needed for completion and resumption. It must not use a permissive analytics/event payload that accidentally stores child choices or reflection text. Media access must follow the same draft/published/withdrawn permissions as metadata.

7. Nonfunctional requirements - proposed targets

All numerical targets below are design proposals, not observed performance. Final test hardware, network profile, pilot concurrency, and deployment region must be recorded before baselining.

NFR-01 | Authorization

Enforce object-level learner isolation and role checks for every protected operation, including recovery, deletion, media preview, and progress. Verify wrong-learner and wrong-role requests across the API surface.

NFR-02 | Sessions and recovery

Use encrypted transport, secure credential storage, expiration/revocation, duplicate-safe issuance, and server-side abuse controls. Exact sign-in, recovery, credential lifetime, and rate-limit values depend on OQ-01 and threat review; no family pairing protocol is part of this version.

NFR-03 | Privacy

No ads/tracking SDKs or sensitive-answer telemetry in this MVP proposal. Review network traces and logs for session/recovery credentials, reflections, child contact data, and raw answers. Decide retention and account-erasure deadlines before release.

NFR-04 | Reliability

Local progress writes survive app restart once acknowledged locally. Server acknowledgment occurs only after durable commit. Retry tests shall prove no duplicate completion or backward completion regression. Explicitly label unsynced state.

NFR-05 | Interaction performance

Proposed target: local navigation/choice feedback starts within 200 ms at p95 on the agreed representative device. Media startup is measured separately. Do not block navigation on analytics.

NFR-06 | Service performance

Proposed target: metadata/progress APIs complete within 1 second at p95 at an agreed pilot load, excluding media transfer. Cold launches and large assets require their own measured budget. No capacity claim until load/device/network assumptions are agreed.

NFR-07 | Accessibility / language

RTL layouts, text/audio alternatives, captions where essential, non-color-only feedback, reduced-motion support, and accessible control names. Verify key journeys with screen readers and 200% text scaling without loss of actions. No standards-compliance certification is claimed.

NFR-08 | Compatibility

Expo React Native is fixed. OS versions, Android/iOS launch coverage, admin browser support, and device matrix remain OQ-04. A tested matrix must exist before release.

NFR-09 | Content compatibility

Unknown schemas/templates fail safely; publication validates supported client capability requirements. Test a currently supported client against a future unsupported revision without a crash or corrupt progress.

NFR-10 | Operations

Capture errors, sync failures, and publication failures with correlation IDs and no sensitive payloads. Test restore from a backup in a nonproduction environment; backup frequency, recovery objectives, retention, and operator ownership must be set before launch.

NFR-11 | Editorial quality

Every published journey has documented source/rights review and an age-appropriateness review by the project's appointed owner. Final religious text is reviewed before publication; this SRS supplies no approval.

NFR-12 | Child usability

Before release, observe children across the 10-14 range completing the key flow without coaching after setup. Record confusion, reading/audio needs, and failure to find retry/exit actions. Sample size and success threshold remain to be agreed; no untested claim that one design fits all ages.

NFR-13 | Localization

Validate complete Arabic/RTL content at launch and a nonpublic English/LTR fixture using the same canonical IDs. Test font growth, audio/caption alternatives, locale fallback, and unchanged progress after language switching. Do not require English content to launch Arabic.

NFR-14 | Practice consistency

Exercise duplicate/reordered/offline check-ins, missed days, timezone boundaries, replayed rewards, and content revisions. Records must not duplicate, reset existing completion, or turn future previews into available content.

8. External interfaces

- **Child mobile app:** Expo React Native. Specific screens are design work to follow, not mandated pixel layouts.
- **Admin client:** proposed desktop web app. Writes through authenticated content operations, not direct database access.
- **Identity boundary:** establish scoped child access, authenticate admins separately, revoke credentials, and implement the selected child recovery model. Provider and login method remain open.
- **Content interface:** paginated/ordered catalog, revision manifest, capability metadata, and authorized media references.

- **Progress interface:** scoped attempt creation, version-bound checkpoint events with idempotency keys, and own confirmed-progress reads.
- **Media pipeline:** uploads, validation/processing status, published-delivery references, and withdrawal checks. Provider, codecs, limits, and signed-URL policy are implementation decisions.

No API route names, database engine, hosting platform, or microservice topology is contracted by this document.

9. Failure and change policy

- Expired or lost session: use the approved recovery flow; never infer identity from nickname/avatar or grant access to a guessed learner ID.
- Interrupted learning: resume locally when required cached data exists; otherwise preserve checkpoint and request connectivity.
- Routine content update: keep current attempt on its version; new attempts use the new version.
- Content withdrawal: stop subsequent authorized delivery; keep an explanatory historical record; do not claim cached bytes can be remotely erased instantly.
- Stale progress submission: merge completion monotonically, validate cursor ordering, and return authoritative state. Authorized device recovery starts from server-confirmed state when supported.
- Failed publish: keep prior live version and return actionable validation errors.
- Account erasure: stop access immediately; apply the agreed erasure/backup policy without promising a period not yet defined.

10. Release gate and outstanding decisions

Use Section 08 for acceptance scenarios. Before a public release, resolve child access/recovery, reflection privacy, launch platforms/countries, content ownership, data retention/erasure, operational ownership, and the test/device/load matrix. Content production and review are release dependencies, not assumed completed work.

05 Detailed use cases

UC-01 - Start or resume the child's own profile

Actor: Child. **Requirements:** FR-01, FR-02, FR-04, FR-29. **Decision dependency:** OQ-01/OQ-09.

1. The child opens the app and starts profile setup or resumes authorized access to an existing profile.
2. The system establishes the child-scoped session through the selected guest/account mechanism. The mechanism is not selected in this draft.
3. The child supplies age-band information and chooses their own avatar, nickname, appearance, color, and badge before entering the map.
4. Profile settings and learning progress are saved within that learner's scope.
5. Later entry resumes valid access or offers the approved recovery flow.

Failures/alternatives: expired credential requires renewal/recovery; a nickname match is not identity proof; failed recovery never opens a different learner's record. A local-only guest may lose unsynced data after app removal or device loss; limitations must be explained if that model is chosen.

Postcondition: the child reaches their own map without a second account or linked person's device. A content admin uses a separate authenticated route.

UC-02 - Explore the first child journey

Actor: Child. **Requirements:** FR-06-FR-11. **Preconditions:** authorized session, published supported content available.

1. Child completes their own character setup, enters «خريطة الحياة الطيبة», and opens the available «باب الذكر» entry experience.
2. Service selects an available revision and creates/resumes a bound attempt.
3. Child views an illustrated scene; narration is optional and core meaning is readable.
4. Child explores a choice and its authored consequence.
5. Child may try a different response and continues after the step's participation criterion is satisfied.
6. Child sees a real-life activity and may defer it; reflection is optional.

Alternatives/failures: unsupported schema to explanatory state with safe return; missing required media to retry without losing checkpoint; optional media failure to text alternative; distressing/repeated-mistreatment scenario to authored trusted-adult guidance, not a diagnostic or emergency service.

Postcondition: the child has a meaningful next action and saved learning checkpoint. No moral score is generated.

Dhikr content is provisional: a notification interrupts study; the child explores a reconnecting choice, discovers the meaning of Dhikr through a story, and tries a brief guided practice. The app accepts “not much changed” without grading emotions. Final Arabic copy, religious references, pacing, and assets require review.

UC-03 - Save, resume, and complete learning

Actor: Child. **Requirements:** FR-12, FR-13, FR-22, FR-25, FR-26.

1. App records the current checkpoint and completion evidence locally using a unique event ID and attempt revision.
2. App marks unsynced progress as pending and submits allowed progress fields to the service.
3. Service checks learner scope, revision availability, step identity, event uniqueness, and sequencing.
4. Service atomically records the event and merges completed steps without regression.
5. Service determines completion from the bound revision's required-step rules and returns confirmed state.
6. App acknowledges synchronization and can resume at the saved checkpoint on later entry.

Alternatives/failures: duplicate request to same result; same event ID/different payload to reject; connection loss to durable queue; force-close to restore local checkpoint; stale cursor event to retain newer cursor; a deliberate later replay of an earlier scene to allow newer cursor while retaining completion; withdrawn revision to stop new content access, retain historical records, show explanation.

Postcondition: progress is either explicitly pending locally or committed on the server. A second device cannot see progress that has never reached the server.

Privacy: choice feedback is processed from authored content; raw choice histories and optional reflection answers are not progress payloads. Completion evidence contains step IDs/statuses, not free-form answers. The server is not certifying real-world behavior.

UC-06 - Author, review, and publish new content

Actor: Admin. **Requirements:** FR-17-FR-21, FR-24.

Preconditions: admin authorization, supported templates known; no learner-data access implied.

1. Admin creates a door/journey or a draft revision of an existing journey.
2. Admin assigns child learning paths, stable step IDs, ordering, template data, media, and completion rules.
3. Media is uploaded privately; processing and rights/accessibility metadata are checked.
4. Admin previews the child path and locale editions and records editorial review, including sources where applicable.
5. Validator checks schema, assets, references, reachable required steps, optionality rules, and supported client capabilities.
6. Admin explicitly publishes using the expected current draft version.
7. Service atomically freezes the revision, changes the live pointer, and records an audit event.
8. Existing compatible clients see the new journey on the next catalog refresh; already open sessions are not forcibly navigated away.

Alternatives/failures: invalid data/unreviewed material to actionable errors; stale draft version to reload/reconcile; publication failure to previous live version remains; upload alone to remains private; same publish operation retried to one published revision and one effective publication action.

Postcondition: a complete revision is live. No app update is needed for content using already supported templates; no arbitrary game-engine creation is implied.

UC-07 - Revise or withdraw content

Actor: Admin. **Requirements:** FR-21-FR-24.

Routine revision: clone live revision to a new draft to review/validate to publish. Existing attempts remain bound to the older available revision. New attempts use the current one. Old completion remains historical.

Withdrawal: admin chooses an exact revision to provides reason to confirms scope to service marks it withdrawn and invalidates new delivery access. Bound attempts receive an unavailable state on their next authorization/content check. Their records are not erased.

Alternatives: no replacement available to honest unavailable state, no fake next journey; correction to withdrawn content to new reviewed revision; previous safe version desired to create a new draft from it and review/publish, not an unreviewed silent rollback.

Limit: already downloaded bytes cannot be guaranteed to disappear immediately from disconnected devices. The offline policy remains under review.

UC-08 - Manage own access and data

Actor: Child. **Requirements:** FR-04, FR-27. **Decision dependencies:** OQ-01/OQ-11.

Session lifecycle: expire/logout/revoke the scoped session according to the selected identity model. A replacement device restores server-confirmed progress only after successful authorized recovery. The exact recovery proof remains undecided; no second-person approval is involved.

Reset/deletion: explain whether the action clears local device data, the remote learner profile, or both. Require deliberate confirmation and scoped authorization. Revoke associated sessions and apply the agreed erasure and backup-retention policy. Content published by admins remains unaffected.

Failure: an invalid recovery proof or another learner's identifier grants no access and cannot delete their records. Unsynced data on a lost device is not guaranteed recoverable.

Postcondition: access management and data deletion apply only to the requesting learner. Revocation is distinct from erasure. Concrete UX and deadlines depend on the access and retention decisions.

UC-09 - Plan and continue Dhikr practice

Actor: Child. **Requirements:** FR-31-FR-34. **Status:** proposed interpretation of the supplied Dhikr concept.

1. Child discovers daily remembering moments, such as before sleep or before studying.
2. Child chooses one approved context and practice for a when/then plan.
3. A suggested seven-day practice window begins in the plan's chosen timezone.
4. Child may check in with tried/remembered/remembered independently, or leave a day blank.
5. App acknowledges participation, resumes after pauses, and offers the closing reflection without claiming that a habit or calmer emotion has been proven.

Failures/alternatives: no check-in does not reset learning; retry writes once; changing devices uses confirmed server state; overlapping plans do not multiply the same reward. Any XP rules are explicit, capped by eligible event identity, and unrelated to worship counts.

Postcondition: saved practice plan and voluntary history; digital completion and long-term practice remain distinct. Compulsory seven-day gating is unresolved.

UC-10 - Create a character and navigate doors

Actor: Child. **Requirements:** FR-29, FR-30.

1. After establishing their own access, child chooses avatar, nickname, appearance, color, and badge from the proposed preset catalog.
2. Choices are saved; the child enters «خريطة الحياة الطيبة».
3. Available Dhikr entry opens its introductory discovery; later authored regions explain their learning prerequisites.
4. Selecting a future preview such as «معية الله» explains that the door is not yet available, without exposing draft content or asking for impossible unlock tasks.

Alternatives: canceled customization retains last saved settings; missing asset has a valid default; withdrawn content takes precedence over prior unlock state. Learning unlocks depend only on available content and the defined learning prerequisites.

UC-11 - Publish a language edition without resetting progress

Actor: Admin; learner is the eventual reader. **Requirements:** FR-28, FR-35, NFR-13.

1. Admin opens an existing canonical content revision and selects Arabic or a later English edition.
2. Admin supplies localized labels, scene/choice/feedback text, audio/captions, and accessibility copy linked to stable IDs.
3. Validation checks complete required fields, media readiness, religious translation review, and locale-specific rendering.
4. Publishing an immutable locale edition makes it eligible for the catalog's enabled-language policy.
5. The learner sees the appropriate published edition with the same progress and unlock identity.

Alternatives: English may stay absent or draft while Arabic launches; missing English falls back explicitly to Arabic after English is enabled; no mixed-language sentence fallback; changed learning meaning/graph requires a new canonical revision rather than a translation-only edit.

UC-12 - Optional closing reflection

Actor: Child. **Requirements:** FR-26. **Decision dependency:** OQ-14.

The closing prompts ask when Dhikr felt easiest, when it was difficult, and where the child would like it in their day. The source proposes writing or a voice note. Those input modes are recorded as requests, not silently enabled.

The child may skip without losing learning progress. Any selected implementation must define storage, retention, deletion, and microphone denial/interruption behavior before release. Raw answers remain excluded from other-user views, content-admin tools, ordinary progress synchronization, and analytics under the current privacy proposal. No AI analysis or voice transcription is implied.

Retired use cases

ID	Status	Disposition
UC-04	Retired in v0.3	Separate adult learning path removed.
UC-05	Retired in v0.3	Adult monitoring and shared-support workflow removed.

These are historical identifiers only; no corresponding current actor or interface is required.

06 Logical architecture

1. Direction

Start with one backend application organized into clear modules, a transactional persistence boundary, and separate media storage/delivery. These are logical responsibilities, not a recommendation to deploy separate microservices. The admin web client is a proposal. Backend framework, identity provider, database, storage/CDN, queues, hosting, and observability products remain undecided.

The content model is the key architectural choice: administrators publish data that existing client renderers understand. This supports new journeys without turning the MVP into a general game-creation platform.

2. Responsibility boundaries

Component	Owns	Does not own
Child mobile shell	Child navigation and accessibility	Server authorization decisions.
Content renderer	Supported template display, authored choices, audio/text controls	Executing remote scripts or inventing new game mechanics.
Local progress store and outbox	Durable checkpoints, pending events, restart recovery	Claiming server sync before acknowledgment.
Identity/session module	Child identity/session scope, admin authentication, access recovery, revocation/deletion initiation	Editorial publication.
Catalog/content module	Drafts, immutable revisions, validation, availability, publication pointer	Treating a new schema as supported by old apps.
Progress module	Version-bound attempts, idempotent events, required-step completion	Moral scores or raw reflection storage.
Media module	Private upload, type validation, asset readiness, delivery authorization	Automatic publication on upload.
Admin client	Editing, review, preview, explicit publication	Direct database writes or learner-data browsing.
Audit/operations	Content lifecycle audit, non-sensitive faults, backup/restore	Child-answer analytics.

3. Proposed trust boundaries

All clients are untrusted. Server operations derive learner access from validated identity/session scope; passing a child ID never grants access. Preview media is private to authorized admins. Published media is available only according to its revision's delivery policy. Catalog filtering is not sufficient access control for direct asset or revision requests.

Child access may use a guest/device credential, an account, or a combination; the choice remains OQ-01. The server binds private data to the validated learner identity. Nickname, age, avatar, and a client-supplied learner ID cannot prove identity. Recovery must authenticate the same learner before restoring remote progress; local-only limitations are explicit if that model is chosen.

Content admins manage content only. A future support capability requires an explicit permission and purpose; it must not be silently added to “admin”.

4. Content contract

Each revision has a schema version and declares required client capabilities. Each step has a stable ID within that revision, learning path, template type, authored data, optional media references, and a completion rule. Choice destinations stay inside their authored learning path unless an explicit supported transition exists.

Publish validation checks:

- Assets exist, are ready, and have the required alternatives/source/rights metadata.
- Required digital steps are reachable; optional tasks do not become hidden gates.
- All references and choice targets resolve; authored loops have an exit.
- Template/schema capabilities are compatible with the intended supported clients.
- Review is recorded and the expected draft version matches the saved version.

Published data is immutable. The active catalog points to a live revision; previous nonwithdrawn revisions remain available for bound attempts. Withdrawal changes availability, not historical content or completion. A content fix requires another reviewed revision.

5. Progress and synchronization

Use one independent identity for each child learner. An attempt binds one learner to one content revision. Persist a resume cursor separately from the set of completed required steps.

Proposed event envelope: eventId, attemptId, revisionId, deviceSessionId, sequence, checkpointStepId, and newly completed allowed step IDs. Exclude raw answer/reflection payloads. The server validates step IDs and state transitions; completion measures participation only, so clients are not proving real-world conduct.

Local storage commits before showing “saved on this device”. The outbox retries with the same identifier. The server atomically deduplicates and commits before returning “synced”. Same identifier with a changed payload is an error. Stale cursor updates cannot overwrite a newer cursor; completed steps merge monotonically.

Simultaneous-device policy and recovery credentials remain open. If one active device is selected, approved recovery revokes the previous session. If simultaneous devices are selected, define cursor-conflict ordering before implementation; completion remains monotonic. No family pairing or companion device exists.

Full offline playback is not promised. Cached scenes may be usable during a disruption; missing media requires connectivity. A replacement device only restores server-confirmed state. Optional reflection data is separate from the progress outbox. Written/voice storage and deletion design remain conditional on OQ-14; no existing synchronization endpoint should accept those payloads by default.

6. Publication consistency

A publish operation uses an idempotency identifier plus expected draft version. Validate before mutation; commit immutable revision, live pointer, and audit record in one transactional boundary. External media must be ready before the transaction. A failure leaves the prior live pointer unchanged. Asset cleanup after abandoned drafts needs a later retention policy.

For withdrawal, deny new authorized delivery and invalidate cached metadata where feasible. Time-bounded media links can reduce exposure, but exact link lifetime/CDN policy is undecided. Do not claim that previously delivered files can be retracted instantly.

7. Data and API design still to come

After the behavioral baseline is accepted, produce:

- Physical schema with keys, constraints, indexes, deletion/retention behavior, and migrations.
- API contracts for child access/recovery, catalog/revisions, progress , and admin workflows.
- Concrete auth threat model, credential lifetime/rotation/recovery, abuse controls, and learner-isolation tests.
- Media format/size limits, processing pipeline, caching and storage budget.
- Deployment topology, environment separation, CI/CD, backups, restore targets, monitoring, and cost estimates.

These are not omitted implementation work: the current stage establishes requirements and UML before committing to a stack. Picking providers before OQ-04/OQ-05/OQ-06/OQ-10 would conceal assumptions about platform, connectivity, distribution, and scale.

8. Main risks and proposed controls

Risk	Proposed control	Decision still needed
Losing access to a child profile	Explicit scoped recovery, expiry, revocation, and honest local-only limits	Choose the access/recovery model.
Leaking another learner's records	Server learner-scope checks and minimal responses	Confirm storage and privacy policy.
A content edit breaks an ongoing journey	Immutable revisions and version-bound attempts	Withdrawal/replacement UX.
Admin publishes unsupported interactions	Capability validation and bounded templates	Final template list.
User assumes unsynced work is backed up	Visible local/pending/confirmed state	Connectivity scope.
Production content is missing or unsuitable	Editorial ownership, provenance, preview, age testing	Content team and review process.
Broad scope overwhelms single-door MVP	One complete vertical journey plus reusable authoring	Approve the proposed MVP boundary.

9. Localization without duplicating the curriculum

Keep locale-neutral Door, Journey, Stage, Step, and Choice identities. A versioned **LocaleEdition** belongs to one canonical ContentRevision and maps stable content keys to text, audio, captions, and accessibility alternatives. Localized door/journey labels are catalog metadata. Avoid titleAr/titleEn columns and duplicated English journeys as the long-term structure.

Arabic is complete and enabled at launch. English editions can be added and reviewed later without changing progress identity or the underlying content graph. Each published edition is immutable; a correction creates another

locale-edition version. A semantic change to the learning graph needs a new canonical revision. Attempts can pin an edition during a session and adopt a reviewed equivalent edition on next entry without losing progress.

Fallback is explicit: Arabic remains the baseline; incomplete English is not published and is not mixed into Arabic UI. The mobile shell still needs translated interface strings, LTR layout, and regression testing for an eventual English release; content readiness alone does not ship a bilingual app.

10. Practice, rewards, and map availability

Add logical modules for character configuration, practice plans/check-ins, participation rewards, and map eligibility within the same proposed backend. Store approved avatar-option IDs; personal media uploads are not a prerequisite.

Represent future_preview, progression_locked, available, completed, and withdrawn separately. Preview-door metadata is explicitly published; unpublished educational assets remain private. Server eligibility checks use reachable learning prerequisites and content availability. Previously unlocked content can still be withdrawn.

PracticePlan identifies learner, approved moment/practice, timezone, and optional target window. PracticeCheckIn is unique by plan and local date; updates are idempotent, with no punitive missing-day reset. A proposed RewardGrant uses learner plus stable eligible reward/event identity to avoid replay farming. These records never certify worship or emotional improvement. Practice details are visible only within the learner's own experience under the proposed access policy.

The source's seven days, ten-second exercise, ten-minute introduction, XP values, named characters, garden, and secret doors are authoring proposals. A simple governed content implementation does not imply background reminders, AI evaluation, sound recording, or arbitrary mini-game generation. Resolve reflection input/storage and practice completion gates before implementing those dependent behaviors.

07 UML models


The following ten models express the draft requirements. Behavioral mechanisms, privacy boundaries, and account ownership marked as proposals remain subject to review. These are software models, not UI layouts.

Model	Purpose
Use cases	The child and content admin are the only current actors. Retired adult learning and monitoring workflows are excluded. Content administration grants no access to learner records.
Content domain	Conceptual classes, not physical database tables. Stable journeys have immutable revisions with child learning paths. Multiplicities describe a valid publishable model; drafts may be incomplete.
Learner domain	Each child is an independent learner with scoped identity and sessions. Attempts bind to content revisions. The access/recovery mechanism and simultaneous-device policy remain open.
Child learning activity	Independent learning, durable local progress, optional practice/reflection steps, and network recovery. A locally finished session can still have synchronization pending.
Child access and recovery	Child profile setup, session resumption, and authorized recovery. Guest versus account access and recovery credentials are not selected. No companion account or approval is involved.
Progress synchronization sequence	Separates local save from server confirmation and handles duplicate submissions. Only the authenticated child can restore their own progress; raw reflections remain outside progress payloads.
Content revision lifecycle	Publication freezes a revision. Editing creates another draft; withdrawal affects future availability without silently removing historical completion.
Logical components	Proposed client, backend, persistence, identity, and media boundaries. Backend modules do not imply separately deployed microservices or a selected vendor.
Localization model	Arabic release and future English editions share canonical content IDs and progress. Localized text and media are versioned, reviewed editions.
Practice and rewards	Remembering moments, plans, voluntary check-ins, and participation rewards. Reflection input/storage and seven-day gating remain open.

Drawing pages use A3 dimensions so the original diagrams remain legible when zoomed or printed at their native size. Editable PlantUML sources are maintained with the project specification.

UML 01 Use cases


The child and content admin are the only current actors. Retired adult learning and monitoring workflows are excluded. Content administration grants no access to learner records.

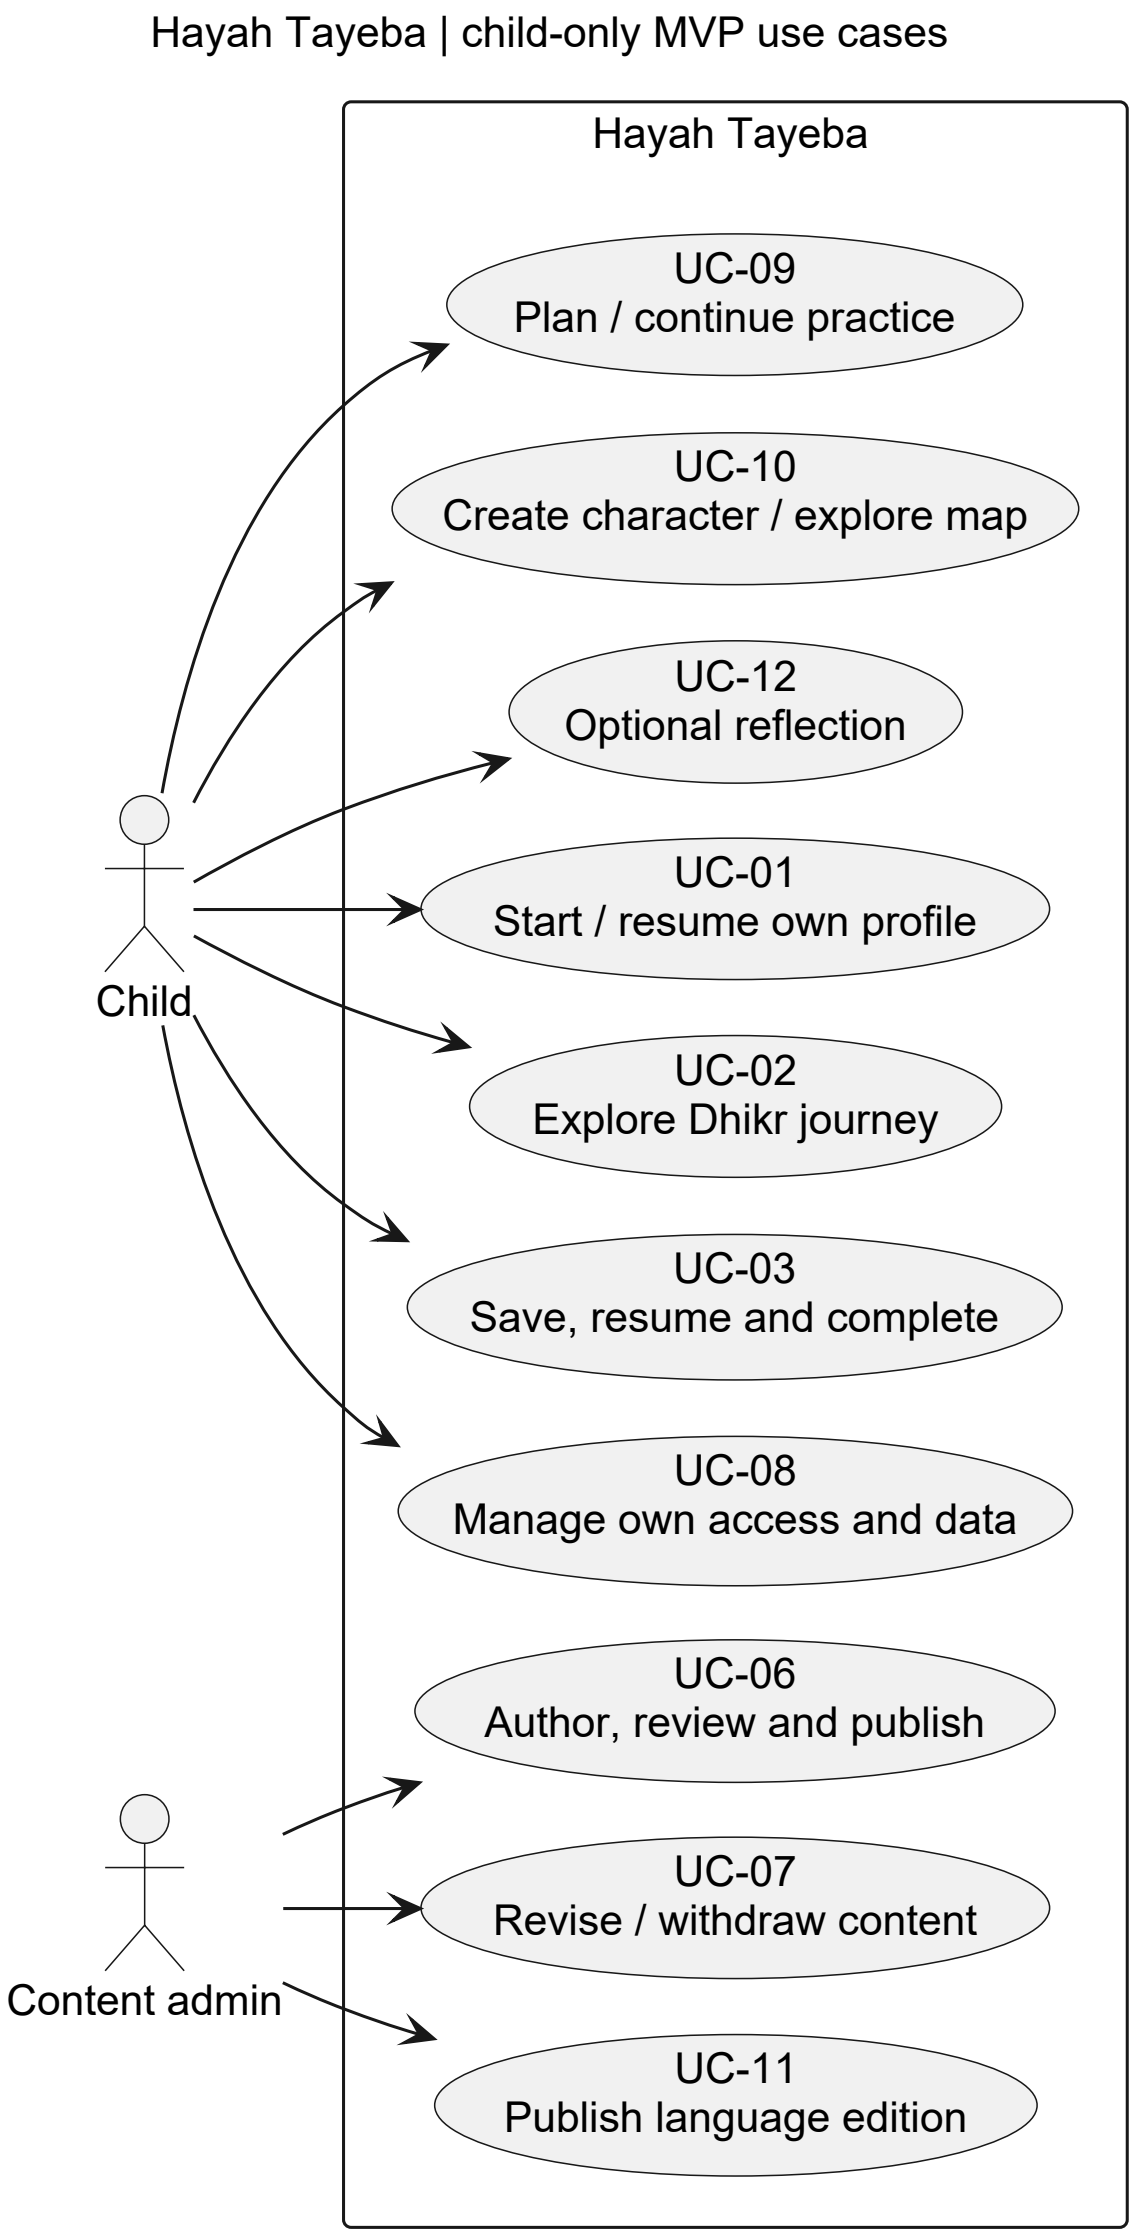

UML 02 Content domain


Conceptual classes, not physical database tables. Stable journeys have immutable revisions with child learning paths. Multiplicities describe a valid publishable model; drafts may be incomplete.

Content domain | conceptual classes, not database tables

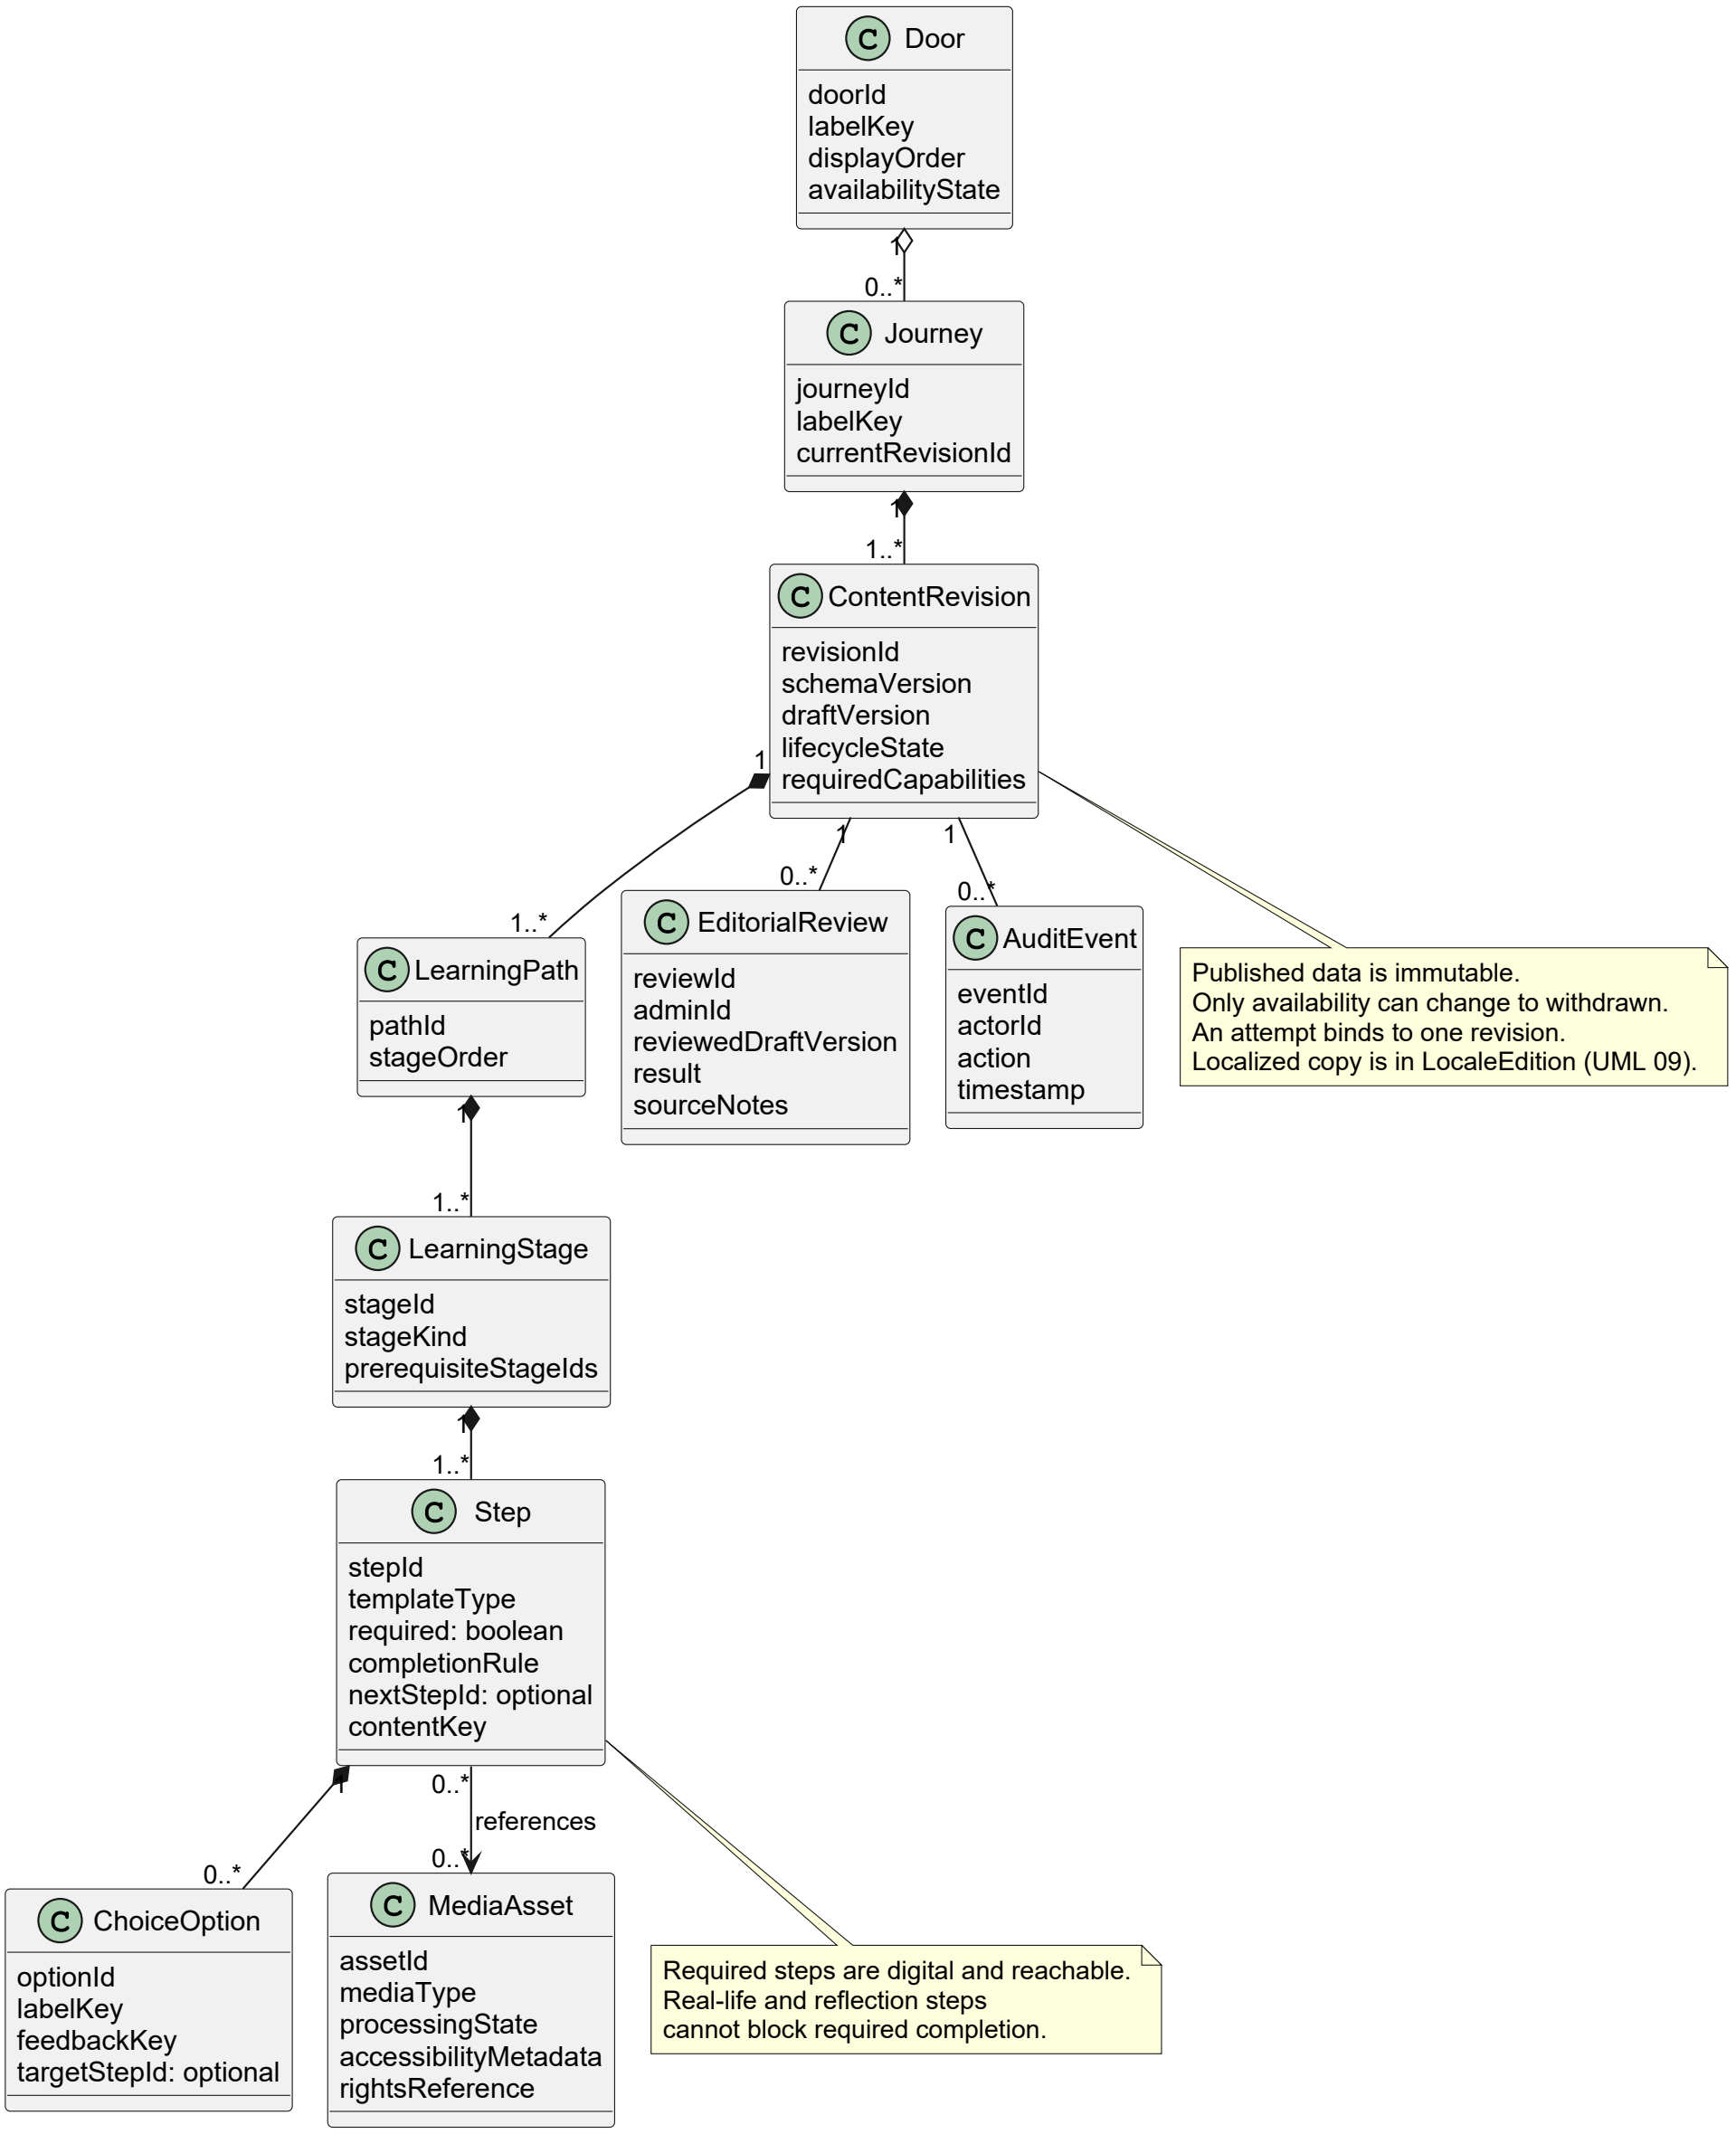


UML 03 Learner domain

Each child is an independent learner with scoped identity and sessions. Attempts bind to content revisions. The access/recovery mechanism and simultaneous-device policy remain open.

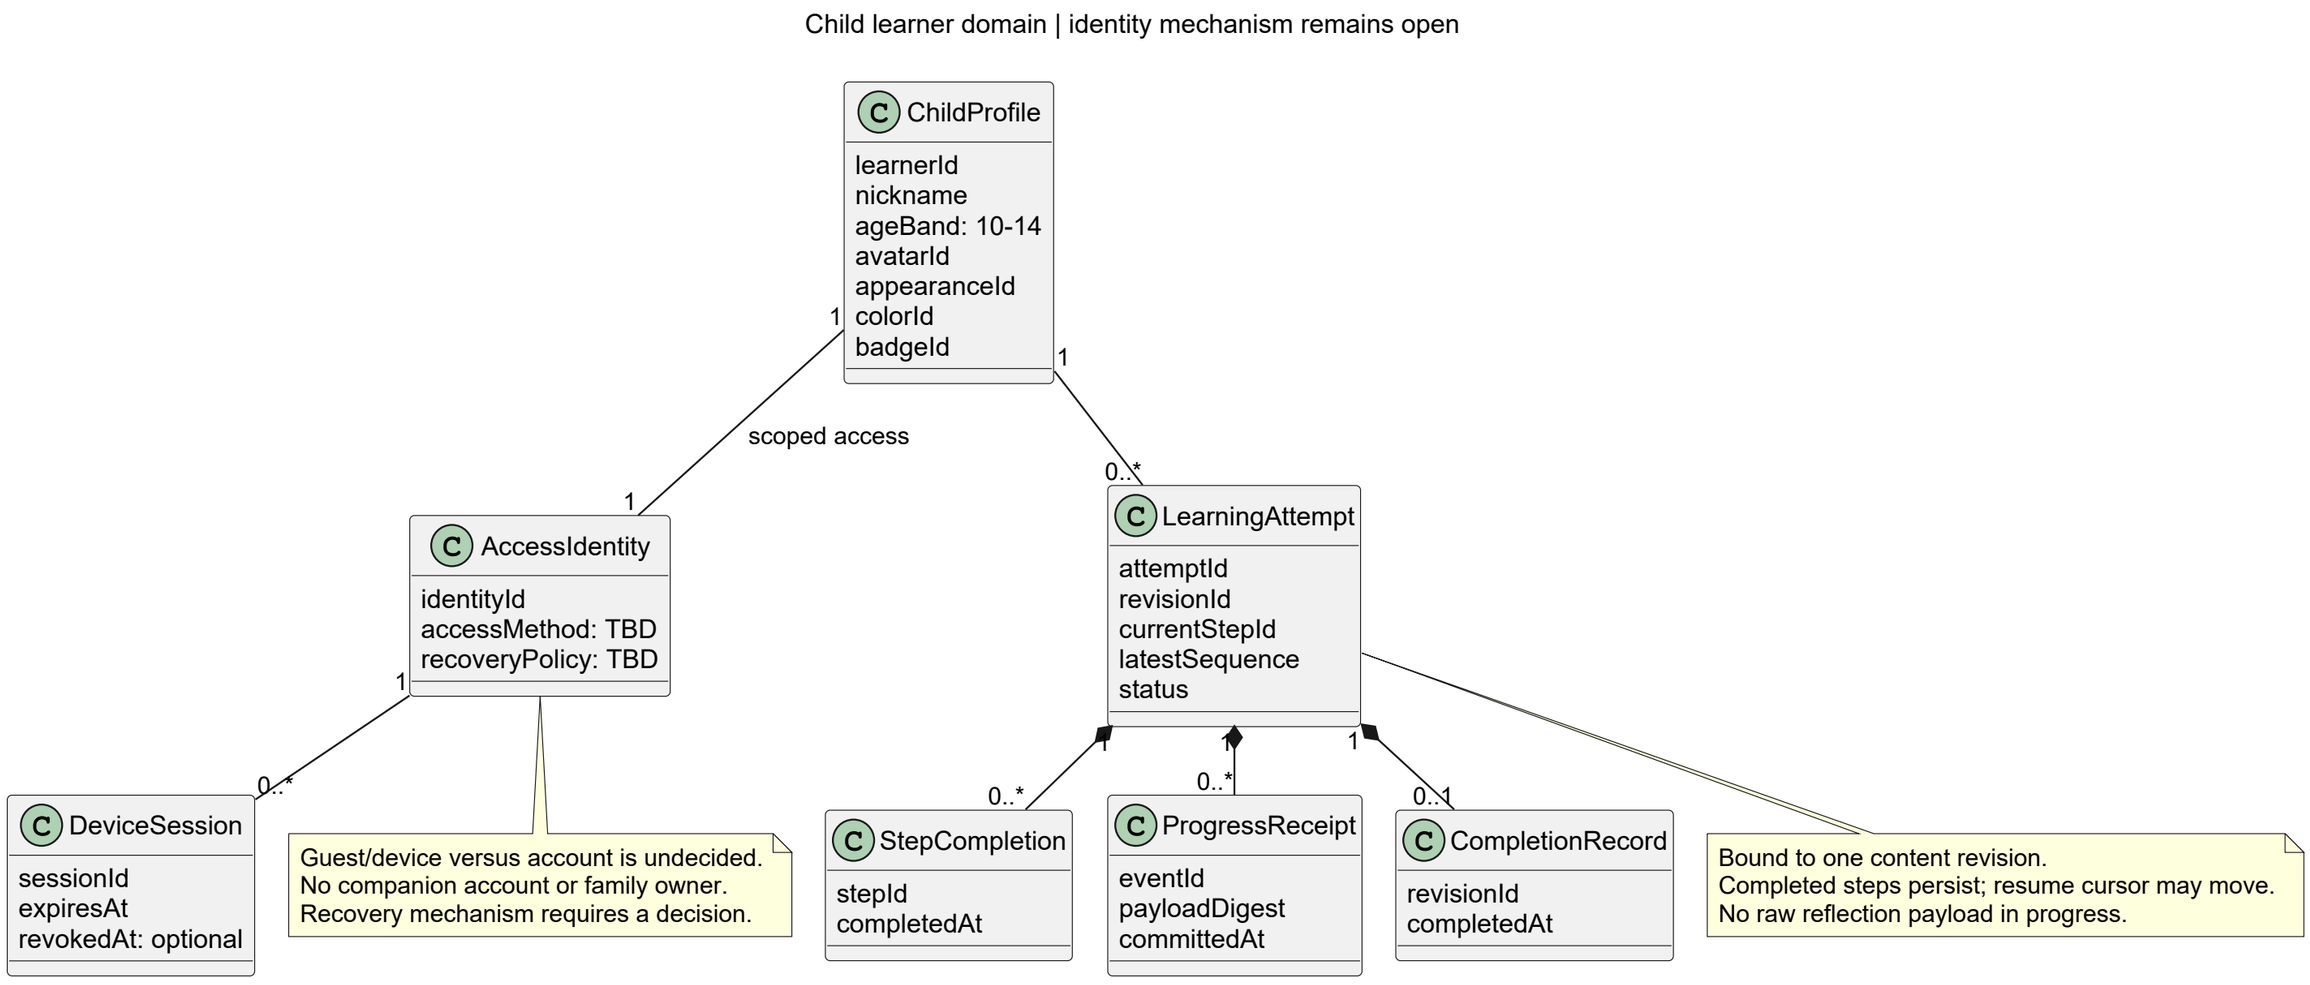


UML 04 Child learning activity

Independent learning, durable local progress, optional practice/reflection steps, and network recovery. A locally finished session can still have synchronization pending.

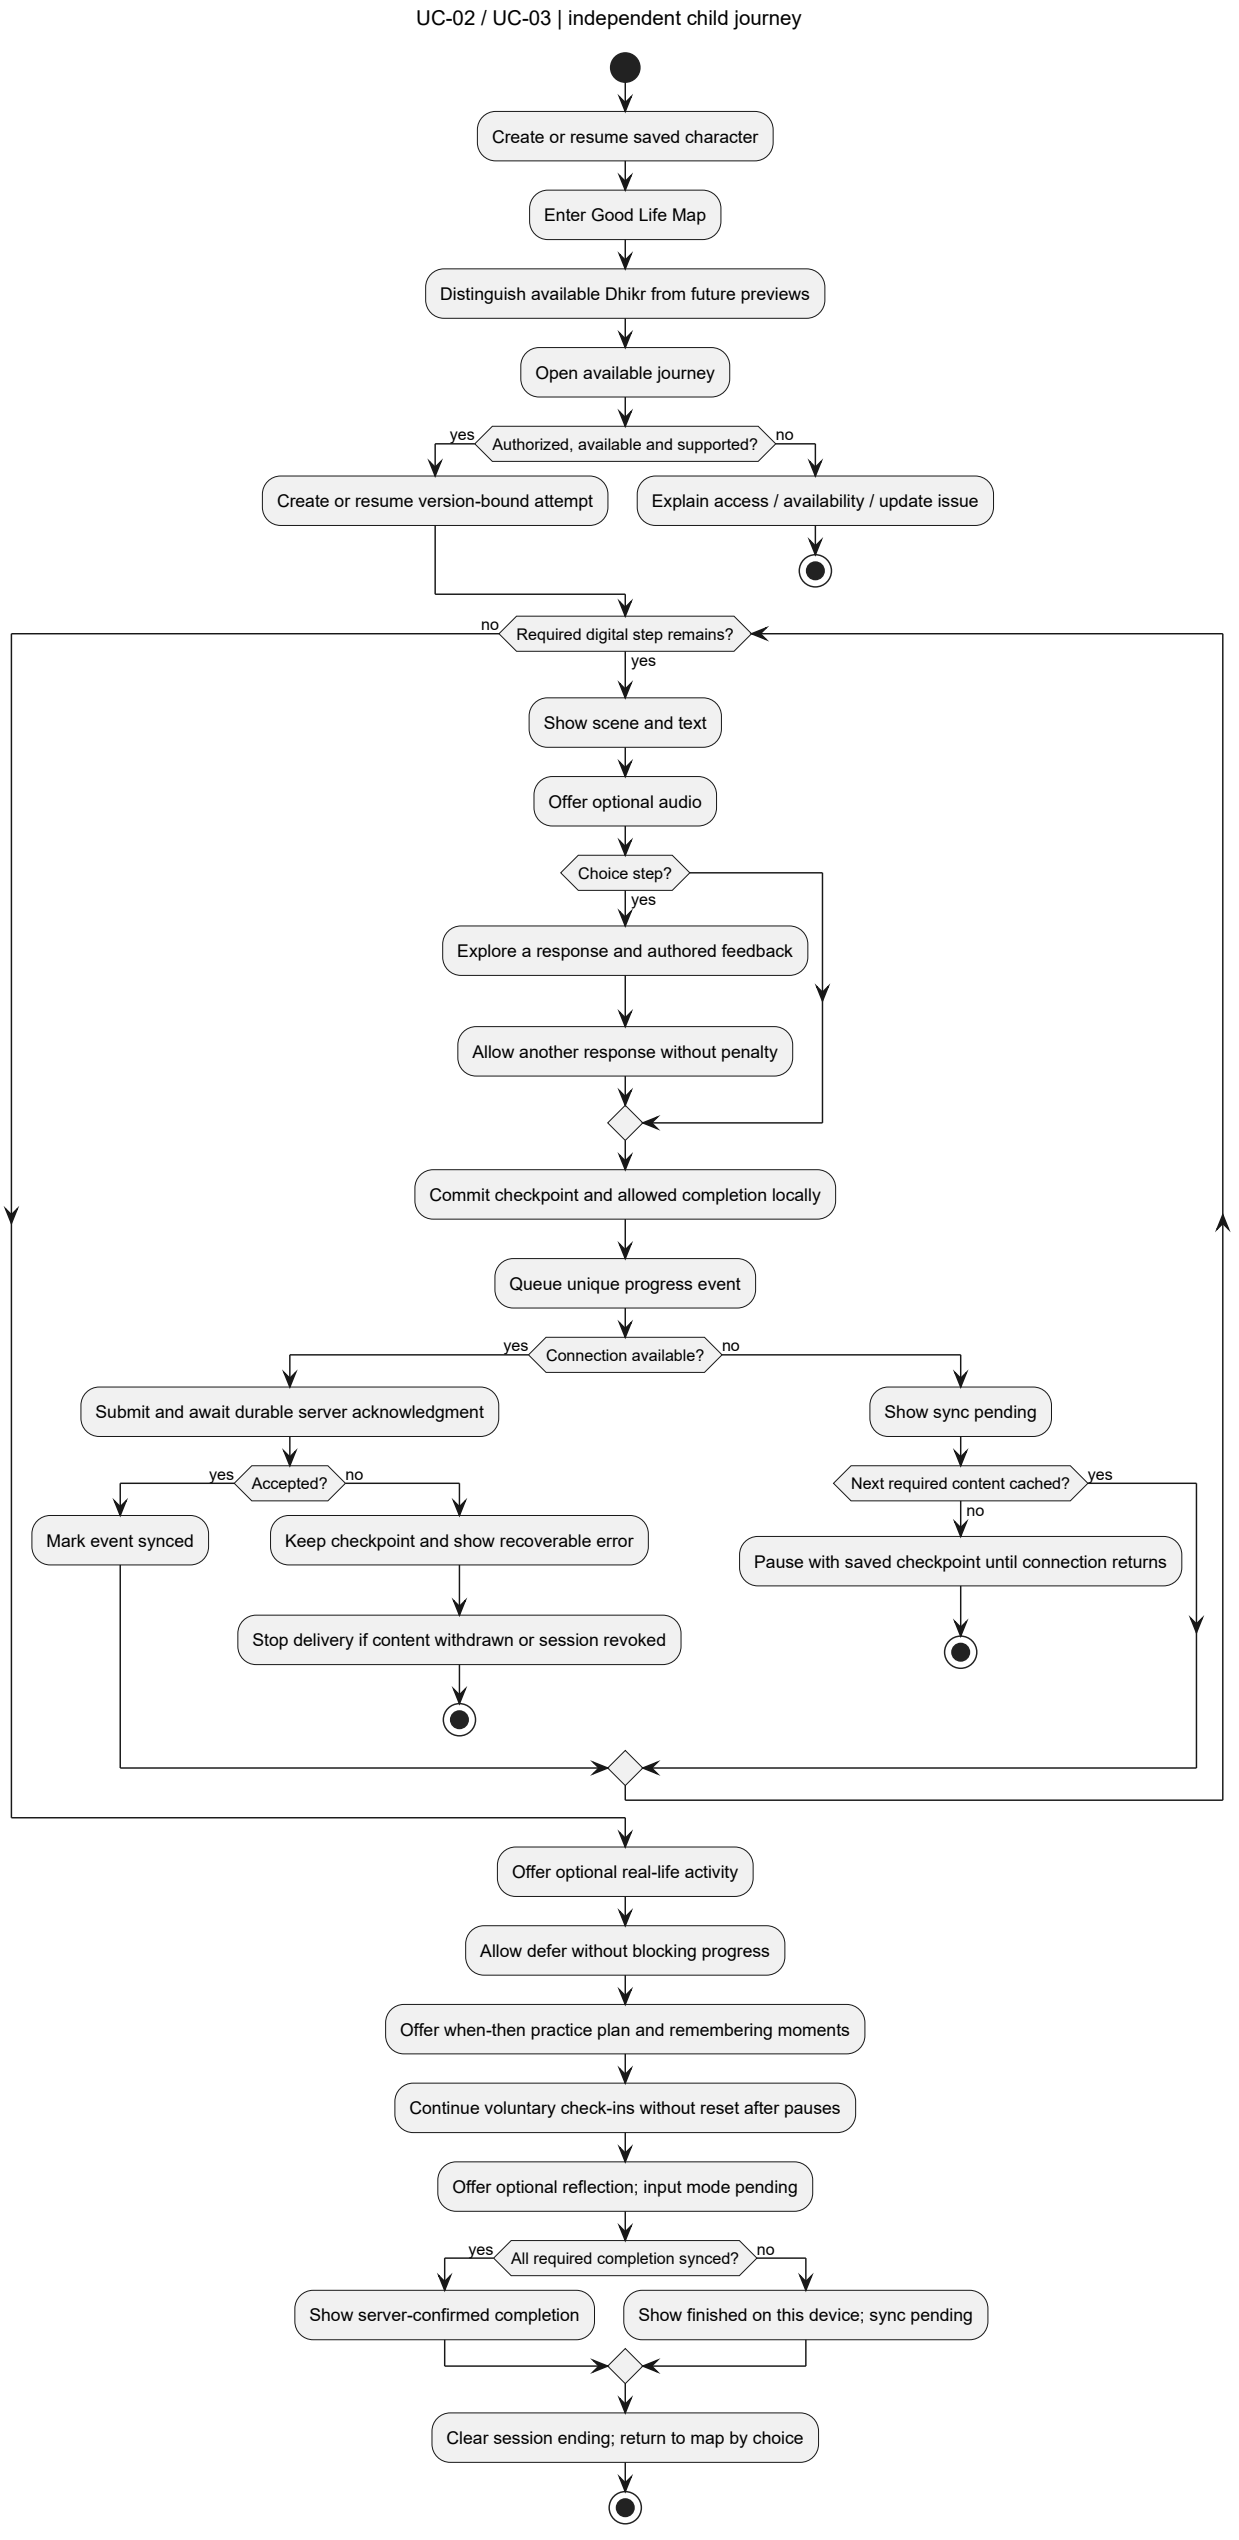


UML 05 Child access and recovery

Child profile setup, session resumption, and authorized recovery. Guest versus account access and recovery credentials are not selected. No companion account or approval is involved.

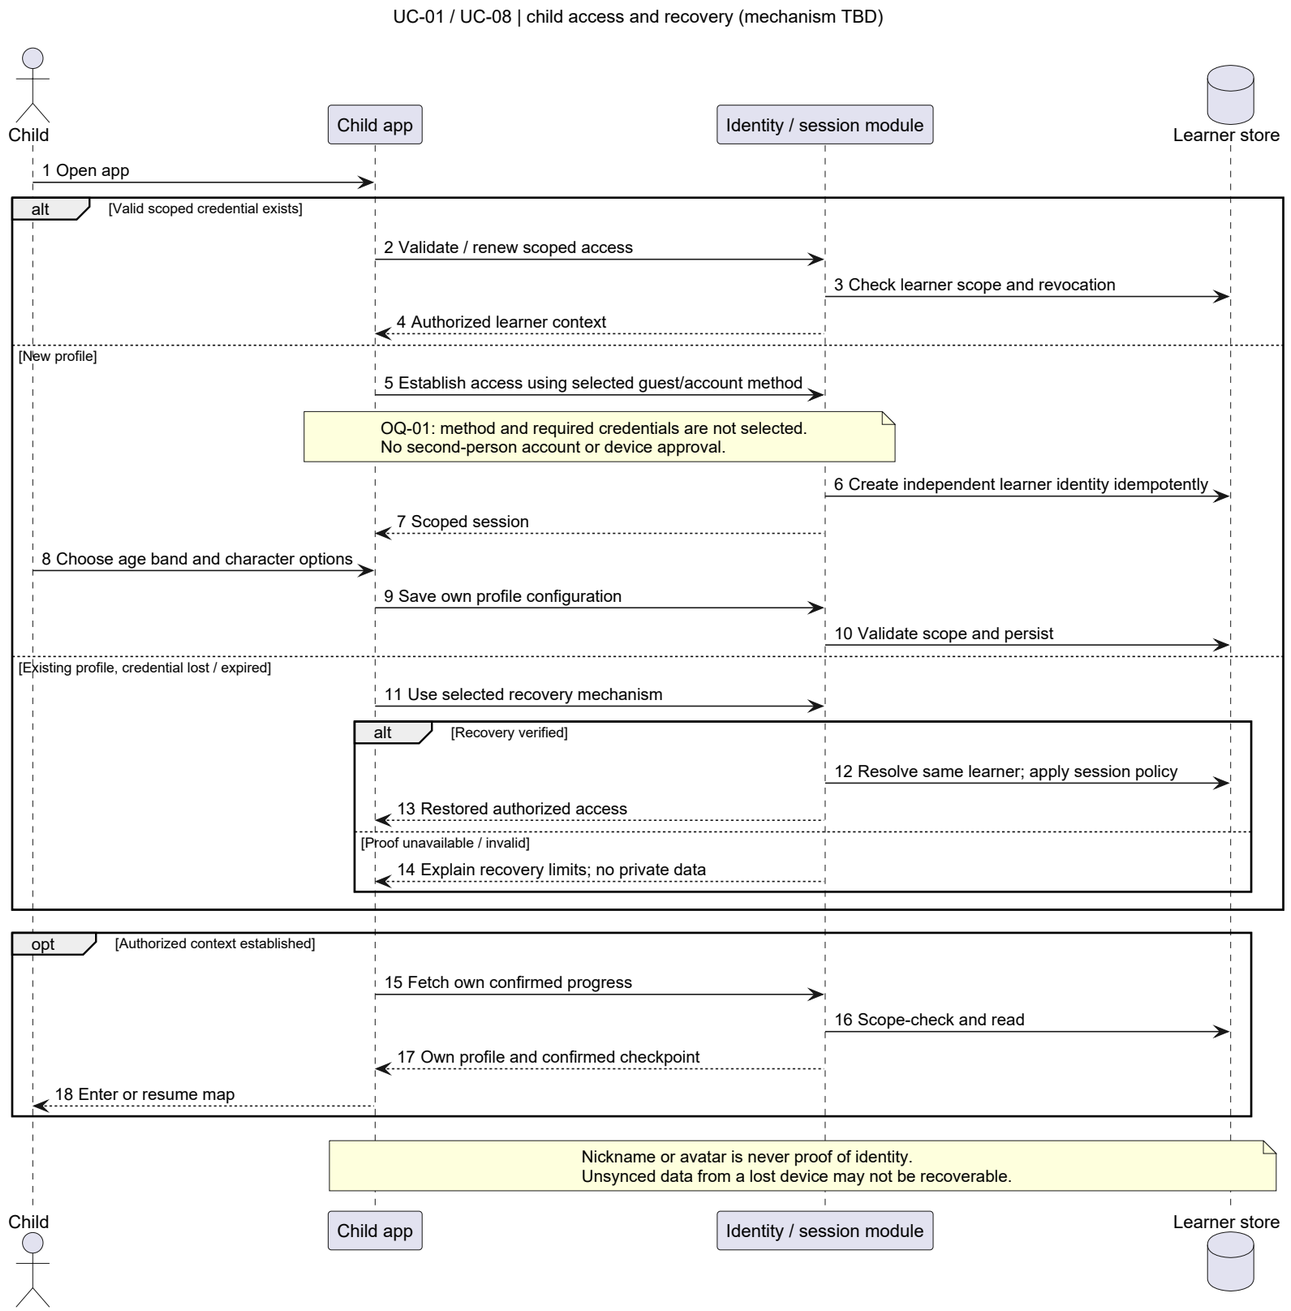


UML 06 Progress synchronization sequence

Separates local save from server confirmation and handles duplicate submissions. Only the authenticated child can restore their own progress; raw reflections remain outside progress payloads.

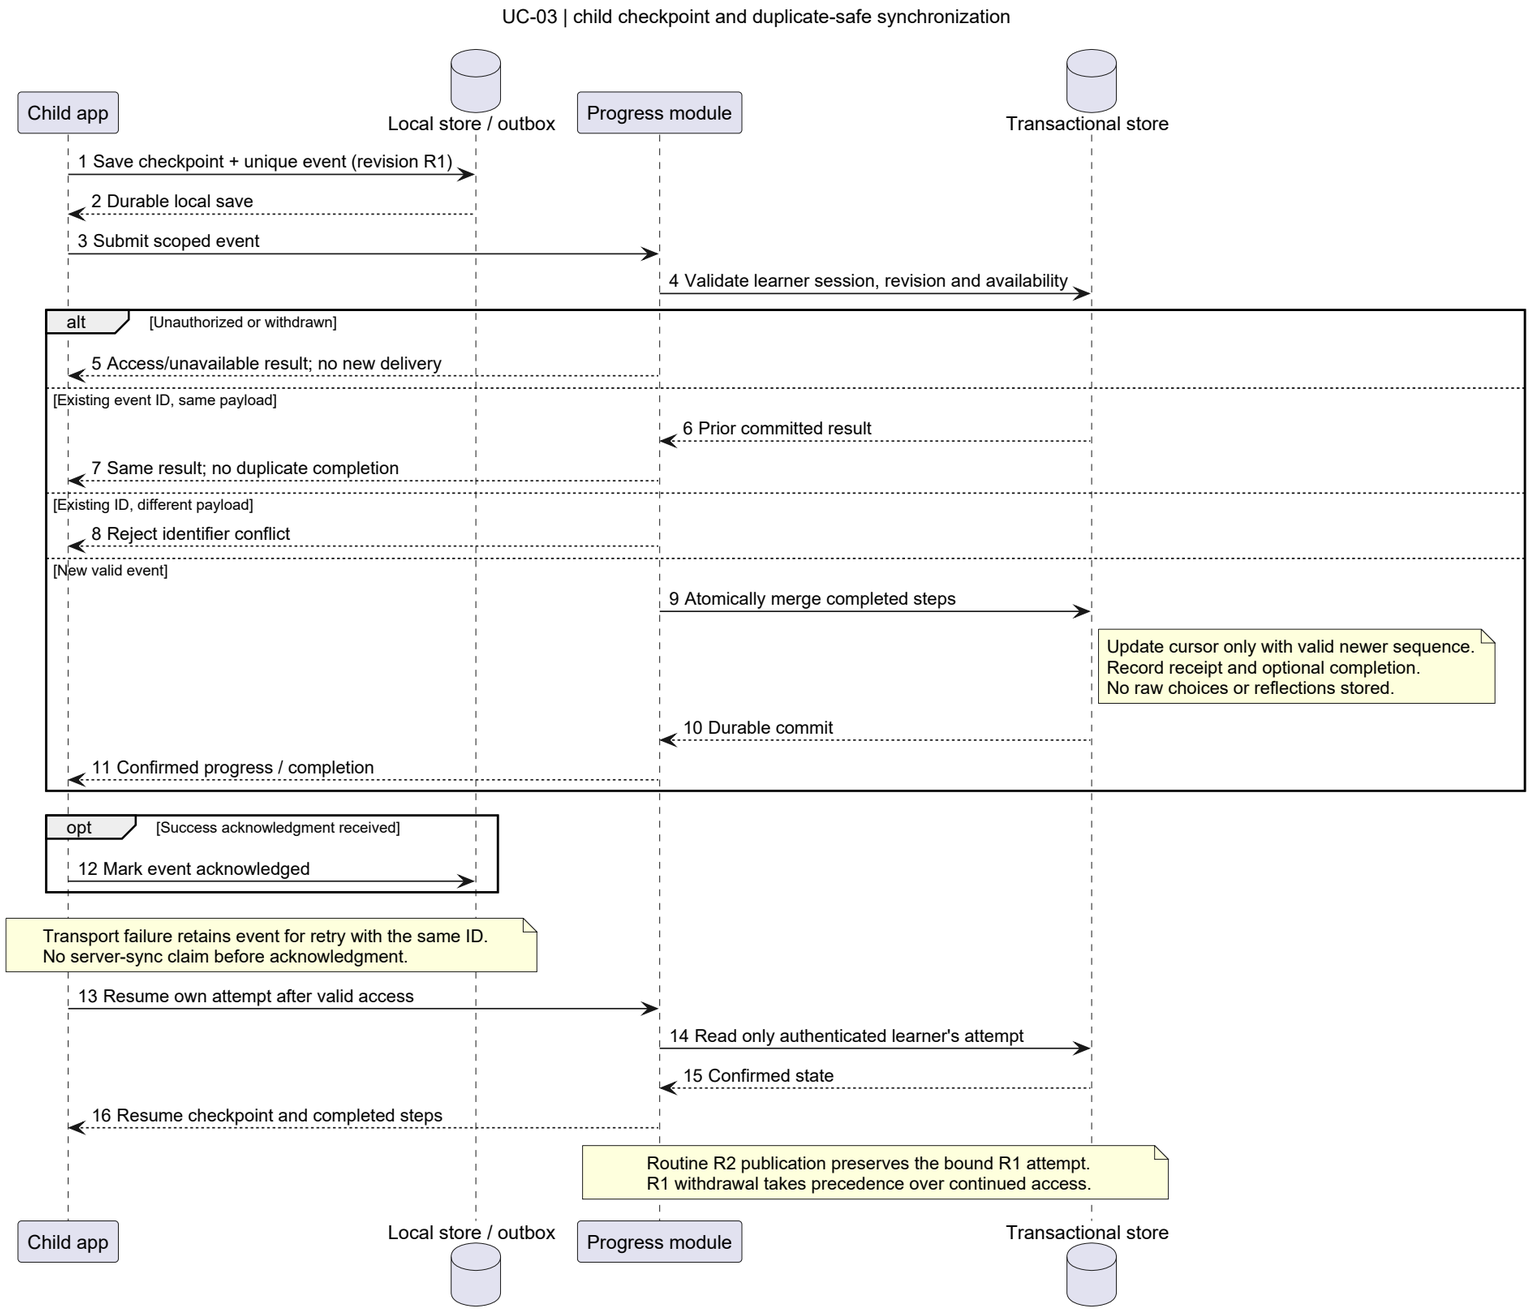


UML 07 Content revision lifecycle

Publication freezes a revision. Editing creates another draft; withdrawal affects future availability without silently removing historical completion.

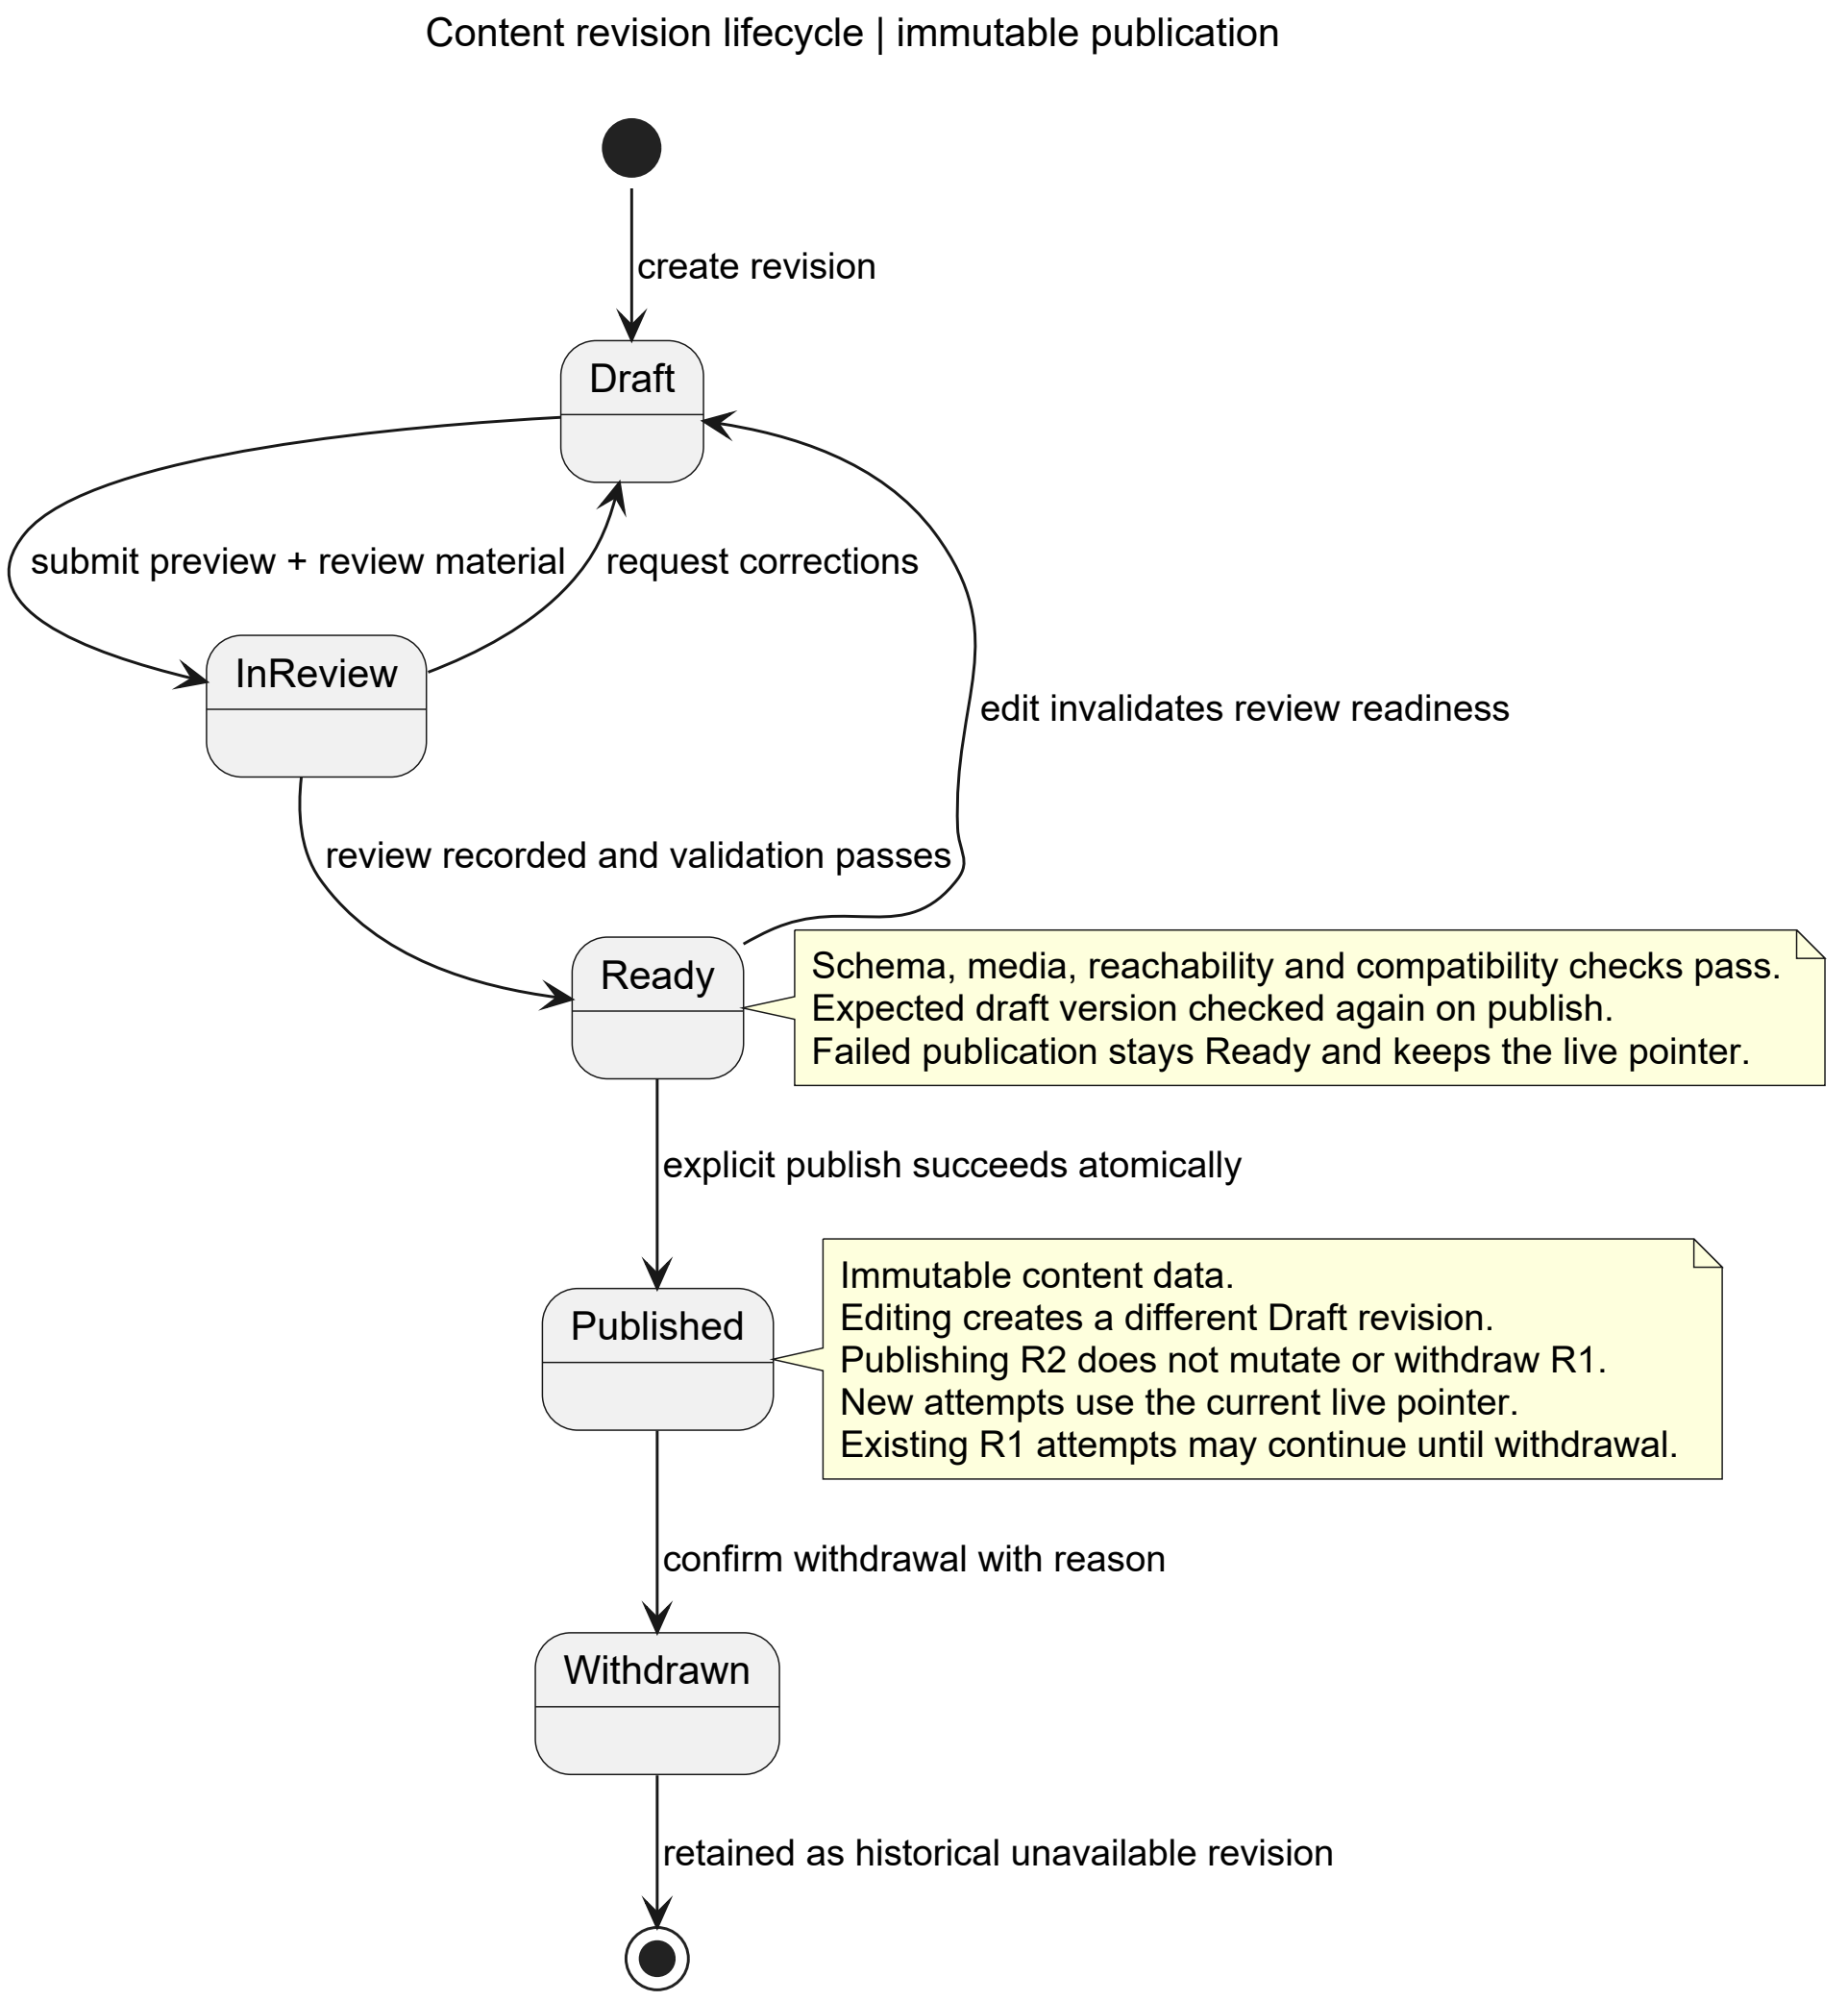


UML 08 Logical components

Proposed client, backend, persistence, identity, and media boundaries. Backend modules do not imply separately deployed microservices or a selected vendor.

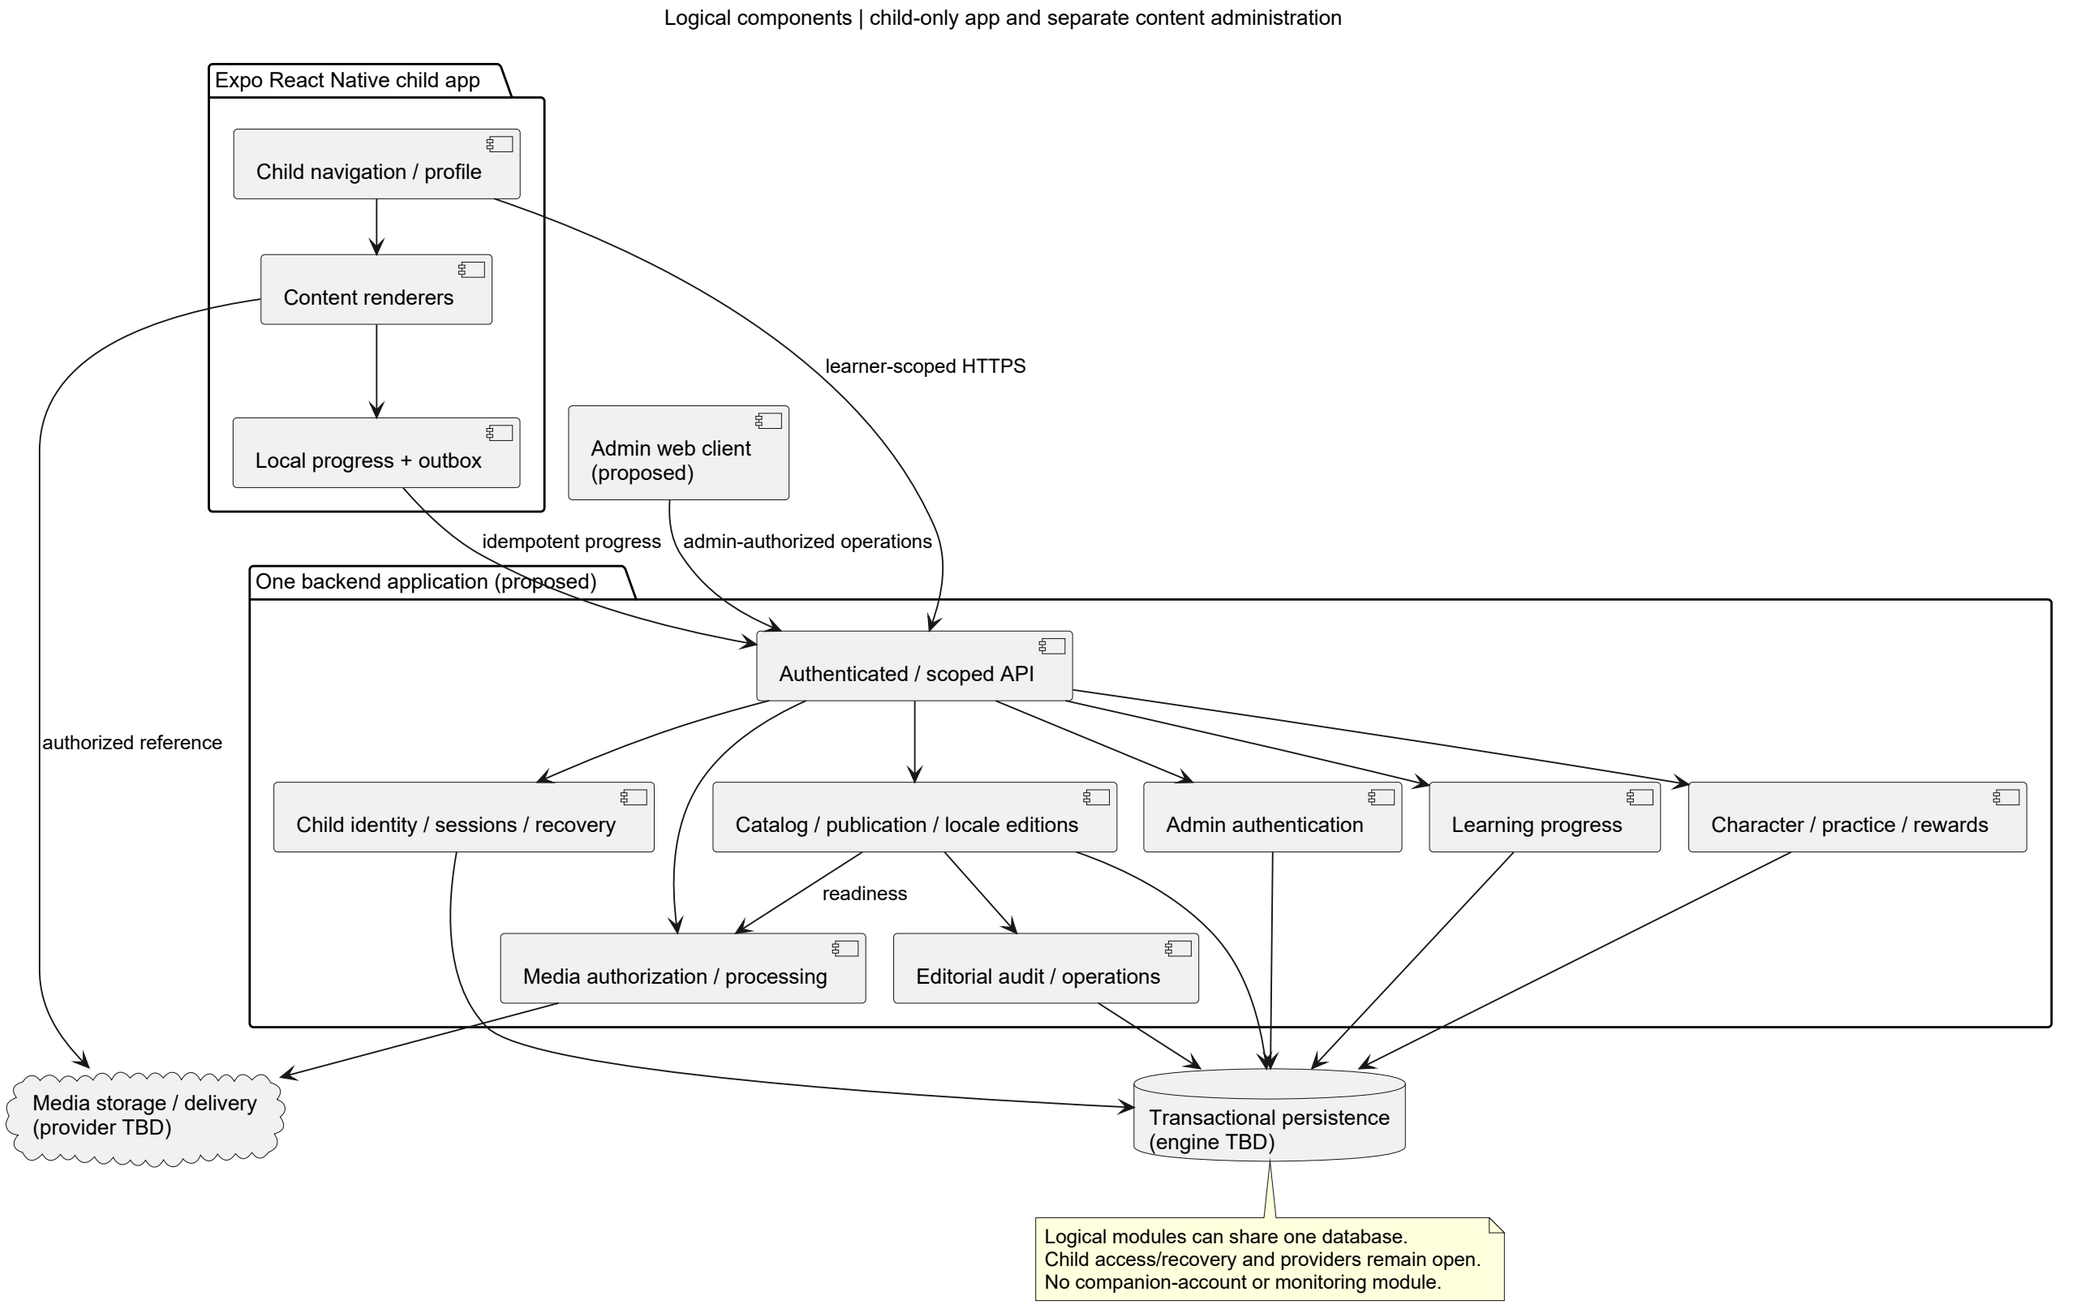

UML 09 Localization model


Arabic release and future English editions share canonical content IDs and progress. Localized text and media are versioned, reviewed editions.

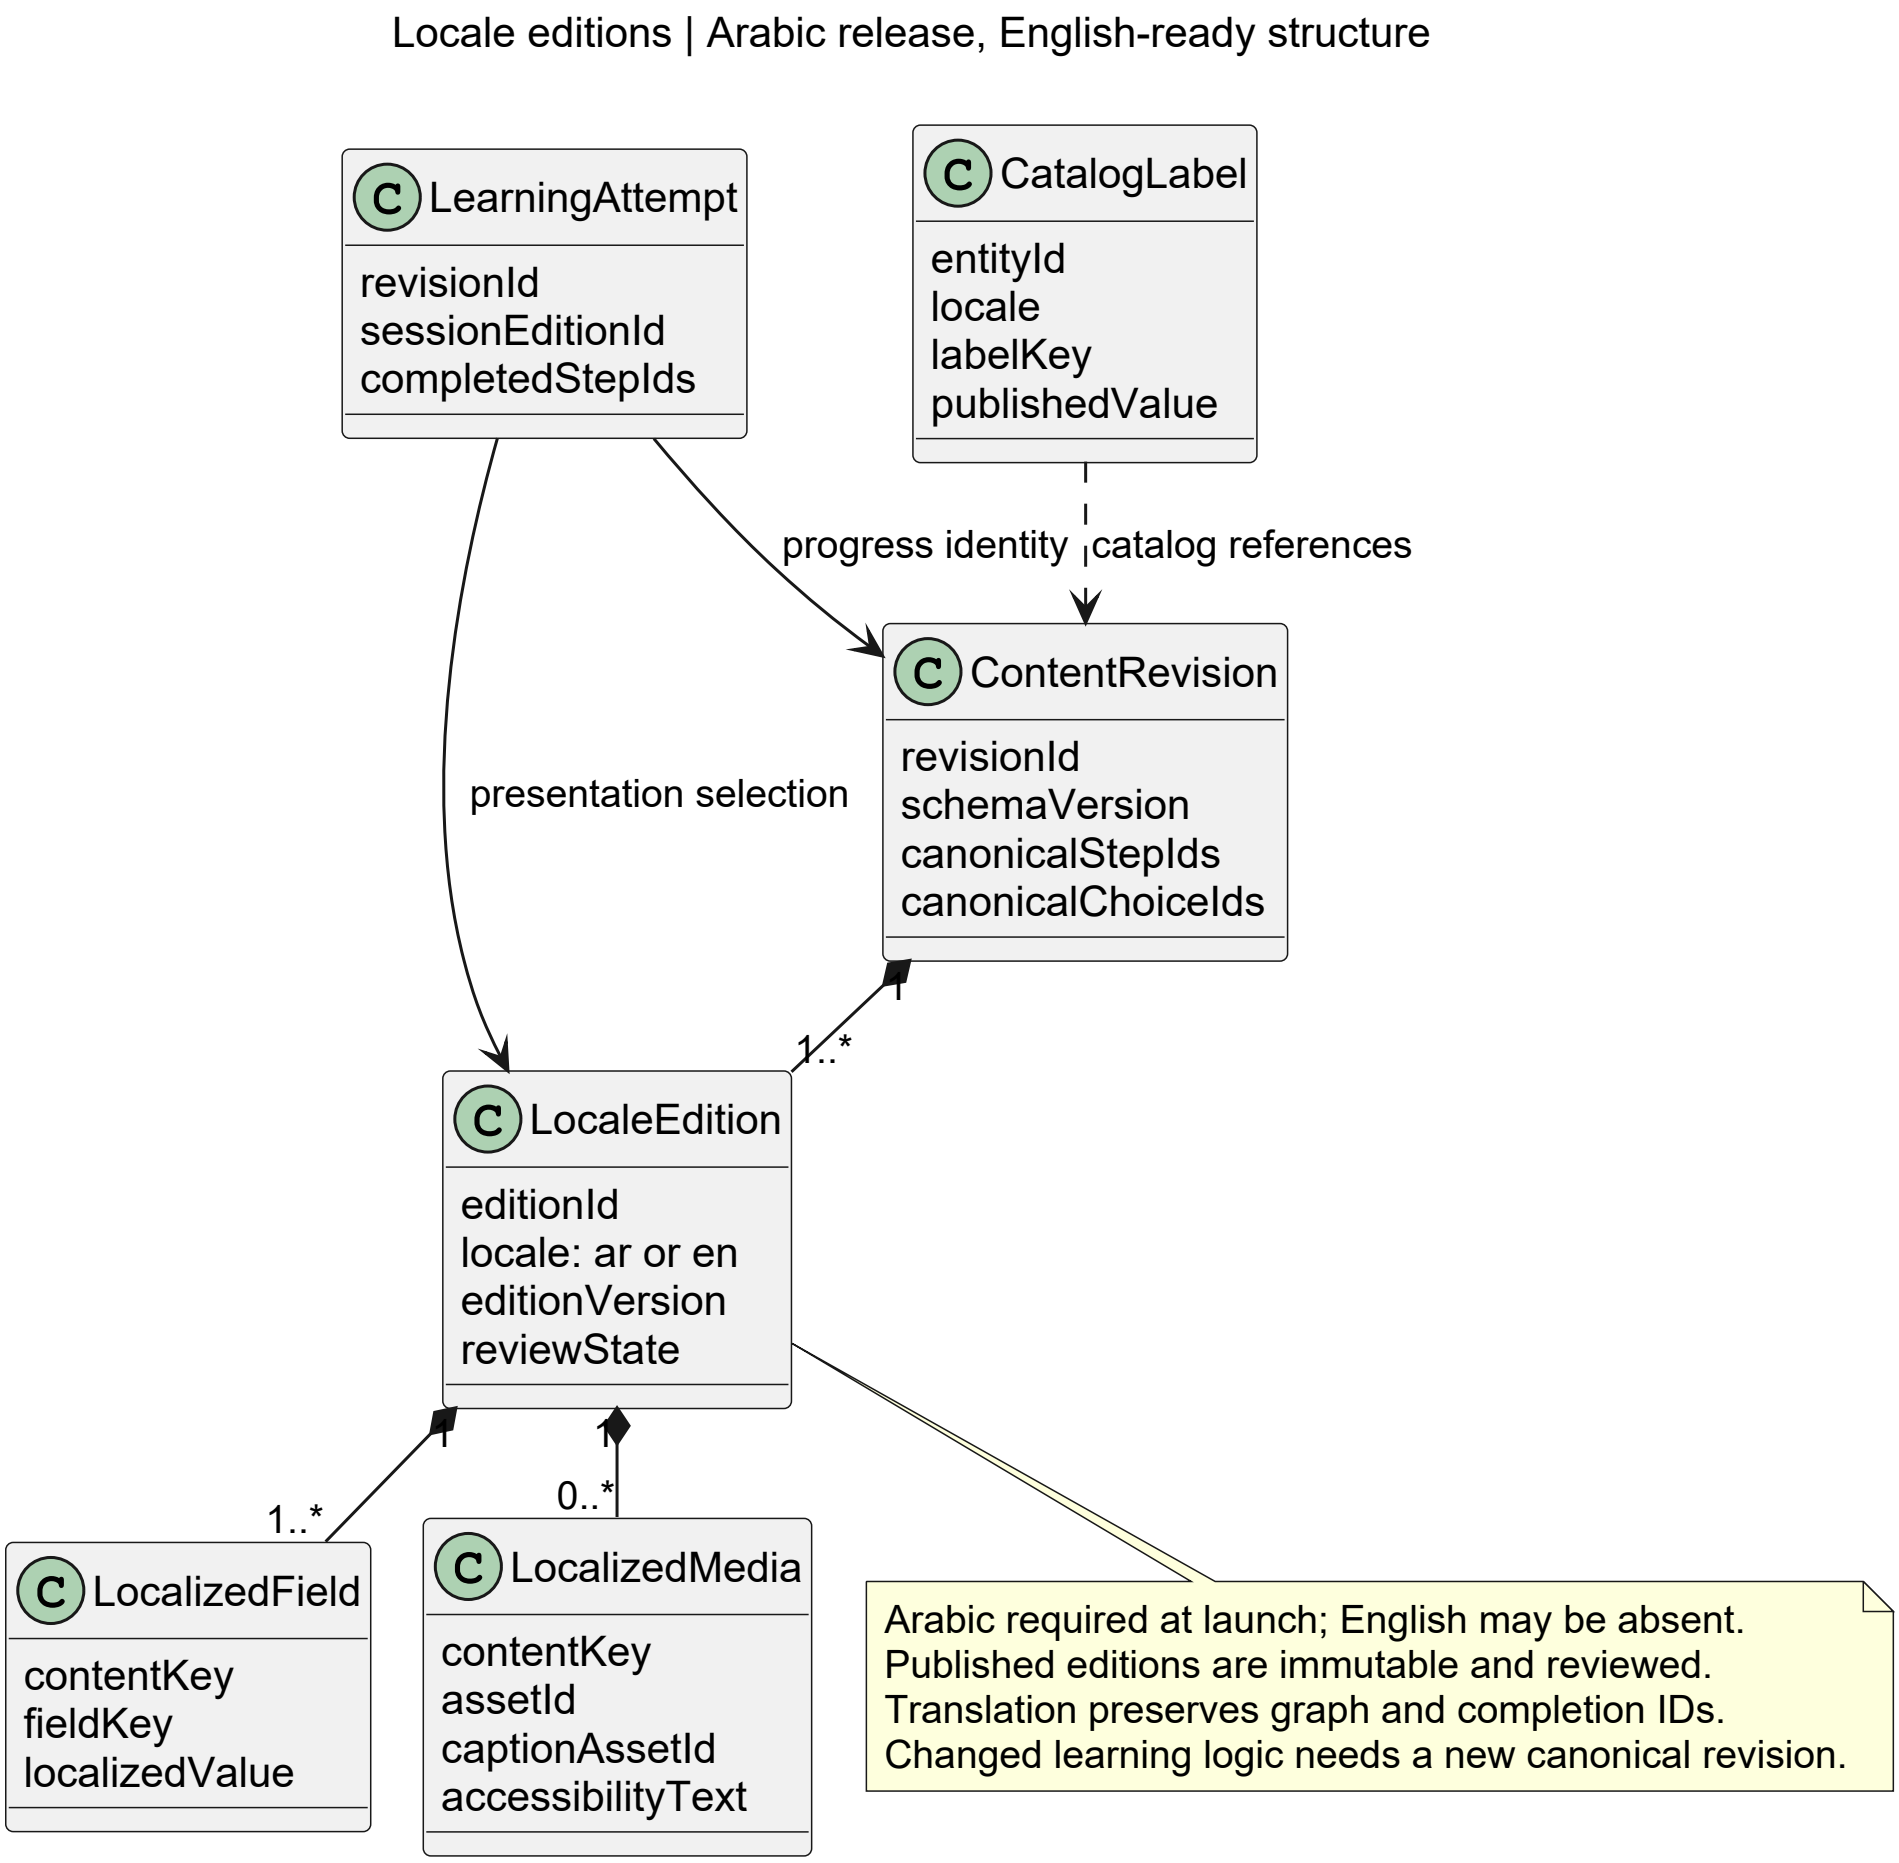

UML 10 Practice and rewards

Remembering moments, plans, voluntary check-ins, and participation rewards. Reflection input/storage and seven-day gating remain open.

Practice and participation | proposed rules, not worship measurement

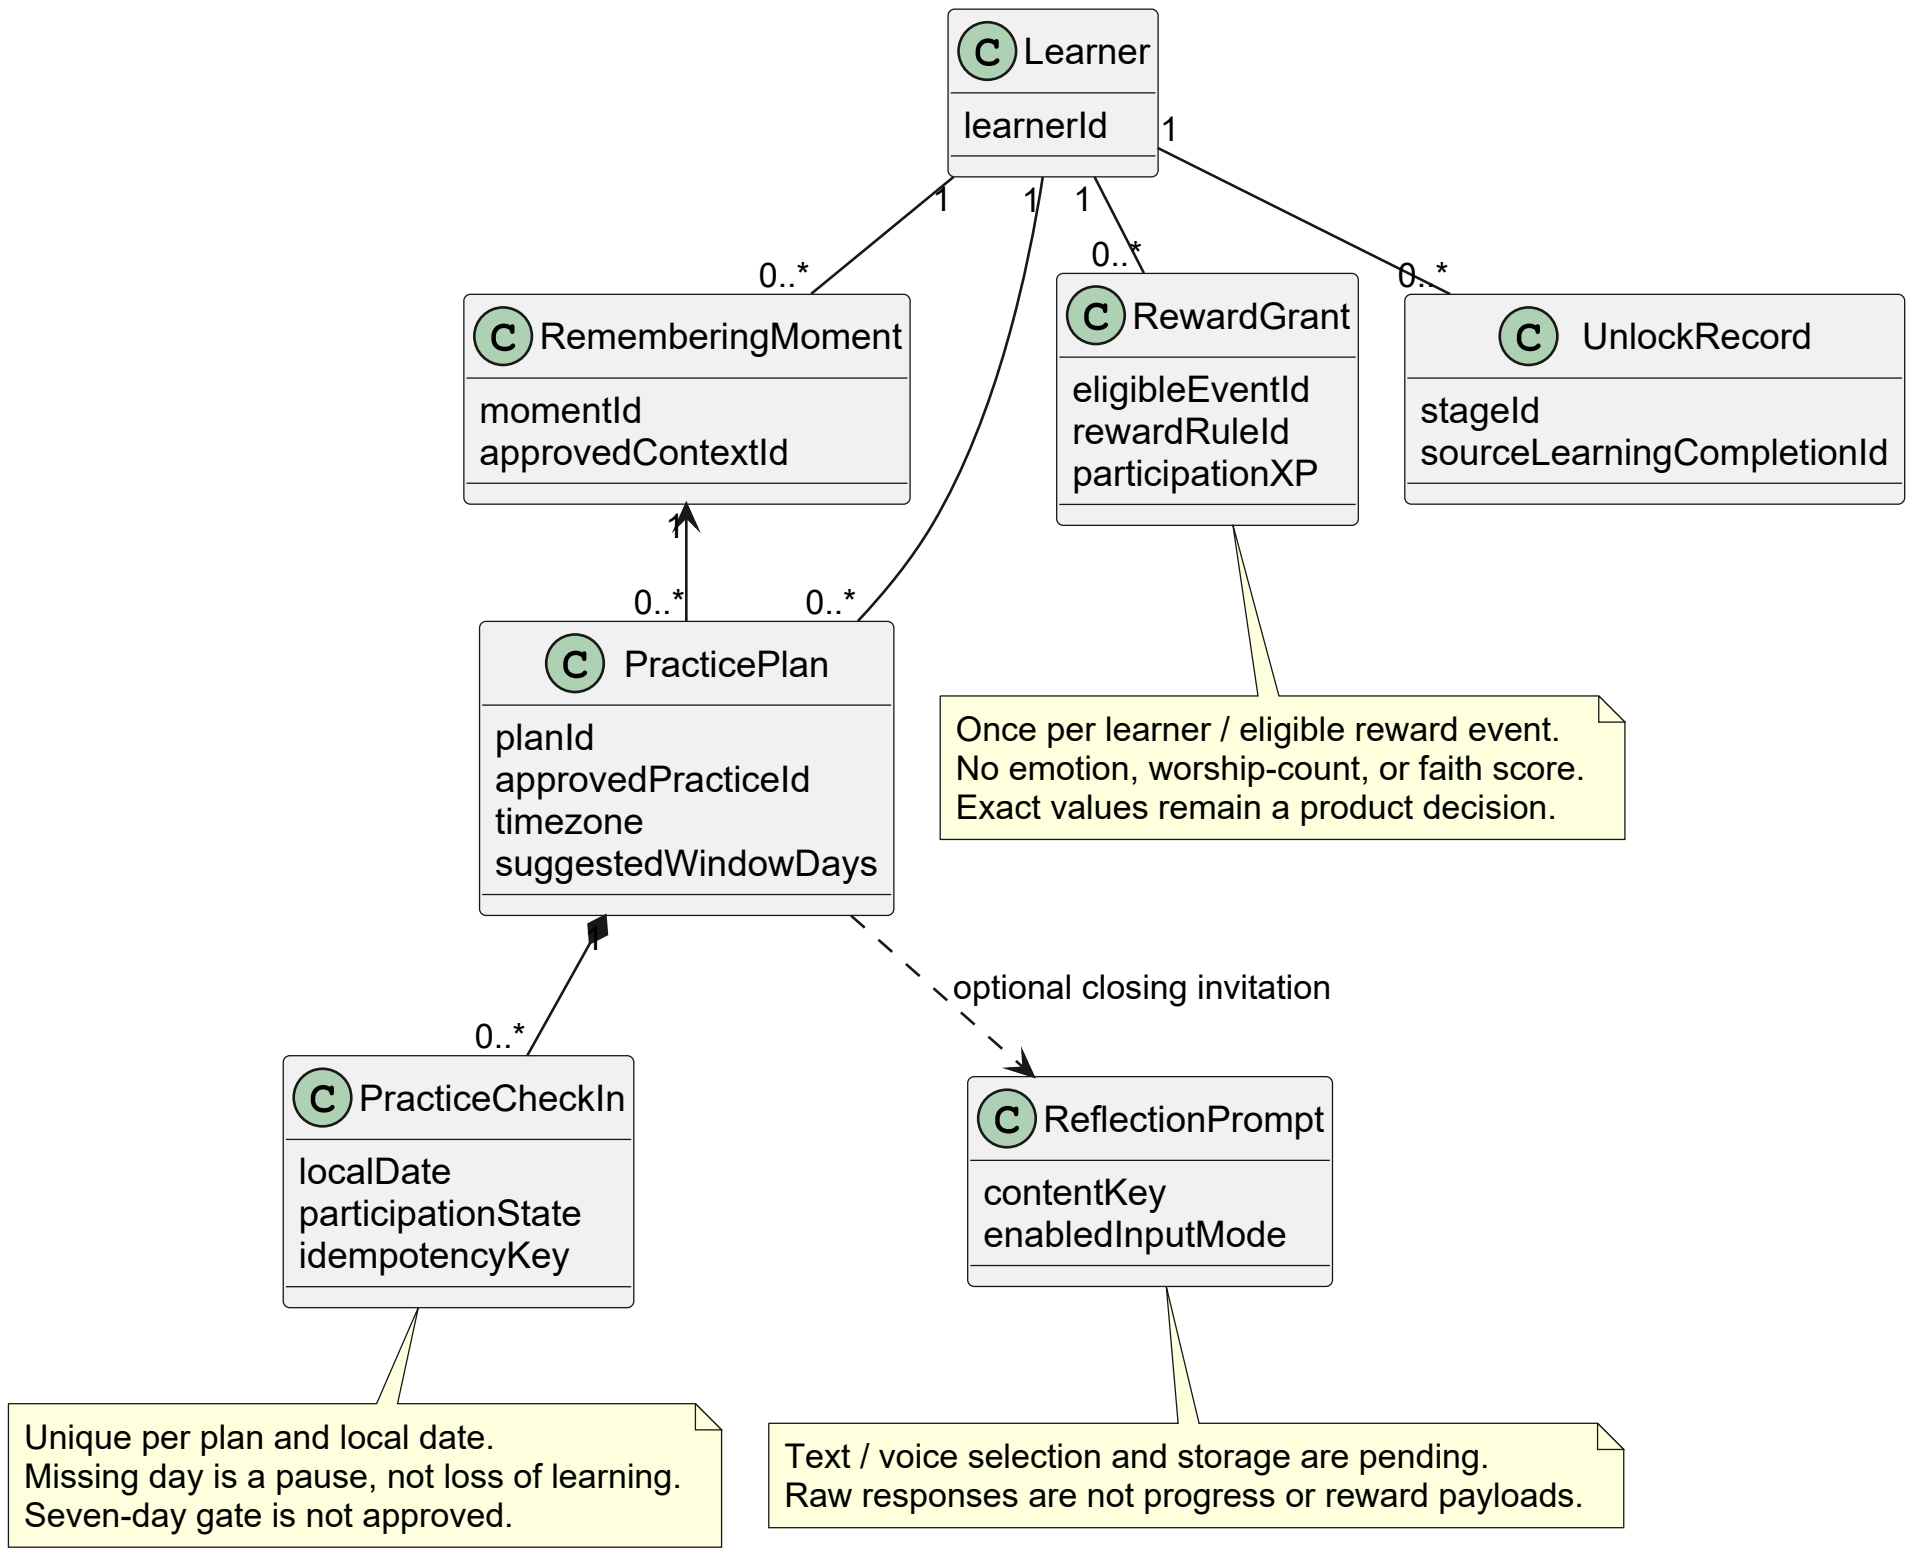

08 Requirements traceability

These are planned acceptance checks. They have not been executed against an application.

Model keys: U1 use cases; U2 content classes; U3 learner classes; U4 child activity; U5 child access sequence; U6 progress sequence; U7 content lifecycle; U8 components; U9 locale editions; U10 practice and rewards. See the numbered models in Section 07.

Functional coverage

Requirement	Use case	Models	Planned acceptance check
FR-01	UC-01, UC-06	U1, U5, U8	AT-01: deny anonymous private-data access, wrong-learner requests, and child publication attempts.
FR-02	UC-01, UC-10	U3, U5	AT-02: independent age/profile/character setup; no second-person account dependency.
FR-03	Retired	None	Removed in v0.3; historical identifier, no current acceptance obligation.
FR-04	UC-01, UC-08	U3, U5	AT-04: expire/revoke session; restore only own confirmed progress through approved recovery; disclose guest limitations.
FR-05	Retired	None	Removed in v0.3; historical identifier, no current acceptance obligation.
FR-06	UC-02	U1, U4	AT-06: one full door and explicit preview metadata work; draft and withdrawn lessons cannot start.
FR-07	UC-02	U2, U4, U8	AT-07: render supported manifest; safely reject future schema/template without corrupting an existing attempt.
FR-08	UC-02	U2, U4	AT-08: read/listen/navigation with audio off, unavailable, or interrupted; essential meaning remains accessible.
FR-09	UC-02	U2, U4	AT-09: every authored choice resolves; try another response; no moral score or completion reset.
FR-10	UC-02	U1, U4	AT-10: finish the learning route with only the child role; no external approval or attendance dependency.
FR-11	UC-02	U2, U4	AT-11: defer real-life task and skip reflection; required progression still works.
FR-12	UC-03	U3, U6	AT-12: save, kill app, resume, lose network, retry duplicate event, reject changed-payload ID reuse.
FR-13	UC-03	U3, U4, U6	AT-13: required-step set yields one completion per attempt; optional skips/replay preserve history.
FR-14	Retired	None	Removed in v0.3; historical identifier, no current acceptance obligation.

Requirement	Use case	Models	Planned acceptance check
FR-15	Retired	None	Removed in v0.3; historical identifier, no current acceptance obligation.
FR-16	Retired	None	Removed in v0.3; historical identifier, no current acceptance obligation.
FR-17	UC-06	U1, U2, U8	AT-17: publish a second supported journey; unchanged client binary retrieves it.
FR-18	UC-06	U2	AT-18: validate every supported template, malformed step, broken target, and optional-step gate.
FR-19	UC-06	U2, U8	AT-19: incomplete/invalid upload cannot publish; draft media is inaccessible to child session.
FR-20	UC-06	U2, U7	AT-20: preview paths and require review; fail on missing alternatives, bad sources/references, unreachable steps.
FR-21	UC-06, UC-07	U2, U7	AT-21: failed, repeated, or stale publish leaves an atomic live pointer and no partial revision.
FR-22	UC-03, UC-07	U2, U3, U6	AT-22: publish R2 during an R1 attempt; old attempt stays on R1 and historical completion survives.
FR-23	UC-07	U7, U8	AT-23: withdraw bound revision; block subsequent online delivery, preserve records, show unavailable state.
FR-24	UC-06, UC-07	U2, U8	AT-24: verify actor/version/action/outcome audit records without credentials or child answers.
FR-25	UC-02, UC-03	U4, U6	AT-25: fail required/optional media and network separately; maintain checkpoint and meaningful retry.
FR-26	UC-03, UC-12	U3, U6	AT-26: choose/skip supported reflection; inspect requests/logs for excluded payloads; text/voice tests await OQ-14.
FR-27	UC-08	U3, U8	AT-27: deliberate scoped reset/deletion; reject cross-learner action; verify agreed erasure process.
FR-28	UC-11	U2, U9	AT-28: Arabic release completeness; nonpublic English fixture shares IDs and progress; explicit fallback.
FR-29	UC-10	U1, U3	AT-29: all five character choices persist through restart/authorized recovery and remain editable.
FR-30	UC-10	U1, U2, U4	AT-30: distinguish available, progression-locked, preview, completed, and withdrawn; reject impossible unlocks.
FR-31	UC-02, UC-09	U2, U4	AT-31: all required Dhikr stages exist; door learning completion differs from continuing practice.
FR-32	UC-09	U10	AT-32: create/edit when-then plan and remembering moments; resume without duplicate context records.

Requirement	Use case	Models	Planned acceptance check
FR-33	UC-09	U10	AT-33: pause/resume, missing days, offline duplicate check-in, and timezone edges.
FR-34	UC-09	U10	AT-34: reward once per eligible event; replay and worship counts do not inflate XP.
FR-35	UC-06, UC-11	U2, U7, U9	AT-35: publish locale edition and preview metadata; reject missing Arabic and invalid prerequisite graphs.

Quality coverage

Requirement	Planned check	Baseline dependency
NFR-01	AT-N01: learner-level authorization for access, recovery, deletion, progress, content, and media.	Final API surface.
NFR-02	AT-N02: expired/revoked credentials, failed recovery, duplicate-safe issuance, secure storage, and abuse controls.	Selected child access model and threat review.
NFR-03	AT-N03: network/telemetry/log inspection and deletion/retention exercise.	Retention and release-country decisions.
NFR-04	AT-N04: local restart, server transaction failure, reordered events, duplicate submissions.	Concrete persistence implementation.
NFR-05	AT-N05: measure p95 local interaction timing against proposed 200 ms target.	Agreed representative device.
NFR-06	AT-N06: measure p95 metadata/progress latency against proposed 1 second target.	Agreed concurrency, network, region, and dataset.
NFR-07	AT-N07: screen reader, 200% text, RTL, captions, non-color feedback, reduced motion.	Supported OS/device matrix.
NFR-08	AT-N08: release-build smoke and regression tests on supported platforms and admin browsers.	Launch platform/version decision.
NFR-09	AT-N09: old supported client versus incompatible manifest; safe fallback and preserved progress.	Compatibility policy and template versions.
NFR-10	AT-N10: injected sync/publish faults, correlation IDs, backup restore rehearsal.	Owner, recovery targets, backup/retention policy.
NFR-11	AT-N11: source/rights and age-suitability review exists for every published revision.	Appointed editorial owner and completed content.
NFR-12	AT-N12: observed child usability sessions across the age range.	Sample/recruitment plan and agreed threshold.
NFR-13	AT-N13: Arabic/RTL and English/LTR fixtures, text growth, media alternatives, locale fallback, unchanged progress.	Locale contract and release-language policy.

Requirement	Planned check	Baseline dependency
NFR-14	AT-N14: duplicate check-ins/rewards, timezones, content revisions, and paused practice.	Confirmed check-in/reward and calendar rules.

Confirmed product needs mapped to the specification

Product decision	Coverage
C-01: ages 10-14	FR-02, NFR-11, NFR-12
C-03: independent child learning	FR-10, FR-11, BR-01
C-04: Dhikr replaces former first journey	SRS scope, FR-06, UC-02
C-05: light fantasy / everyday dialogue	FR-06, UC-02, editorial review
C-06: Expo React Native	SRS interfaces, NFR-08, architecture / U8
C-08: admin content updates	FR-17-FR-24, UC-06/UC-07
C-09: complete single-door MVP	SRS scope, FR-06, AT-17 tests later extensibility
C-10: supplied concept materials	Executive brief and source limitations; production content remains a dependency
C-11: documents before UI	This pack; no UI implementation or visual design is performed
C-12: Arabic first, English-ready structure	FR-28, FR-35, NFR-13, UC-11, U9
C-13: child character creation	FR-29, UC-10, U3
C-14: locked-door map	FR-06, FR-30, UC-10, U2/U4
C-15: child-only scope	FR-01/02/04/10/27, retired requirements/use cases, U1/U3/U5/U6/U8

Documentation verification versus product verification

Documentation checks validate file links, unique IDs, coverage, and renderable diagram syntax. They cannot prove that an implementation is secure, a child understands the experience, the religious content is correct, or the service meets latency targets. Those checks occur after the relevant content and software exist.

09 Review and document control

Review sequence

1. Confirm the first-release scope and the child access/recovery model.
2. Agree learner-data privacy, reflection modes, and progress expectations across devices.
3. Approve supported content templates and assign editorial ownership.
4. Resolve launch-platform, connectivity, operating, and data-retention decisions.
5. Baseline the SRS, then update the use cases, UML, and acceptance mapping together.

Change control

Keep requirement IDs stable. Record an explicit decision before promoting a proposal to the approved baseline. Revise related diagrams and acceptance checks when behavior changes. A routine content edit must not silently rewrite historical learner completion.

Source material

- Presentation 13.pptx: supplied conceptual project presentation.
- Expanded project notes: supplied written material about the learning themes and journey.
- Client revisions: ages 10-14, complete Dhikr door, character creation, locked-door map, Arabic-first localization, and removal of the mother role. Written/voice reflection and child access/recovery remain open.
- Product-planning decisions: confirmed ages 10-14, child-only scope, first door, visual direction, framework, and admin content updates.

Verification status

The source pack contains 30 active functional requirements plus 5 retired identifiers, 14 nonfunctional requirements, 15 business rules, ten active use cases and two retired identifiers, and ten UML diagrams. Requirement identifiers and traceability coverage were checked, and the diagrams were rendered from their editable sources. These documentation checks do not substitute for application, security, accessibility, content, or usability acceptance testing.

Review record

Record agreed decisions and revisions here before establishing an approved baseline.

Field	Review entry
Document version	0.3 - client review draft
Review date	To be recorded
Reviewer / role	To be recorded
Decisions accepted	Reference C-, P-, OQ-, or requirement IDs
Changes requested	Reference requirement IDs and affected models
Baseline status	Not yet approved