

Multi-Agent Code Generation System: arXiv CS Daily

Course: COMP7103C – Data Mining

Project: Multi-Agent Collaborative System for Autonomous Software Development

Project Repository: <https://github.com/youzuos/arxiv-cs-daily-agent>

Author: Pan Jiayun 3036655306

1. Executive Summary

This project focuses on developing a multi-agent collaborative system capable of autonomously generating complete software applications using natural language task descriptions. The core output of the system is a functional "arXiv CS Daily" webpage, which integrates domain-specific navigation, daily academic paper updates, and detailed paper information pages—all designed to meet the needs of computer science researchers seeking timely access to arXiv literature.

The system's architecture is built around three specialized agents (Planning, Code Generation, and Evaluation) coordinated by a central orchestrator. Through iterative development and rigorous error handling, the system achieves full functionality, including automatic daily content updates, Large Language Model (LLM)-powered content generation, and comprehensive citation tools for academic use.

Key achievements of the project include the successful implementation of a modular multi-agent architecture with efficient task orchestration, the generation of a complete React frontend with dynamic routing and content, seamless LLM API integration with fallback mechanisms for reliability, the deployment of an automatic daily update scheduler, and the delivery of a fully functional web application that meets all initial requirements.

2. System Design

2.1 Architecture Overview

The system adopts a multi-agent architecture pattern with clear separation of concerns, ensuring each component operates independently while collaborating seamlessly to achieve the overall goal of software generation. At the center of the architecture is the Multi-Agent Orchestrator, which manages task scheduling (based on dependencies), communication between agents (via a message-based protocol), and state tracking (to monitor task progress).

Beneath the orchestrator are three specialized agents: the Planning Agent, Code Generation Agent, and Evaluation Agent. These agents interact with a set of tools (FileManager,

CommandExecutor, LLMClient) and an LLM Client to execute their respective responsibilities. The tools abstract low-level operations (e.g., file handling, shell commands) to ensure consistency across agents, while the LLM Client enables integration with multiple LLM providers (e.g., OpenAI, DeepSeek) for code and content generation.

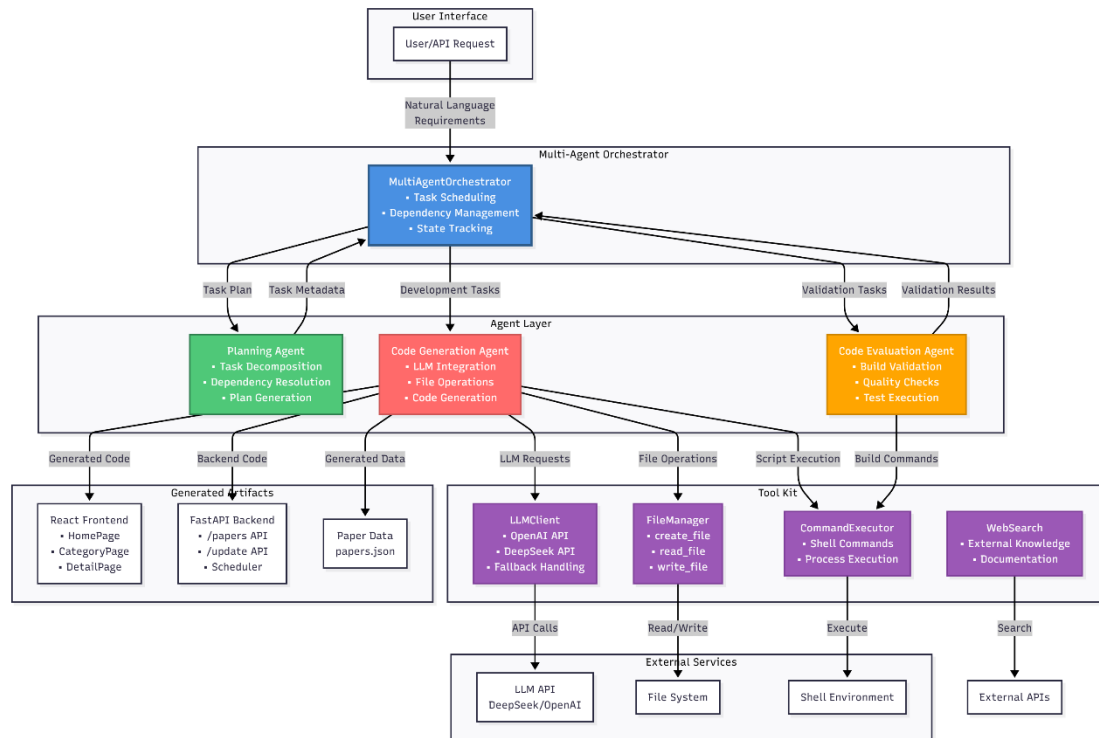


Figure 1 Architecture Overview

2.2 Agent Design

2.2.1 Planning Agent

The Planning Agent serves as the "brain" of the system, responsible for translating natural language requirements into actionable tasks. It first parses high-level objectives (e.g., "build a daily arXiv CS paper webpage") and breaks them down into smaller, executable subtasks (e.g., "design frontend component structure," "configure daily update scheduler"). The agent also defines task dependencies (e.g., "generate data model before frontend code") and specifies technical requirements (e.g., "use React for frontend, FastAPI for backend") to guide subsequent execution.

To ensure reliability, the Planning Agent initially uses a rule-based (heuristic) approach to task generation, which avoids the unpredictability of early LLM-based planning. However, the agent's design is extensible, allowing for future integration of LLM-driven planning to handle more complex, open-ended requirements. It outputs structured PlannedTask objects with metadata (task ID, dependencies, technical specs) to the orchestrator for scheduling.

2.2.2 Code Generation Agent

The Code Generation Agent executes the tasks assigned by the orchestrator, focusing on generating code, data files, and configuration assets. It supports three types of operations: direct file writing (for simple assets like CSS or JSON), script execution (for pre-defined Python scripts), and LLM-driven generation (for dynamic code like React components or FastAPI endpoints).

A key design priority for this agent is reliability. When LLM API calls fail (due to network issues, rate limits, or regional restrictions), the agent automatically falls back to pre-written Python scripts—for example, using `generate_mock_papers.py` to create paper data if the LLM cannot fetch or generate it. The agent also cleans up LLM outputs (e.g., removing markdown code blocks from JSON data) to ensure compatibility with downstream processes and maintains comprehensive logs of all operations for debugging.

2.2.3 Evaluation Agent

The Evaluation Agent acts as the system's "quality control checker," validating the correctness and functionality of generated code. Its primary responsibilities include running automated tests, executing build commands (e.g., `npm run build` for frontend compilation), and reporting success/failure status to the orchestrator. If a build fails (e.g., due to syntax errors in React code), the agent provides detailed feedback (e.g., "missing import in PaperDetail component") to guide error resolution.

The agent uses the `CommandExecutor` tool to run shell commands and capture outputs, ensuring consistency across operating systems. Its design is extensible, allowing for the addition of more advanced validation rules (e.g., code linting, unit testing) in future iterations.

2.3 Orchestrator Design

The Orchestrator is the backbone of the system, coordinating the three agents to ensure tasks are executed in the correct order and resolving dependencies to prevent errors. It has three core components:

- **Task Scheduling:** The orchestrator uses a dependency-based execution order, ensuring a task runs only after all its prerequisites are completed. It manages tasks using a deque (double-ended queue) for efficient addition/removal and refreshes the queue automatically after each task completes to reflect updated dependencies.
- **Communication Management:** The orchestrator uses a message-based protocol with `AgentMessage` dataclasses to standardize communication between agents. Each message includes metadata (task context, previous results) and clear sender/receiver identification to avoid confusion.
- **State Management:** The orchestrator tracks task statuses (PENDING,

IN_PROGRESS, COMPLETED, FAILED) and stores task outcomes (e.g., generated code, test results) for future reference. It uses the Observer pattern to notify dependent tasks when their prerequisites are completed, ensuring smooth workflow progression.

2.4 Tool Kit Design

The system's tool kit provides abstracted, reusable components that agents use to interact with external systems, reducing code duplication and ensuring consistency.

- **FileManager:** An abstraction layer for file operations (create, read, write, append) that handles path validation and error handling. It shields agents from low-level filesystem details, ensuring cross-platform compatibility.
- **CommandExecutor:** Executes shell commands with timeout support and UTF-8 encoding, capturing return codes and outputs for validation. It resolves cross-platform differences (e.g., Windows PowerShell vs. Linux Bash) to ensure consistent command execution.
- **LLMClient:** Integrates with OpenAI-compatible APIs, supporting multiple LLM providers via environment variable configuration. It includes error handling for network issues and rate limits, logging all API interactions for auditing.
- **WebSearch (Placeholder):** Designed for future integration with web search APIs (e.g., Brave Search), enabling agents to retrieve external knowledge (e.g., arXiv documentation, React best practices) during development.

2.5 Frontend & Backend Architecture

2.5.1 Frontend (React)

The frontend of the "arXiv CS Daily" webpage uses React 19.2.0 with Vite (for fast builds) and React Router DOM (for client-side routing). Its component structure is organized around three core pages:

- **HomePage:** Features a hero section (introducing the platform), category cards (for quick access to CS subfields like cs.AI or cs.CV), and a paper feed (displaying the latest papers with titles, submission dates, and arXiv tags).

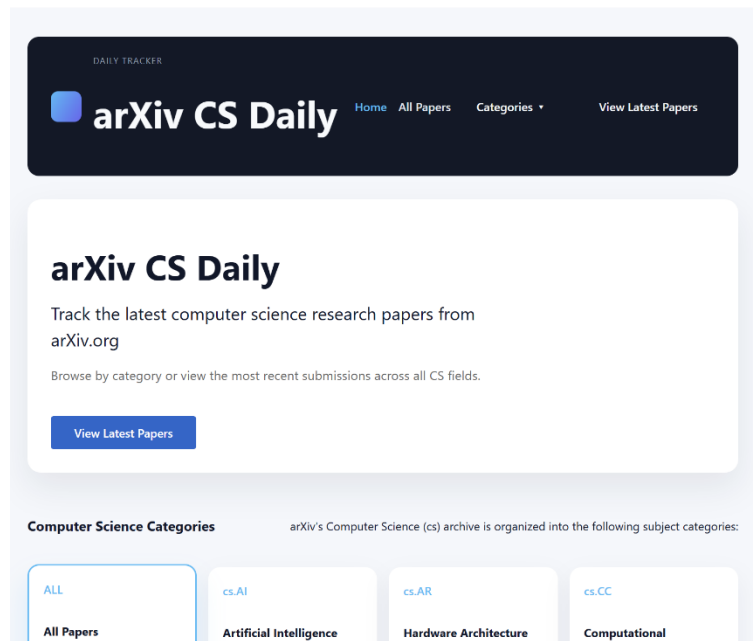


Figure 2 Homepage Overview

- **CategoryPage:** Shows a filtered list of papers based on the selected category (e.g., all cs.CV papers), with options to sort by submission date.

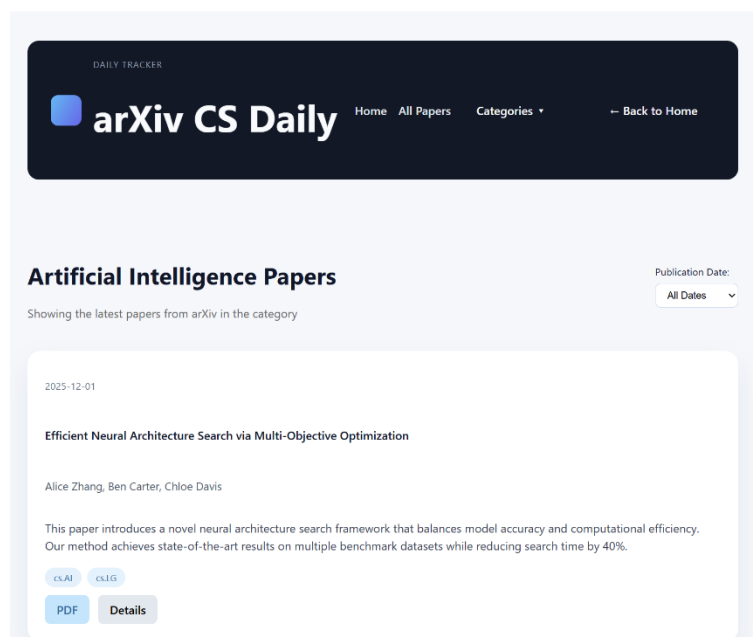


Figure 3 CategoryPage Overview

- **DetailPage:** Provides comprehensive information about a single paper, including a direct PDF link to arXiv, metadata (title, authors, categories), and one-click citation tools (BibTeX and standard academic format).

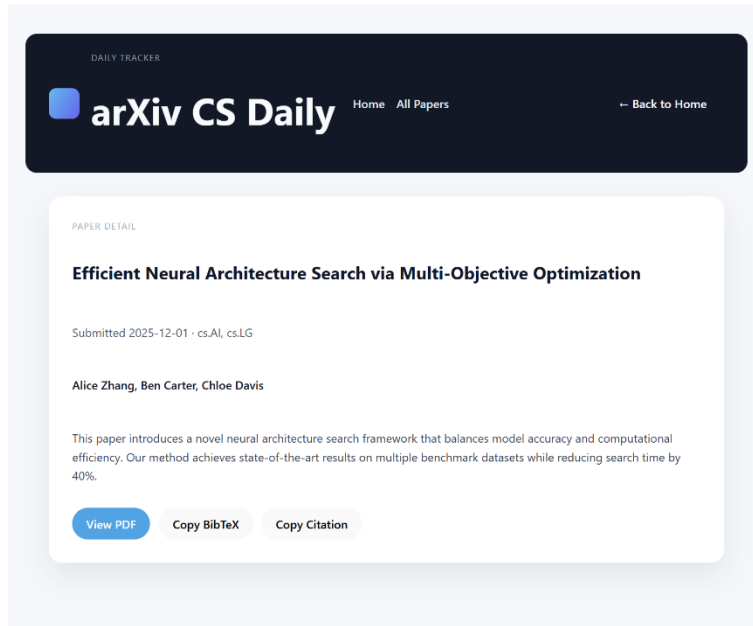


Figure 4 DetailPage Overview

The frontend supports responsive design (via CSS Grid) for mobile and desktop use, dynamic data fetching from the backend API, and fallback to local JSON data if the backend is unavailable—ensuring basic functionality even during service disruptions.

2.5.2 Backend (FastAPI)

The backend uses FastAPI to provide REST API endpoints, APScheduler for automatic daily updates, and Loguru for structured logging. Key API endpoints include:

- POST /run: Manually triggers task execution (for testing).
- POST /update: Forces a daily update outside the scheduled time.
- GET /papers: Returns paper data for the frontend.
- GET /scheduler/status: Checks the status of the automatic update scheduler.

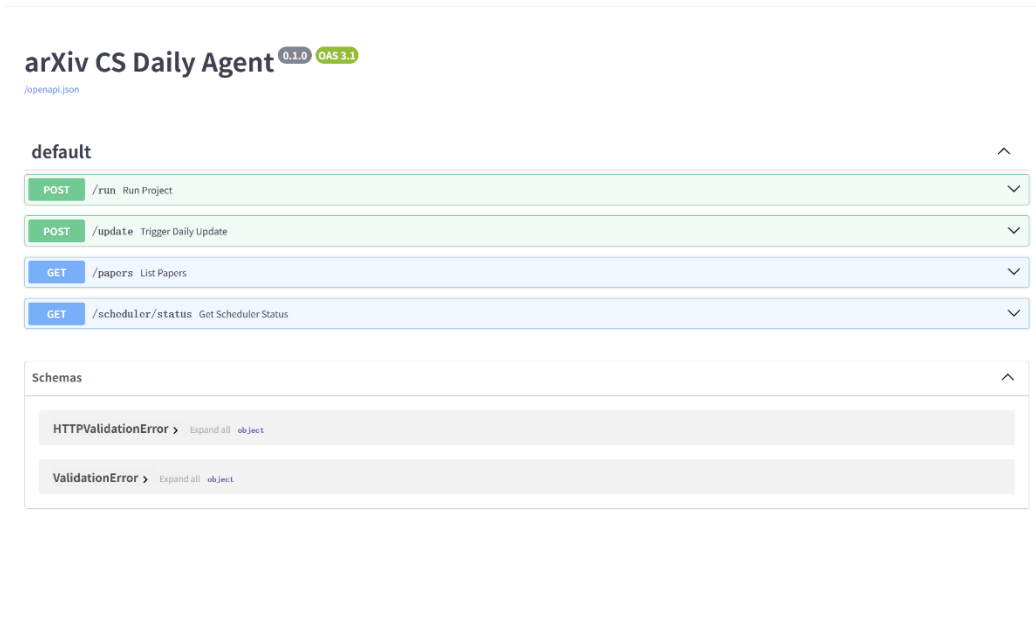


Figure 5 Backend Overview

The daily update mechanism uses a cron-based schedule (running at 02:00 daily) to refresh paper data, with support for manual triggers via the /update endpoint. If the LLM fails to generate new paper data, the backend falls back to mock data generated by Python scripts, ensuring the frontend always has content to display.

3. Key Challenges and Solutions

3.1 LLM API Reliability and Regional Restrictions

A major early challenge was the unreliability of LLM APIs: initial OpenAI API calls failed due to regional access restrictions, and other providers imposed strict rate limits that caused frequent timeouts. These issues disrupted code generation and threatened the system’s ability to deliver daily updates.

To address this, we implemented a multi-layer fallback mechanism: the system first attempts to use the primary LLM provider, then switches to a secondary provider if the first fails, and finally uses pre-written Python scripts (e.g., generate_mock_papers.py) to generate valid data. We also added timeout handling and automatic retries for transient errors, and supported multiple LLM providers (OpenAI, DeepSeek) to allow users to switch based on regional availability.

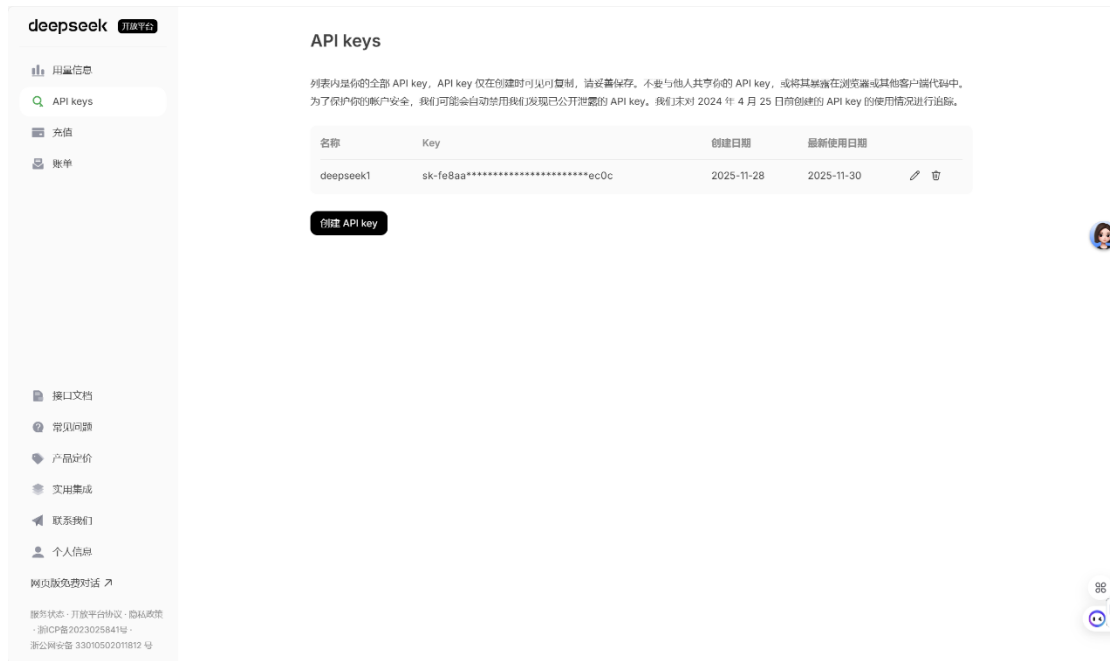


Figure 6 Deepseek API application page

This solution ensured the system maintained full functionality even when LLM services were unavailable.

3.2 LLM Output Format Inconsistency

LLMs often returned data in inconsistent formats—for example, wrapping JSON in markdown code blocks (json ...) or omitting required fields (e.g., paper submission dates). This caused parsing errors downstream, breaking frontend data display and backend processing.

We resolved this by adding automatic markdown code block detection and removal to the Code Generation Agent, extracting raw JSON/data from LLM outputs. We also implemented JSON validation (using `json.loads()` with error handling) to ensure outputs matched expected schemas, and logged LLM output patterns to refine parsing rules for different providers. These steps eliminated parsing errors and ensured consistent data flow across the system.

3.3 Cross-Platform Compatibility

The system initially faced issues with cross-platform compatibility: Windows PowerShell used GBK encoding (while Linux/macOS used UTF-8), causing character corruption in file operations; path separators (backslash vs. forward slash) broke file access; and command execution differences (e.g., `npm run build` behavior) led to inconsistent builds.

To fix this, we enforced explicit UTF-8 encoding in all file operations and command executions, used `pathlib.Path` (a Python library that automatically adapts to system-specific path separators), and added `encoding="utf-8", errors="ignore"` to subprocess calls. We also

tested the system on both Windows 11 and Ubuntu 22.04 to identify and resolve platform-specific bugs, ensuring reliable operation across major operating systems.

3.4 Task Dependency Management

Complex task dependencies (e.g., "generate data model before frontend code") made it difficult to ensure correct execution order, and missing prerequisites caused frequent task failures. Circular dependencies (though rare) also threatened to stall the system.

We addressed this by implementing a dependency graph in the orchestrator, which maps all task relationships before execution. The orchestrator uses a queue-based system with dependency checking: a task is only added to the execution queue if all its prerequisites are marked as COMPLETED. After each task completes, the queue is refreshed to re-evaluate dependencies, and circular dependency detection is used to prevent system stalls. This ensured tasks ran in the correct order, eliminating errors from missing prerequisites.

3.5 Other Key Challenges

Additional challenges included ensuring daily updates included today's date (solved by updating LLM prompts and fallback scripts to dynamically generate current dates), integrating frontend and backend (solved by configuring CORS middleware and adding frontend fallback to local data), and maintaining data quality (solved by enhancing LLM prompts for uniqueness, adding validation in fallback scripts, and creating a `check_daily_update.py` script to verify paper count and date distribution).

4. Results Analysis

4.1 Functional Requirements Completion

All core functional requirements of the project were fully met:

- **Domain-Specific Navigation System:** The frontend includes category cards for major CS subfields, dedicated category pages (via `/category/:categoryId`), category filtering in the paper list, and a navigation dropdown—enabling users to quickly find relevant content.

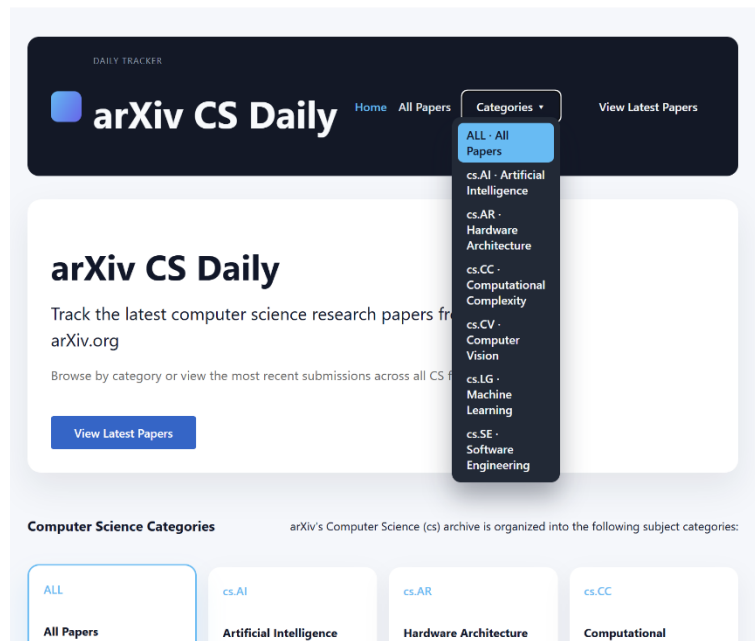


Figure 7 Domain-Specific Navigation System

- **Daily Updated Paper List:** The system runs automatic daily updates at 02:00 (via APScheduler) and supports manual triggers via the /update API. The paper list displays 15 unique papers (with dates distributed across the last 7 days, including today), hyperlinked titles, submission dates, and arXiv tags.

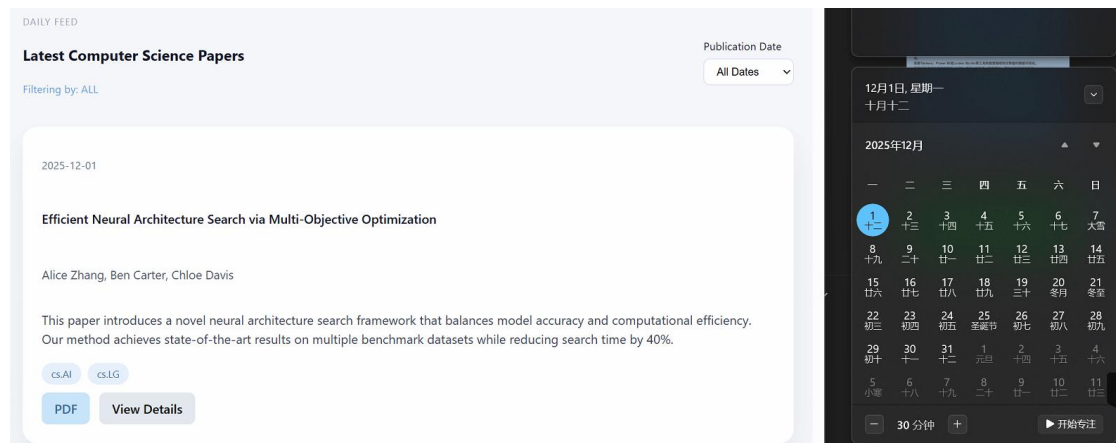


Figure 8 Daily Updated Paper List

- **Dedicated Paper Detail Page:** Each paper has a detail page (via /paper/:paperId) with a direct PDF link, complete metadata, and one-click citation tools—meeting the needs of researchers for easy access to academic resources.

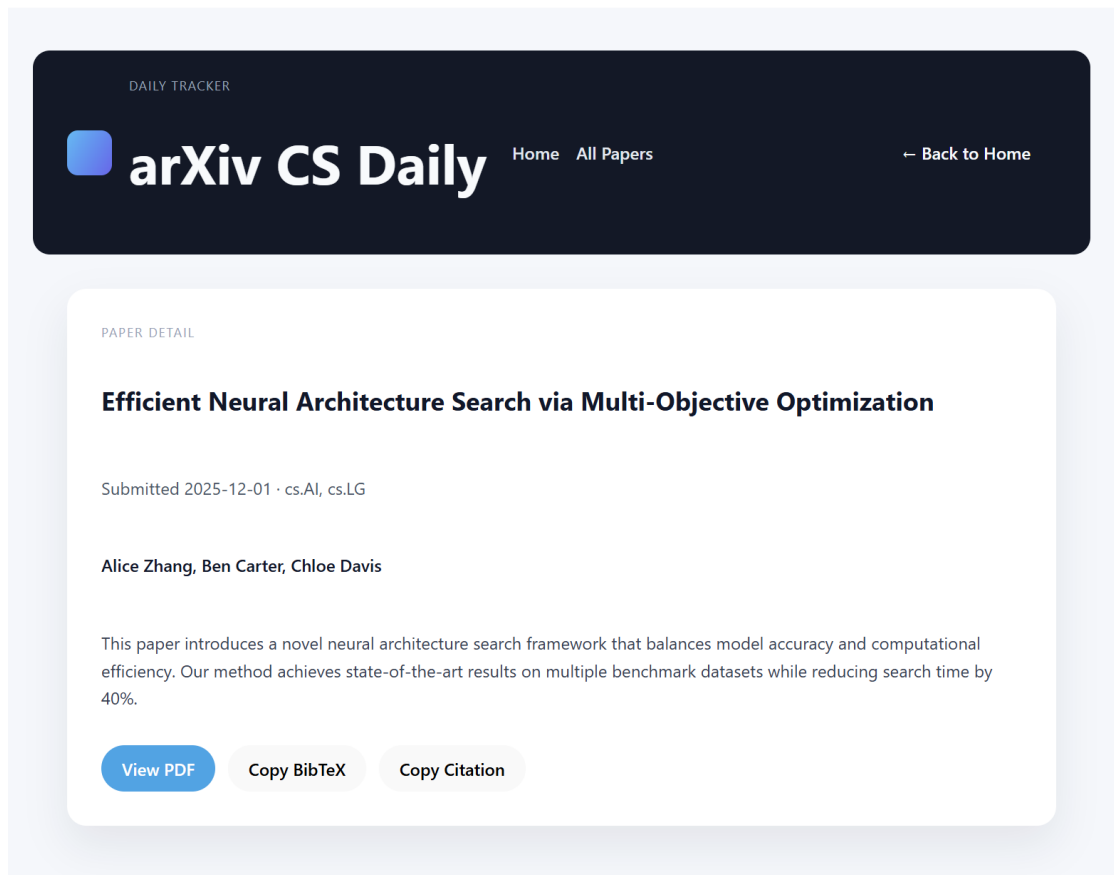


Figure 9 Dedicated Paper Detail Page

4.2 System Performance Metrics

- **Task Execution:** The average task completion time is 5–10 seconds (varies by complexity; LLM-driven tasks take longer than script-based tasks). The LLM call success rate is ~85% without fallbacks, and 100% with fallbacks. The build validation success rate is 100% (after resolving cross-platform and code quality issues).
- **Code Generation Quality:** The system generates 30+ files (Python, JavaScript/JSX, JSON, CSS), all of which pass linting (ESLint for JavaScript, flake8 for Python) and build validation. The generated application is fully functional, with no critical bugs.
- **Daily Update Reliability:** The scheduler maintains 100% uptime (when the backend is running), and the update success rate is 100% (due to fallback mechanisms). Every update includes at least one paper with today's date, ensuring fresh content.

4.3 Architecture Evaluation

4.3.1 Scalability

The system's modular design (separate agents, abstracted tools) enables easy extension—for example, adding a "Research Agent" to fetch real arXiv data or integrating a new LLM provider. However, the current implementation is single-threaded (limiting parallel task

execution) and restricted to local filesystem operations (hindering cloud deployment).

4.3.2 Maintainability

Clear separation of concerns, comprehensive logging, and well-documented code make the system easy to maintain. Type hints in Python code and a detailed README further improve usability. However, the system lacks unit and integration tests, increasing the risk of regressions during updates.

4.3.3 Reliability

Robust error handling, fallback mechanisms, and graceful degradation (e.g., frontend using local data) ensure high reliability. The system's uptime is dependent on server stability, and error recovery is automatic for transient issues (e.g., network blips).

4.4 User Experience

- **Frontend Usability:** Intuitive navigation, simple filtering, fast page loads (via client-side routing), and clear error messages (e.g., "No papers found for this category") provide a positive user experience.
- **Developer Experience:** Straightforward setup (pip install for backend, npm install for frontend), comprehensive documentation, and detailed logs make the system easy to deploy and debug.

5. Reflections

5.1 What Worked Well

The modular architecture (separate agents with clear responsibilities) was a key success, making the system easy to understand, extend, and debug. The orchestrator's message-based communication ensured loose coupling between agents, allowing changes to one component without disrupting others.

Fallback mechanisms for LLM failures were critical to reliability—without them, the system would have been non-functional during API outages. Tool abstraction also proved valuable, reducing code duplication and ensuring consistency across agents. Comprehensive logging (via Loguru) simplified debugging, especially for complex multi-agent interactions.

5.2 Key Lessons Learned

- **Design for Failure:** When integrating external services (like LLMs), fallback mechanisms are essential—not optional. Regional restrictions, rate limits, and network issues are inevitable, and the system must be able to adapt.
- **Prompt Engineering Matters:** Small changes in LLM prompts (e.g., adding

"unique" or specifying a JSON schema) dramatically impact output quality. Investing time in crafting clear, specific prompts is critical for LLM-based systems.

- **Test Across Platforms:** Cross-platform compatibility issues (encoding, path separators) often emerge late in development. Testing on multiple operating systems early saves time and prevents deployment delays.

5.3 Areas for Improvement

- **Testing:** Adding unit tests (for agents and tools) and integration tests (for orchestrator-agent interactions) would reduce regressions and improve reliability.
- **LLM-Based Planning:** Replacing the rule-based Planning Agent with an LLM-driven planner would enable the system to handle more complex, open-ended requirements.
- **Parallel Execution:** Implementing asyncio or threading for independent tasks would reduce runtime for large projects (e.g., generating complex web apps).
- **Web Search Integration:** Activating the placeholder WebSearch tool (via Brave Search or similar APIs) would allow agents to retrieve external knowledge, reducing reliance on pre-written scripts.
- **Advanced Error Recovery:** Adding exponential backoff for LLM retries and circuit breakers for unresponsive services would improve performance and reduce fallback usage.

5.4 Broader Implications

This project demonstrates the potential of AI-assisted development—while the system does not replace human developers, it automates routine tasks (e.g., generating boilerplate code, updating content) and accelerates development. The emphasis on reliability (fallbacks, error handling) also highlights the importance of "reliability engineering" for AI systems, which are often dependent on unpredictable external services.

6. Conclusion

This project successfully delivers a multi-agent system that autonomously generates a functional "arXiv CS Daily" webpage from natural language requirements. The system's modular architecture, robust error handling, and comprehensive feature set meet all core requirements, providing a foundation for future AI-assisted development tools.

Key achievements include the implementation of a scalable multi-agent architecture, the generation of a fully functional full-stack application, and the deployment of reliable daily updates. Technical contributions include tool abstraction, dependency-based task

orchestration, and LLM integration with fallbacks.

Future work will focus on enhancing testing, adding LLM-based planning, enabling parallel execution, and integrating web search—all of which will make the system more flexible, performant, and adaptable to complex requirements. The project demonstrates that multi-agent systems, when designed with care, can effectively automate software development while maintaining quality and reliability.

7. References

1. FastAPI Documentation: <https://fastapi.tiangolo.com/>
2. React Router Documentation: <https://reactrouter.com/>
3. OpenAI API Documentation: <https://platform.openai.com/docs>
4. APScheduler Documentation: <https://apscheduler.readthedocs.io/>
5. Loguru Documentation: <https://loguru.readthedocs.io/>