

quantmsdiann: a scalable SDRF-driven DIA-NN workflow for reanalysis of single-cell, spatial, and bulk proteomics datasets

Qi-Xuan Yue^a, Yufei Shen^a, Asier Larrea^c, Chengxin Dai^b, Henry Webel^d, Jose Nimo^{f,k,l}, Fabian Coscia^{f,l}, Orhun Kok^g, Nikolai Slavov^{g,h}, Juan Antonio Vizcaíno^c, Timo Sachsenberg^{i,j}, Mingze Bai^a, Vadim Demichev^e, Yasset Perez-Riverol^{c,*}

^aChongqing Key Laboratory of Big Data for Bio Intelligence, Chongqing University of Posts and Telecommunications, Chongqing, China

^bState Key Laboratory of Proteomics, Beijing Proteome Research Center, National Center for Protein Sciences (Beijing), Beijing Institute of Life Omics, Beijing, China

^cEuropean Molecular Biology Laboratory, European Bioinformatics Institute (EMBL-EBI), Wellcome Genome Campus, Hinxton, Cambridge, UK

^dNovo Nordisk Foundation Center for Protein Research, Faculty of Health and Medical Sciences, University of Copenhagen, Copenhagen, Denmark

^eQuantitative Proteomics laboratory, Charité – Universitätsmedizin Berlin, Berlin, Germany

^fSpatial Proteomics Group, Max-Delbrück-Center for Molecular Medicine in the Helmholtz Association (MDC), Berlin, Germany

^gDepartment of Bioengineering, Department of Biology, Department of Chemistry and Chemical Biology, Single Cell Proteomics Center, and Barnett Institute for Chemical and Biological Analysis, Northeastern University, Boston, Massachusetts, USA

^hParallel Squared Technology Institute, Watertown, Massachusetts, USA

ⁱDepartment of Computer Science, Applied Bioinformatics, University of Tübingen, Tübingen, Germany

^jInstitute for Bioinformatics and Medical Informatics, University of Tübingen, Tübingen, Germany

^kCharité – Universitätsmedizin Berlin, corporate member of Freie Universität Berlin and Humboldt-Universität zu Berlin, Berlin, Germany

^lGerman Cancer Consortium (DKTK), Partner Site Berlin, Heidelberg, Germany

Abstract

Public proteomics archives now host thousands of data-independent acquisition (DIA) datasets, but they remain difficult to integrate and reuse because each dataset has been processed with a different software configuration, and most of them lack standardised metadata. Here, we present **quantmsdiann**, an open-source Nextflow/nf-core workflow that parallelises DIA-NN across cloud and HPC infrastructures, guided by the experimental design declared in SDRF format. The workflow ships container-pinned profiles for any of the supported DIA-NN version through Docker and Singularity, with no manual installation or dependency resolution, and natively handles all vendor formats, and the HUPO-PSI standard mzML. It exports harmonised quantification tables as MSstats input, the new Quantitative Proteomics eXchange format (QPX), and a **pmultiqc** quality-control report. The parallelisation design reanalyses a 2,300-run single-cell dataset in 2.2 hours on an HPC cluster of 300 nodes. We benchmark **quantmsdiann** on four ProteoBench DIA instrument modalities, where distributed **quantmsdiann** reproduces single-machine community submissions independent of DIA-NN release. We reanalyse public DIA deposits spanning single-cell proteomes (HeLa on Orbitrap Astral, PXD046357; and an oocyte plexDIA cohort, MSV000093870) and bulk cell-line panels (NCI-60/PXD003539 and ProCan/PXD030304, with three further cohorts

*Corresponding author.

URL: yasset@ebi.ac.uk (Yasset Perez-Riverol)

combined into a five-cohort pan-cohort under a single invocation). Reprocessing with current DIA-NN releases matches or exceeds the originally deposited counts: across the bulk cell-line and HeLa single-cell cohorts it recovers more protein groups (gains of +17% to +59% across cohorts, each under the original study’s own counting criterion), and more precursors where a DIA-NN-based original count is available, than the original or 1.8.1 analyses; a spatial Deep Visual Proteomics cohort (PXD064049) is additionally recovered. Multiplexed plexDIA and phosphoproteomics cohorts are processed end-to-end to demonstrate full workflow support, but are not benchmarked against the deposited analyses because their identification counts are not comparable across engine versions. `quantmsdiann` is a step towards scalable, reproducible reanalysis of the growing DIA data landscape and a foundation for community efforts in large-scale DIA meta-analysis and atlas building. `quantmsdiann` is available at <https://github.com/bigbio/quantmsdiann>.

Keywords: DIA-NN, single-cell proteomics, spatial proteomics, phosphoproteomics, plexDIA, data-independent acquisition, Nextflow, nf-core, SDRF, reproducibility, QPX, pmultiqc

1. Introduction

Data-independent acquisition (DIA) is a rapidly growing mass-spectrometry strategy for proteomics at scale, now approaching parity with data-dependent acquisition among public proteomics deposits, and DIA-NN [1] is among the most widely adopted analysis engines across timsTOF [2, 3], Astral, and Orbitrap platforms. Recent benchmarks confirm DIA-NN’s competitiveness for single-cell DIA workflows [4], and recent releases have expanded support for plexDIA, timsTOF parallel accumulation-serial fragmentation (PASEF), and vendor-native raw-file reading. At the same time, DIA dataset sizes and run counts are growing rapidly [5], and the proteomics community is increasingly interested in reanalysing public deposits to recover additional identifications, integrate across cohorts, and build large-scale DIA atlases [6, 7]. DIA-NN’s command-line interface, simplicity, and analytical power make it a natural engine for mining public archives, but realising it at scale is fundamentally a distributed-computing problem: extracting more information from public data means reprocessing cohorts of hundreds to thousands of runs fast enough that reanalysis can be iterative rather than a one-off effort. The same need extends beyond reanalysis: laboratories generating their own large cohorts increasingly have access to cloud and HPC infrastructure and benefit from distributing the analysis rather than running it on a single workstation. The steps of a DIA-NN run are heterogeneous and map naturally onto heterogeneous hardware: many lightweight per-file passes that fit small nodes, and a few memory- and compute-heavy cohort-level steps that need large nodes. Efficient large-scale analysis therefore depends on software containers and workflow engines that can place each task on appropriate cloud or HPC resources [8]. Despite this analytical maturity, most DIA-NN users run the tool as a desktop application, which limits its scalability for large datasets. Deployments on HPC and cloud infrastructure remain difficult, relying on shell scripts, bespoke directory conventions, and hand-curated sample sheets. As a result, the same raw data analysed by two laboratories, or with two DIA-NN releases, can yield non-overlapping quantification tables that are difficult to reconcile.

In 2024 we published `bigbio/quantms` [6], a Nextflow pipeline that standardised multi-engine DIA and DDA analyses behind a Sample and Data Relationship Format (SDRF) [9] input on the `nf-core` framework [10]. `quantms` was, however, built around DIA-NN 1.8.1 with a fixed parameter set, and its DDA/DIA combination within the same workflow made extending DIA-specific functionality difficult. New DIA-NN parameters conflicted with DDA options, versions were hard-coded, sample-level acquisition parameters were not properly propagated to per-run DIA-NN invocations, and

raw-file conversion was mandatory. Iterative reanalysis at archive scale requires a workflow that combines the reproducibility of nf-core, the sensitivity of current DIA-NN releases, the metadata discipline of SDRF, and a parallelisation strategy capable of processing thousands of raw files.

Here, we present **quantmsdiann**, an independent SDRF-driven Nextflow pipeline dedicated to DIA-NN that extends DIA-specific features beyond what the original bigbio/quantms pipeline could accommodate. While **quantmsdiann** shares its SDRF-first design philosophy and parts of the configuration-generation tooling with quantms, its workflow, container set, and module library are developed and released independently, with container-pinned profiles for every DIA-NN version selectable at runtime under Docker or Singularity. Downstream, it exports a harmonised QPX (Quantitative Proteomics eXchange) Parquet archive alongside the standard DIA-NN reports and MSstats input. We demonstrate the pipeline along three axes: ProteoBench [11] benchmarks across four DIA modalities and successive DIA-NN releases; independent reanalyses of public DIA deposits spanning bulk cell lines (NCI-60, ProCan), single-cell datasets, a spatial Deep Visual Proteomics cohort, and a phosphoproteomics cohort; and a pan-cohort of five public DIA cell-line reanalyses integrated under a single SDRF-driven invocation. Across the single-cell and bulk cell-line cohorts, reanalysis with the current DIA-NN build recovers on average $\sim 36\%$ more protein groups ($+17\%$ to $+59\%$ across cohorts) than the original or 1.8.1 analyses, so reanalysing archived data with an up-to-date engine recovers measurably more of each deposit.

2. Experimental Procedures

2.1. Pipeline implementation

quantmsdiann is implemented in Nextflow DSL2 ($\geq 25.10.4$) and follows nf-core community standards [10] for pipeline structure, testing, documentation, and continuous integration. It supports both DIA-NN library-free analysis (predicting the spectral library in-silico from a FASTA reference) and library-based analysis against a user-supplied spectral library; all analyses in this study used the library-free mode with the UniProt human reference proteome [12] (UP000005640, downloaded March 2026). Each computational step is packaged as a versioned container image (Docker, Singularity, or Apptainer). Open-source community tools (ThermoRawFileParser [13], pridepy [14], QPX, and the wiffconverter SCIEX reader) are pulled from public registries (BioContainers [15] or ghcr.io/bigbio). Because the DIA-NN license restricts redistribution, only version 1.8.1 is shipped as an image (the default, from BioContainers); releases from 1.9 onward (1.9.2–2.5.1, including the 2.5.1-enterprise build) are built locally from the per-release recipes in the companion **quantms-containers** repository (<https://github.com/bigbio/quantms-containers>) and tagged so the workflow selects them automatically (Supplementary Note 2). The repository at <https://github.com/bigbio/quantmsdiann> is organised as a standard nf-core pipeline with main workflow (**main.nf**), subworkflows, modules, test data and CI configurations, and documentation. Pipeline version v2.2.0 (release codename “Chongqing”, 2026-06-16) was used for the analyses reported in this paper.

2.2. SDRF extensions for quantmsdiann

quantmsdiann accepts SDRF [9] as primary input. SDRF parsing is performed using the **sdrf-pipelines** Python package developed within the quantms project, which validates the SDRF against the proteomics-specific subset of EFO, PSI-MS, and PRIDE ontology terms and emits a normalised per-sample channel for downstream Nextflow processes. To express DIA- and DIA-NN-specific acquisition settings at the sample level, we extended the SDRF with additional comment columns: the MS1 and MS2 scan mass-window intervals and, for multiplexed experiments, the plexDIA

channel definitions and their isotopologue labels. Because these settings are declared per sample, heterogeneous MS1/MS2 window schemes, or a plexDIA channel layout, can be mixed within a single cohort without any change to the workflow. We added a `convert-diann` command to `sdrf`-pipelines that reads these extended columns together with the standard fields (enzyme, fixed and variable modifications, instrument, precursor mass tolerance, fragment mass tolerance, and missed-cleavage settings) and writes a per-run DIA-NN command-line configuration; where SDRF columns are absent, DIA-NN defaults appropriate for the inferred instrument are applied.

2.3. Raw file handling and DIA-NN execution

A key advance over its predecessor `quantms` is that native vendor (raw) formats are first-class inputs in `quantmsdiann`: whereas `quantms` converted every raw file to mzML up front, `quantmsdiann` reads each instrument’s native format directly and converts only when a particular format or DIA-NN version requires it. Thermo `.raw` or `timsTOF` (`.d` or `.d.zip`) files are read natively by DIA-NN $\geq 2.1.0$; for DIA-NN versions lower than 2.1.0 conversion to mzML is performed with `ThermoRawFileParser` [13] (`-mzml_convert`); Bruker `.d` folders are ingested natively, with compressed forms (`.d.tar/.zip/.gz`) decompressed first; and Sciex `.wiff` / `.wiff2` are converted to mzML with the open-source `wiffconverter` (<https://github.com/bigbio/wiffconverter>). Generic `.dia` and pre-converted `.mzML` inputs pass through unchanged, with optional OpenMS re-indexing (`-reindex_mzml`).

2.4. Quality control and QPX export

Per-run and per-cohort quality control reports are generated by `pmultiqc` [16], a proteomics extension of MultiQC [17] that summarises DIA-NN-specific metrics including peptide and protein counts, missed cleavages, charge-state distributions, precursor and fragment mass accuracy, and per-run identification yield. The QPX archive is produced by the `qpxc` CLI from the `qpx` package (<https://github.com/bigbio/qpx>), which writes Parquet files for identifications (psm, peptide, protein-group, feature), metadata (sample, run, ontology), and provenance, and optionally exports `MuData` (`.h5mu`) containers for severse-based [18] downstream analysis. The aim of exporting to QPX is to bundle the SDRF, identifications, quantifications, and pipeline provenance into a single queryable artefact for reanalysis and long-term archival, and to provide a standardised input for downstream tools that support the format (e.g. MSstats, Perseus, or custom scripts).

2.5. Datasets benchmarked and compute environment

Supplementary Note 1 (Table S1) lists all benchmark and reanalysis datasets with their instrument, acquisition mode, and deposition year, and an SDRF prepared from the original sample metadata. They fall into four experiment classes: *ProteoBench* DIA benchmarks (modules 5, 7, 9, and 10); *single-cell and spatial proteomics*, comprising the HeLa single-cell cohort PXD046357 (Orbitrap Astral), the oocyte plexDIA cohort MSV000093870, the PXD064049 spatial Deep Visual Proteomics cohort, and the PXD071075 single-cell scalability sweep; *bulk cell-line panels* (PXD003539, PXD030304, PXD004701, PXD041421, and PXD017199); and *phosphoproteomics* (PXD034128, PXD034623, and PXD049692). For each cell-line reanalysis cohort, the original published quantification was downloaded from PRIDE as the comparator, with both it and the `quantmsdiann` reanalysis thresholded at 1% precursor-level FDR; the conservative contaminant/decoy filter and the like-for-like-threshold rule applied to the original headline counts are described in Supplementary Note 3. Runtime benchmarks were run on the EMBL-EBI HPC cluster (LSF scheduler), with per-task CPU and memory dispatched by Nextflow and memory profiled from the Nextflow trace report (`-with-trace`).

3. Results

3.1. *quantmsdiann* pipeline architecture

Built on the nf-core framework [10], *quantmsdiann* accepts a single SDRF file as primary input, which encodes per-sample metadata (cell line or tissue origin, factor values, instrument, post-translational modifications) and per-run file references. We extended the SDRF with DIA-relevant columns (MS1 and MS2 mass windows, and plexDIA channel definitions and labels) and added an adapter to sdrf-pipelines [9] (*convert-diann*) that translates each run’s declared metadata into a per-run DIA-NN command-line configuration. Every run is therefore parametrised from its own metadata with no manual configuration or parameter-harmonisation step, removing a common source of analysis-script divergence between groups: different MS1/MS2 window schemes can be mixed within a cohort, or a plexDIA dataset run with its channel definitions, without any workflow change beyond the SDRF. The workflow comprises four mandatory and three optional modules organised around the DIA-NN analysis core (Fig. 1), alternating between per-file parallel stages (red; raw-file preparation, preliminary calibration, and individual search) and collective stages (green; in-silico library generation, empirical library assembly, final quantification, MSstats conversion, and *pmultiqc* [16] quality-control reporting) operating on the full cohort.

quantmsdiann follows DIA-NN’s distributed multi-pass flow, alternating parallel per-file work with serial cohort-wide steps (Fig. 1). Each raw file is first prepared *in parallel* (vendor-format conversion, decompression, or indexing) where needed; conversion to mzML is mandatory for early DIA-NN versions and for some vendor formats such as SCIEX *.wiff*. A spectral library is then predicted in-silico from the FASTA once (*serial*; skipped when a library is supplied), and every file is calibrated against it in a *parallel* first pass. The first-pass results are merged into a single empirical library (*serial*); each file is searched again against that library *in parallel*; and a final consolidation pass merges all per-file results into the cohort quantification, applying match-between-runs, normalisation, and protein inference (*serial*). MSstats conversion, *pmultiqc* reporting, and QPX export then run once at the end (*serial*). The two per-file search passes carry essentially all of the compute and scale across cluster nodes, driving the throughput reported below (Section 3.2); the serial steps set a largely fixed wall-clock floor. Outputs include the standard DIA-NN report tables: *report.tsv* (or *report.parquet*), *report.pr_matrix.tsv*, and *report.pg_matrix.tsv*, alongside MSstats-formatted input and a *pmultiqc* [16] quality-control report. A harmonised QPX archive bundles identifications, metadata, and provenance into a Parquet-based artefact, queried directly with DuckDB and, for the quantification layers, exported to MuData (*.h5mu*) for severse-compatible [18] downstream analysis.

We evaluate *quantmsdiann* along four lines that together motivate it as a reanalysis platform. First, because every release is provided as a container-pinned profile selectable at runtime, the same SDRF can be analysed with any supported DIA-NN version (1.8.1 through 2.5.1, including the enterprise build, and any other release via a custom container), so the engine version is a runtime choice rather than a reinstallation. Second, the per-file parallel design lets a single invocation scale with data volume, from six-run benchmarks to cohorts of thousands of single-cell runs (Section 3.2). Third, on the ProteoBench community benchmarks this distributed execution reproduces the identification and quantification performance of single-machine DIA-NN runs, i.e. scaling out does not change the result relative to a desktop analysis (Section 3.2). Fourth, with that equivalence established, reanalysing public deposits with current DIA-NN releases recovers more identifications than the originally deposited analyses, with the largest gains on low-input single-cell data (Sections 3.3–3.4).

3.2. *quantmsdiann* throughput, scaling, and analytical equivalence

To characterise how *quantmsdiann* scales on an HPC cluster or cloud, we simulated the reanalysis of an entire single-cell experiment of $\sim 2,300$ raw files (PXD071075) across cluster sizes from 10 to 300 nodes (set through the Nextflow `executor.queueSize`), and measured the end-to-end wall-clock time (Fig. 2a). Because the per-file work is parallelised across nodes, a single SDRF-driven invocation completed the whole cohort within hours: wall-clock fell monotonically from 37.4 h at 10 nodes to 2.2 h at 300 nodes (excluding the one-time in-silico library-prediction step, which is independent of cluster size). Against an ideal linear ($1/N$) strong-scaling reference the measured curve stays close up to ~ 100 nodes (parallel efficiency 95% at 50 nodes, 82% at 100) and then bends away, with a practical knee near 200 nodes (2.4 h, 79% efficiency): beyond it a $30\times$ increase in cluster width yields only a $17\times$ speed-up, and efficiency falls to 58% at 300 nodes. This floor reflects two effects a single sweep cannot separate: the serial cohort-level steps that run once regardless of node count (empirical-library merge, final consolidation, export), and contention for filesystem I/O and scheduler slots as concurrency rises on a shared cluster, so part of the plateau is specific to this EMBL-EBI allocation rather than an intrinsic limit of the workflow. With one run per sweep point the exact knee is only indicative, but the practical message holds: size the cluster to the desired turn-around time rather than to maximum throughput.

We then compared the time-to-finish across every dataset in this study (Fig. 2b), reporting each run net of the one-time in-silico library-prediction step. The in-silico library generation is excluded because it cannot be parallelised and depends heavily on the library-generation parameters (e.g. the number of modifications and the MS1 and MS2 window scheme). Across cohorts spanning three orders of magnitude in file count, wall-clock stayed within hours because the per-file passes absorb additional files in parallel: the 5,798-run ProCan cohort (PXD030304) finished in 6.2 h, in the same band as cohorts orders of magnitude smaller, while the 6-run ProteoBench benchmarks completed in under 0.7 h. Time-to-finish is therefore governed by per-run search cost and cohort-level consolidation rather than by the number of files: the longest reanalysis was a 206-run cohort on an older Q Exactive instrument (PXD017199, 11.4 h), exceeding the far larger ProCan cohort, followed by a 10-file phosphoproteomics cohort whose deep variable-modification search drives its 8.0 h (PXD049692). Peak memory during the cohort-level consolidation stayed within the 64–128 GB available on commodity HPC nodes, so no high-memory specialist hardware is required. The plexDIA, phosphoproteomics and spatial cohorts — processed to demonstrate workflow support rather than benchmarked against deposited data — likewise complete within minutes to hours per cohort (Fig. 2b), even though the deep variable-modification phosphoproteomics search is the most expensive per run. Per-step wall-clock and resource envelopes, and per-run wall-clock broken down by dataset type, are reported in Supplementary Note 4 (Figs. S1–S3). All of the above runs were executed on the EMBL-EBI HPC cluster; to confirm that the workflow is not tied to a single infrastructure, an independent group ran *quantmsdiann* on a separate (non-EBI) SLURM cluster with the same container-pinned profiles, reproducing the per-step parallel and collective runtime structure on third-party infrastructure (Supplementary Fig. S1b).

To confirm that this distributed, SDRF-driven execution matches a single-machine (desktop) DIA-NN run, we benchmarked *quantmsdiann* against the ProteoBench community submissions [11], processing the four public ProteoBench DIA modules (Orbitrap Astral, *Module 7*; single-cell Astral, *Module 9*, PXD049412; timsTOF diaPASEF, *Module 5*, PXD062685; SCIEX ZenoTOF 7600, *Module 10*, PXD070049) and comparing quantification accuracy and per-precursor identification counts against the public-submission snapshot (29 May 2026). All runs were library-free (the library predicted in-silico from the FASTA; *quantmsdiann* also supports user-supplied libraries), so for a like-for-like comparison we kept only predicted-from-FASTA DIA-NN community submissions, and

we report the oldest supported release (1.8.1) and the current 2.5.1-enterprise build at DIA-NN’s recommended per-version q-values under a uniform 1% global precursor cut-off. On the two modules with predicted-from-FASTA DIA-NN community submissions (Orbitrap Astral, Module 7, $n = 15$; timsTOF diaPASEF, PXD062685, $n = 8$), **quantmsdiann** reproduces the expected HYE per-species $\log_2$ fold-changes, and across both releases its measured ratios sit within the spread of the standalone, desktop DIA-NN community submissions (Fig. 2c). We therefore observe no major differences in quantification accuracy between desktop DIA-NN and **quantmsdiann**: scaling the analysis across the cluster delivers the same result as a single-machine run.

Identification depth, by contrast, rises monotonically with DIA-NN version on every module (precursors +9–22%, per-run protein groups +10–12%, and proteins quantified in every run +11–18% from 1.8.1 to 2.5.1-enterprise; the academic 2.5.1 build and the full per-version, per-module breakdown are in Supplementary Note 5, Fig. S4), in line with the broader ProteoBench community trend [11] and motivating reanalysis of public deposits with the current build (Sections 3.3–3.4).

3.3. Single-cell DIA reanalysis improves with current DIA-NN releases

To assess **quantmsdiann** on low-input data, where library-free sensitivity and match-between-runs matter most, we reanalysed two label-free Orbitrap Astral single-cell cohorts, HeLa (PXD046357) and a larger A549/H460 cohort of 146 single cells (PXD049412), through the workflow under DIA-NN 1.8.1 and the current 2.5.1-enterprise build, both parametrised from the same SDRF (Fig. 3). The newer 2.5.1-enterprise version increased total identifications: on HeLa Astral, total precursors rose from 22,631 to 26,238 (+16%) and protein groups from 4,137 to 4,840 (+17%), with the gain holding per cell (Fig. 3a). On the deeper A549/H460 cohort the reanalysis reproduced the original study’s Astral single-cell depth [19], reaching a median of 3,383 protein groups per cell and up to 5,654 in the deepest cells, with total precursors rising from 61,439 to 72,031 (+17%) and total protein groups from 7,039 to 7,564 (+7%); the protein-level gain is more modest than the precursor gain, consistent with the near-saturated protein depth of this larger cohort. The improvement is largest in the data-completeness profile (the number of protein groups quantified across an increasing fraction of cells; Fig. 3b), consistent with stronger cross-run propagation, while quantitative precision is preserved (Fig. 3c).

3.4. The value of reanalysing public DIA deposits at scale

Public DIA deposits are typically processed once, with the search engine available at the time of deposition, and are seldom revisited — leaving measurable signal latent in raw data that has already been collected, paid for, and published. Reanalysing these deposits with a current DIA-NN build recovers that signal: across every deposit reanalysed here — single-cell, bulk cell-line and spatial — reprocessing yielded more protein groups than the originally deposited or published analysis, and more precursors wherever the original was itself DIA-NN, on every deposit (Fig. 4). The recovery is therefore not a property of any single dataset but a systematic return on reprocessing archived DIA data with an up-to-date engine. These comparisons assume that recent DIA-NN (2.5/2.5.1) exercises largely correct false-discovery-rate (FDR) control; older releases and other search engines may have substantially higher true FDR at the same nominal 1% q-value, and verifying their FDR calibration on each deposited dataset is beyond the scope of this work. The reported gains should therefore be read as identifications recovered under a current, FDR-controlled engine, not as strictly FDR-matched differences; for the same reason we restrict cross-engine comparisons to identification counts under the original studies’ own thresholds and do not compare plexDIA protein groups or phosphoproteomic site numbers across engines (Methods). To show the value of running one SDRF-driven workflow across many independent deposits, we reanalysed

five public cell-line DIA panels in a single `quantmsdiann` invocation: NCI-60 (PXD003539, Guo *et al.* 2019 [20]; originally OpenSWATH), ProCan-DepMapSanger (PXD030304, Gonçalves *et al.* 2022 [21]; originally DIA-NN 1.7.x), the Sun *et al.* 2023 PCT-SWATH breast-cancer panel (PXD004701, 76 lines [22]), the MultiPro batch-effect testbed (PXD041421, Wang *et al.* 2023 [23]), and Tognetti *et al.* 2021 (PXD017199, 67 breast-cancer lines [24]) (Supplementary Fig. S11). For the two cohorts with a published DIA protein-group headline, the reanalysis recovered more protein groups under the original studies' ≥ 2 -unique-peptide criterion, applied to the deposited count and to the `quantmsdiann` count under its own global protein-group rule: NCI-60 6,812 versus 4,284 (+59%) and ProCan 8,993 versus 6,698 (+34%; Fig. 4a). This ≥ 2 -peptide gain exceeds the change in the total protein-group count: current DIA-NN releases identify more peptides per protein, so proteins that the original analyses supported with a single peptide now clear the stricter two-peptide threshold, expanding the high-confidence protein set rather than only the marginal one. The Sun PCT-SWATH panel, whose deposited OpenSWATH analysis reports proteotypic proteins rather than a ≥ 2 -peptide count, shows a comparable recovery at the standard 1% protein-FDR rule: 8,304 `quantmsdiann` protein groups (`Lib.PG.Q.Value` ≤ 0.01) versus 6,183 in the deposited analysis (+34%). The size of the gain reflects the age and engine of the deposited analysis, largest for the oldest, OpenSWATH-era NCI-60 (+59%); the recoverable value is therefore greatest exactly where deposits are most numerous: the large back-catalogue of DIA data processed with older or non-DIA-NN engines. Each original count is recomputed from public data — NCI-60 and Sun from the deposited PRIDE OpenSWATH analyses, ProCan from the authors' figshare peptide-count matrix — so every bar is reproducible rather than a transcribed paper headline (Methods). (PXD041421 and PXD017199 carry no published DIA headline and contribute reanalysis-only counts.) Across the five cohorts the reanalysis spans 12,914 unique UniProt accessions, of which 5,716 (44.3%) are detected in all five (a pan-cohort core proteome) and a further 1,472 (11.4%) in exactly four. Tissue-level coverage spans 29 tissue categories (27 pan-cancer tissues plus a non-cancer reference and an unassigned bin; Supplementary Fig. S11b), which maps both the cell lines contributing to each tissue and the union of unique proteins detected per tissue, led by lung, breast, and haematopoietic-and-lymphoid tissue. Because every count comes from a single SDRF-parameterised `quantmsdiann` invocation, the resulting protein matrix is queryable from the published QPX archive and can be filtered, joined, or re-grouped by Cellosaurus, NCIt, or Disease Ontology terms without manual harmonisation, turning a set of independently deposited cohorts into a single reusable cross-study resource. The same recovery extends beyond bulk cell lines to another acquisition mode: a spatial Deep Visual Proteomics cohort of MYCN-amplified neuroblastoma recovered more identifications than its original DIA-NN 1.8.1 analysis (PXD064049; precursors 21,535 versus 17,958, +20%; protein groups 3,301 versus 2,947, +12%, both counted from the per-precursor reports under the same 1% `Lib` q-value rather than the deposited count matrices, which are written at different run-specific q-values per DIA-NN version). Residual protein-group inference inflation is higher in the deposited 1.8.1 analysis (3.2% multi-accession groups) than in the reanalysis (1.3%), so this protein-group gain is a conservative estimate. Per-cohort completeness, peptide-per-protein distributions and accession overlap for the reanalysed cohorts are provided in Supplementary Note 6 (Figs. S5–S11).

4. Discussion

`quantmsdiann` automates the path from a deposited DIA dataset to a reproducible quantification table, at a scale that supports systematic reanalysis of public DIA archives. The SDRF-first design encourages experiment annotation upstream of analysis and produces metadata that is

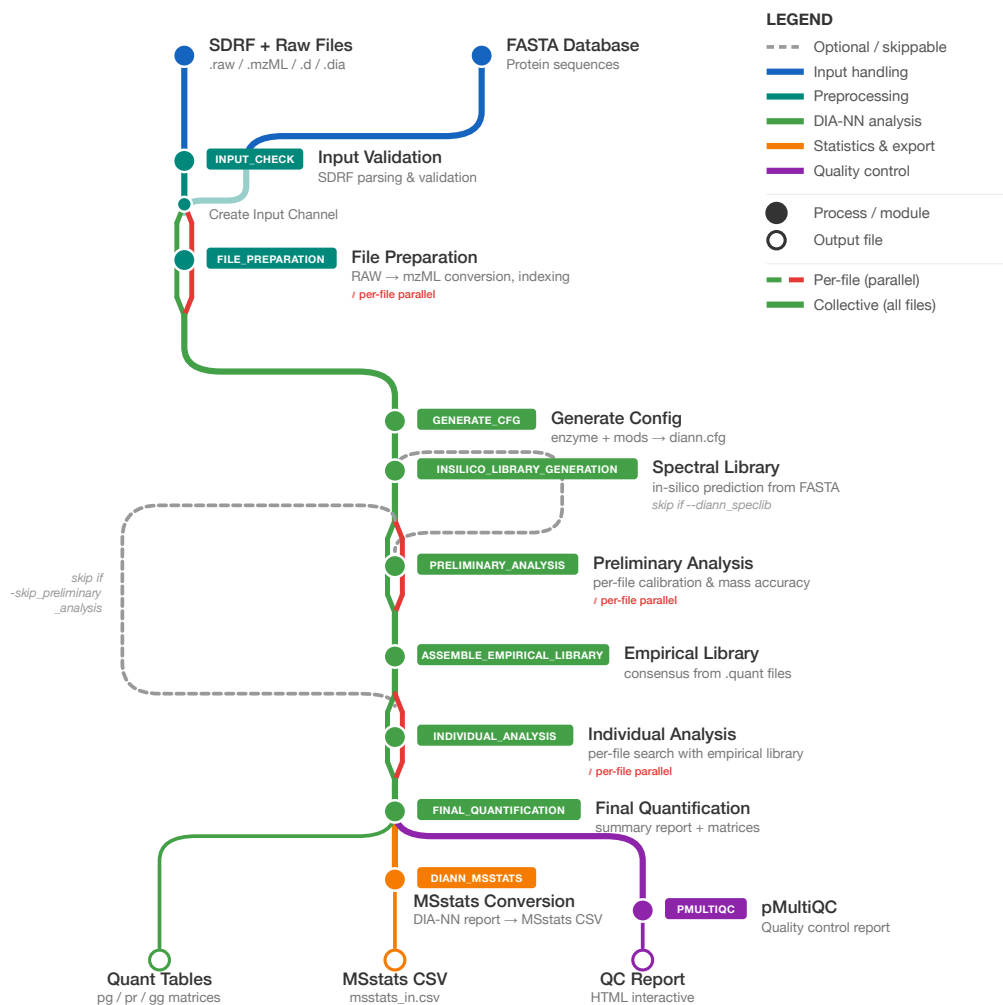


Figure 1: **The quantmsdiann workflow.** Subway diagram: mandatory modules as filled circles, optional/skippable modules as open circles. Per-file parallel stages (red; raw-file preparation, preliminary calibration, individual search) run as one task per raw file, whereas collective stages (green; in-silico library generation, empirical library assembly, final quantification, MSstats conversion, pmultiqc reporting, and QPX export) run once over the full cohort.

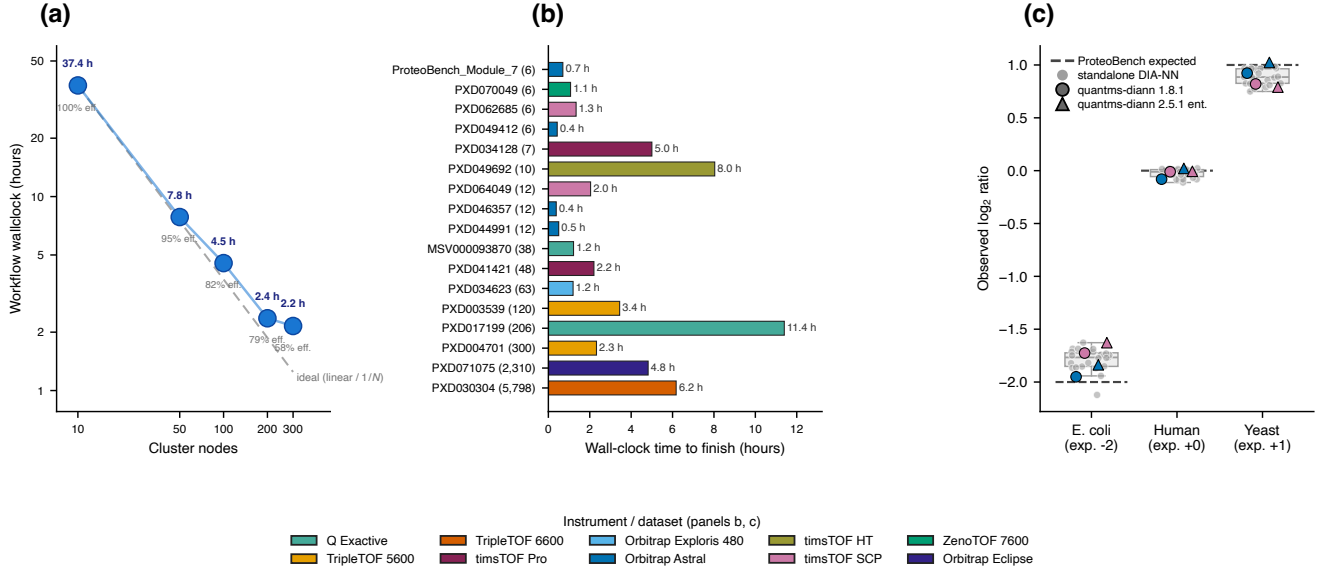


Figure 2: Runtime scaling and ProteoBench quantification accuracy. (a) Workflow wall-clock versus the number of cluster nodes (Nextflow `executor.queueSize`) on the PXD071075 single-cell cohort, log-log axes. The dashed grey line is ideal linear ($1/N$) strong scaling anchored at the 10-node point; parallel efficiency (measured/ideal speed-up) is printed under each dot. The measured curve bends above the ideal beyond ~ 100 nodes (efficiency $100\% \rightarrow 58\%$ over the sweep), reflecting both the fixed serial cohort-level steps and shared-cluster resource contention at high concurrency on this EMBL-EBI allocation (see text); each point is a single run. (b) Wall-clock time to finish each reanalysis, one bar per dataset, ordered by cohort size and coloured by instrument family; (a) and (b) exclude the one-time in-silico spectral-library prediction, except the PXD003539 bar, whose incomplete execution trace did not allow the library step to be separated, so its bar conservatively includes it (a ~ 0.4 h overstatement relative to the other bars). (c) ProteoBench quantification accuracy per HYE species: observed $\log_2$ fold-change against the ProteoBench-expected ratio (dashed) for the two DIA modules with predicted-from-FASTA DIA-NN community submissions (Orbitrap Astral, Module 7; timsTOF SCP diaPASEF, PXD062685). Standalone DIA-NN community runs (all versions) appear as a grey strip and box; `quantmsdiann` points are coloured by instrument (shared legend) and shaped by DIA-NN version (circle, 1.8.1; triangle, 2.5.1-enterprise), and track the community distribution across species, i.e. distributed orchestration does not change quantification accuracy. Per-version, per-module identification depth is in Supplementary Note 5 (Fig. S4).

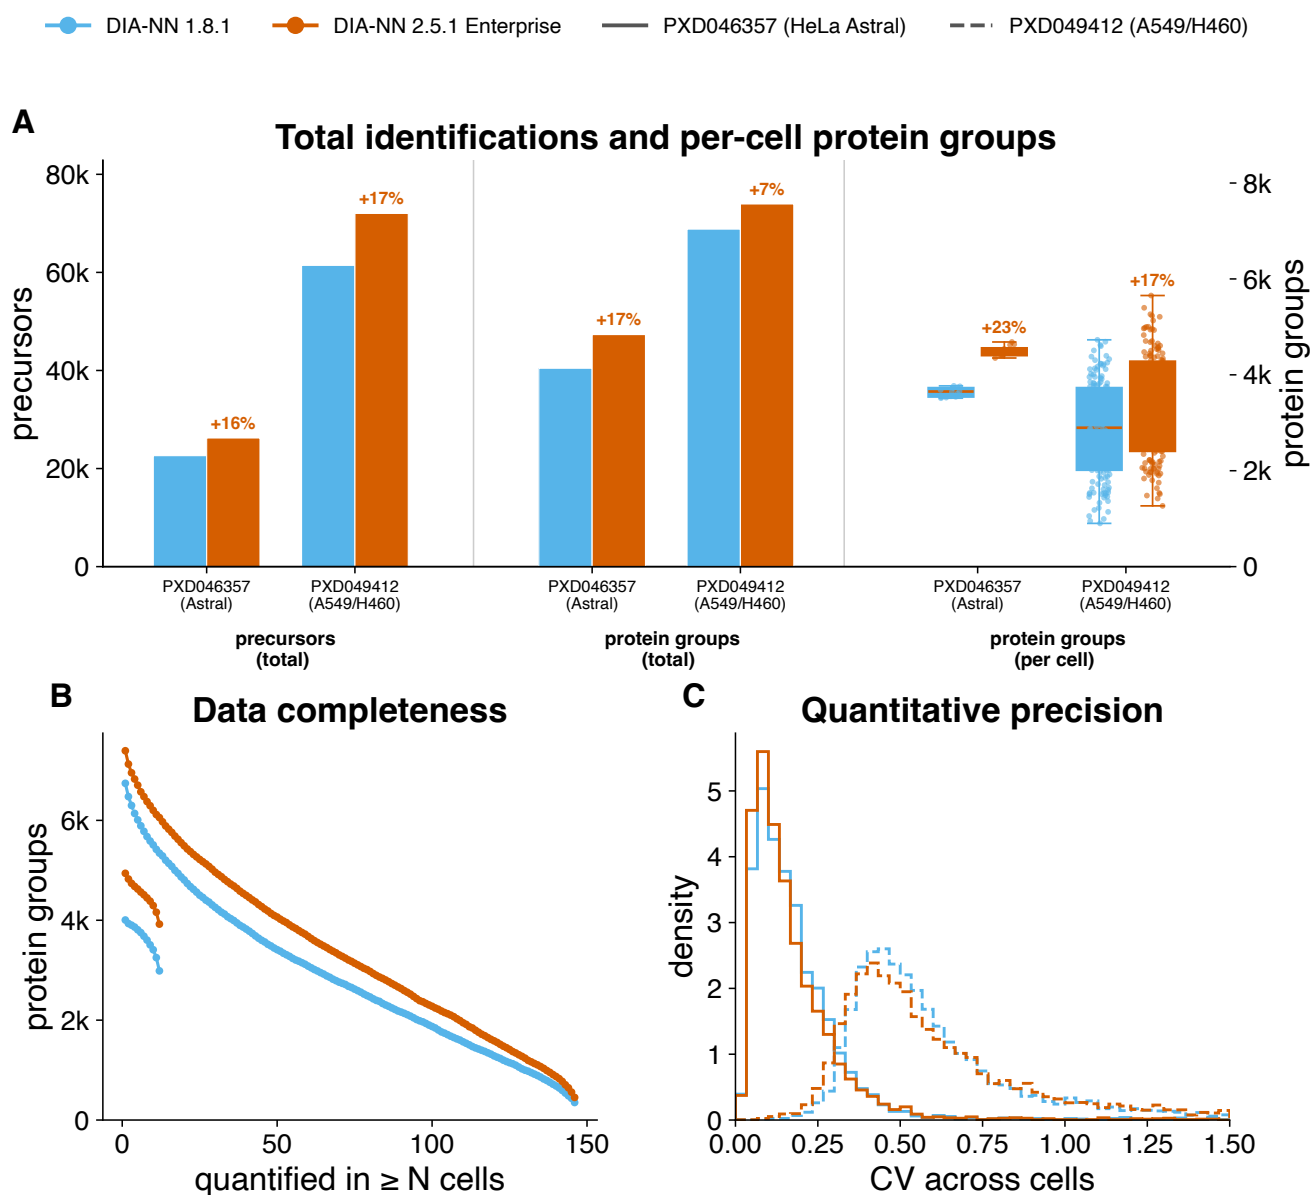


Figure 3: Single-cell DIA reanalysis by quantmsdiann, comparing DIA-NN 1.8.1 with the current 2.5.1-enterprise build on identical raw data. Two label-free Orbitrap Astral single-cell cohorts are shown: HeLa (PXD046357) and a larger A549/H460 cohort of 146 single cells (PXD049412; the 20x/40x A549 library runs are excluded from per-cell counts). **(a)** Total identifications and per-cell depth, per build, for both cohorts: total precursors (left axis) and total protein groups together with the per-cell protein-group distribution (box and jittered points; right axis); the per-build percentage change is annotated. The A549/H460 cohort reaches comparable per-cell depth on many more cells, but its total protein-group count is already saturated (so the version effect is concentrated in precursor depth). **(b)** Data-completeness curves for both single-cell cohorts (HeLa Astral, solid; A549/H460, dashed): protein groups quantified in at least N cells, the match-between-runs signature, where the right endpoint is the complete-profile count. **(c)** Distribution of per-protein coefficient of variation across cells for both cohorts (HeLa solid, A549/H460 dashed), summarising quantitative precision (axis truncated at $CV = 1.5$); the larger A549/H460 cohort shows the expected higher cell-to-cell variability.

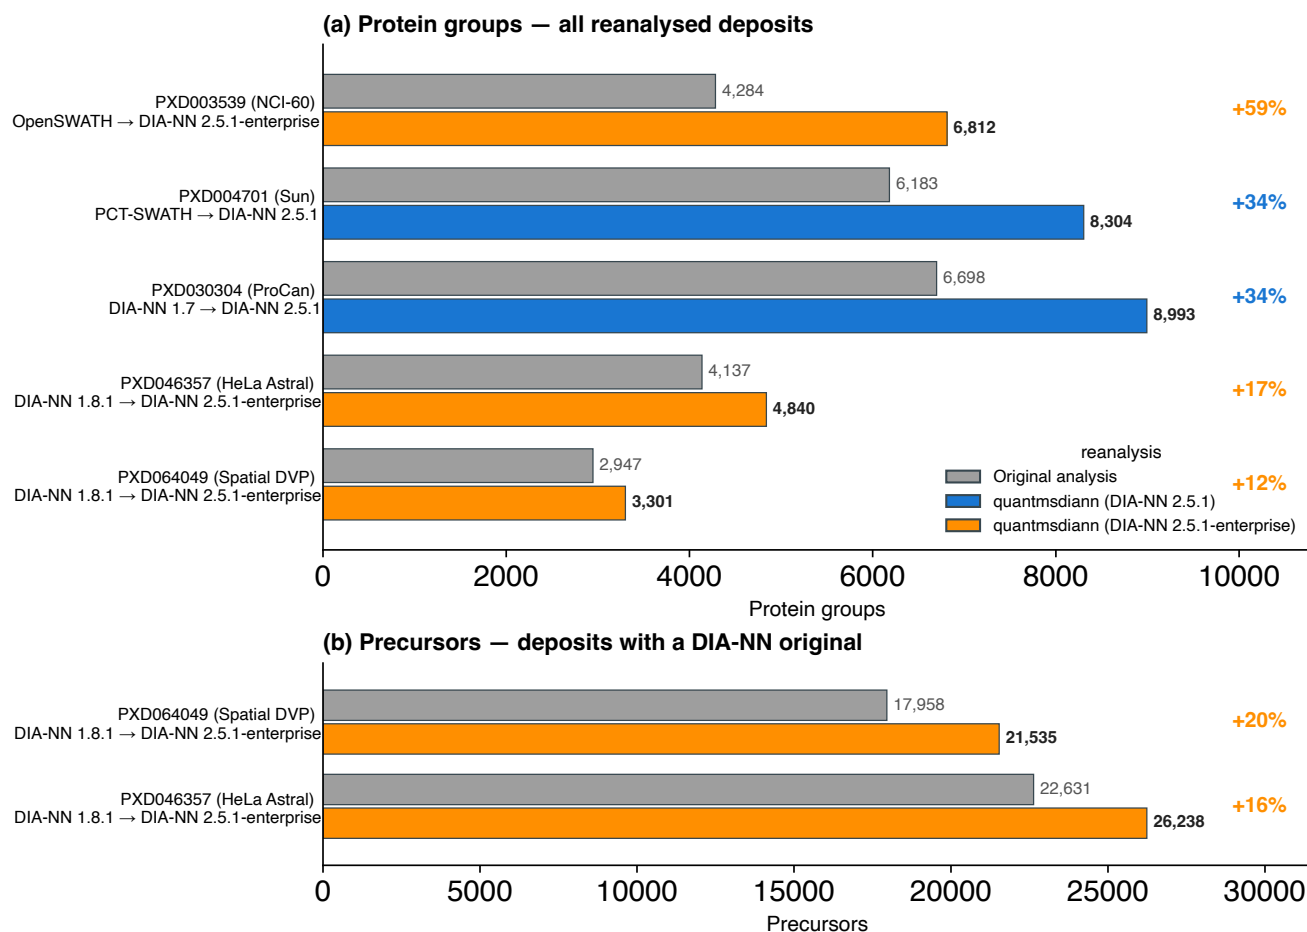


Figure 4: **Reanalysis with current DIA-NN recovers more than the originally deposited analyses.** Each public DIA deposit is shown as the originally deposited or published count (grey) versus the **quantmsdiann** reanalysis (coloured by the DIA-NN version used: 2.5.1 or 2.5.1-enterprise), sorted by gain. **(a)** Protein groups for the five reanalysed deposits, spanning single-cell (HeLa Astral, PXD046357), bulk cell-line (NCI-60, PXD003539; ProCan, PXD030304; Sun, PXD004701) and spatial Deep Visual Proteomics (PXD064049). The multiplexed plexDIA cohort (MSV000093870) is not shown: plexDIA protein-group counts are not comparable across DIA-NN versions, so plexDIA is processed for workflow support only and not benchmarked against the deposited analysis. **(b)** Precursors, restricted to the two deposits with a DIA-NN-based original precursor count (HeLa Astral and spatial DVP); the OpenSWATH/PCT-SWATH originals provide no comparable precursor count. The **quantmsdiann** side is counted from the precursor report (parquet) for the bulk and single-cell cohorts and from the deposited and reanalysis count matrices for the spatial cohort; the original side is the deposit's matrix or published headline (Supplementary Note 3). The five-cohort pan-cohort integration (per-tissue coverage) is in Supplementary Fig. S11.

interoperable with the wider proteomics ecosystem [9]; the QPX archive bundles the SDRF, harmonised quantification tables and pipeline provenance into a single Parquet container so that reanalysed results can be archived (e.g. on Zenodo) and re-queried alongside the original raw data. By focusing on DIA-NN rather than the multi-engine scope of the related bigbio/quantms pipeline [6], **quantmsdiann** achieves a leaner dependency surface and faster pipeline-level execution for the DIA-only regime, where the dominant cost is per-file DIA-NN invocation rather than across-engine comparison.

Every reanalysis in this study completed in less than 12h on the EMBL-EBI HPC cluster, independent of cohort size: the 2,300-run single-cell cohort finished in 2.2 h at 300 nodes. This follows from how end-to-end wall-clock is structured, as a largely fixed serial overhead plus the per-file analysis stages. The serial overhead is dominated by in-silico spectral-library generation from the FASTA (the single largest non-parallel step), plus cohort-level consolidation. The per-file stages run as independent tasks across the cluster (Fig. 2a), so their elapsed time grows only sub-linearly with cohort size as files are processed in parallel waves (per-step envelopes in Supplementary Note 4, Fig. S1). Time-to-finish is therefore dominated by the fixed overhead for small cohorts and stays within a few hours even for the largest deposits, so a small dataset is not necessarily faster than a much larger one (Fig. 2b); the serial overhead itself scales with the predicted-library size, growing for wide variable-modification searches such as phosphoproteomics, rather than with the number of files.

Our evaluation covers three complementary aspects of **quantmsdiann**: analytical agreement with the desktop version of DIA-NN (ProteoBench; Fig. 2c), recovery against published per-study quantifications (independent reanalyses; Figs. 3, 4), and archive-scale throughput (pan-cohort; Supplementary Fig. S11). On the ProteoBench DIA modules, **quantmsdiann**'s quantification accuracy is comparable to the standalone DIA-NN community submissions: across both DIA-NN releases its per-species HYE fold-changes sit within the spread of the community runs, so distributed, SDRF-driven orchestration reproduces a desktop DIA-NN analysis rather than changing its output. The recovery results suggest that the value of DIA reanalysis is real but time-limited (largest for deposits originally analysed with older or non-DIA-NN engines and shrinking toward parity for recently processed cohorts), a regime an SDRF-driven workflow is suited to address as new DIA-NN versions ship. The workflow already supports broader single-cell and laser-microdissected spatial acquisition modes (Fig. 1, library-handling branch), and SDRFs for the Brunner [2], Derks [25], Leduc [26], Wang [4], Mund [27] and Makhmut [28] datasets are in preparation.

The cross-DIA-NN-version reproducibility view enabled by **quantmsdiann** is, to our knowledge, the first pipeline-level treatment of this question for DIA-NN. We expect this to become increasingly important as DIA-NN evolves: a deposited single-cell DIA dataset analysed with DIA-NN 1.8 today and re-analysed with DIA-NN 2.x in two years should not produce different biological conclusions for the same data and parameters. In current practice such re-analyses are rarely performed, because the bespoke per-study scripts make them prohibitively expensive, a barrier the single-invocation audit of Section 3.2 removes. By design, **quantmsdiann** ends at harmonised quantification, leaving batch correction, cell-type assignment, and differential-abundance analysis to downstream packages such as *scp* [29] that read its QPX or MSstats output directly; in this sense it complements existing single-cell DIA workflows rather than competing with them. **quantmsdiann** is open-source under the MIT license and is openly developed as a community effort within the nf-core and bigbio proteomics ecosystem, so that it can continue to track new DIA-NN releases and acquisition modes as they appear.

Data Availability

All datasets reanalysed in this study are publicly available through ProteoMeXchange. Cell-line bulk DIA reanalyses: PRIDE PXD003539 (Guo 2019, NCI-60), PXD004701 (Sun 2023), PXD030304 (ProCan-DepMapSanger), PXD017199 (Tognetti 2021), PXD041421 (Wang 2023). Spatial Deep Visual Proteomics reanalysis: PRIDE PXD064049 (MYCN-amplified neuroblastoma, diaPASEF). Scalability experiment: PRIDE PXD071075 (Wu 2025). ProteoBench benchmarks: PXD049412 (single-cell, Module 9), PXD062685 (diaPASEF, Module 5), PXD070049 (ZenoTOF, Module 10), and Module 7 (Astral) datasets. The full list of PRIDE accessions used in the pan-cohort of DIA cell-line reanalyses is provided in Supplementary Note 1 (Table S1). `quantmsdiann` is available at <https://github.com/bigbio/quantmsdiann> under the MIT license; documentation is hosted at <https://quantmsdiann.quantms.org/>. The pipeline is implemented in Nextflow DSL2 ($\geq 25.10.4$) and packages each step as a versioned Docker, Singularity, or Apptainer container image. DIA-NN 1.8.1 is distributed publicly via BioContainers; because the DIA-NN license restricts redistribution of later releases, containers for DIA-NN 1.9 and above are built locally from the recipes in <https://github.com/bigbio/quantms-containers> (see Experimental Procedures). Pipeline version v2.2.0 (release codename “Chongqing”, 2026-06-16) was used for the analyses reported in this paper. Analysis scripts that generated the figures in this manuscript are available at <https://github.com/ypriverol/quantmsdiann-paper> (this repository).

Supplemental Data

This article contains supplemental data. The Supplementary Notes provide the full PRIDE accession list (Supplementary Note 1, Table S1), DIA-NN container-build recipes (Supplementary Note 2), the filtering and protein-counting rules (Supplementary Note 3), per-process runtime and resource envelopes (Supplementary Note 4, Figs. S1–S3), the ProteoBench per-version identification breakdown (Supplementary Note 5, Fig. S4), per-cohort completeness, peptide-per-protein and accession-overlap figures (Supplementary Note 6, Figs. S5–S11), and a table of software, formats, and public resources with their repositories (Supplementary Note 7, Table S2).

Conflict of Interest

V.D. holds shares of Aptila Biotech. The other authors declare no competing interests.

Acknowledgments

M.B. is supported by the Science and Technology Innovation Key R&D Program of Chongqing (CSTB2023TIAD-STX0002). A.L. acknowledges support from MCIN (Recovery, Transformation and Resilience Plan); the Basque Government “Biotechnology Complementary Plan Applied to Health” funded by the European Union NextGeneration EU (PRTR-C17.I1; PRTR-C17.I01.P01.S13) (AAAA_ACG_AY_2539/22_05); and an EMBO Scientific Exchange Grant (number 10015/2023). Y.P.-R. acknowledges support from the Wellcome Trust [223745/Z/21/Z], BBSRC [BB/V018779/1, BB/X001911/1], EPSRC [EP/Y035984/1], a UKRI single-cell proteomics (SCP) grant [UKRI701], and EMBL core funding. N.S. and O.K. acknowledge support from a UKRI single-cell proteomics (SCP) grant [UKRI701]. J.A.V. acknowledges support from a UKRI single-cell proteomics (SCP) grant [UKRI701] and EMBL core funding. V.D. was funded by the German Ministry of Education and Research (BMBF), as part of the National Research Node “Mass spectrometry in Systems Medicine” (MSCoreSys), under grant agreement 161L0221.

Author Contributions

QXY, YS and CD developed the pipeline. HW helped build the containers and contributed to the workflow implementation and manuscript writing. AL annotated the SDRF metadata and helped run the workflow. TS, FC, NS and JN assisted with the DIA-NN reanalyses and manuscript writing; TS additionally contributed to the workflow design and to the design of QPX and the SDRF format, and JN tested the tool and identified multiple issues. OK provided feedback on the plexDIA datasets. VD provided DIA-NN expertise and guidance on cross-version reproducibility. JAV provided proteomics data-resource infrastructure and funding, supervised the EMBL-EBI contributors, and contributed to manuscript review and editing. MB contributed to manuscript writing and supervised the students; MB and YPR conceived and supervised the project. QXY and YPR wrote the original draft, with input from all authors. All authors read and approved the final manuscript.

Abbreviations

CLI	command-line interface
DDA	data-dependent acquisition
DIA	data-independent acquisition
DIA-NN	data-independent acquisition neural networks (DIA search and quantification software)
diaPASEF	data-independent acquisition with parallel accumulation–serial fragmentation
EFO	Experimental Factor Ontology
FDR	false discovery rate
HPC	high-performance computing
HUPO-PSI	Human Proteome Organization Proteomics Standards Initiative
HYE	human, yeast, and <i>E. coli</i> (ProteoBench three-proteome mixture)
IQR	interquartile range
LSF	Load Sharing Facility (HPC scheduler)
MS	mass spectrometry
MS1/MS2	first-/second-stage mass spectrometry (precursor/fragment scans)
PASEF	parallel accumulation–serial fragmentation
PSI-MS	HUPO-PSI mass spectrometry controlled vocabulary
QPX	Quantitative Proteomics eXchange
SDRF	Sample and Data Relationship Format

References

- [1] V. Demichev, C. B. Messner, S. I. Vernardis, K. S. Lilley, M. Ralser, DIA-NN: neural networks and interference correction enable deep proteome coverage in high throughput, *Nat Methods* 17 (2020) 41–44. doi:10.1038/s41592-019-0638-x.
- [2] A.-D. Brunner, M. Thielert, C. Vasilopoulou, C. Ammar, F. Coscia, A. Mund, et al., Ultra-high sensitivity mass spectrometry quantifies single-cell proteome changes upon perturbation, *Mol Syst Biol* 18 (2022) e10798. doi:10.15252/msb.202110798.

- [3] F. Meier, A.-D. Brunner, M. Frank, A. Ha, I. Bludau, E. Voytik, et al., diaPASEF: parallel accumulation-serial fragmentation combined with data-independent acquisition, *Nat Methods* 17 (2020) 1229–1236. doi:10.1038/s41592-020-00998-0.
- [4] J. Wang, Y. Huang, F. Lu, Q. Xu, Z. Yang, Y. Jiang, et al., Benchmarking informatics workflows for data-independent acquisition single-cell proteomics, *Nat Commun* 16 (2025) 10276. doi:10.1038/s41467-025-65174-4.
- [5] Y. Perez-Riverol, C. Bandla, D. J. Kundu, S. Kamatchinathan, J. Bai, S. Hewapathirana, N. S. John, A. Prakash, M. Walzer, S. Wang, J. A. Vizcaíno, et al., The PRIDE database at 20 years: 2025 update, *Nucleic Acids Res* 53 (D1) (2025) D543–D553. doi:10.1093/nar/gkae1011.
- [6] C. Dai, J. Pfeuffer, H. Wang, P. Zheng, L. Käll, T. Sachsenberg, et al., quantms: a cloud-based pipeline for quantitative proteomics enables the reanalysis of public proteomics data, *Nat Methods* 21 (2024) 1603–1607. doi:10.1038/s41592-024-02343-1.
- [7] L. Lautenbacher, P. Samaras, T. K. Schmidt, B. Kuster, M. Wilhelm, et al., ProteomicsDB: toward a FAIR open-source resource for life-science research, *Nucleic Acids Res* 50 (D1) (2022) D1541–D1552. doi:10.1093/nar/gkab1026.
- [8] Y. Perez-Riverol, P. Moreno, Scalable data analysis in proteomics and metabolomics using BioContainers and workflows engines, *Proteomics* 20 (9) (2020) e1900147. doi:10.1002/pmic.201900147.
- [9] C. Dai, A. Füllgrabe, J. Pfeuffer, E. M. Solovyeva, J. Deng, P. Moreno, et al., A proteomics sample metadata representation for multiomics integration and big data analysis, *Nat Commun* 12 (2021) 5854. doi:10.1038/s41467-021-26111-3.
- [10] P. A. Ewels, A. Peltzer, S. Fillinger, H. Patel, J. Alneberg, A. Wilm, et al., The nf-core framework for community-curated bioinformatics pipelines, *Nat Biotechnol* 38 (2020) 276–278. doi:10.1038/s41587-020-0439-x.
- [11] R. Devreese, C. Jachmann, B. Van Puyvelde, H. Webel, W. Bittremieux, C. Chiva, et al., ProteoBench: the community-curated platform for comparing proteomics data analysis workflows, *bioRxivPreprint* (2025). doi:10.64898/2025.12.09.692895.
- [12] UniProt Consortium, UniProt: the universal protein knowledgebase in 2025, *Nucleic Acids Res* 53 (2025) D609–D617. doi:10.1093/nar/gkae1010.
- [13] N. Hulstaert, J. Shofstahl, T. Sachsenberg, M. Walzer, H. Barsnes, L. Martens, et al., ThermoRawFileParser: modular, scalable, and cross-platform RAW file conversion, *J Proteome Res* 19 (2020) 537–542. doi:10.1021/acs.jproteome.9b00328.
- [14] S. Kamatchinathan, S. Hewapathirana, C. Bandla, S. Insua, J. A. Vizcaíno, Y. Perez-Riverol, pridepy: a Python package to download and search data from PRIDE database, *J Open Source Softw* 10 (107) (2025) 7563. doi:10.21105/joss.07563.
- [15] F. da Veiga Leprevost, B. A. Grüning, S. Alves Aflitos, H. L. Röst, J. Uszkoreit, H. Barsnes, M. Vaudel, et al., BioContainers: an open-source and community-driven framework for software standardization, *Bioinformatics* 33 (16) (2017) 2580–2582. doi:10.1093/bioinformatics/btx192.

- [16] Q.-X. Yue, C. Dai, S. Kamatchinathan, A. Larrea, Y. Perez-Riverol, et al., pmultiqc: an open-source, lightweight, and metadata-oriented QC reporting library for MS proteomics, *bioRxivPreprint* (2025). doi:10.1101/2025.11.02.685980.
- [17] P. Ewels, M. Magnusson, S. Lundin, M. Källér, MultiQC: summarize analysis results for multiple tools and samples in a single report, *Bioinformatics* 32 (2016) 3047–3048. doi:10.1093/bioinformatics/btw354.
- [18] I. Virshup, D. Bredikhin, L. Heumos, G. Palla, G. Sturm, A. Gayoso, et al., The scverse project provides a computational ecosystem for single-cell omics data analysis, *Nat Biotechnol* 41 (2023) 604–606. doi:10.1038/s41587-023-01733-8.
- [19] J. A. Bubis, T. N. Arrey, E. Damoc, B. Delanghe, J. Slovakova, T. M. Sommer, H. Kagawa, P. Pichler, N. Rivron, K. Mechtler, M. Matzinger, Challenging the astral mass analyzer to quantify up to 5,300 proteins per single cell at unseen accuracy to uncover cellular heterogeneity, *Nature Methods* (2025). doi:10.1038/s41592-024-02559-1.
- [20] T. Guo, A. Luna, V. N. Rajapakse, C. C. Koh, Z. Wu, W. Liu, Y. Sun, H. Gao, M. P. Menden, C. Xu, et al., Quantitative proteome landscape of the NCI-60 cancer cell lines, *iScience* 21 (2019) 664–680. doi:10.1016/j.isci.2019.10.059.
- [21] E. Gonçalves, R. C. Poulos, Z. Cai, S. Barthorpe, S. S. Manda, N. Lucas, A. Beck, et al., Pan-cancer proteomic map of 949 human cell lines, *Cancer Cell* 40 (2022) 835–849.e8. doi:10.1016/j.ccell.2022.06.010.
- [22] R. Sun, W. Ge, Y. Zhu, A. Sayad, A. Luna, M. Lyu, S. Liang, et al., Proteomic dynamics of breast cancer cell lines identifies potential therapeutic protein targets, *Mol Cell Proteomics* 22 (2023) 100602. doi:10.1016/j.mcpro.2023.100602.
- [23] H. Wang, K. P. Lim, W. Kong, H. Gao, B. J. H. Wong, S. X. Phua, T. Guo, W. W. B. Goh, MultiPro: DDA-PASEF and diaPASEF acquired cell line proteomic datasets with deliberate batch effects, *Sci Data* 10 (2023) 858. doi:10.1038/s41597-023-02779-8.
- [24] M. Tognetti, A. Gabor, M. Yang, V. Cappelletti, J. Windhager, O. M. Rueda, et al., Deciphering the signaling network of breast cancer improves drug sensitivity prediction, *Cell Syst* 12 (5) (2021) 401–418.e12. doi:10.1016/j.cels.2021.04.002.
- [25] J. Derks, A. Leduc, G. Wallmann, R. G. Huffman, M. Willetts, S. Khan, et al., Increasing the throughput of sensitive proteomics by plexdia, *Nat Biotechnol* 41 (2023) 50–59. doi:10.1038/s41587-022-01389-w.
- [26] A. Leduc, L. Khoury, J. Cantlon, S. Khan, N. Slavov, Massively parallel sample preparation for multiplexed single-cell proteomics using npop, *Nat Protoc* 19 (2024) 3750–3776. doi:10.1038/s41596-024-01033-8.
- [27] A. Mund, F. Coscia, A. Kriston, R. Hollandi, F. Kovács, A.-D. Brunner, et al., Deep visual proteomics defines single-cell identity and heterogeneity in primary human cancers, *Nat Biotechnol* 40 (2022) 1231–1240. doi:10.1038/s41587-022-01302-5.
- [28] A. Makhmut, D. Qin, S. Fritzsche, J. Nimo, J. König, F. Coscia, A framework for ultra-low-input spatial tissue proteomics, *Cell Syst* 14 (2023) 1002–1014.e5. doi:10.1016/j.cels.2023.10.003.

- [29] C. Vanderaa, L. Gatto, The current state of single-cell proteomics data analysis, *Curr Protoc* 3 (2023) e658. doi:10.1002/cpz1.658.