

```
# ----- Various -----  
#  
# Require explicit names when deleting indices:  
#  
#action.destructive_requires_name: true  
action.auto_create_index: .watches,.triggered_watches,.watcher-history-  
[root@106.52.90.51 metricbeat]#
```

es 的

```
#action.destructive_requires_name: true  
action.auto_create_index: .watches,.triggered_watches,.watcher-history-  
[root@106.52.90.51 metricbeat]# cat ../elasticsearch/config/elasticsearch.yml
```

配置文件


禁止了 metricbeat 自动创建索引

```
1 action.auto_create_index: .watches,.triggered_watches,.watcher-history-*
```

注意卡着时间点

先把查询 进程的 程序给停了 不然就会误报机器宕机

然后删除这个索引

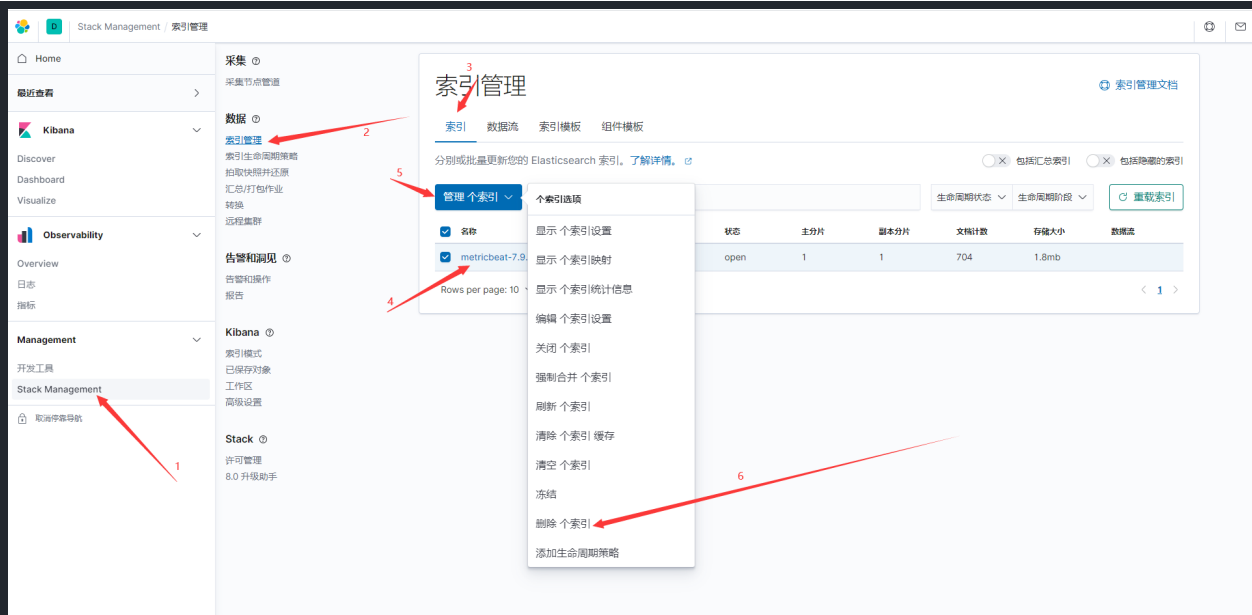

建立索引

正常的用put 需要上网查

也可以执行

```
[root@106.52.90.51 metricbeat]# ./metricbeat setup
Overwriting ILM policy is disabled. Set `setup.ilm.overwrite: true` for enabling.

Index setup finished.
Loading dashboards (Kibana must be running and reachable)
Loaded dashboards
[root@106.52.90.51 metricbeat]#
```

这样就重建好索引了