SETUP GUIDE

Fund Document Intelligence: Setup guide

Connect your own Google Drive folder and Claude. About 15 minutes, done once.
The steps match README "Full setup", steps 1 to 3.

What you'll need

Accounts

- **A Google account**. It owns the Cloud project and the Drive folder.
- **An Anthropic Console account** with **API credits**. These are billed separately from a Claude.ai subscription.

On your computer

- **Docker Desktop**, running (`docker info`)
- **Python 3.12** (`python3.12 --version`)
- **Node.js LTS** (`node --version`)
- A clone of this repository

WHAT YOU'LL END UP WITH

An OAuth **client ID** and **client secret** (or the client JSON file) from Google, and an **API key** from Anthropic. `./scripts/init_env.sh` writes them into `.env`, which is git-ignored and never committed. Never paste these values into chat, issues or commits.

Part 1: Google Cloud OAuth client	Create a project · Enable the Drive API · Google Auth Platform · Create the client
Part 2: Anthropic API key	API keys · Billing
Part 3: Next steps	init_env.sh · start.sh · Connect Google Drive
Troubleshooting	Common errors and fixes


PART 1

Google Cloud OAuth client

You create your own OAuth client; no Google credentials ship with this repo. The app stays in **Testing** mode, so no Google verification is needed.

1 Create a project

Go to **console.cloud.google.com**, open the project picker, choose **New project** and name it (e.g. `doc-intelligence`). Then click **Create**.

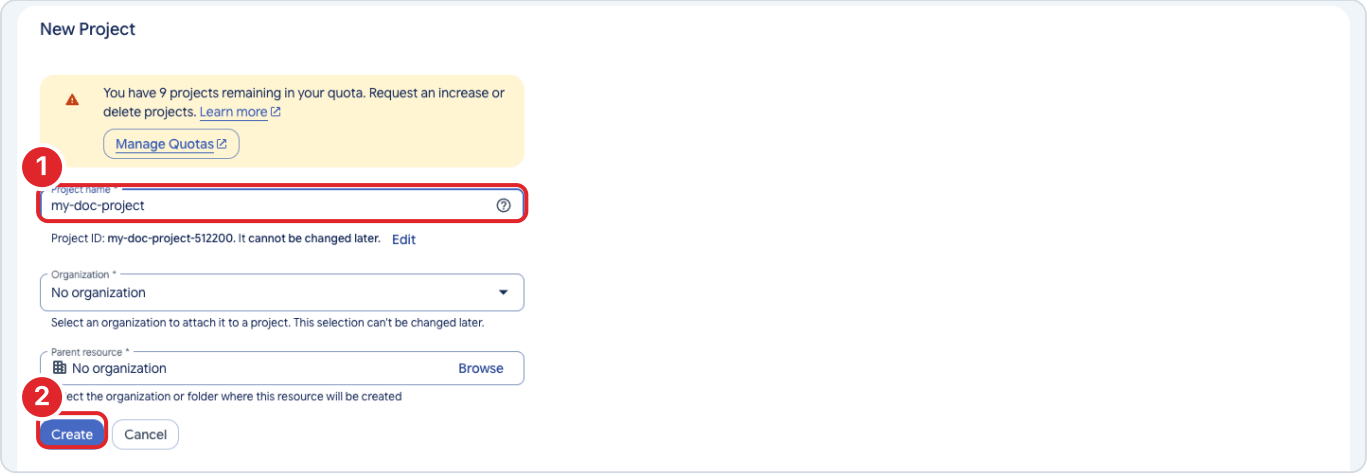


IAM & Admin → New Project. The form is shown filled with an example name and was not submitted.

1 Project name 2 Create

2 Enable the Drive API

Go to **APIs & Services → Library**, search **Google Drive API**, then click **Enable**. When it's on, the page shows **Manage** and "API Enabled".

EASY TO MISS
Without it, sign-in succeeds but listing folders fails.

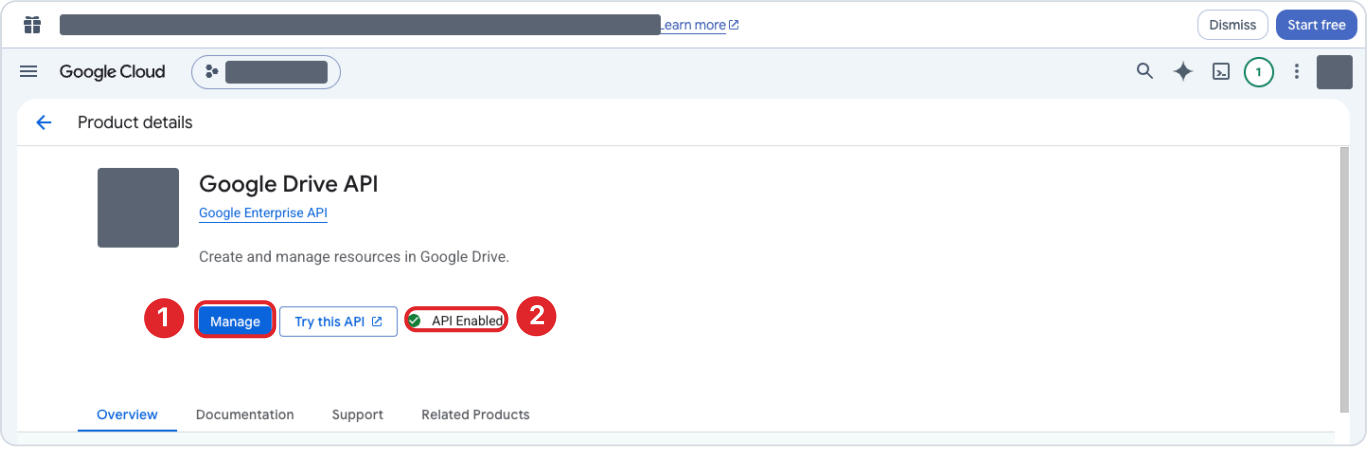

APIs & Services → Library → Google Drive API. On a project where it's off, the blue button reads Enable.


1 Enable (reads Manage once it's on) 2 API Enabled

3 Configure Google Auth Platform

In the left menu, open **Google Auth Platform** (formerly "OAuth consent screen"). There are three pages to set up.

3a. Branding

App name (e.g. *Fund Document Intelligence*), your **support email** and **developer contact email**.

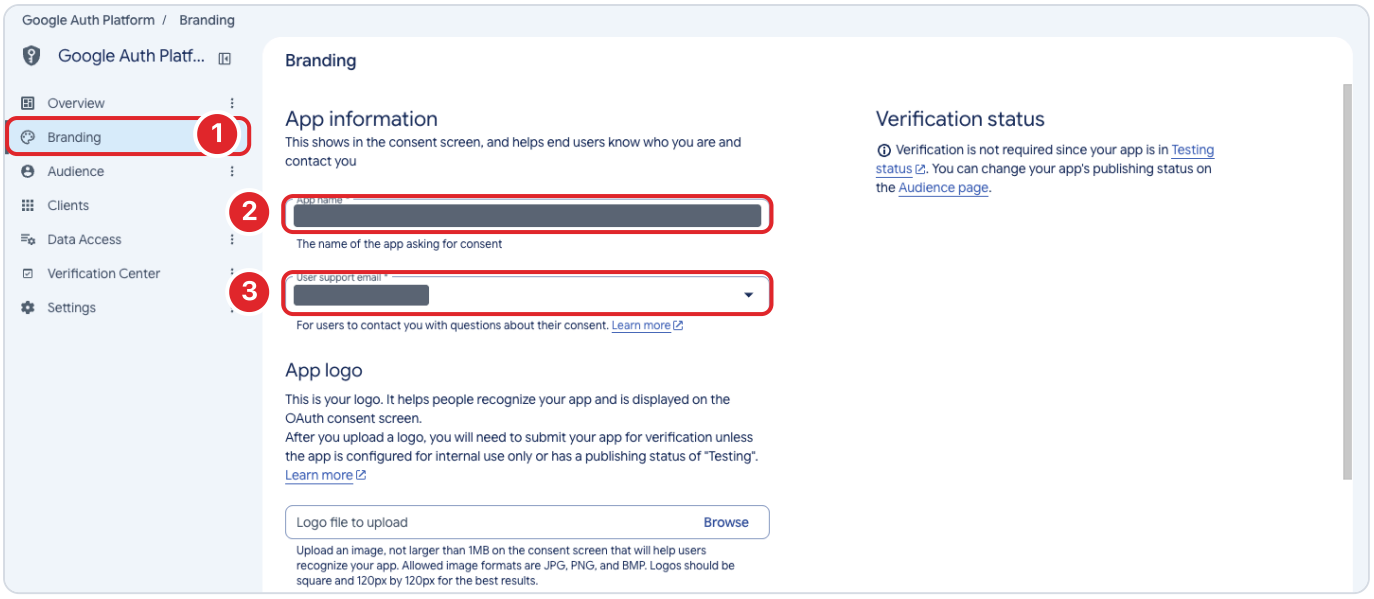

Google Auth Platform → Branding. The app name and email are hidden here.


1 Branding 2 App name 3 User support email

3b. Audience

User type **External**, publishing status **Testing**. Under **Test users**, click **Add users** and add the Google account whose Drive you'll connect.


REQUIRED

Without this, Google rejects the sign-in with `access_denied`.

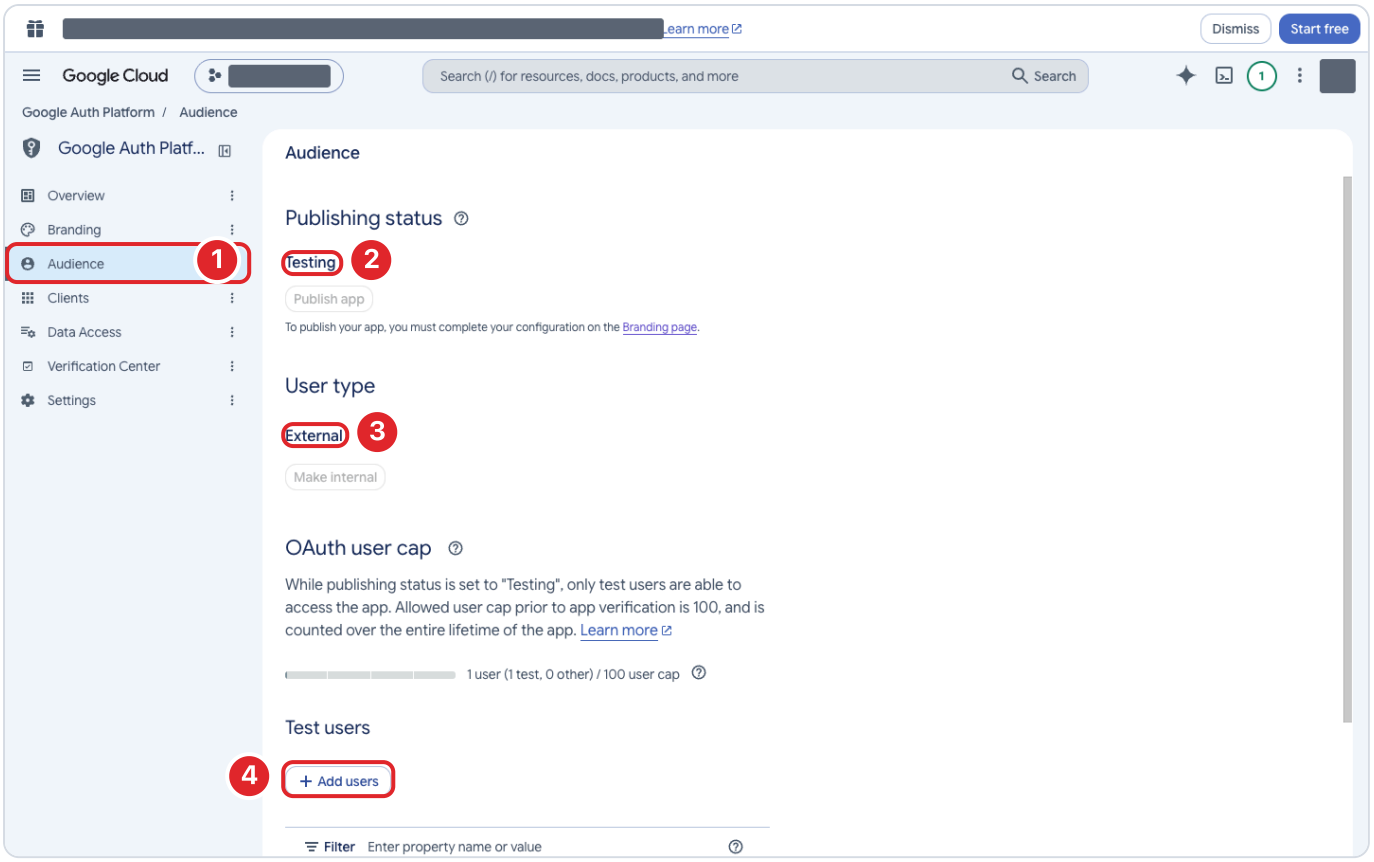

Google Auth Platform → Audience: publishing status Testing, user type External.

1 Audience 2 Testing 3 External 4 Add users

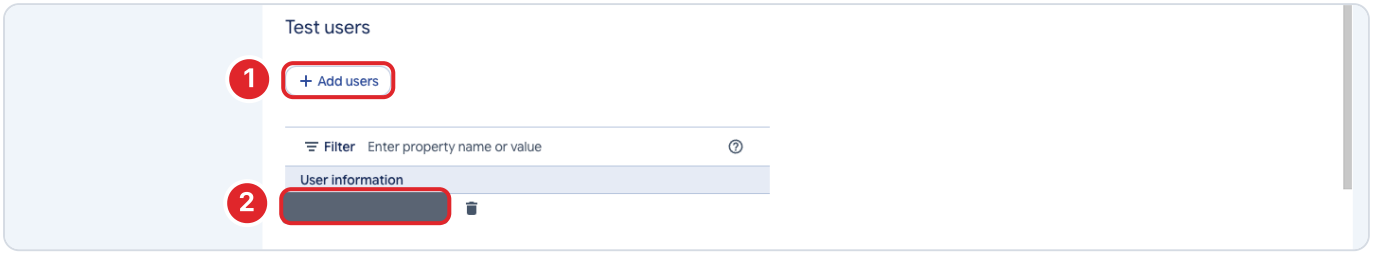


Test users list (the email is hidden). Your Drive account must be listed here.

1 Add users 2 Your test user


3c. Data Access (optional in Testing mode)

Add the scope `https://www.googleapis.com/auth/drive.readonly`. The app also requests `openid` and `userinfo.email`, only to show which account is connected. The app can only read Drive; it never writes.

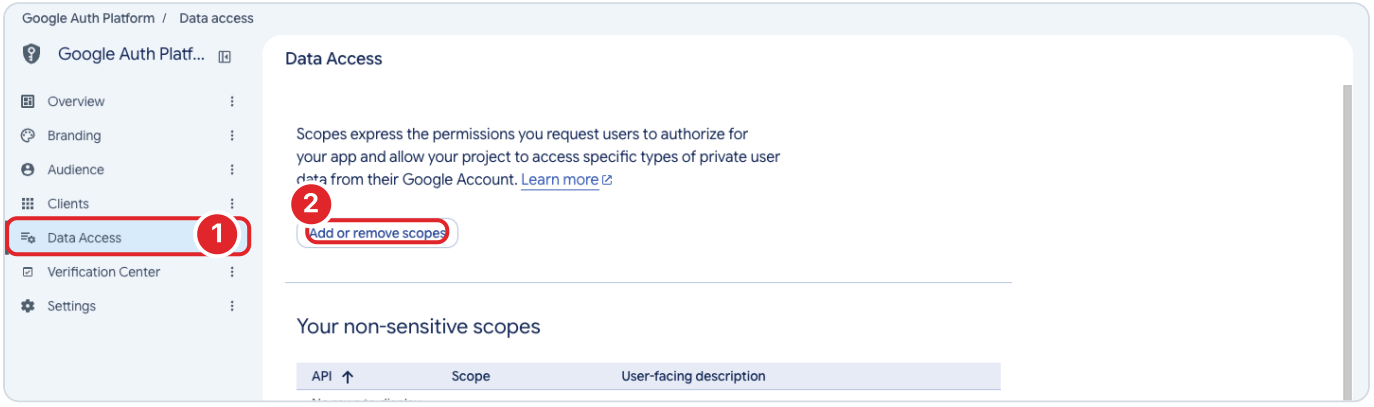

Google Auth Platform → Data Access.

1 Data Access 2 Add or remove scopes

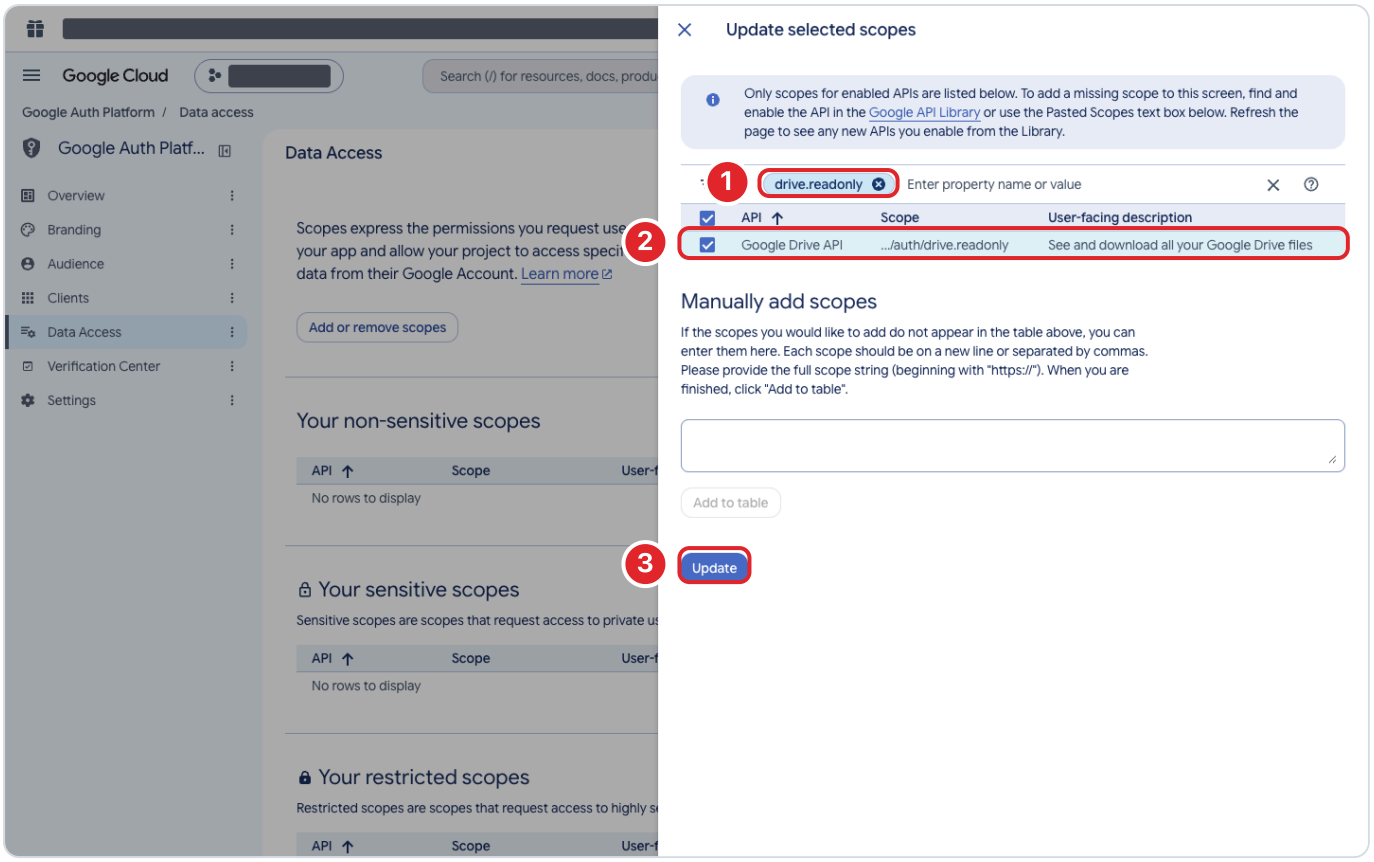

Filter for drive.readonly, tick the Google Drive API row, click Update, then Save on the page. Nothing was saved for this guide.

1 Filter: drive.readonly 2 .../auth/drive.readonly 3 Update


4 Create the OAuth client

Go to **Google Auth Platform → Clients → Create client**.

- Application type: **Web application**
- Authorized redirect URIs: add **exactly**


  ```
  http://localhost:8000/api/auth/google/callback
  ```

  No trailing slash, and `localhost`, not `127.0.0.1`. It must equal `GOOGLE_REDIRECT_URI` in `.env`.
- Click **Create**, then copy the **Client ID** and **Client secret**. Or download them as JSON (step below).

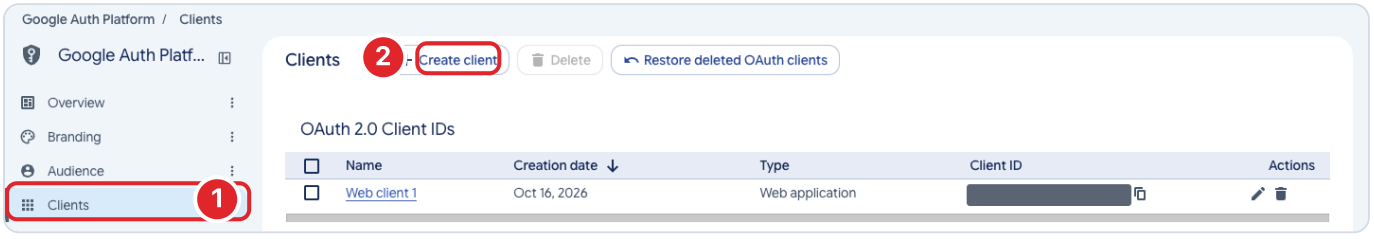

Google Auth Platform → Clients. Your existing client is listed here (the client ID is hidden).

1 Clients 2 Create client

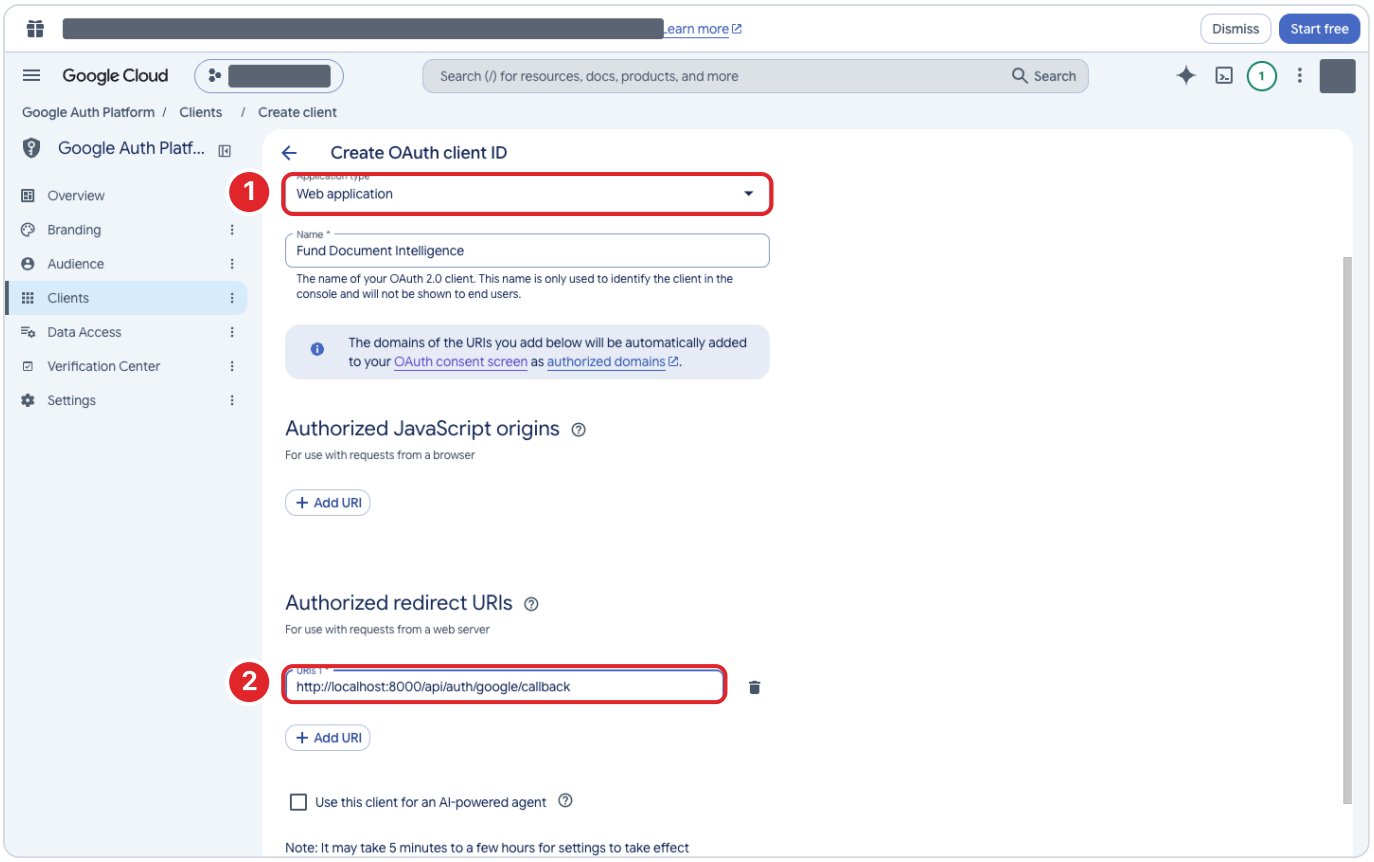

Google Auth Platform → Clients → Create client, filled in (not submitted).

1 Application type: Web application 2 Authorized redirect URI




Then click Create.

1 http://localhost:8000/api/auth/google/callback 2 Create

Copy or download the ID and secret

Right after **Create**, Google shows the **Client ID** and **Client secret** with a **Download JSON** button (usually saved as `client_secret_<id>.apps.googleusercontent.com.json`). Download it there, and give that file to `./scripts/init_env.sh` in Part 3. It reads the ID and secret from the file and checks the redirect URI for you.

Afterwards, the client's page (below) still lists the redirect URI and the Client ID. Google now says that viewing and downloading an existing secret is no longer available, so if you lost it, use **Add secret** on this page to make a new one.

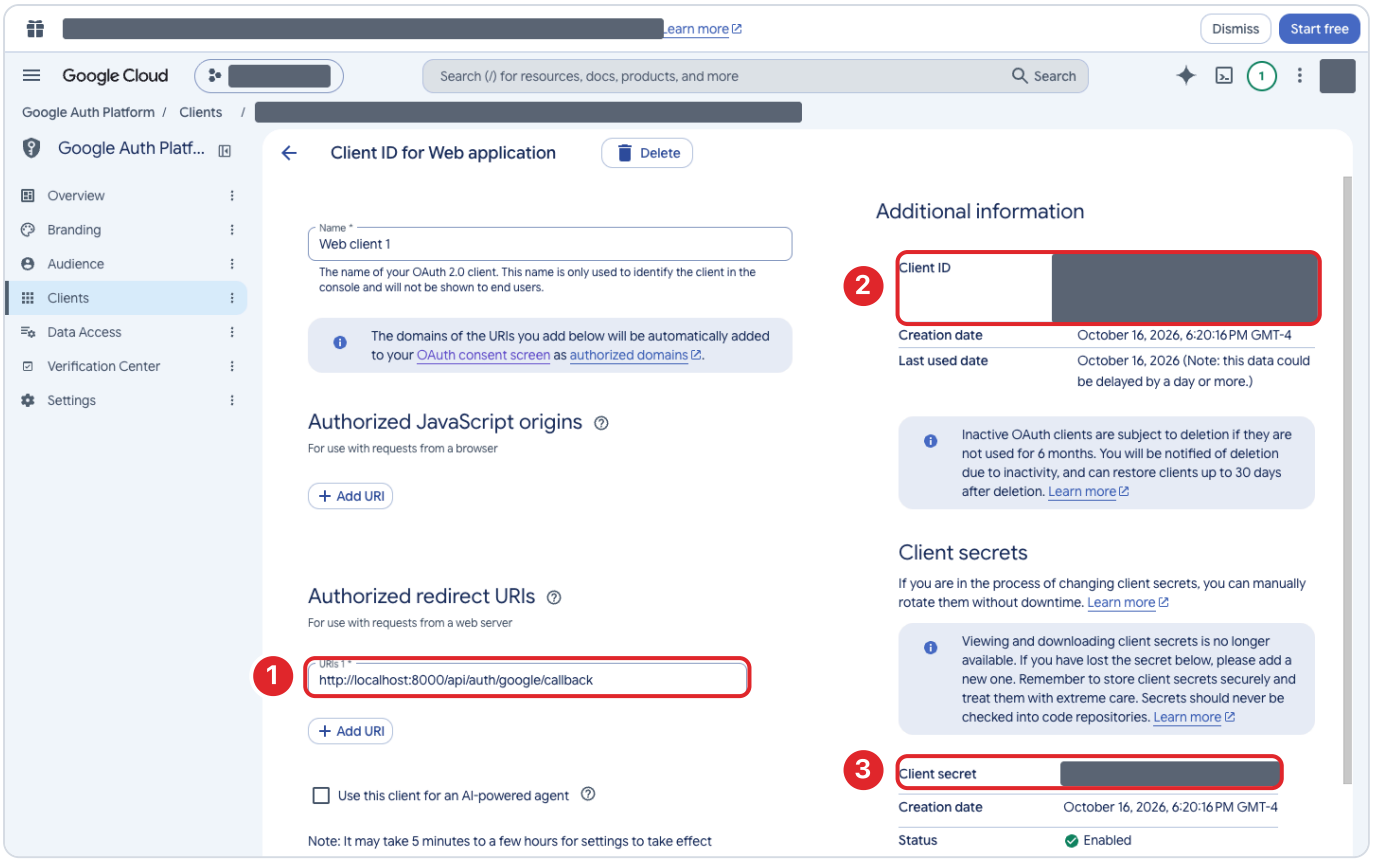

The existing client's page: the redirect URI is visible; the client ID and secret are hidden.

1 Redirect URI, exactly as in .env 2 Client ID 3 Client secret (masked by Google)

KEEP IT PRIVATE

The client secret and the JSON file are secrets. Keep them out of git, chat and screenshots (the ID and secret are hidden above). Google shows a secret in full only once, when it's created, so copy or download it then.


PART 2

Anthropic API key

The app uses Claude for extraction (worker) and for Ask (API). It needs a key from the **Anthropic Console** on an account with credits.

1 Create a key in API keys

Open **console.anthropic.com** (it now opens as platform.claude.com) → **API keys** and click **Create key**. On the first screen of the dialog, choose **Continue with an API key**. Give the key a name (e.g. `fund-docs-app`), set **Scope** to your workspace (e.g. *Default workspace*), then click **Create key**.

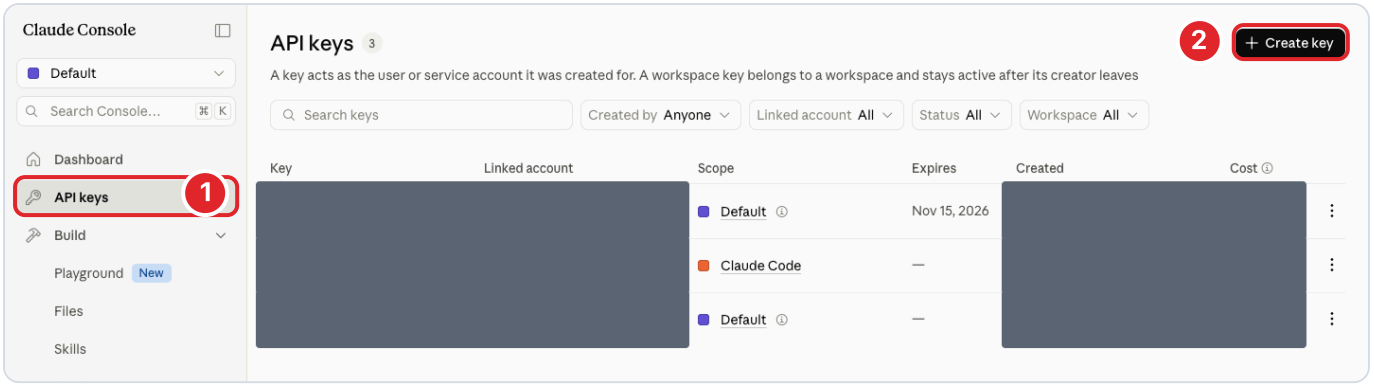


Console → API keys. Key names, owners, dates and costs are hidden.

1 API keys 2 Create key

COPY IT ONCE

The key (`sk-ant-…`) is shown only once, right after you create it. Paste it straight into `./scripts/init_env.sh`. If you lose it, delete it and create a new one.

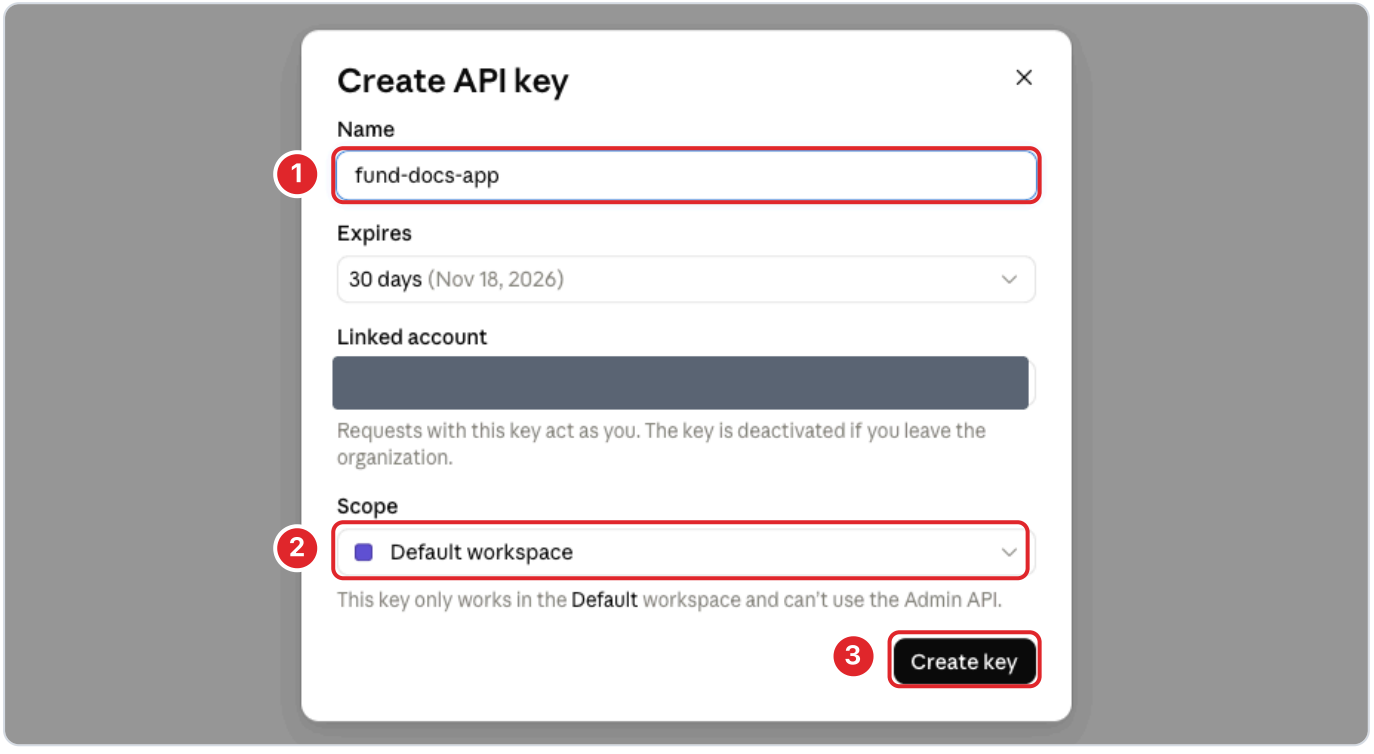

The Create API key dialog, filled with an example name (not submitted). Pick the Default workspace as scope.


1 Name 2 Scope 3 Create key

2 Add credits in Billing

Open **Settings → Billing** and buy credits (or set up auto-reload).

BILLED SEPARATELY

The API is billed separately from a Claude.ai subscription. Without credits, every call fails with "credit balance is too low".

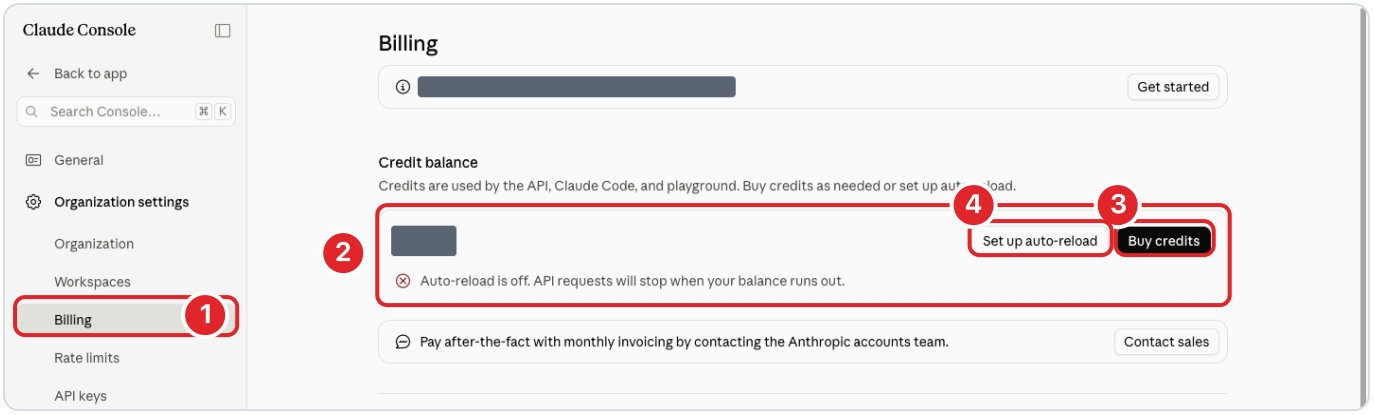

Settings → Billing → Credit balance. The balance is hidden.

1 Billing 2 Credit balance 3 Buy credits 4 Auto-reload (optional)

PART 3

Next steps

1 Fill in `.env` with the setup script

```
./scripts/init_env.sh
```

- **Step 1/4, Anthropic key:** paste the key. Typing is hidden, and the script checks the key with one call to Anthropic.
- **Step 2/4, Google client:** choose "path to the client JSON" and **drag the downloaded JSON into the terminal**. The script checks that the redirect URI is exactly `http://localhost:8000/api/auth/google/callback` and that the client type is Web application.
- Steps 3 and 4 generate the local secrets and pick a free Postgres port. The script never prints a secret value.

To start fresh: `./scripts/init_env.sh --reset` (backs up the old `.env` and asks for every key again).

2 Start the app

```
./start.sh
```

3 Connect in the browser

1. The app opens on **Connect**. Click **Connect Google Drive** and sign in with your test-user account.
2. Google warns that the app is unverified (expected in Testing mode). Click **Continue**.
3. **Tick the box for "See and download all your Google Drive files".** If it's left unticked, the app returns `insufficient_scope`.
4. Pick your folder (in **My Drive**) and confirm. You land on **Ingestion**, where documents go `pending → processing → done`.

Troubleshooting

SYMPTOM	FIX
access_denied	Your account isn't a **Test user** (Google Auth Platform → Audience), or you cancelled the consent screen.
insufficient_scope	You didn't tick the Drive checkbox on Google's consent screen. Connect again and tick it.
redirect_uri_mismatch	The client's Authorized redirect URI must be exactly `http://localhost:8000/api/auth/google/callback`.
Folder list fails	Connected, but folders don't load: enable the **Google Drive API** for the project (Part 1, step 2).
credit balance is too low	Documents `failed`: add credits to the Anthropic account behind `ANTHROPIC_API_KEY` (Part 2, step 2).