



Continuous Integration mit Jenkins



Klasse:

5YHIT

Fach:

Softwareentwicklung

Autor:

Yunus Sari

Datum:

05.03.2017


Version:



0.01

Contents

Überschrift 1	Fehler! Textmarke nicht definiert.
Überschrift 2	Fehler! Textmarke nicht definiert.
Überschrift 3	Fehler! Textmarke nicht definiert.

Installation von Jenkins

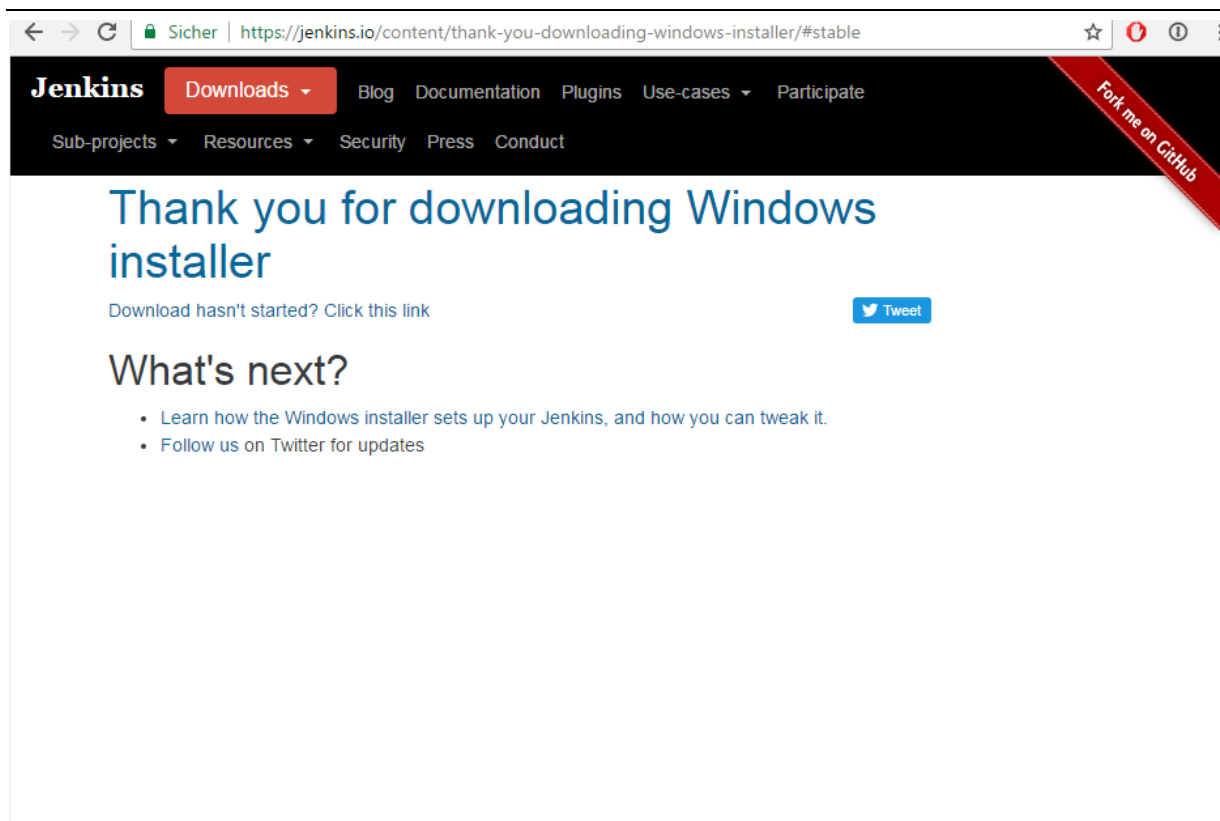

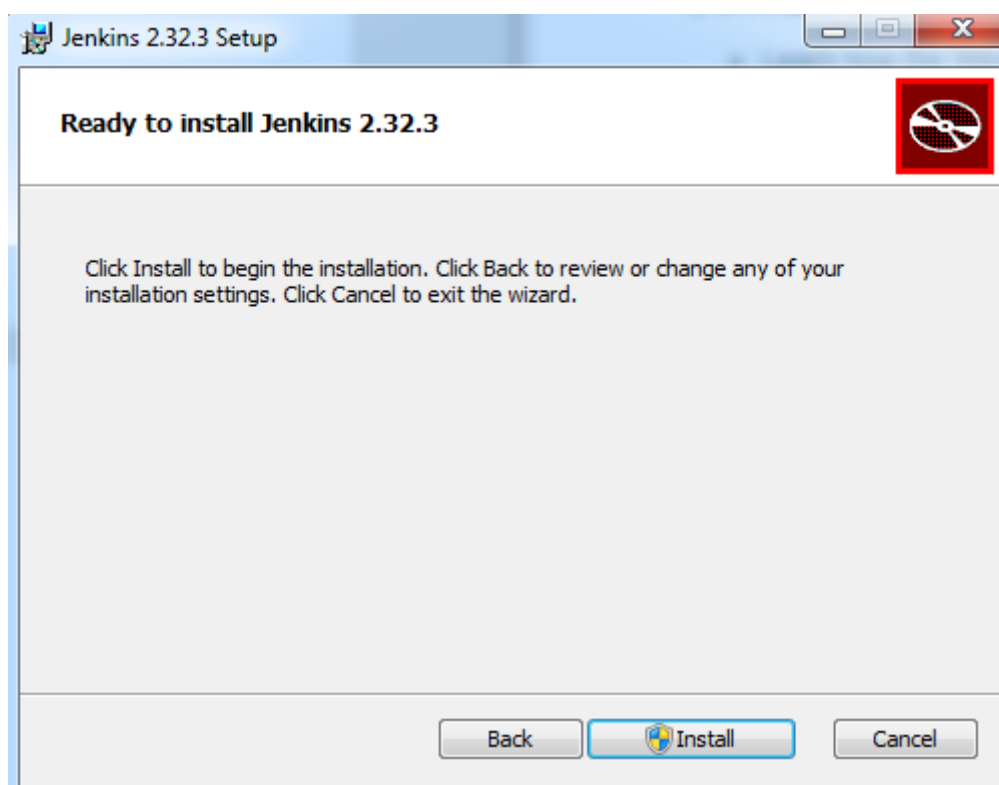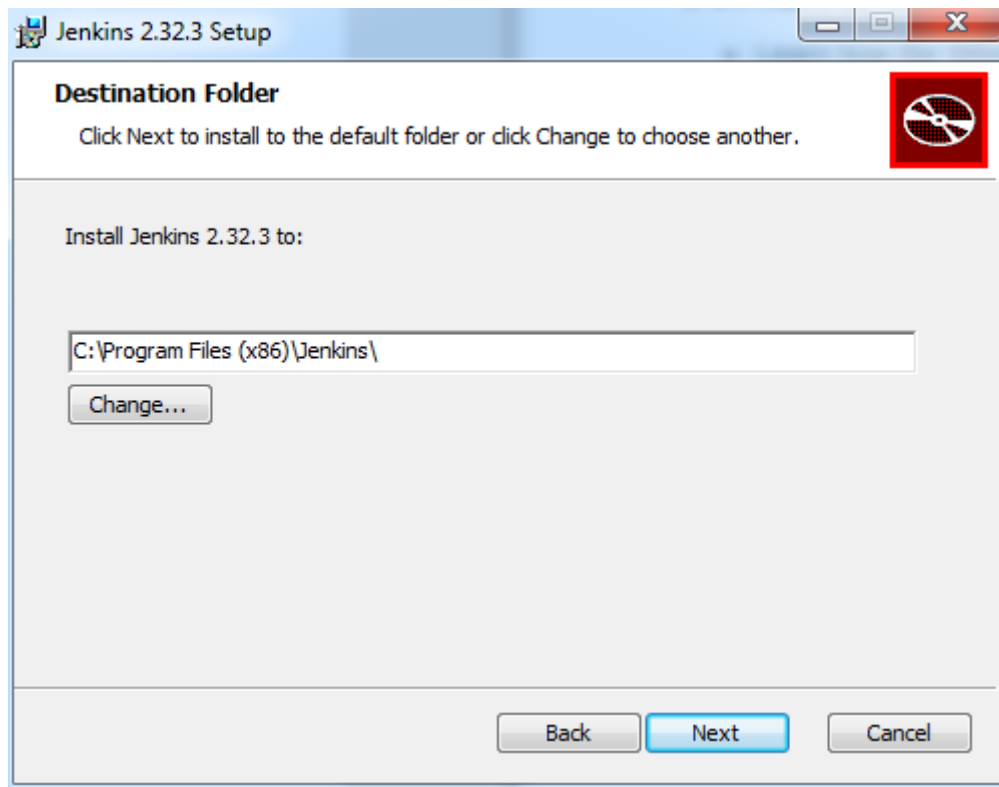

Getting Started

Unlock Jenkins


To ensure Jenkins is securely set up by the administrator, a password has been written to the log ([not sure where to find it?](#)) and this file on the server:

```
C:\Program Files (x86)\Jenkins\secrets\initialAdminPassword
```

Please copy the password from either location and paste it below.

Administrator password

[Continue](#)

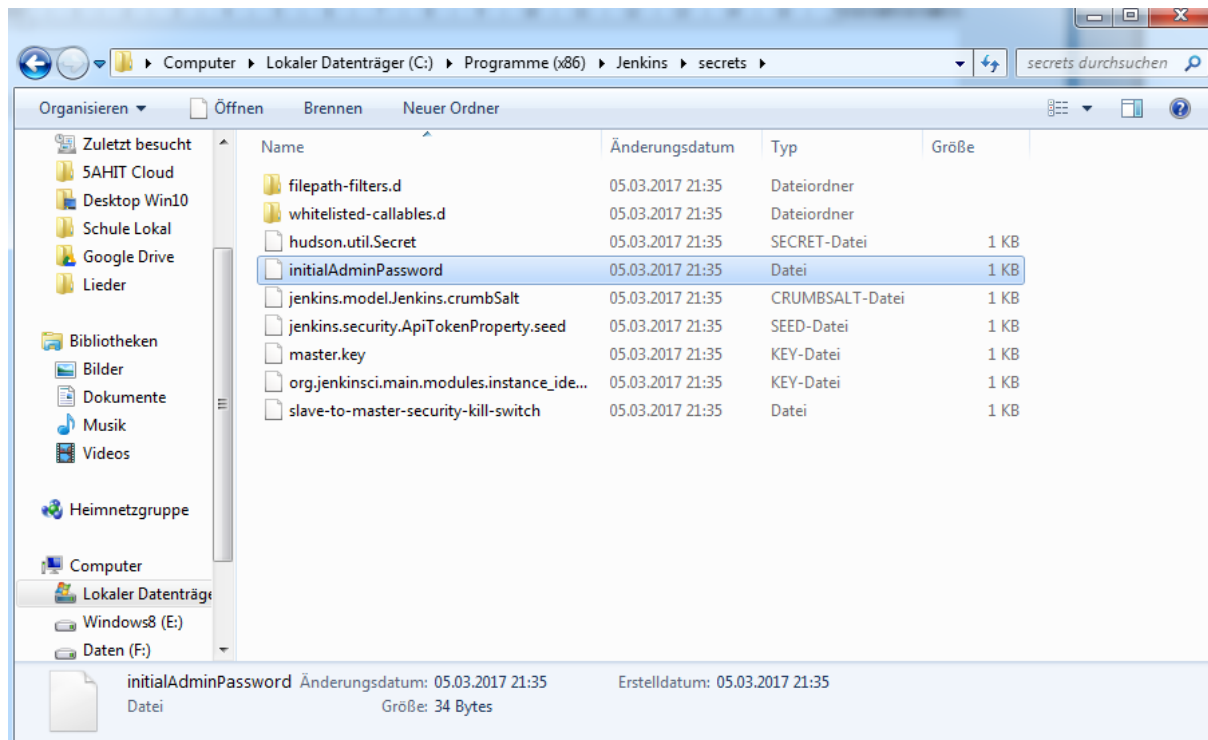

```
1 18b7005b9d144274b2f224afc4e011cb
2
```

Getting Started

Getting Started

✓ Folders Plugin	✓ OWASP Markup Formatter Plugin	⌂ build timeout plugin	⌂ Credentials Binding Plugin
⌂ Timestamper	⌂ Workspace Cleanup Plugin	⌂ Ant Plugin	⌂ Gradle Plugin
⌂ Pipeline	⌂ GitHub Organization Folder Plugin	⌂ Pipeline: Stage View Plugin	⌂ Git plugin
⌂ Subversion Plug-in	⌂ SSH Slaves plugin	⌂ Matrix Authorization Strategy Plugin	⌂ PAM Authentication plugin
⌂ LDAP Plugin	⌂ Email Extension Plugin	⌂ Mailer Plugin	⌂ GitHub plugin
⌂ Cobertura Plugin			

** bouncycastle API Plugin
 Folders Plugin
 ** Structs Plugin
 ** JUnit Plugin
 OWASP Markup Formatter Plugin
 PAM Authentication plugin

** - required dependency

Jenkins 2.32.3

Getting Started

Create First Admin User

Benutzer:

Passwort:

Passwort-Wiederholung:

Voller Name:

E-Mail-Adresse:

Jenkins 2.32.3 [Continue as admin](#) [Save and Finish](#)

Getting Started

Jenkins is ready!

Your Jenkins setup is complete.

[Start using Jenkins](#)