

0 Native index


1 Index normalization

2 Replicate and align


3 Unified bit matrix 8×32

4 Pointwise AND

HDC

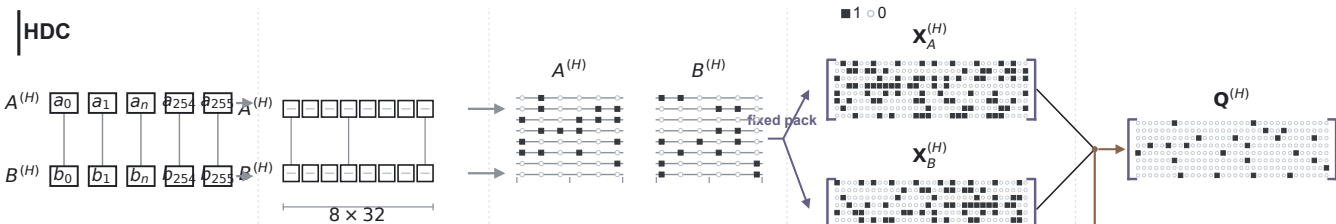

ECC

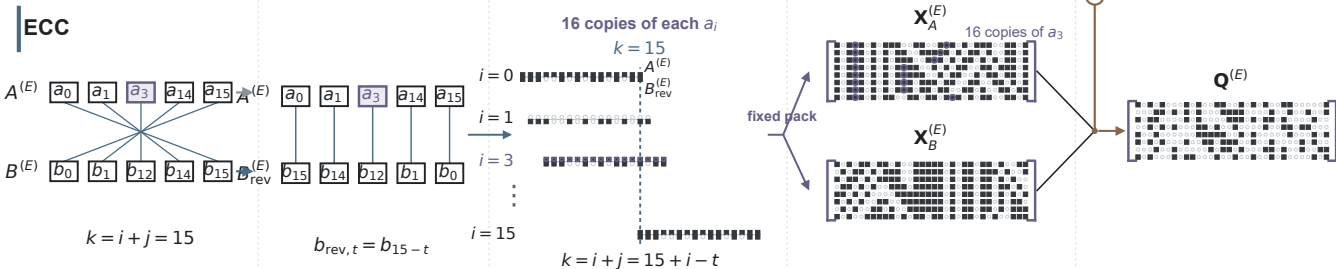

$$\tau \in \{H, E\}: \mathbf{x}_A^{(\tau)}, \mathbf{x}_B^{(\tau)}, \mathbf{Q}^{(\tau)} \in \{0, 1\}^{8 \times 32}, \quad \mathbf{Q}^{(\tau)} = \mathbf{x}_A^{(\tau)} \odot \mathbf{x}_B^{(\tau)}$$