


# The main idea:

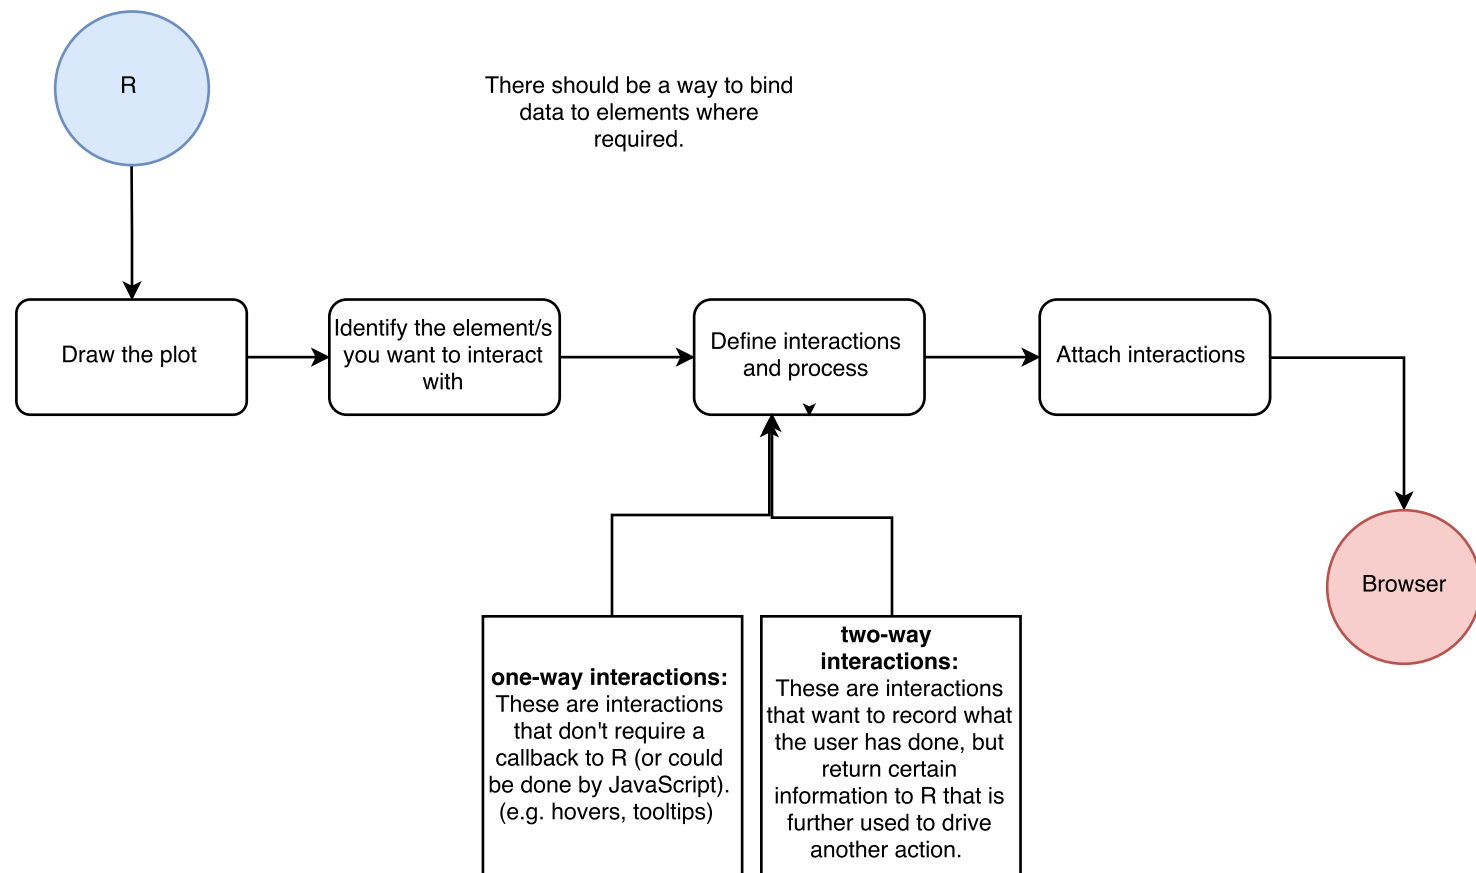

An idea for achieving flexibility:  
Here, it can get complex as the user could have the freedom to define what happens next when values (if any) are returned.  
(similar to how Shiny deals with matching 'inputs' and 'outputs' - here the user could define what happens with the values that are sent back to R.)