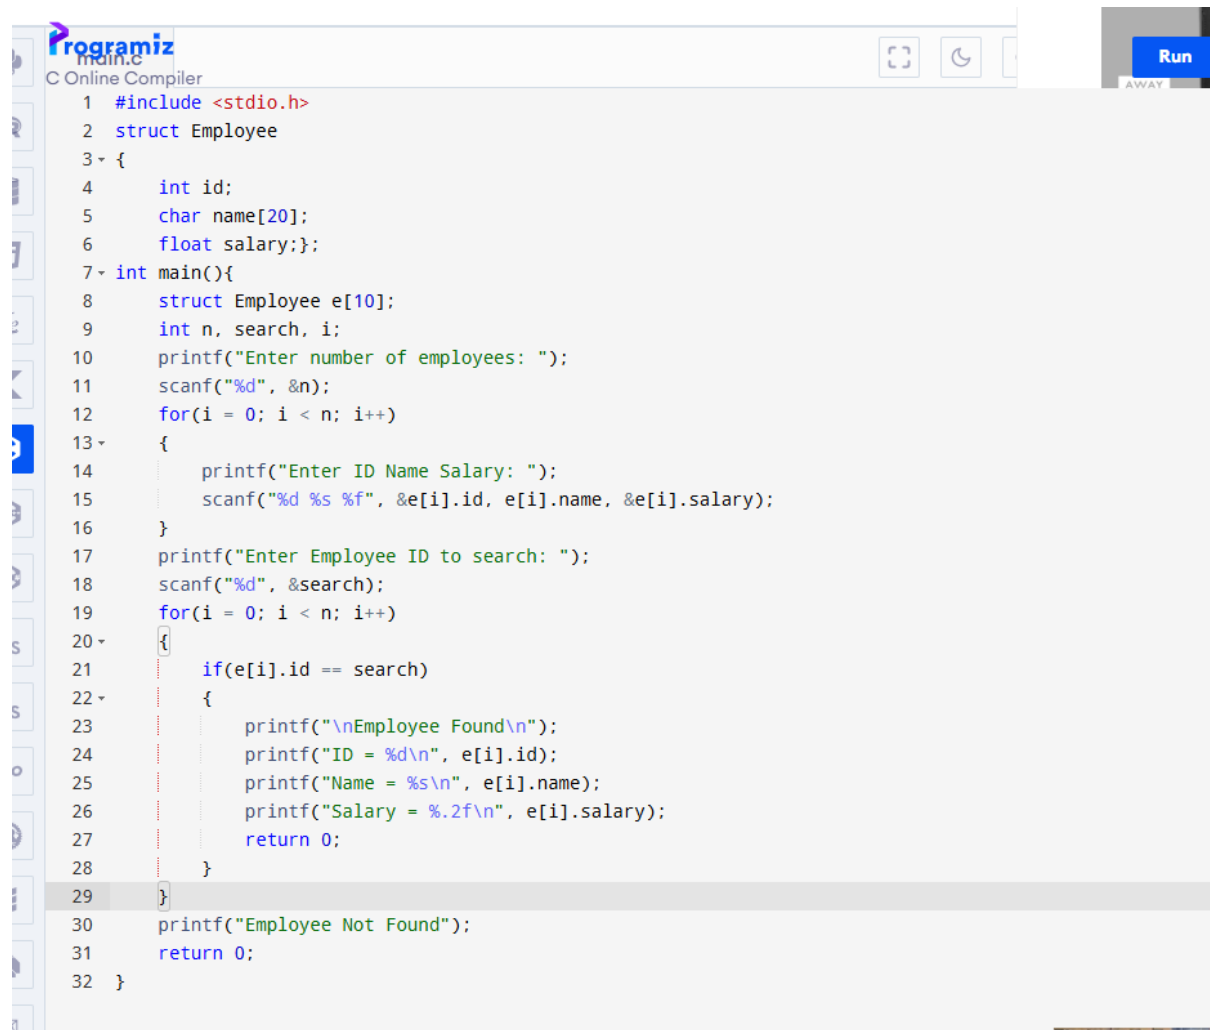



16. Develop a C program for implementing random access file for processing the employee details.

Code:

The image shows a screenshot of the Programiz Online Compiler interface. The code is written in C and implements a program to manage employee details using a random access file. The code includes a struct for Employee with fields for id, name, and salary. The main function prompts the user to enter the number of employees, then enters each employee's details (ID, Name, Salary). It then prompts for an employee ID to search and prints the details of the found employee. If no employee is found, it prints "Employee Not Found". The code is as follows:

```
1 #include <stdio.h>
2 struct Employee
3 {
4     int id;
5     char name[20];
6     float salary;};
7 int main(){
8     struct Employee e[10];
9     int n, search, i;
10    printf("Enter number of employees: ");
11    scanf("%d", &n);
12    for(i = 0; i < n; i++)
13    {
14        printf("Enter ID Name Salary: ");
15        scanf("%d %s %f", &e[i].id, e[i].name, &e[i].salary);
16    }
17    printf("Enter Employee ID to search: ");
18    scanf("%d", &search);
19    for(i = 0; i < n; i++)
20    {
21        if(e[i].id == search)
22        {
23            printf("\nEmployee Found\n");
24            printf("ID = %d\n", e[i].id);
25            printf("Name = %s\n", e[i].name);
26            printf("Salary = %.2f\n", e[i].salary);
27            return 0;
28        }
29    }
30    printf("Employee Not Found");
31    return 0;
32 }
```

Output:

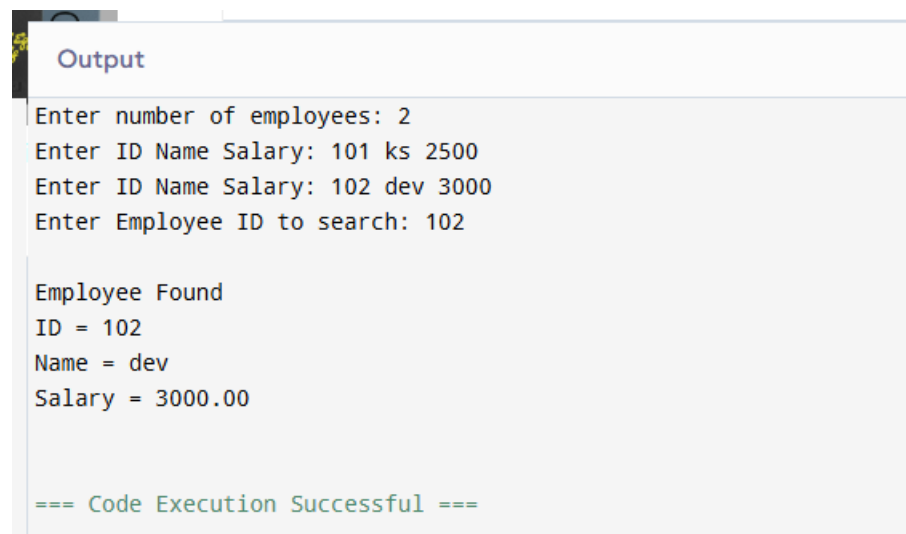The image shows a screenshot of the output window of the Programiz Online Compiler. The output displays the execution of the C program, showing the prompts and the user input. The output is as follows:

```
Output
Enter number of employees: 2
Enter ID Name Salary: 101 ks 2500
Enter ID Name Salary: 102 dev 3000
Enter Employee ID to search: 102

Employee Found
ID = 102
Name = dev
Salary = 3000.00

=== Code Execution Successful ===
```

