

Org-mode Latex Export Example

Derek Feichtinger

May 1, 2018

Contents

1	Version information	2
2	Debugging	2
3	Major document elements	2
3.1	Equations	2
3.2	Figures	4
3.2.1	inclusion of SVG graphics	6
3.3	Tables	6
3.3.1	nicer table formatting using booktab style	6
3.3.2	Math in tables	6
3.3.3	Table font size	7
3.3.4	Sidewaystable	7
3.3.5	Table over multiple pages with long text wrapped to cell width	9
3.3.6	Tables with colored rows using xcolors and colortbl	10
3.3.7	TODO Tables with colored rows using tabu	11
3.4	Source code	12
4	Text features	12
4.1	Text font size	12
4.2	Footnotes and margin notes	13
4.3	References to sections, figures, tables, equations	13
5	some interesting links	14
6	Index creation	14
7	References	15
8	Indexes and tables of contents	17

1 Version information

- Emacs version

Emacs version: GNU Emacs 25.3.1 (x86_64-pc-linux-gnu, GTK+ Version 3.18.9)
of 2017-12-30
org version: 9.1.9

- L^AT_EX version

pdfTeX 3.14159265-2.6-1.40.16 (TeX Live 2015/Debian)
kpathsea version 6.2.1
Copyright 2015 Peter Breitenlohner (eTeX)/Han The Thanh (pdfTeX).
There is NO warranty. Redistribution of this software is
covered by the terms of both the pdfTeX copyright and
the Lesser GNU General Public License.
For more information about these matters, see the file
named COPYING and the pdfTeX source.
Primary author of pdfTeX: Peter Breitenlohner (eTeX)/Han The Thanh (pdfTeX).
Compiled with libpng 1.6.17; using libpng 1.6.17
Compiled with zlib 1.2.8; using zlib 1.2.8
Compiled with poppler version 0.41.0

2 Debugging

- Org removes some of the intermediate files if the variable `org-latex-remove-logfiles` is set to true. So, for debugging, it makes sense to set it to nil.
- Use `pdflatex` with the option `synctex=1`. This option creates `*.synctex.gz` files which can be used by a viewer to jump to the respective text in the Tex file upon mouse clicking within the PDF. This is very useful to check the resulting L^AT_EX code when doing tests. Here is my own setting of the `org-latex-pdf-process` emacs configuration variable.

```
(setq org-latex-pdf-process
  (let
    ((cmd (concat "pdflatex -shell-escape -interaction nonstopmode"
      " --synctex=1"
      " -output-directory %o %f"))))
  (list cmd
    "cd %o; if test -r %b.idx; then makeindex %b.idx; fi"
    "cd %o; bibtex %b"
    cmd
    cmd)))
```

3 Major document elements

3.1 Equations

- Nice link for mathematical symbols [on wikipedia](#):

This is an example for an equation

$$cores_{extrapol} = cores_{intern2013} \cdot offl\% \cdot \frac{gf \cdot (volume_{user} + volume_{intern})}{volume_{intern}}$$

This is an example for an equation embedded in the text $cores_{extrapol} = cores_{intern2013} \cdot offl\% \cdot \frac{gf \cdot (volume_{user} + volume_{intern})}{volume_{intern}}$ The text continues after the formula.

Here follows a numbered equation that also can be referenced like in the following parentheses (eq 1). Note that we have to rely here on standard latex syntax, since org mode does not offer equations as a native element that we can mark up with #+NAME tags, etc.

$$cores_{extrapol} = cores_{intern2013} \cdot offl\% \cdot \frac{gf \cdot (volume_{user} + volume_{intern})}{volume_{intern}} \quad (1)$$

from an [article by Stefaan Lippens](#) on on using *textnormal* for including normal text correctly in a math environment.

$$\begin{array}{ll} \int_1^9 x dx & \text{this is textrm} \\ \sum_1^9 y & \text{this is textsf} \\ \prod_1^9 z & \text{this is textnormal} \end{array}$$

Only textnormal will guarantee that the text appears in the default font of the document.

3.2 Figures

I can reference the figure like this: Fig. 1.

Note

- there must be no empty line between the picture's link and the meta definitions for name, caption, etc.
- The figure must have a caption.
- The OPTION `tex:t` must be set for references to work.

Specifier	Permission
h	Place the float here, i.e., approximately at the same point it occurs in the source text (however, not exactly at the spot)
t	Position at the top of the page.
b	Position at the bottom of the page.
p	Put on a special page for floats only.
\!	Override internal parameters \LaTeX uses for determining "good" float positions.
H	Places the float at precisely the location in the \LaTeX code. Requires the float package, e.g., <code>\usepackage{float}</code> . This is somewhat equivalent to h!.

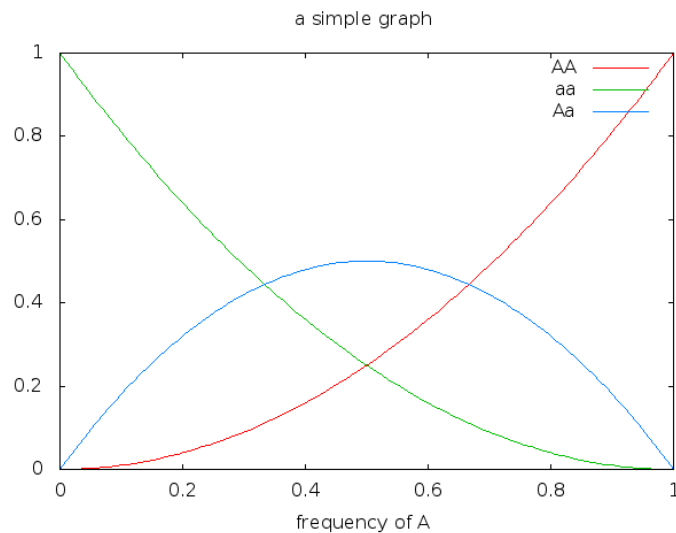


Figure 1: A simple graph




Figure 2: A simple graph at half the width

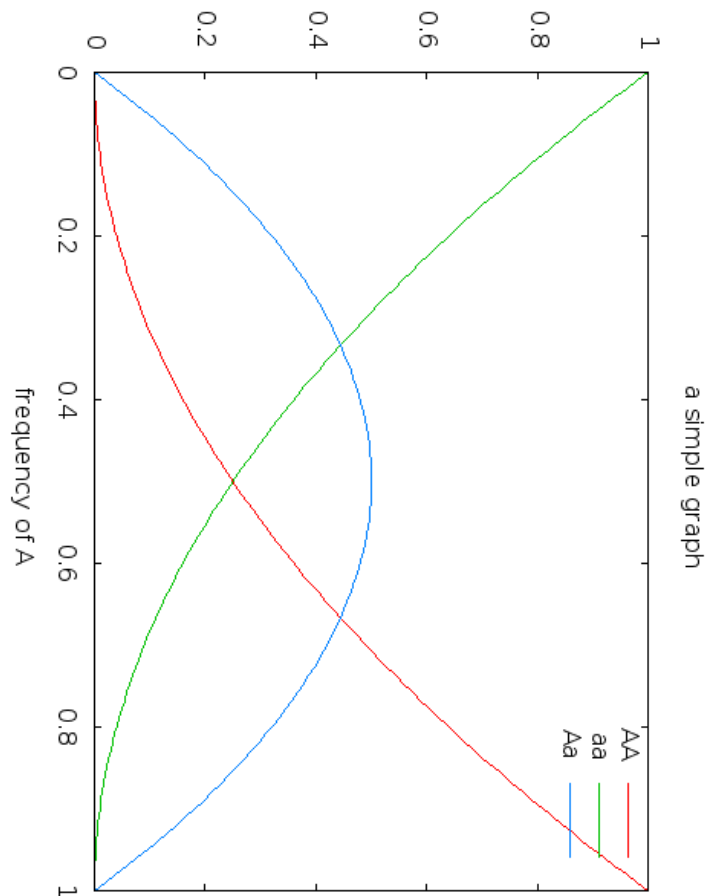


Figure 3: A simple graph rotated 270°

A pdf can be included the same way, e.g. by specifying

```
#+ATTR_LATEX: :options page=10 :width 10cm
[[file:myfig.pdf]]
```

3.2.1 inclusion of SVG graphics

q.v. my [my plantuml example documentation](#).

3.3 Tables

- Documentation
 - Very nice overview: <https://en.wikibooks.org/wiki/LaTeX/Tables>

3.3.1 nicer table formatting using booktab style

Some [interesting tips](#) for booktab style tables by M. Püschel.

Booktabs can be turned on by default for all tables by setting this variable for the document or globally:

```
org-latex-tables-booktabs: t
```

Whether table captions appear above or below the table can be configured using this variable setting:

```
org-latex-table-caption-above: nil
```

Table 1: default table			
Column 1	Column 2	Column 3	Column 4
1	10	100	1000
2	11	101	1001
3	12	102	1002
4	13	103	1003
5	14	104	1004
15	60	510	5010

Table 2: table using booktabs style			
Column 1	Column 2	Column 3	Column 4
1	10	100	1000
2	11	101	1001
3	12	102	1002
4	13	103	1003
5	14	104	1004
15	60	510	5010

3.3.2 Math in tables

Use *math* or *inline math* together with *array* environment.

Here we use the simple math mode

$$\frac{Column1}{\sin(x)} \quad \frac{Column2}{\tan(x)}$$

This uses the `inline-math` mode $\frac{Column1}{\sin(x)} \quad \frac{Column2}{\tan(x)}$

3.3.3 Table font size

The font size is determined by the `:font` switch in the `#+ATTR_LATEX` line.

Column 1	Column 2
Some text	Some other text
10	20

Sidenote:

- When a caption is used, the latex export uses a `table` environment.
- The previous captionless table generates a `tabular` environment.

Table 3: Table small size

Column 1	Column 2
Some text	Some other text
10	20

Table 4: Table footnotesize

Column 1	Column 2
Some text	Some other text
10	20

Table 5: Table scriptsize

Column 1	Column 2
Some text	Some other text
10	20

Table 6: Table tiny size

Column 1	Column 2
Some text	Some other text
10	20

3.3.4 Sidewaystable

Use the `float: sideways` ATTR option (The `float: sidewaysstable=` has been deprecated since Org 8.3, q.v. [info:org#Tables in L^AT_EX export](https://orgmode.org/manual/Tables-in-LaTeX-export.html)) Using the `sidewaystable` together with a `:placement [H]` specifier requires that the `rotfloat` package is loaded.

Table 7: A sidewaysstable					
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6
1	10	100	1000	example	result
2	11	101	1001	example	result
3	12	102	1002	example	result
4	13	103	1003	example	result
5	14	104	1004	example	result
6	15	105	1005	example	result
7	16	106	1006	example	result

This text comes after the `sidewaystable` (we want to check whether the placement modifier was observed).

Even though in the [info documentation it reads](#): "Note: `:placement` is ignored for `:float sideways tables.`", the modifier `[H]` is observed, as can be confirmed in the resulting `TEX` code.

3.3.5 Table over multiple pages with long text wrapped to cell width

Use the `longtabu` environment. This requires that you have loaded the `tabu` and `longtable` packages.

Table 8: A multi-page table with automatic text wrapping

100	Some extremely long sentence which surely needs a linebreak if I add some additional words like these
101	Some other extremely long sentence which surely needs a linebreak if I add some additional words like these
102	bla bla
103	repetition ahead
100	Some extremely long sentence which surely needs a linebreak if I add some additional words like these
101	Some other extremely long sentence which surely needs a linebreak if I add some additional words like these
102	bla bla
103	repetition ahead
100	Some extremely long sentence which surely needs a linebreak if I add some additional words like these
101	Some other extremely long sentence which surely needs a linebreak if I add some additional words like these
102	bla bla
103	repetition ahead
100	Some extremely long sentence which surely needs a linebreak if I add some additional words like these
101	Some other extremely long sentence which surely needs a linebreak if I add some additional words like these
102	bla bla
103	repetition ahead
100	Some extremely long sentence which surely needs a linebreak if I add some additional words like these
101	Some other extremely long sentence which surely needs a linebreak if I add some additional words like these
102	bla bla
103	repetition ahead
100	Some extremely long sentence which surely needs a linebreak if I add some additional words like these

101 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 102 bla bla
 103 repetition ahead
 100 Some extremely long sentence which surely needs a linebreak if I add
 some additional words like these
 101 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 102 bla bla
 103 repetition ahead
 100 Some extremely long sentence which surely needs a linebreak if I add
 some additional words like these
 101 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 102 bla bla
 100 Some extremely long sentence which surely needs a linebreak if I add
 some additional words like these
 98 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 96 bla bla
 94 repetition ahead
 92 Some extremely long sentence which surely needs a linebreak if I add
 some additional words like these
 90 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 88 bla bla
 86 repetition ahead
 84 Some extremely long sentence which surely needs a linebreak if I add
 some additional words like these
 82 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 80 bla bla
 78 repetition ahead
 76 Some extremely long sentence which surely needs a linebreak if I add
 some additional words like these
 74 Some other extremely long sentence which surely needs a linebreak if
 I add some additional words like these
 72 bla bla

3.3.6 Tables with colored rows using `xcolors` and `colortbl`

A very nice reference for color in tables is provided by Xavier on the texblog.org:

<https://texblog.org/2018/01/15/color-table-series-part-2-xcolor-package/>

One can use the `\rowcolors` command to define coloring of alternating rows.
 In front of the table use the following

`\rowcolors[2]{blue!10}{blue!25}`

The arguments translate to

- `[2]` start coloring in the second row
- `{blue!10}{blue!25}` definition of the two colors for odd and even rows according to the `xcolors` package

In order to prevent spillover of the `rowcolors` definition into later table, I wrap the whole table in `\begin{table}` and `\end{table}` definitions.

Table 9: A table with alternate line colors

Column 1	Column 2	Column 3	Column 4	Column 5	Column 6
1	10	100	1000	example	result
2	11	101	1001	example	result
3	12	102	1002	example	result
4	13	103	1003	example	result
5	14	104	1004	example	result
6	15	105	1005	example	result
7	16	106	1006	example	result

3.3.7 TODO Tables with colored rows using `tabu`

This needs the `tabu` and `xcolor` packages to be loaded. Use the `\LATEX` command `\taburowcolors` to define the colors right before the table.

`\taburowcolors[2]2{lightgray..white}`

The options in this command translate to

- `[2]` start coloring in 2nd row
- `2` : use 2 colors (so, if set to 2 then it is just alternating)
- `{lightgray..white}` defines the first and last color in the color range. This is a color series definition provided by the `xcolor` package.

Table 10: A table with alternate line colors

Column 1	Column 2	Column 3	Column 4	Column 5	Column 6
1	10	100	1000	example	result
2	11	101	1001	example	result
3	12	102	1002	example	result
4	13	103	1003	example	result
5	14	104	1004	example	result
6	15	105	1005	example	result
7	16	106	1006	example	result

`Booktabs` style does not mix well with this. The caption is too near to the table ruler, so here some work would need to be invested to get an aesthetically pleasing layout.

Table 11: A table with alternate line colors					
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6
1	10	100	1000	example	result
2	11	101	1001	example	result
3	12	102	1002	example	result
4	13	103	1003	example	result
5	14	104	1004	example	result
6	15	105	1005	example	result
7	16	106	1006	example	result

Here, for comparison, a colored table produced by an inline \LaTeX fragment. Q.v. [this stackexchange discussion](#) to understand the color series.

Note: I need to do some more testing to get a better understanding of how the color ranges are defined. E.g. here in the 5th row there is suddenly a yellow color pouring in.

Row1	1
Row2	2
Row3	3
Row4	4
Row5	5

Row1	1
Row2	2
Row3	3
Row4	4
Row5	5

3.4 Source code

In order to get nice source code formatting and markup, one needs to add the **minted** package. I add here the relevant excerpt from my emacs initialization file (listing 1), which also serves as a first lisp code example

I also add listing 2 as an example for C code markup:

4 Text features

4.1 Text font size

Text Example Huge Text Example huge
Text Example LARGE Text Example Large Text Ex-
ample large Text Example normalsize Text Example small Text Example footnote-
size Text Example scriptsize Text Example tiny

```
(eval-after-load "ox-latex"
  '(progn
    ;; we want source code blocks to be syntax colored when exporting
    ;; via latex. We configure latex minted which uses python
    ;; pygments
    (add-to-list 'org-latex-packages-alist '(" " "minted"))
    (setq org-latex-listings 'minted)
    ;; define mappings of src-code-language to lexer that minted shall use
    ;;(add-to-list 'org-latex-listings-langs '(ipython "Python"))
    (add-to-list 'org-latex-minted-langs '(ipython "python"))))
```

Listing 1: emacs init.el snippet for including code markup by minted

```
#include "stdlib.h"
int main(int argc, char **argv) {
    printf("Hello World");
    exit(0);
}
```

Listing 2: C code markup example

4.2 Footnotes and margin notes

Examples for footnotes: This is a text with a footnote ¹. The footnote will be displayed on the bottom of the current page. One can also place all footnotes in a separate chapter called *footnotes* at the end of the org file².

Footnotes definitions can be placed within an org section using the `[fn:1]` syntax and observing that no leading indentation is allowed on such a line. Alternatively the footnotes can be collected in a special section called "Footnotes". I recommend reading the respective INFO entry (e.g. there is also the possibility to define footnotes inline). When using `C-c C-x f` to insert footnotes a lot of the work is taken over by org itself (also allows footnote renumbering, etc.). One can jump between the footnote reference and its definition by the usual `C-c C-o` combination.

Margin notes can be inserted by directly inlining the \LaTeX command as demonstrated in the source code for this section. By default the margin notes are justified. This often looks awkward. Using this [stackexchange answer](#), I define a macro which yields:

I like the margin notes to be left aligned instead of being justified.

*a default
margin note*

*a left aligned
margin note
that looks
nicer*

4.3 References to sections, figures, tables, equations

Here, we show the usage of links to the text sections: Examples for References to figures are also found in chapter 3.2, to tables in chapter 3.3, and to equations in chapter 3.1.

Other references

- Figures can be referenced like this: Fig. 1.

¹This is the footnote text

²this is another footnote

- These are references to table 1 and table 2.
- And an example of an equation reference: eq 1. This reference requires latex syntax and a latex label as target. All the other links work based on org link syntax can use the name given to the elements via a leading `#+NAME:` line.

5 some interesting links

- Org L^AT_EX exports
 - Subfigures in an org document for exporting to L^AT_EX: gmane.emacs.orgmode/92821
- Hyperlink formatting
 - described in the L^AT_EX [hyperref](#) manual.
 - This is an example of how to get links that are not framed by red rectangles, but just have a blue font color


```
#+LaTeX_HEADER: \hypersetup{colorlinks=true, linkcolor=blue}
```
- Building a L^AT_EX Document Class
 - <http://tutex.tug.org/pracjourn/2005-4/hefferon/hefferon.pdf>

6 Index creation

Must be solved by including L^AT_EX source commands:

- Requires in the preamble
 - `\usepackage{makeidx}`
 - `\makeindex`
- Mark up words by `\index{word}`
- At the location where the index should appear, use `\printindex`
- to render the document, a call to the `makeindex` binary needs to be added in the build command. I use the following definition in my `init.el`.

```
(setq org-latex-pdf-process
  (let
    ((cmd (concat "pdflatex -shell-escape -interaction nonstopmode"
                  " -output-directory %o %f")))
    (list cmd
          "cd %o; if test -r %b.idx; then makeindex %b.idx; fi"
          cmd
          cmd)))
```

7 References

Some important org references that also display that citations directly following each other will be combined [3, 1]. And another single reference [2].

The `#+BIBLIOGRAPHY:` command inserts the reference list at the location where it is placed. It requires the name of the bib-file (without .bib extension) and the name of a style (e.g. plain).

For HTML exports one can also pass options to the `bibtex2html` binary (look at the comments section of `ox-bibtex.el` and also the `bibtex2html` man page).

Table 12: bibtex2html options

option	functionality
-d	sort by date
-a	sort as BibTeX (usually by author) default
-u	unsorted i.e. same order as in .bib file
-r	reverse the sort
-t	limit to entries cited in document

Multiple options can be combined as follows:

`option:-d option:-r`

To get the citations correctly processed rendered, one needs to add a bibtex invocation to the \LaTeX command chain:

```
(setq org-latex-pdf-process
  (let
    ((cmd (concat "pdflatex -shell-escape -interaction nonstopmode"
                  " --synctex=1"
                  " -output-directory %o %f"))))
  (list cmd
        "cd %o; if test -r %b.idx; then makeindex %b.idx; fi"
        "cd %o; bibtex %b"
        cmd
        cmd)))
```

To just produce a bibliography of all items in the bib file, one can use the following \LaTeX snippet. The `\nocite{*}` command includes an item that has not been cited in the document; a star matches all documents, so all get included (q.v. [this link](#)).

```
#+BEGIN_LATEX
\documentstyle{amsart}
\begin{document}
\nocite{*}
\bibliographystyle{amsplain}
\bibliography{bib-filename}
\end{document}
#+END_LATEX
```

References

- [1] DOMINIK, C. *The Org Mode 7 Reference Manual-Organize your life with GNU Emacs*. Network Theory Ltd., 2010.
- [2] FEICHTINGER, D., AND PLATTNER, D. A. Direct proof for $o = mn^V$ (salen) complexes. *Angewandte Chemie International Edition in English* 36, 16 (1997), 1718–1719.
- [3] SCHULTE, E., DAVISON, D., DYE, T., AND DOMINIK, C. A multi-language computing environment for literate programming and reproducible research. *Journal of Statistical Software* 46, 3 (2012), 1–24.

8 Indexes and tables of contents

List of Tables

1	default table	6
2	table using booktabs style	6
3	Table small size	7
4	Table footnotesize	7
5	Table scriptsize	7
6	Table tiny size	7
7	A sideways table	8
8	A multi-page table with automatic text wrapping	9
9	A table with alternate line colors	11
10	A table with alternate line colors	11
11	A table with alternate line colors	12
12	bibtex2html options	15

List of Listings

1	emacs init.el snippet for including code markup by minted	13
2	C code markup example	13

List of Figures

1	A simple graph	4
2	A simple graph at half the width	5
3	A simple graph rotated 270°	5

Index

booktab style tables, [6](#)

footnote, [13](#)

footnotes, [13](#)

longtable, [9](#)

longtabu, [9](#)

Margin notes, [13](#)

tabu, [9](#)

Emacs 25.3.1 (Org mode 9.1.9)