

INSTALLATION MANUAL


Quick glance

Docker Desktop	IOS simulator (Xcode)	Android simulator (Android Studio)	Node.js 20 LTS (Optional)	Java21 (maven)
-----------------------	----------------------------------	---	------------------------------	-------------------

Software preparation

1) Install Docker Desktop

- Go to <https://www.docker.com/products/docker-desktop/> , then click Download Docker Desktop and choose the one suits for your system.

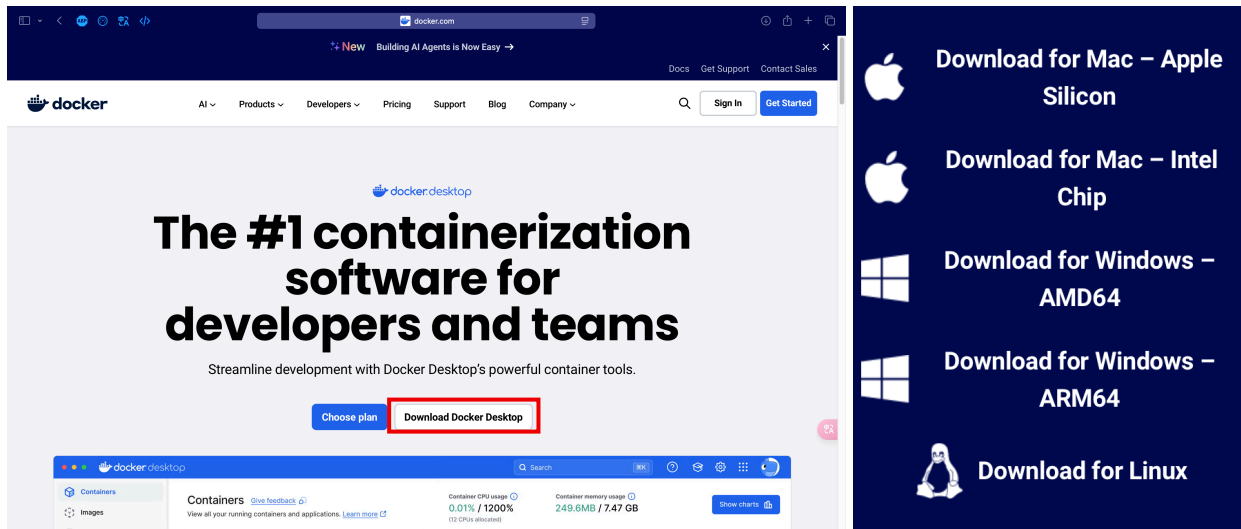


- After finishing installation, keep it running.

2) IOS simulator (macOS only)

- Install **Xcode** from the **App Store**. Now you can launch the simulator by searching “**Simulator**” in **Spotlight** on macOS.


3) Android simulator (macOS/Windows)

- Install **Android Studio** from <https://developer.android.com/studio> , click Download and choose the one suits for your system.

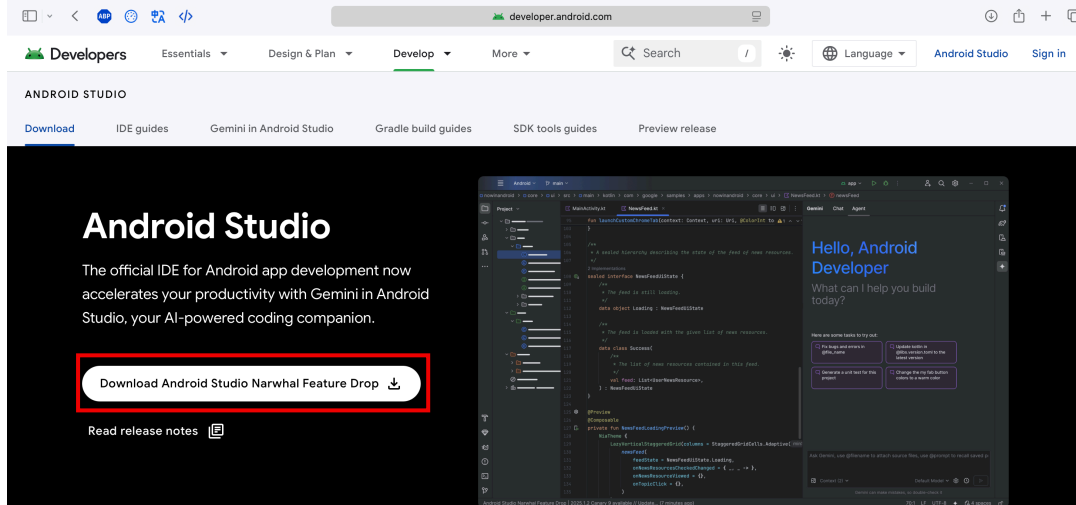

New features

- After finishing installation, open Android Studio → create a New Project → Device Manager → Create an AVD (a **Pixel 8** device with **API 34**).

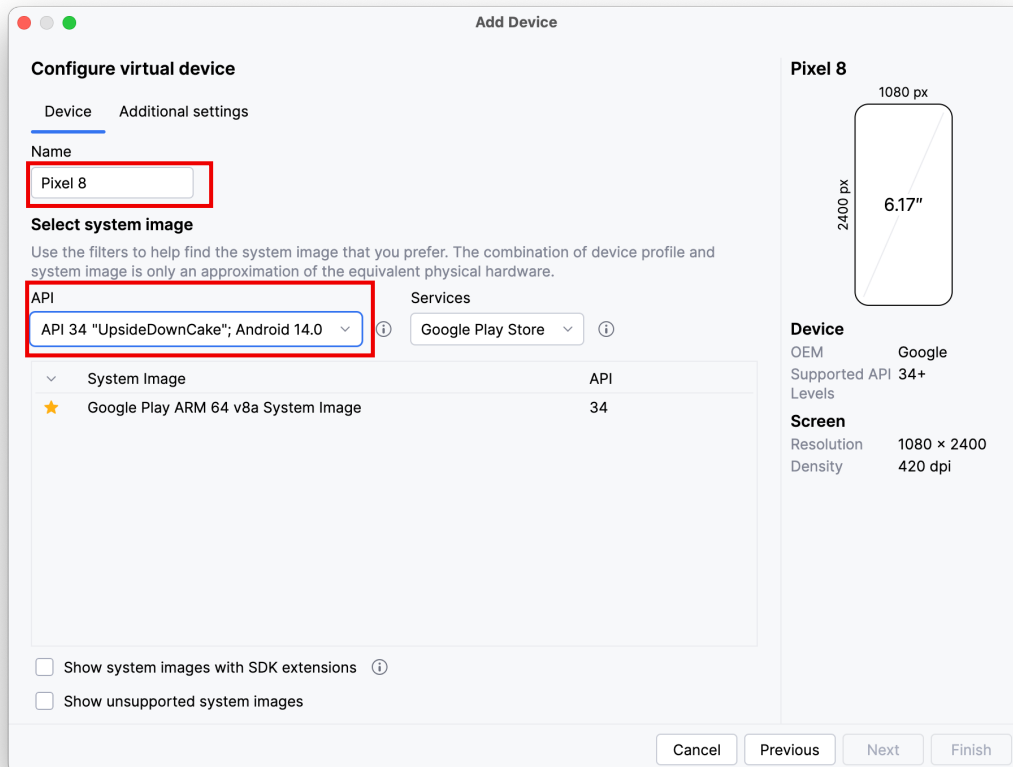

4) Install Java 21 with maven

> This is required to build the backend JAR locally or run the backend directly on your machine.

- macOS (use Homebrew):

```
# install java 21
```

```
brew install openjdk@21
```

```
echo 'export JAVA_HOME=$(/usr/libexec/java_home -v 21)' >> ~/.zshrc
```

```
echo 'export PATH="$JAVA_HOME/bin:$PATH"' >> ~/.zshrc
```

```
source ~/.zshrc
```

```
java -version
```

```
echo $JAVA_HOME
```

```
# install maven
```

```
brew install maven
```

- Windows 10/11 (use winget):

```
# install java 21
```

```
winget install --id Microsoft.OpenJDK.21 -e
```

```
$JAVA_HOME = "C:\Program Files\Microsoft\jdk-21"
```

```
[Environment]::SetEnvironmentVariable("JAVA_HOME", $JAVA_HOME, "Machine")
```

```
$path = [Environment]::GetEnvironmentVariable("Path","Machine")
```

```
[Environment]::SetEnvironmentVariable("Path", $path + ";$JAVA_HOME\bin",  
"Machine")
```

```
java -version
```

```
echo $env:JAVA_HOME
```

- Windows Install maven

1. Decide install directory - Example: C:\Dev\tools\ or D:\Dev\tools\

2. Download Maven from Official website: <https://maven.apache.org/download.cgi>

> Download Binary zip archive for Maven 3.9.9: apache-maven-3.9.9-bin.zip

3. Install Maven from ZIP

3.1 Extract the ZIP to your chosen directory, e.g.: C:\Dev\tools\apache-maven-3.9.9

3.2 Set Environment Variables

- Press Win + S, search "Environment Variables" → "Edit the system environment variables".

- Click Environment Variables...

- Add/Update:

JAVA_HOME = path to your JDK (e.g. C:\Program Files\Java\jdk-21)

Optional: MAVEN_HOME = C:\Dev\tools\apache-maven-3.9.9

Edit Path variable → add:

C:\Dev\tools\apache-maven-3.9.9\bin

or:

%MAVEN_HOME%\bin

3.3 Apply and re-open terminal (environment changes require a new session).

4. Verify Installation

```
mvn -v
```

```
where mvn
```

- mvn -v should print Maven, Java, and OS details.

- where mvn should point to your ...\\apache-maven-3.9.9\\bin\\mvn.cmd

Start Project (commands)

5) Clone the project from GitHub, open a terminal (or PowerShell) enter:

```
git clone https://github.com/unsw-cse-comp99-3900/capstone-project-25t2-9900-w13a-cake.git
```

- Then go to project's root folder:

```
cd capstone-project-25t2-9900-w13a-cake
```

- You can run `ls` command to see our project structure:

```
capstone-project-25t2-9900-w13a-cake
```

```
|—— README.md
```

```
|—— StayFresh_Backend/
```

```
|—— foodDelivery_customer/
```

```
|—— foodDelivery_driver/
```

```
|—— foodDelivery_restaurant/
```

```
|—— foodelivery_admin/
```

```
|—— docker-compose.yml
```

```
|—— docker-compose-admin.yml
```

```
|—— docker-compose-customer.yml
```

```
|—— docker-compose-driver.yml
```

```
|—— docker-compose-restaurant.yml
```

- Go to StayFresh_Backend folder, package the backend.

```
cd StayFresh_Backend
```

```
mvn install
```

```
mvn package
```

- When finishing, go back to the rout folder


```
cd ..
```

6) Run docker compose:

```
docker compose up -d
```

Wait for all services to start.

Note: You can check at Docker Desktop that all services are on.

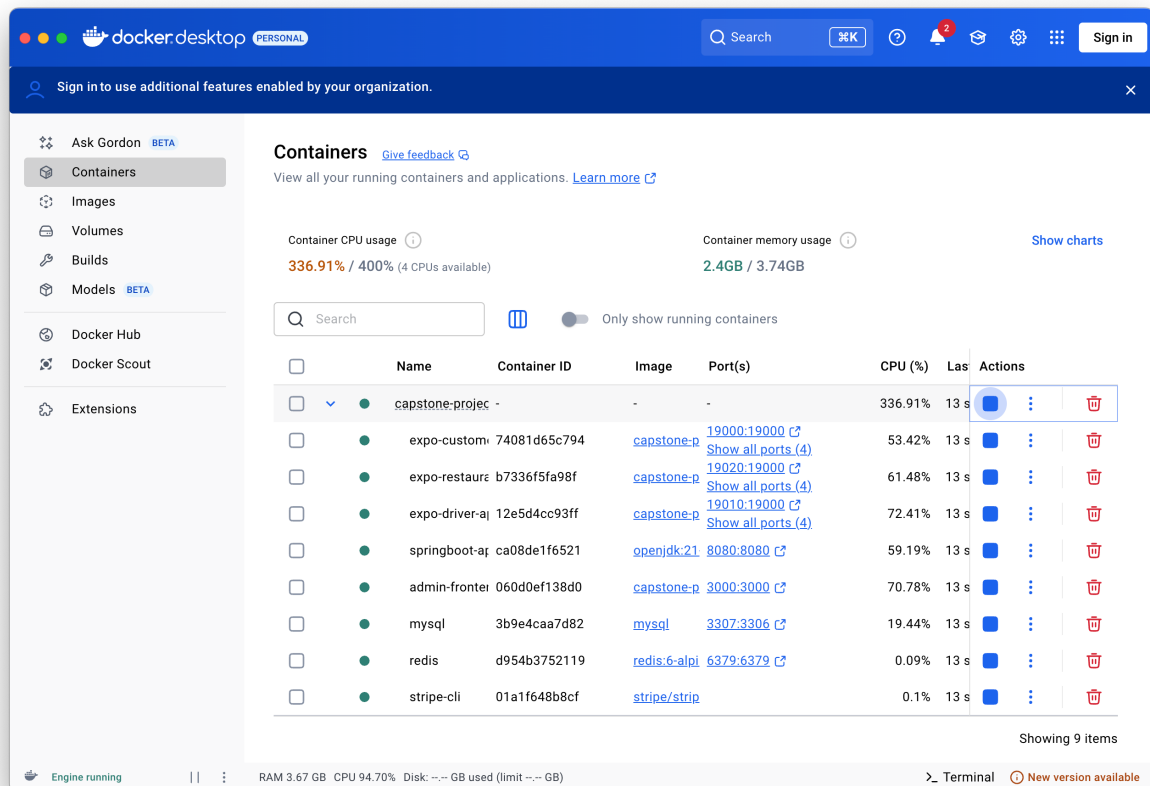

*) Stop all services:

```
docker compose stop
```


or

```
docker compose down
```


Open the Three Mobile Apps (in Simulators)

7) iOS (macOS only):

- Go to <https://expo.dev/go>, choose **SDK 50**, then click **IOS Simulator Install**.

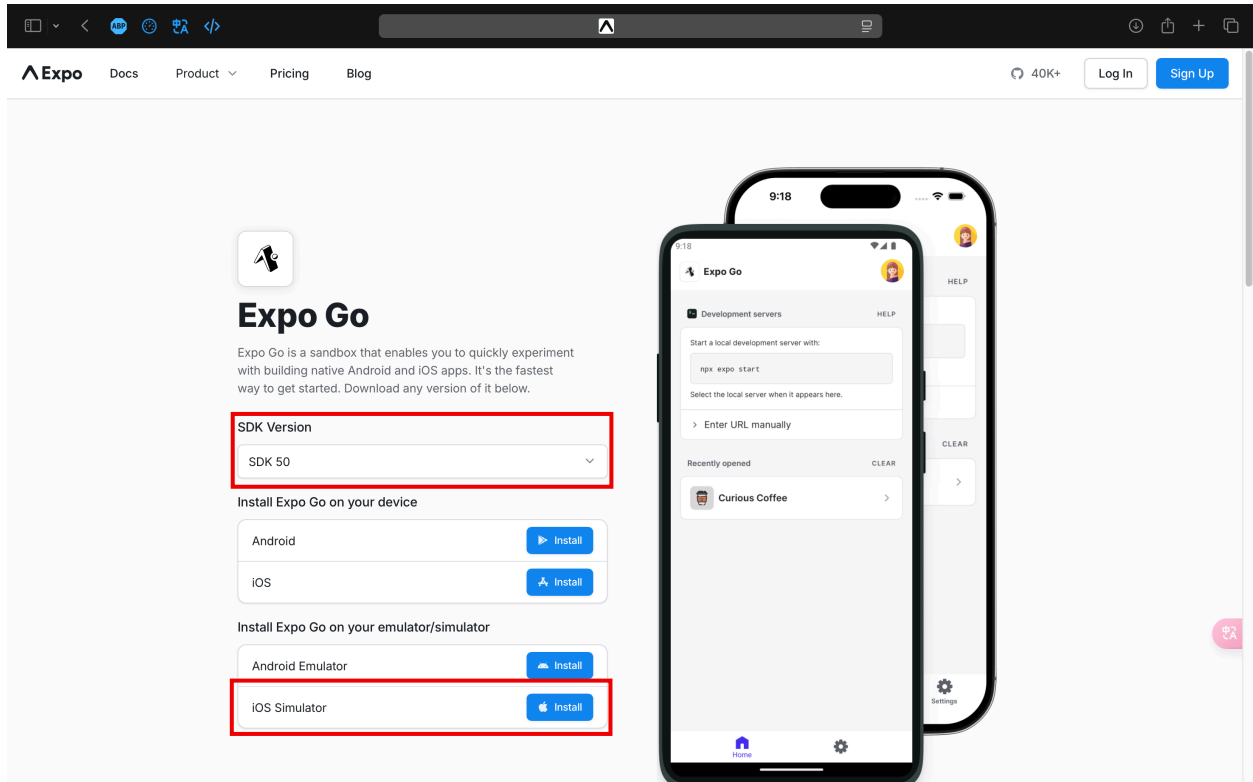

- Follow the **Manual installation** instruction to install **Expo Go App** on simulator.

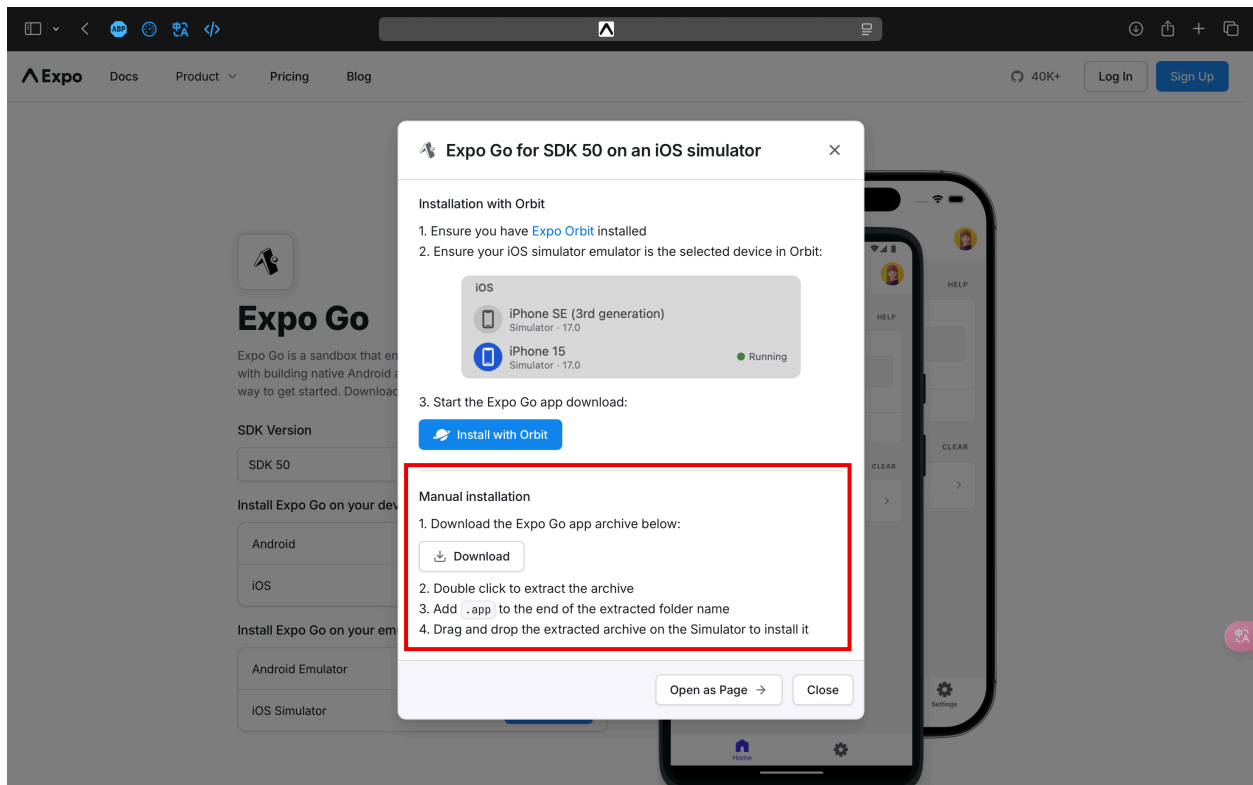

- Launch Simulator.

- Run customer App

Open Expo Go, enter: `exp://your IP address:8081`

Or use command:

```
xcrun simctl openurl booted "exp:// your IP address:8081"
```

- Run driver App

Open Expo Go, enter: `exp://your IP address:8082`

Or use command:

```
xcrun simctl openurl booted "exp:// your IP address:8082"
```

- Run restaurant App

Open Expo Go, enter: `exp://your IP address:8083`

Or use command:

```
xcrun simctl openurl booted "exp:// your IP address:8083"
```

8) Android (macOS/Windows):

- Open Android Studio → Open your project → Device Manager → Start your AVD.
- Open **Google Play**, search “**Expo Go**”, then install it.
- Run customer App

Open Expo Go, enter: exp://your IP address:8081

- Run driver App

Open Expo Go, enter: exp://your IP address:8082

- Run restaurant App

Open Expo Go, enter: exp://your IP address:8083

9) Admin Website

- Go to <http://localhost:3000>

Note: You can open as many as simulator that you need, for this project we can open 3 simulators in either IOS or Android.

Test Accounts

- customer:

Email: jacksonLai@gmail.com

Password: 123456

- driver:

Email: driver@123.com

Password: 123456

- restaurant:

Email: restaurant@123.com

Password: 123456

- Admin:

Email: admin1@123.com

Password: 123456

Note: test card payment in customer App: 4242 4242 4242 4242 with any expire time and cv code.

Quick Troubleshooting

Port already in use:

- Close the process using the port, then start again.

MacOS:

```
kill -9 $(lsof -t -i :<port>)
```

Windows (**PowerShell**):

```
Stop-Process -Id (Get-NetTCPConnection -LocalPort <port>).OwningProcess -Force
```

Optional (only if you choose to run outside Docker)

- **Node.js 20 LTS** is required to run the mobile apps or web admin directly on your machine (without Docker).

macOS (use Homebrew):

```
brew install node@20
```

```
echo 'export PATH="/opt/homebrew/opt/node@20/bin:$PATH"' >> ~/.zshrc &&  
source ~/.zshrc
```

```
node -v
```

```
npm -v
```

Windows 10/11 (use winget):

```
winget install --id OpenJS.NodeJS.LTS -e
```

```
node -v
```

`npm -v`

Note: This is not required when you run everything with Docker as described above.

For development and further interest:

- MySQL: Account: root, Password: 123
- Redis: Account: root, Password:

Now you can explore the functions of our Apps!