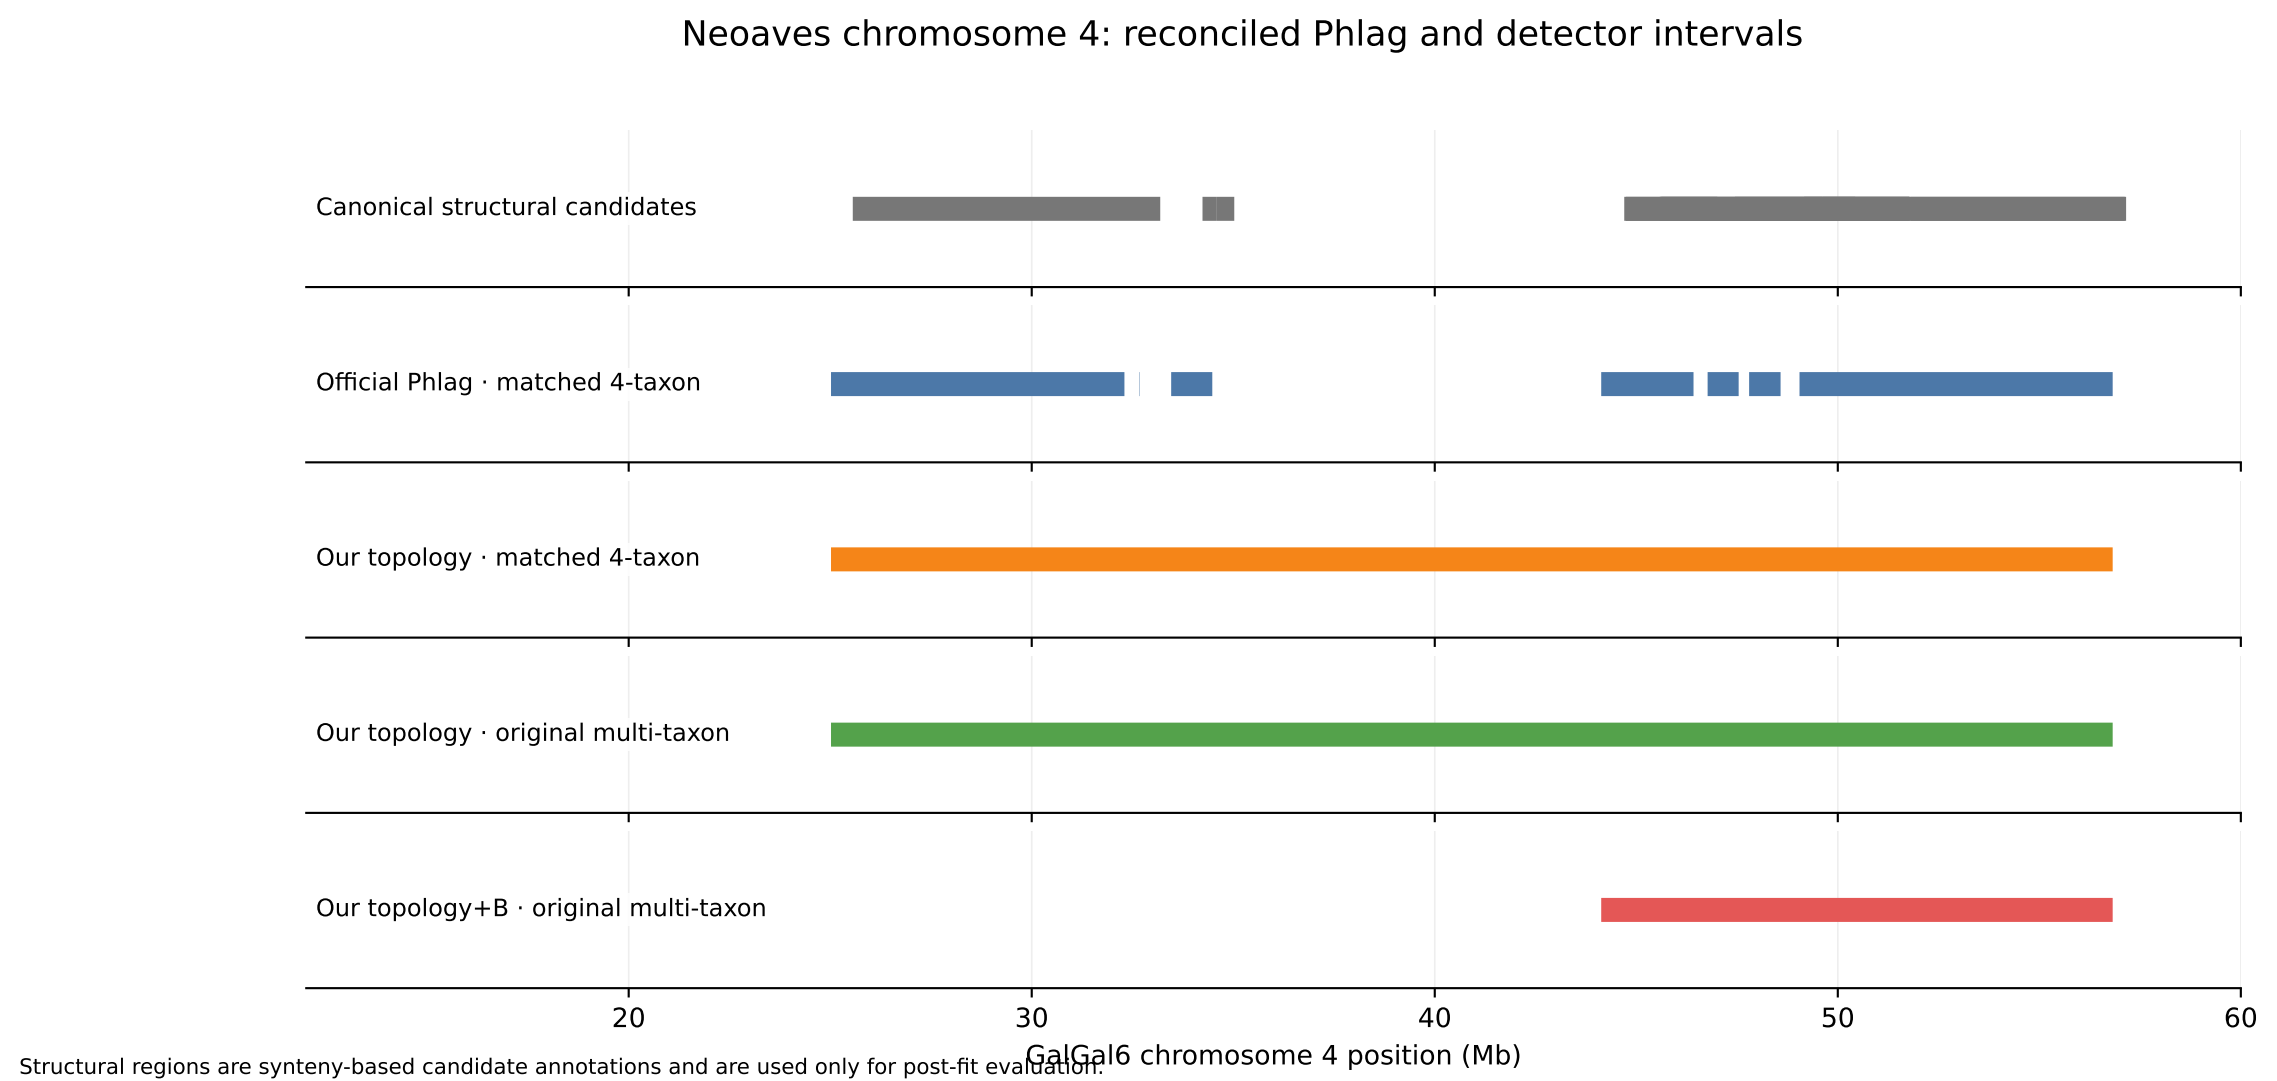

Structural regions are synteny-based candidate annotations and are used only for post-fit evaluation.
Matched and original multi-taxon tracks use different observation domains.