宝书APP

}

```
• 底部导航: 首页, 发现, 发布, 消息, 我
• 首页: 轮播图, 笔记
• 发现:美食,时尚,美妆,运动,影音,旅行,居家,母婴,读书,数码,时尚男士
• 发布页: 图片, 标题, 内容
• 消息: 收到的赞和收藏, 收到的评论和@, 新增关注
• 我: 头像, 昵称, 关注, 粉丝, 签名, 个人笔记, 个人收藏
• 设置:
• 退出登录:返回登录注册页
• 登录页
• 注册页
详情页,
• 评论页,
• 发布信息
    • example[
     img:"http://ci.xiaohongshu.com/7338bf98-62cb-4170-8027-
     18d93a3240f3@r 750w 750h ss1.jpg",
     title:"迟来的#陈佳影#口红色号来了",
     "content":"No.1 品牌: MAC 色号: chili我一直很钟爱MAC这个品牌, 也是我觉得最值
     得入的口红品牌之一,价格也算比较平价了,这款小辣椒相比较而言不干,而且很容
     易上色,这个涂的轻一些偏橘红色,重一些会偏砖红色,几乎算是陈佳影剧中蓝色大
     衣的标配了";
     ]
· userList.json
 {
    • num
    o data:
     [

    id,

        tel,
        pass,
        userName,
        userImg,
        birth,
        ■ sex:(0代表女1代表男),
        bio,
        follow,
        fens,
         }
         ]
```

```
• nodeList.json
      o num
      o data:
        [

    id,

            nodeld,
            • nodelmg:"",
            title:"",
            ■ content:"""
            ■ likes:[id],(被喜欢)
            ■ collect:[id],(被收藏)
            type,
            • recommend,
              ]
· collectList.json
  {
      o id,
      o collectList:['nodeld'],
        }
        ]
· commentList.json
  [
  {
      o nodeld,
      o textList:[{id:,text:, time}]
        }
        ]

    hotSearch.json

  {
      key:[]
```


API

• PS:data代表客户端传给服务端的数据, result代表服务端传给客户端的数据

- 所有接口的data里面包含的数据都需要前端传给后台,除 /nodeList/addNode 这个接口, 下面有这个接口传递的data的详细信息
- 首页 放推荐的笔记
 - url: /nodeList/recommend,
 - o data:{
 - recommend:true,(定死了)
 - page:number
 }
 - o method: post
 - result:[

{

- id:number,
- userName:"",
- userImg:"",
- nodeld:number,
- nodelmg:"",
- title:"",
- content:"",
- likes:[] array 获取点赞数量取length,
- collect:[] array 获取点赞数量取length,
- time:"",
- type:"",
- recommend:boolean}]

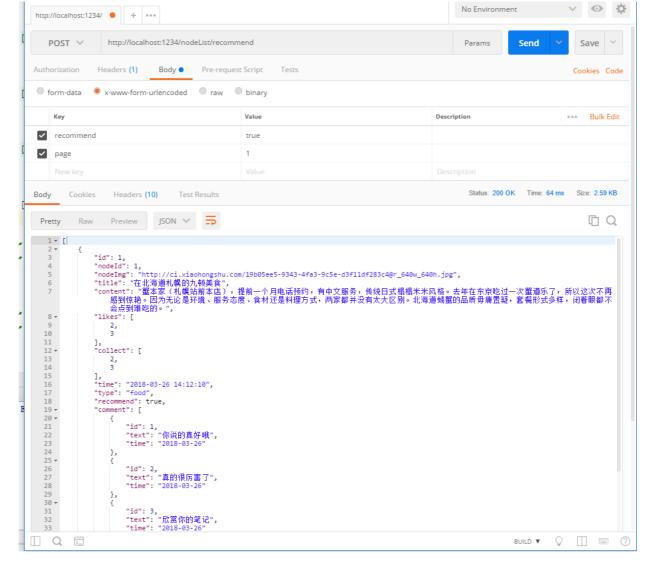

• 发现 - 分类的笔记


```
url:/nodeList/class
```

```
o data:{
```

- type:"",
- page:number
 }
- o method:post
- o result:[
 {
 - id:number,
 - userName:"",
 - userImg:"
 - nodeld:number,
 - nodelmg:"",
 - title:"",
 - content:"",
 - likes:[] array 获取点赞数量取length,
 - collect:[] array 获取点赞数量取length,
 - time:"",


```
type:"",recommend:boolean,}]
```

- o type:
 - food
 - fashion
 - beauty
 - exercise
 - audioVideo
 - travel
 - home
 - baby
 - book
 - digital
 - man

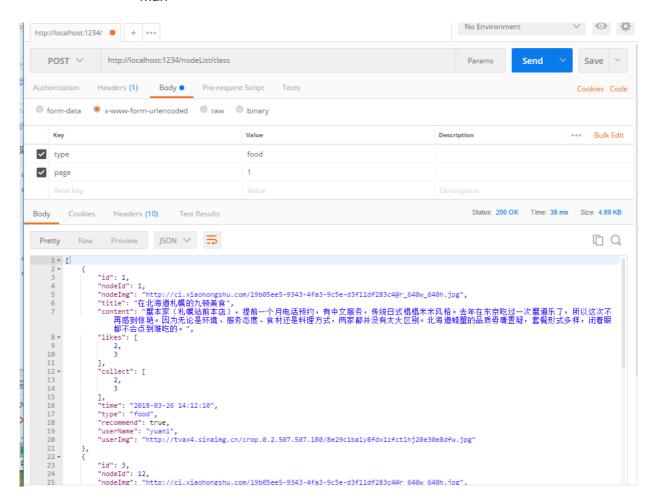

- 发布 发布信息到服务器
 - url:/nodeList/addNode
 - o data:{
 - id:number, (前端传过来用户id)
 - nodeld:number, (不需要前端传过来)
 - nodelmg:"",(前端传过来网上地址图片)
 - title:"",(前端传过来标题)

- content:"",(前端传过来笔记内容)
- likes:[] array 获取点赞数量取length,(不需要前端传过来)
- collect:[] array 获取点赞数量取length,(不需要前端传过来)
- time:"",(前端传过来new Date()的日期例如: 2018-03-27 14:00:00)
- type:"",(前端传过来类型)
- recommend:boolean, (不需要前端传递过来)
- o method:post
- result:"success"or"error"

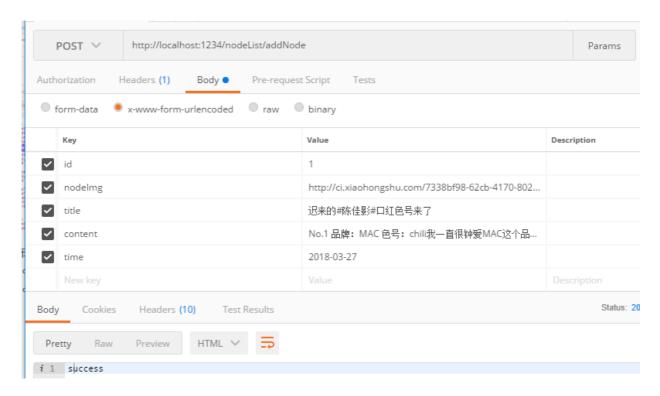


• 笔记详情页


- url:/nodeList/info
- method:get
- o data:{
- +nodeld:number

}

- o result:{
 - id:number,
 - userName:"",
 - userImg:"
 - nodeld:number,
 - nodelmg:"",
 - title:"",
 - content:"",
 - likes:[] array 获取点赞数量取length,
 - collect:[] array 获取点赞数量取length,
 - time:"",
 - type:"",
 - recommend:boolean,


}

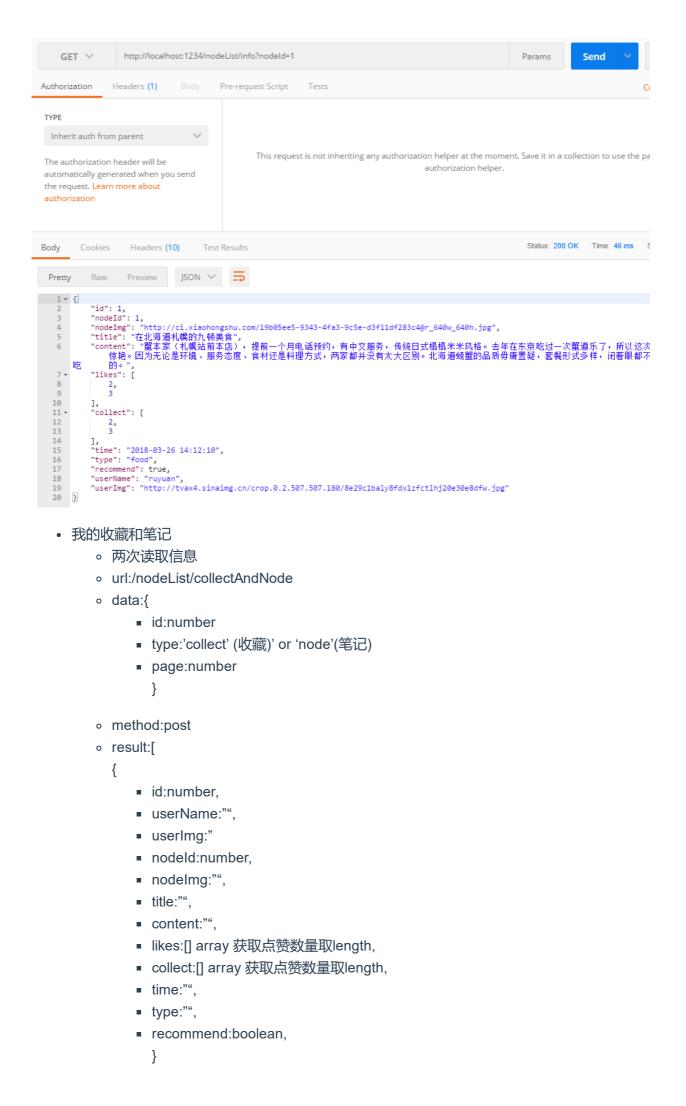

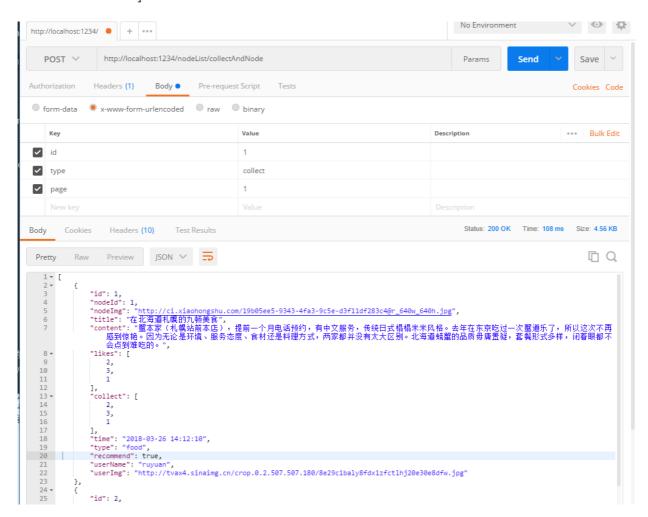

• 搜索历史


- url: /nodeList/searchKey
- o method:get
- o result:{
 - **-** []

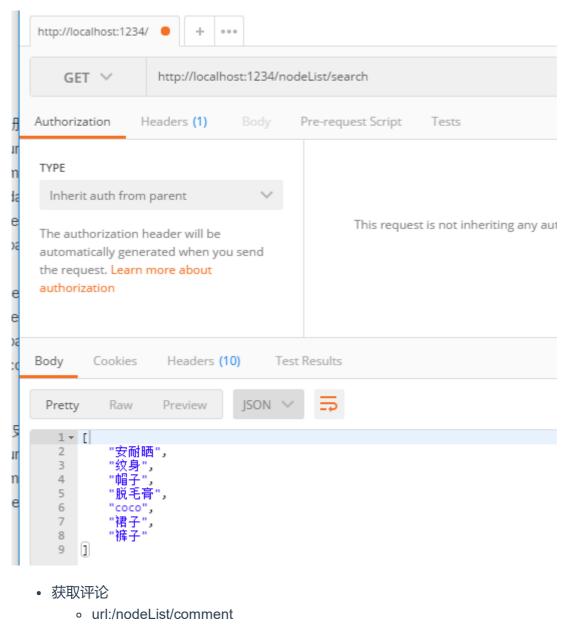

- o data:
 - {
 - nodeld:num,
 - page:number
 - **.** }


1. + method:post

```
result:[
id": 1,
userName:"",
userImg:"",
"text": "你说的真好哦",
"time": "2018-03-26"
},
]
```

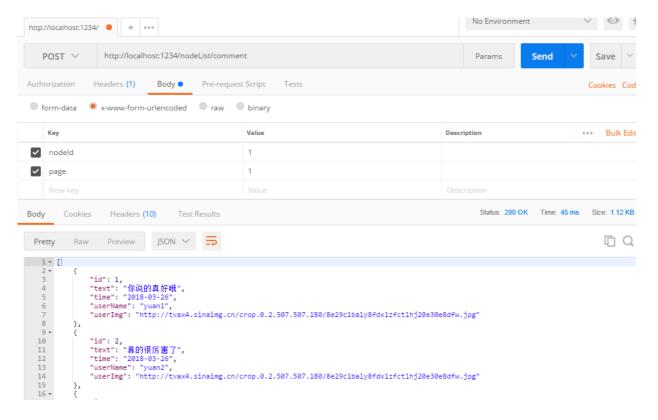

• 添加评论

- url:/nodeList/addComment
- method:post
- o data:{
 - nodeld
 - id,
 - text,
 - time
- result:"success"or"error"

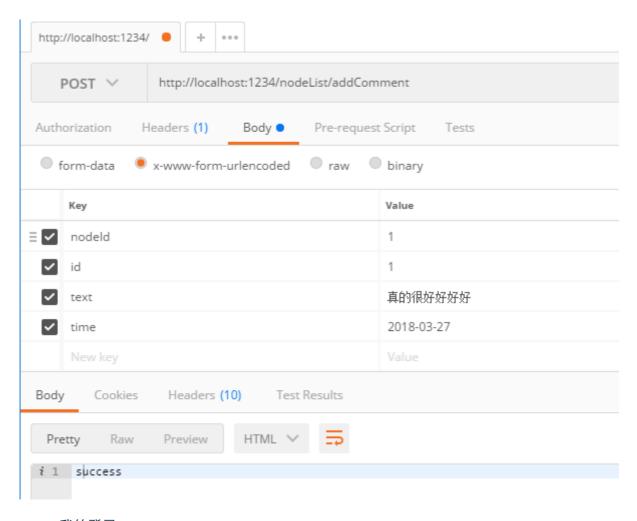

• 我的登录

- url:/profile/login
- method:post
- o data:{
 - tel:"",
 - pass:""
- o result: id

• 我的登录

- o url:/profile/login
- method:get
- result:session.loginId||0

• 我的信息

- o url:/profile/info
- method:get
- data:id
- o result:{
 - id:number,
 - tel:"",
 - pass:"",
 - userName:"",
 - userImg:"",

```
follow:[],
                   • fens:[]
                     }
    GET ∨
                    http://localhost:1234/profile/info?id=1
Authorization
                 Headers (1)
                                            Pre-request Script
                                                                  Tests
TYPE
  Inherit auth from parent
                                                     This request is not inheriting any authorization helper at the moment. S
The authorization header will be
                                                                                                authorization helper.
automatically generated when you send
the request. Learn more about
authorization
Body
         Cookies
                   Headers (10)
                                        Test Results
                                  JSON V
                   Preview
            Raw
   1 + {
           "id": 1,
"tel": "13322087793",
"pass": "670b14728ad9902aecba32e22fa4f6bd",
   3
   4
           "userName": "ruyuan",
"userImg": "http://tvax4.sinaimg.cn/crop.0.2.507.507.180/8e29c1baly8fdx1zfctlhj20e30e8dfw.jpg",
"birth": "1996-07-24",
   5
            "sex": "1",
"bio": "相信自己",
   8
   9
            "follow": [
  10 -
  11
                10,
  12
                5,
                4,
  13
  14
                3
  15
            "fens": [
  16 🕶
  17
  18
                4
  19
            ]
     }
  20
   • 我的注册
          o url:/profile/register
          method:post
          o data:{
          tel:"",
          o pass:"",
              }
          o result:{
          tel:"",
          o pass:"",
           。 code:"",(4位随机数)
              }
```

birth:"",

bio:"",

• 获取轮播图

url:/nodeList/banner


sex:number(0代表女,1代表男)

```
method:get
             result:[
                 {
                       id,
                       title,
                       img
                                                                                                              No Environment
                                                                                                                                           v •
http://localhost:1234/ • + •••
    GET ∨
                   http://localhost:1234/nodeList/banner
                                                                                                                Params
                                                                                                                              Send
                                                                                                                                              Save
                Headers (1) Body Pre-request Script
Authorization
TYPE
 Inherit auth from parent
                                                  This request is not inheriting any authorization helper at the moment. Save it in a collection to use the parent's
The authorization header will be
                                                                                         authorization helper.
automatically generated when you send
the request. Learn more about
Body
                                                                                                                  Status: 200 OK Time: 40 ms Size: 896
        Cookies
                  Headers (10)
                                     Test Results
                  Preview JSON V
                                                                                                                                                □ C
 Pretty
           Raw
1 - [
               "id": 1,
"title": "冰岛",
"img": "http://s4.xiaohongshu.com/static/message/7821aeff981210ed1585c297cbdb9396.jpeg"
  5
6
7 ×
8
9
10
11
12 ×
13
14
15
16
17 ×
18
               "id": 2,
"title": "火锅",
"img": "http://s4.xiaohongshu.com/static/message/5ebfale02e1850a4f54631ff50f8c9bd.jpeg"
               "id": 3,
"title": "妆容",
"img": "http://s4.xiaohongshu.com/static/message/5676b0513f77ddf4b7a449ca3f8blea6.jpeg"
               "id": 4,
"title": "福利社",
"img": "http://ci.xiaohongshu.com/11af9a62-1a05-4984-a271-48f12354b352"
  20
21
22 ]
    • 添加收藏 对应的id中 添加nodeld

    url:/nodeList/addCollect

             o method:post
             o data:{
                       ■ id:num
                       nodeld:num
                           }
```


o result: 'success' or 'error'

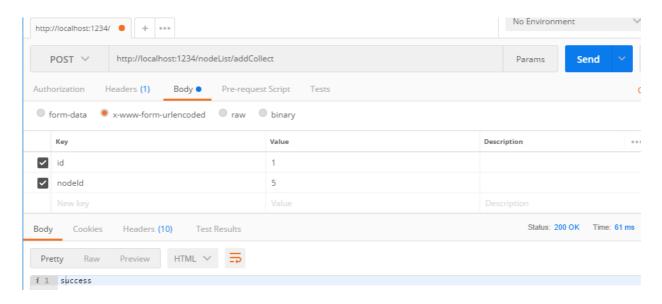

- 是否收藏 对应的id中 添加nodeld
 - url:/nodeList/isCollect
 - o method:post
 - o data:{
 - id:num
 - nodeld:num

}


。 result:'true'or 'false' ture表示已收藏 false表示未收藏

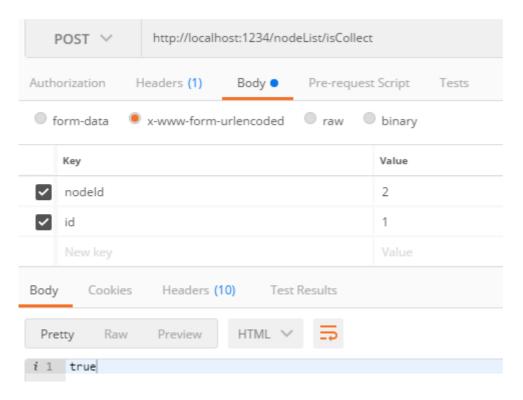

- 点赞 添加用户id
 - o url:/nodeList/like
 - method:post
 - o data:{
 - id:num

nodeld:num
}


o result:'success' or 'error'

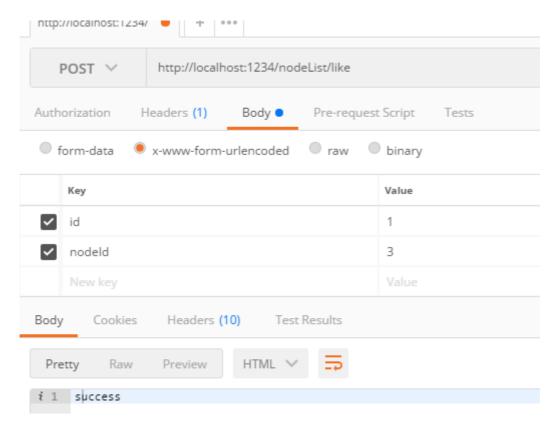

- 是否点赞添加用户id
 - url:/nodeList/isLike
 - method:post
 - o data:{
 - id:num
 - nodeld:num

}

。 result:'true'or 'false' ture表示已点赞 false表示未点赞

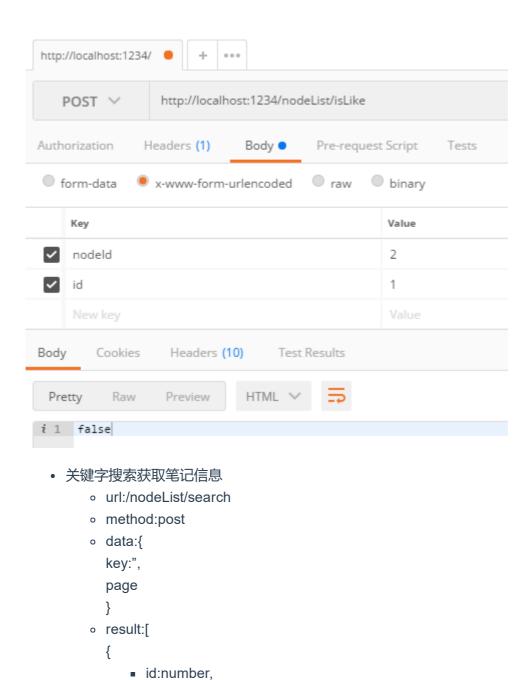

userName:"",userImg:"

nodeld:number,nodelmg:"",


• recommend:boolean,

likes:[] array 获取点赞数量取length,collect:[] array 获取点赞数量取length,

title:"",content:"",


time:"",type:"",

}

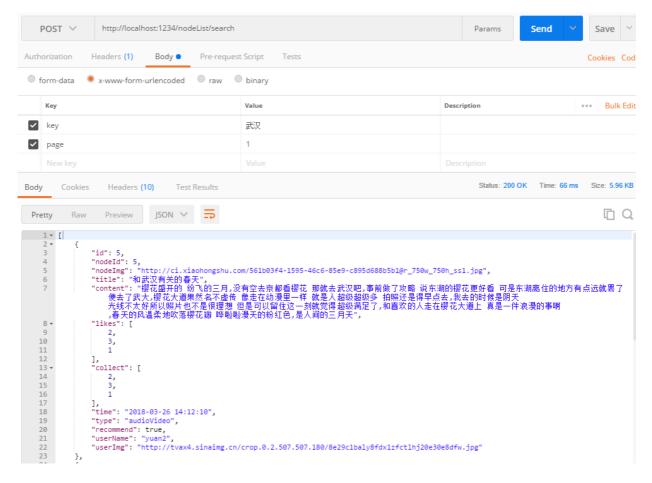


• 关注添加用户fid

- o url:/profile/follow
- o method:post
- o data:{
 - id:,(自己的id)
 - fld:(用户的id)
- result:'success' or 'error'

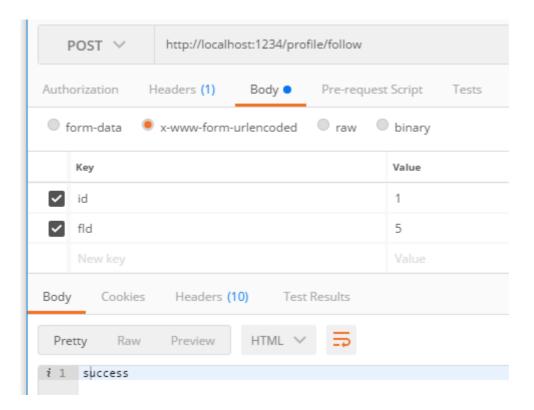

- 是否关注
 - url:/profile/isFollow
 - o method:post
 - o data:{
 - id,(自己的id)
 - fld(用户的id) }
 - result:'true'or'false'true为已关注, false为未关注

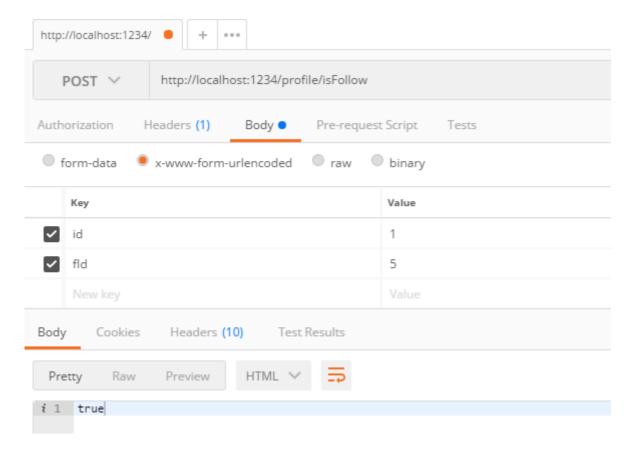

• 编辑个人资料

- o url:/profile/edit
- method:post
- o data:{
 - id,
 - tel,
 - userName,
 - birth,
 - sex,
 - bio,}
- o result:'success' or 'error'

