

# **Artificial Intelligence Capstone**

NYCU - Spring 2021

Before we actually start the course, let's look at some recent developments in "AI":

## StyleGAN (nVidia, 2018/12)



**Are these real people?**

<https://petapixel.com/2017/11/07/ai-creates-photo-realistic-faces-people-dont-exist/>

<https://www.thispersondoesnotexist.com/>

# StyleGAN applied to cats (nVidia, 2019/2)



**Are these real cats?**

# Artificial Intelligence?

First, consider these two subjects / products of AI research:

Robot Mouse

vs.

Robothespian

- Are they **intelligent**?
- Which is closer to your original idea of AI?
- What are their **goals**?
- What are their required **skill sets**? Which of these skills are considered intelligent?

# Goals of Artificial Intelligence

- "Artificial" means "man-made". So, what kind of artificial intelligence do we want to achieve?
- Two dimensions:
  - To be **human-like**, or to be **rational**? (After all, human beings are not always rational.)
  - To focus on the process of **thinking**, or to focus on the **behaviors**?
- Therefore, four different possible goals of AI:
  - Thinking humanly
  - Acting humanly
  - Thinking rationally
  - Acting rationally

# General vs. Narrow AI

## ■ General AI:

- Human-like intelligence: Thinking, reasoning, learning, creativity, etc., that are not limited to specific fields.
- A popular topic of science fictions.
- Generalized learning is the key.
- Still out of reach.


## ■ Narrow AI:

- Designed for specific tasks.
- Human experts control "what" and "how" to learn.
- The focus of "practical AI".

# (Acting Humanly) Turing Test

Turing's (1950) "*Computing machinery and intelligence*":

- "Can machines think?" → "Can machines behave intelligently?"
- Operational test for intelligent behavior: the Imitation Game

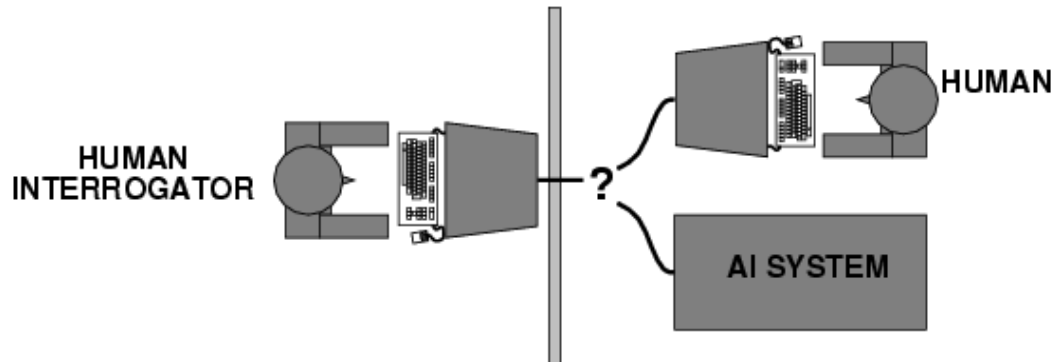

- Predicted that by 2000, a machine might have a 30% chance of fooling a lay person for 5 minutes
- Anticipated all major arguments against AI in the following 50 years
- Suggested major components of AI: knowledge, reasoning, language understanding, learning.

Q: How much do you think today's technology can pass the Turing Test?

# A Brief History of AI

- 1943 McCulloch & Pitts: Boolean circuit model of brain
- 1950 Turing's "Computing Machinery and Intelligence"
- 1950s Early AI programs: checkers, Logic Theorist, etc.
- 1956 Dartmouth meeting: The term "Artificial Intelligence" adopted
- 1965 Robinson's complete algorithm for logical reasoning (a theorem prover)
- 1966-74 AI discovers computational complexity; neural network research almost disappears; the start of "AI winter"
- 1980-93 Expert systems industry booms and busts
- 1985 Neural networks return to popularity
- 1995 The start of "data science"
- 1997 Deep Blue
- 2009 The "Big Bang" of deep learning with GPU computing
- 2012 AlexNet and ImageNet visual recognition
- 2016+ AlphaGo, etc.



# About This Course

## ■ Instructor information:


- Contact: EC709, ext. 56689, wangts@cs.nctu.edu
- Office hour: 2DX or by appointment

## ■ The main topics:

- Searching (including some game playing)
- Reasoning (logic and knowledge)
- Learning

## ■ Textbook:

- *Artificial Intelligence: A Modern Approach* by Russell & Norvig. (3rd ed. 2009, or 4th ed. 2020)

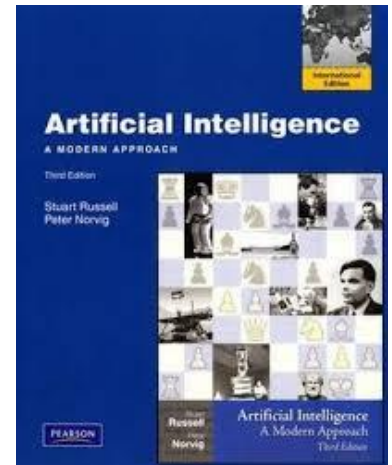

# About This Course

- Exams and homework (50%):
  - Two written exams
- Projects (50%):
  - A total of 3~4 projects. At least one will be a group project.
  - You need to submit your code and a report for each project you do.

# The Concept of "Agents"

- An agent is anything that can be viewed as **perceiving** its **environment** through **sensors** and **acting** upon that environment through **actuators**

- Human agents:

- Sensors: eyes, ears, etc.
- Actuators: hands, legs, mouth, etc.




- Robotic (nonhuman) agents:

- Sensors: cameras, range finders, etc.
- Actuators: motors, speakers, etc.



# The Concept of "Agents"

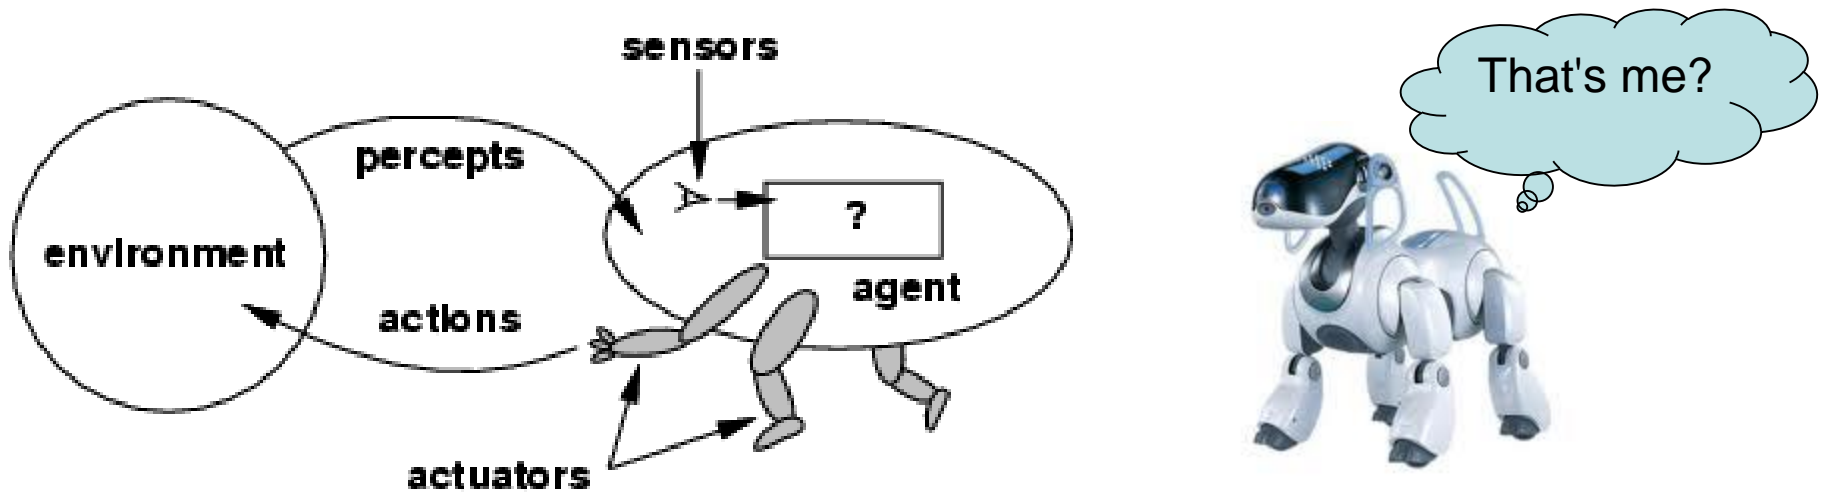


- Abstractly, an agent is a function from percept histories to actions:

$$f : P^* \rightarrow A$$

- This course is about designing **rational agents**: For any given class of environments and tasks, we seek the agent (or class of agents) with the best performance.


# Example: Vacuum-Cleaner World

- Percepts: location and contents, e.g., [A, *Dirty*]
- Actions: *Left*, *Right*, *Suck*, *NoOp*.

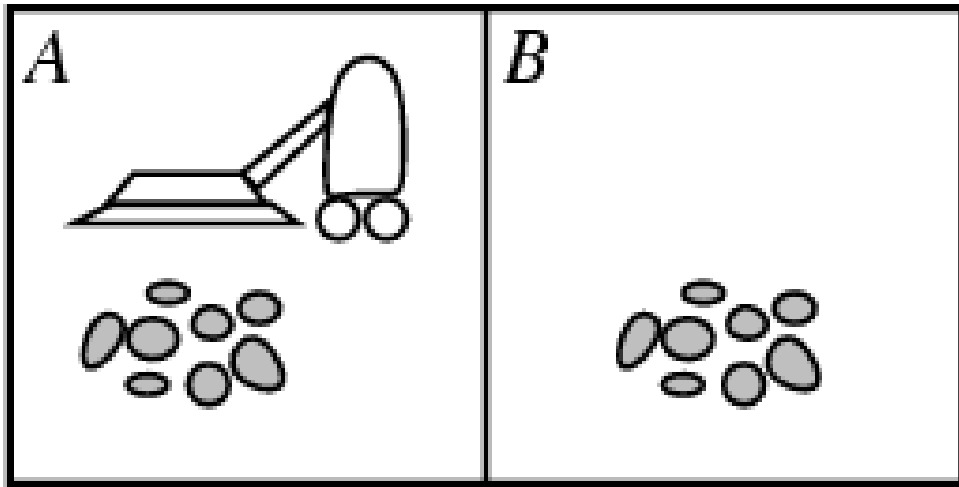

# Example: A Vacuum-Cleaner Agent

Percept sequence	Action
<i>[A, Clean]</i>	<i>Right</i>
<i>[A, Dirty]</i>	<i>Suck</i>
<i>[B, Clean]</i>	<i>Left</i>
<i>[B, Dirty]</i>	<i>Suck</i>
<i>[A, Clean], [A, Clean]</i>	<i>Right</i>
<i>[A, Clean], [A, Dirty]</i>	<i>Suck</i>
<i>⋮</i>	<i>⋮</i>



```
function REFLEX-VACUUM-AGENT( [location,status]) returns an action
  if status = Dirty then return Suck
  else if location = A then return Right
  else if location = B then return Left
```

# Rationality of an Agent

- Example (generalized vacuum-cleaner world): Fixed performance measure evaluates the environment sequence
  - one point per square cleaned up in time  $T$ ?
  - one point per clean square per time step, minus one per move?
  - penalize for  $> k$  dirty squares?
- Given the available percept sequence, a rational agent chooses the action that optimizes the expected value of the performance measure.
- Rational  $\neq$  omniscient (percepts may not supply all relevant information)
- Rational  $\neq$  clairvoyant (action outcomes may not be as expected)
- Therefore, **rational  $\neq$  successful**, and **rational  $\neq$  optimal**

# PEAS

To design a rational agent, we must specify the following.

Example: An automated taxi

- **Performance measure**: safety, destination, profits, legality, comfort, ...
- **Environment**: roads, traffic, pedestrians, weather, ...
- **Actuators**: steering, accelerator, brake, horn, speaker, display, ...
- **Sensors**: video, accelerometers, gauges, engine sensors, GPS, ...





# More PEAS Examples







# Environment Types

- Fully observable or partially observable:
- Single agent or multi-agent:
- Deterministic or stochastic: (Is the current state of the environment completely determined by its past states and the agents' actions?)
- Episodic or sequential: (Are future decisions affected by past ones?)
- Static or dynamic: (Does the environment change between actions of the agent?)
- Discrete or continuous:
- Known or unknown: (rules or "laws of physics" known to the agent)

# Example Environment Types

Try to characterize the environment types of these games:

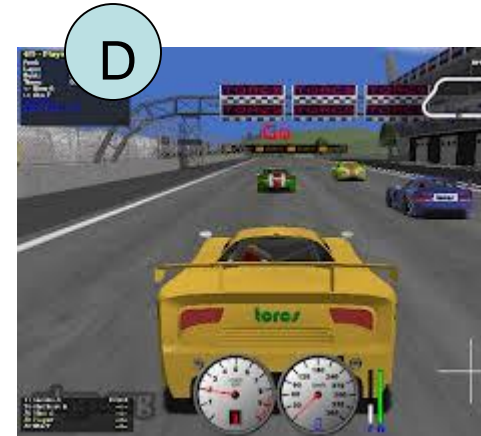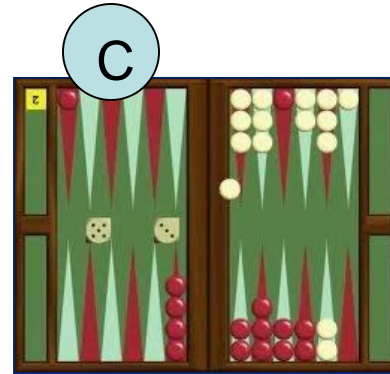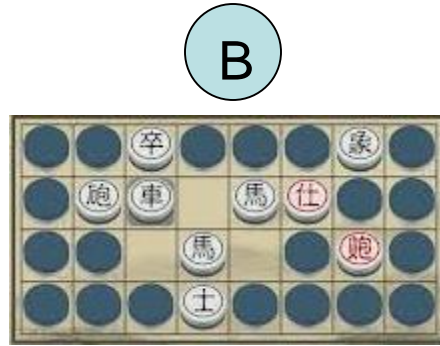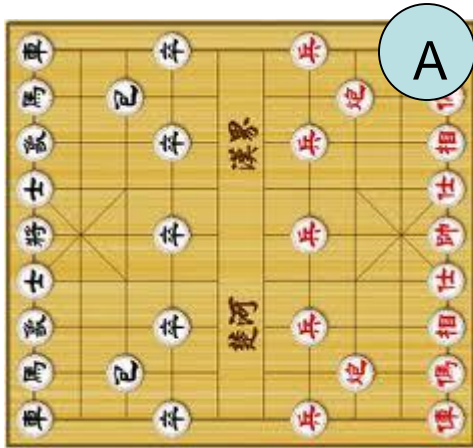

	A	B	C	D
Observable?				
Single-agent?				
Deterministic?				
Episodic?				
Static?				
Discrete?				
Known?				

# Agent Types


Four basic types, in order of increasing generality:

- Simple reflex agents
- Model-based reflex agents
- Goal-based agents
- Utility-based agents

All these can be turned into learning agents.


# Simple Reflex Agent

Actions are only based on rules.

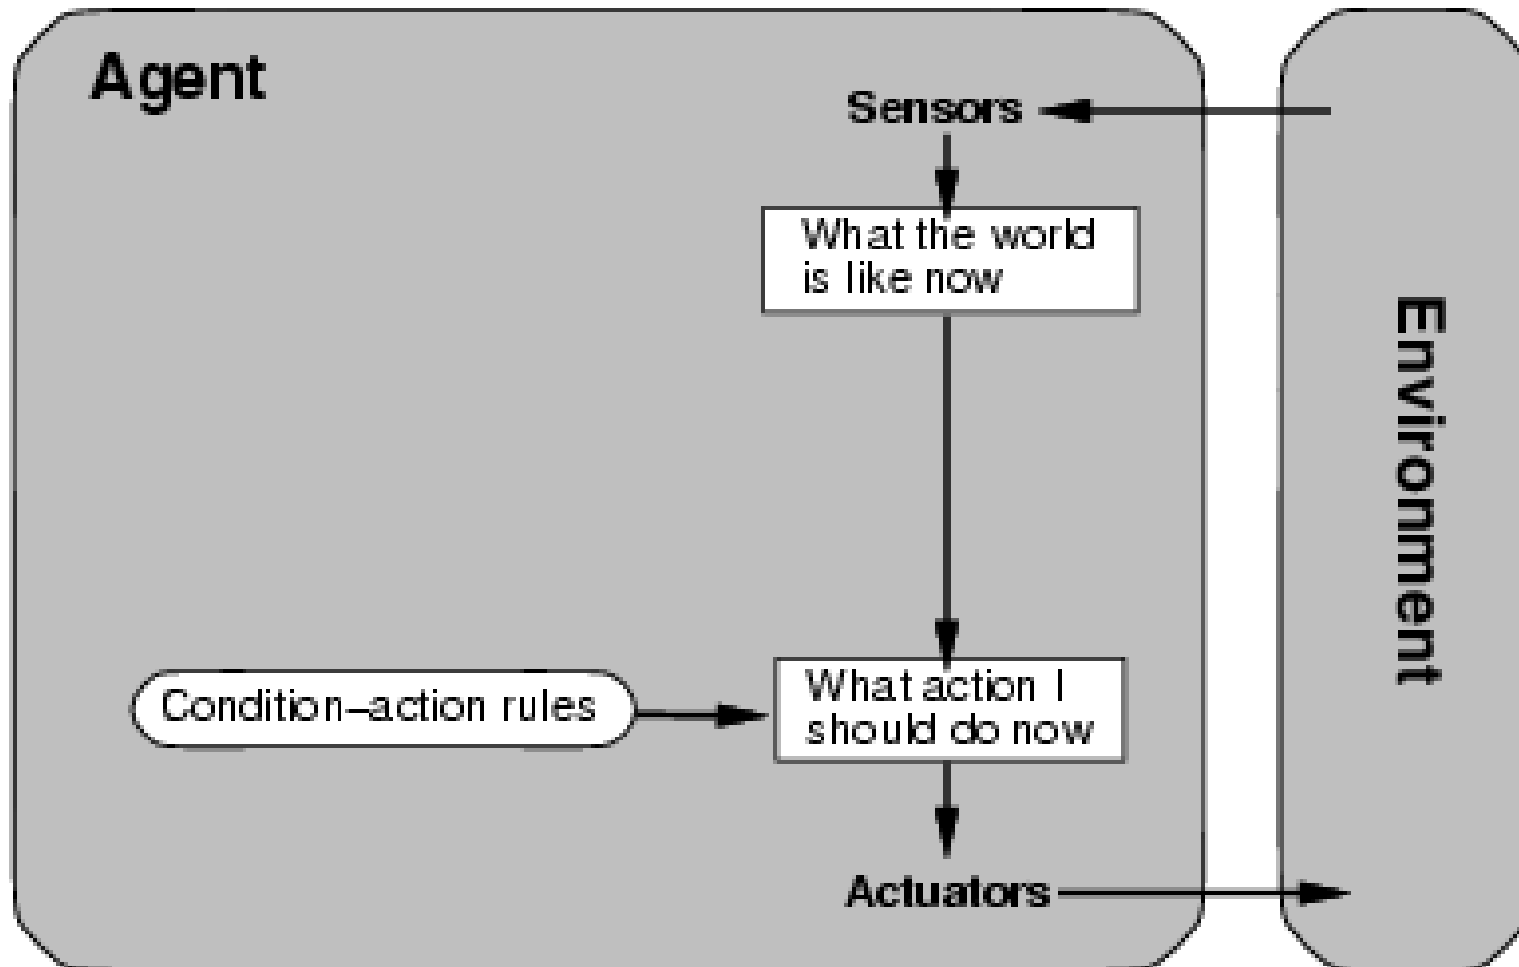


# Model-Based Reflex Agent

The agent keeps track of the "**state**" of itself and the world. It knows how the state is changed.

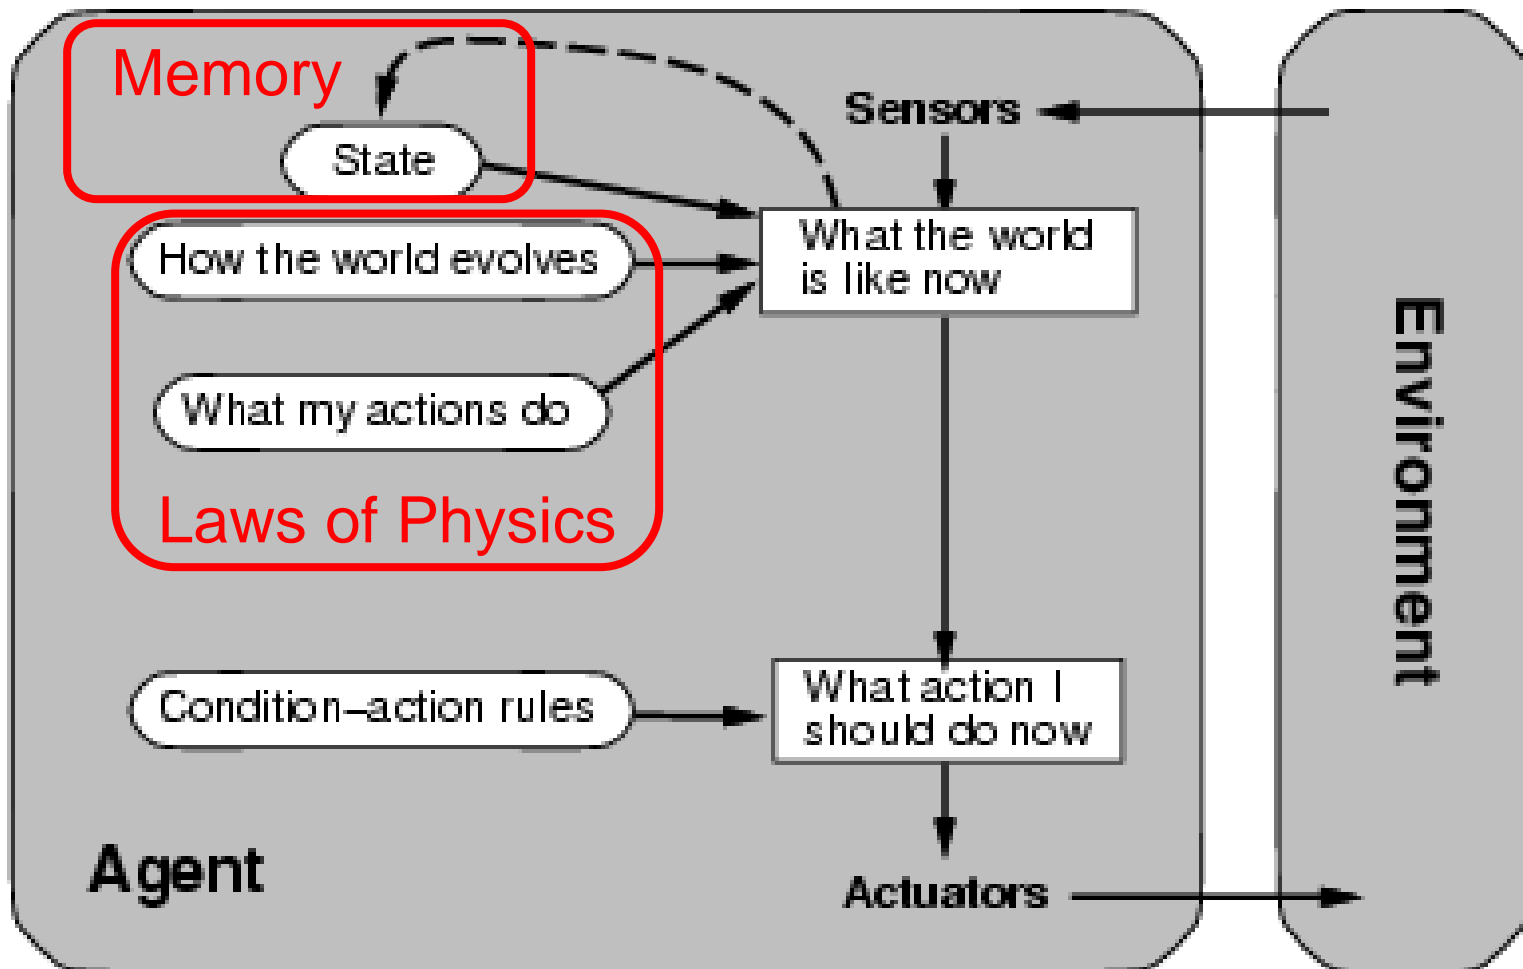


# Goal-Based Agent

The agent aims to reach a "goal" state.  
This affects how it selects the action.

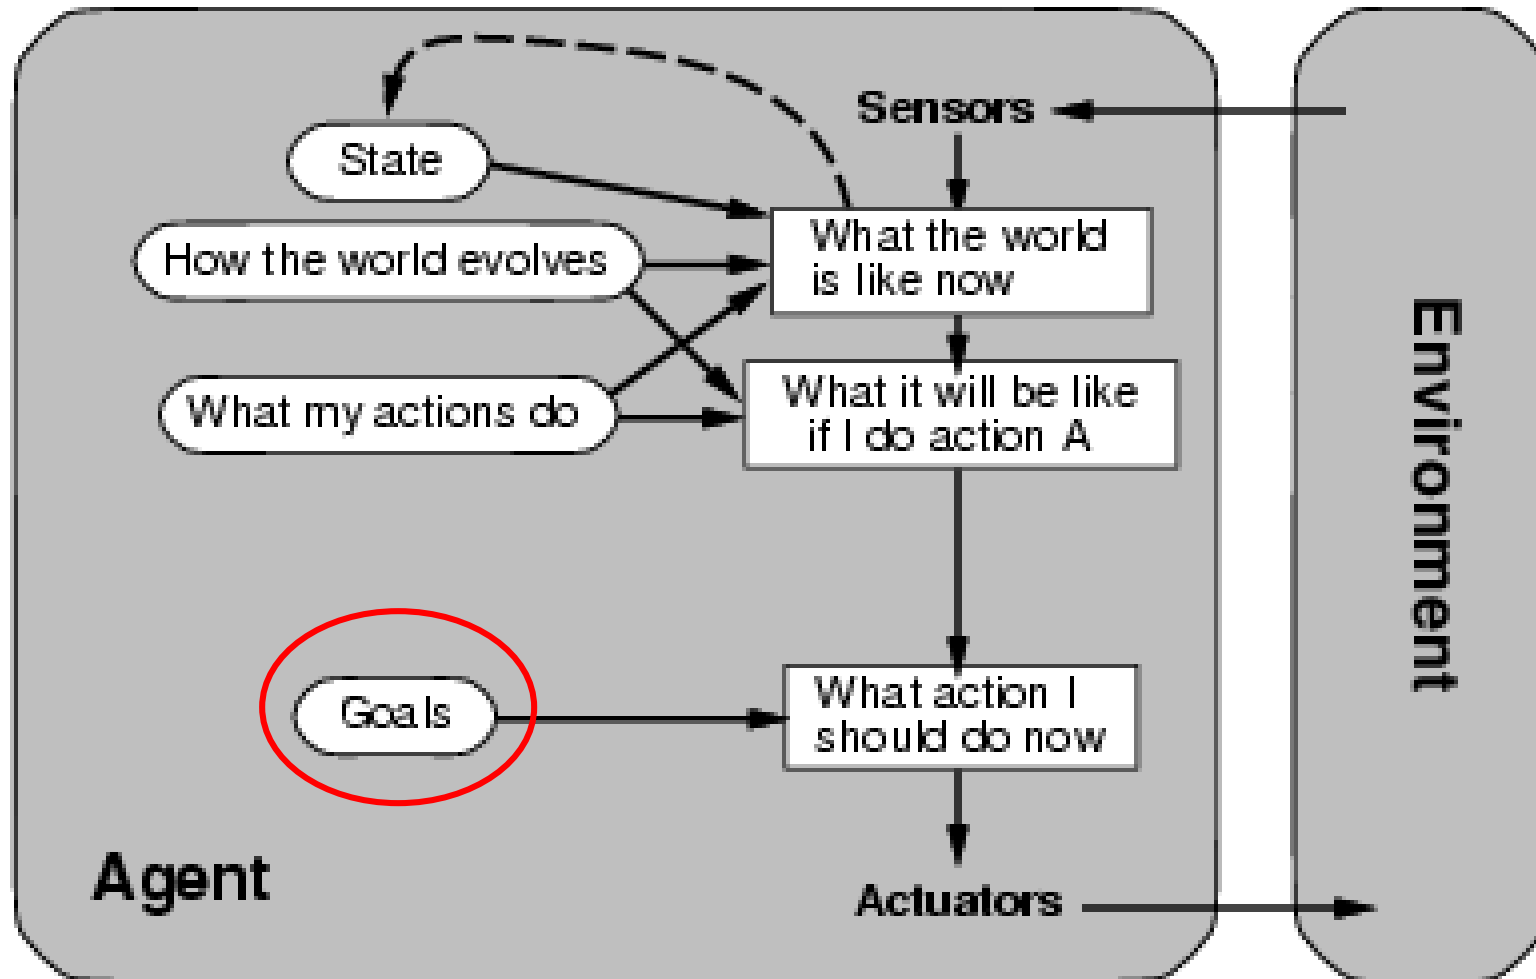


# Utility-Based Agent

Utility is more general than goals.

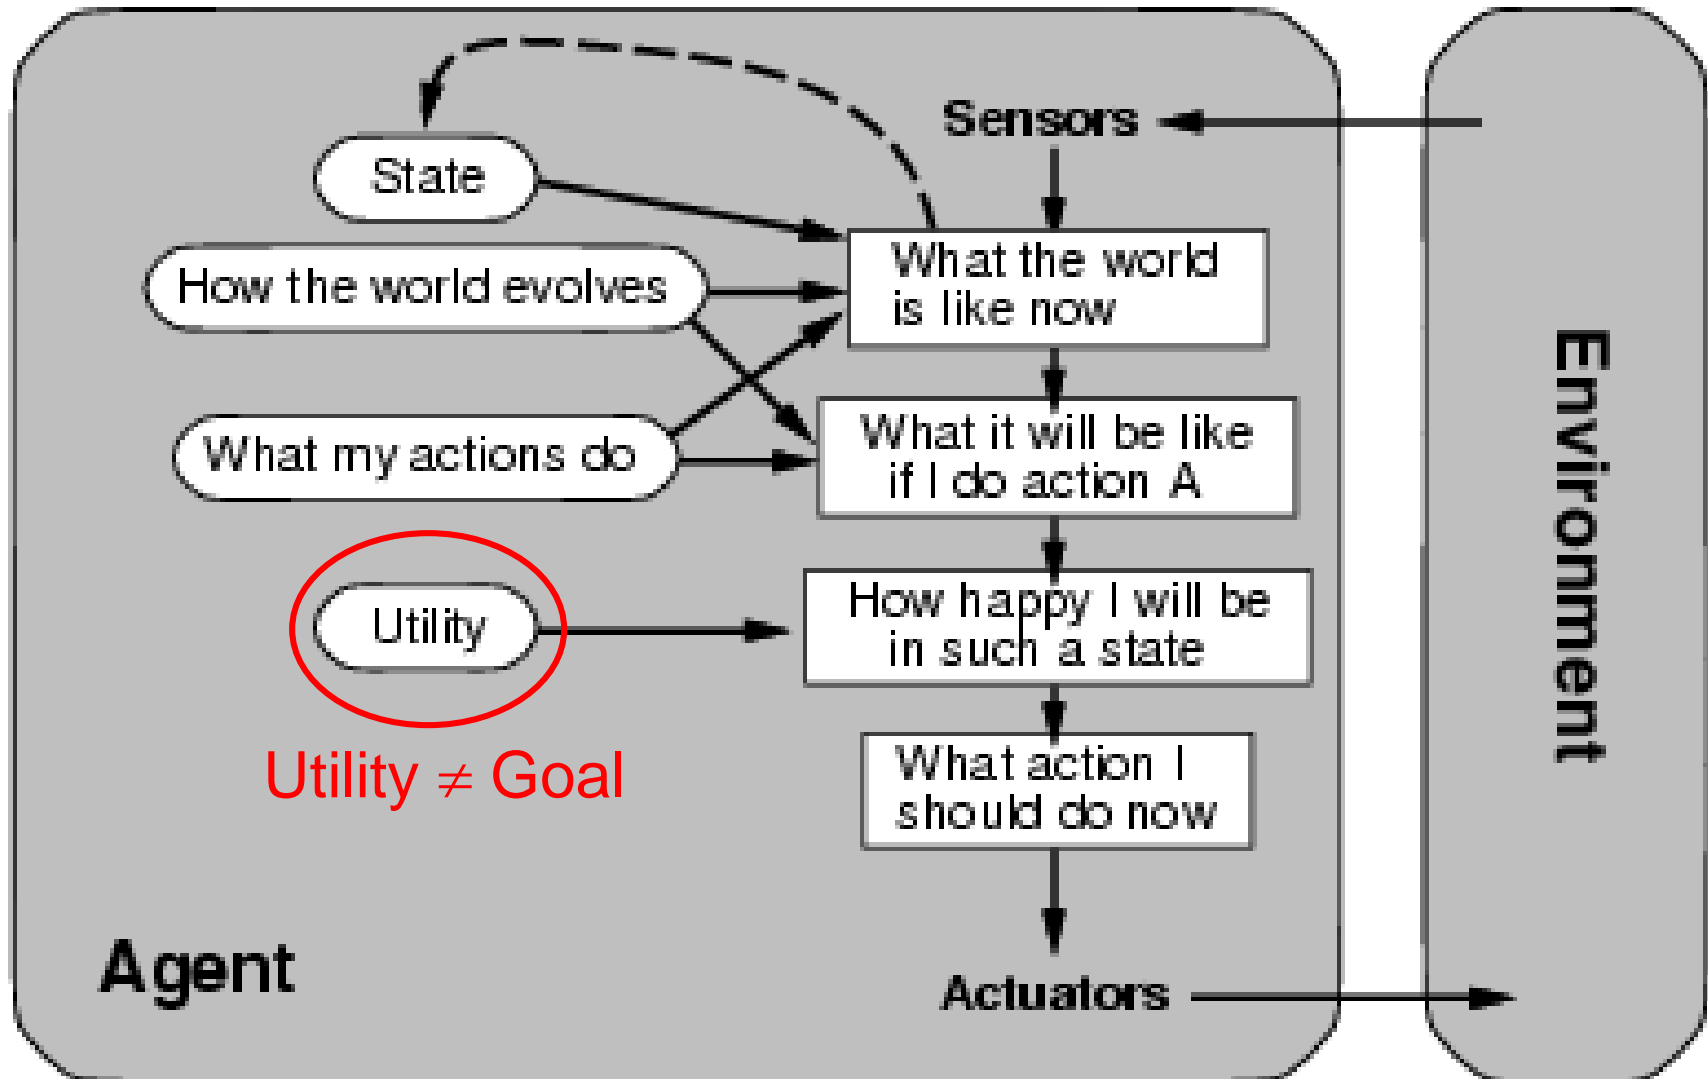



# Learning Agent

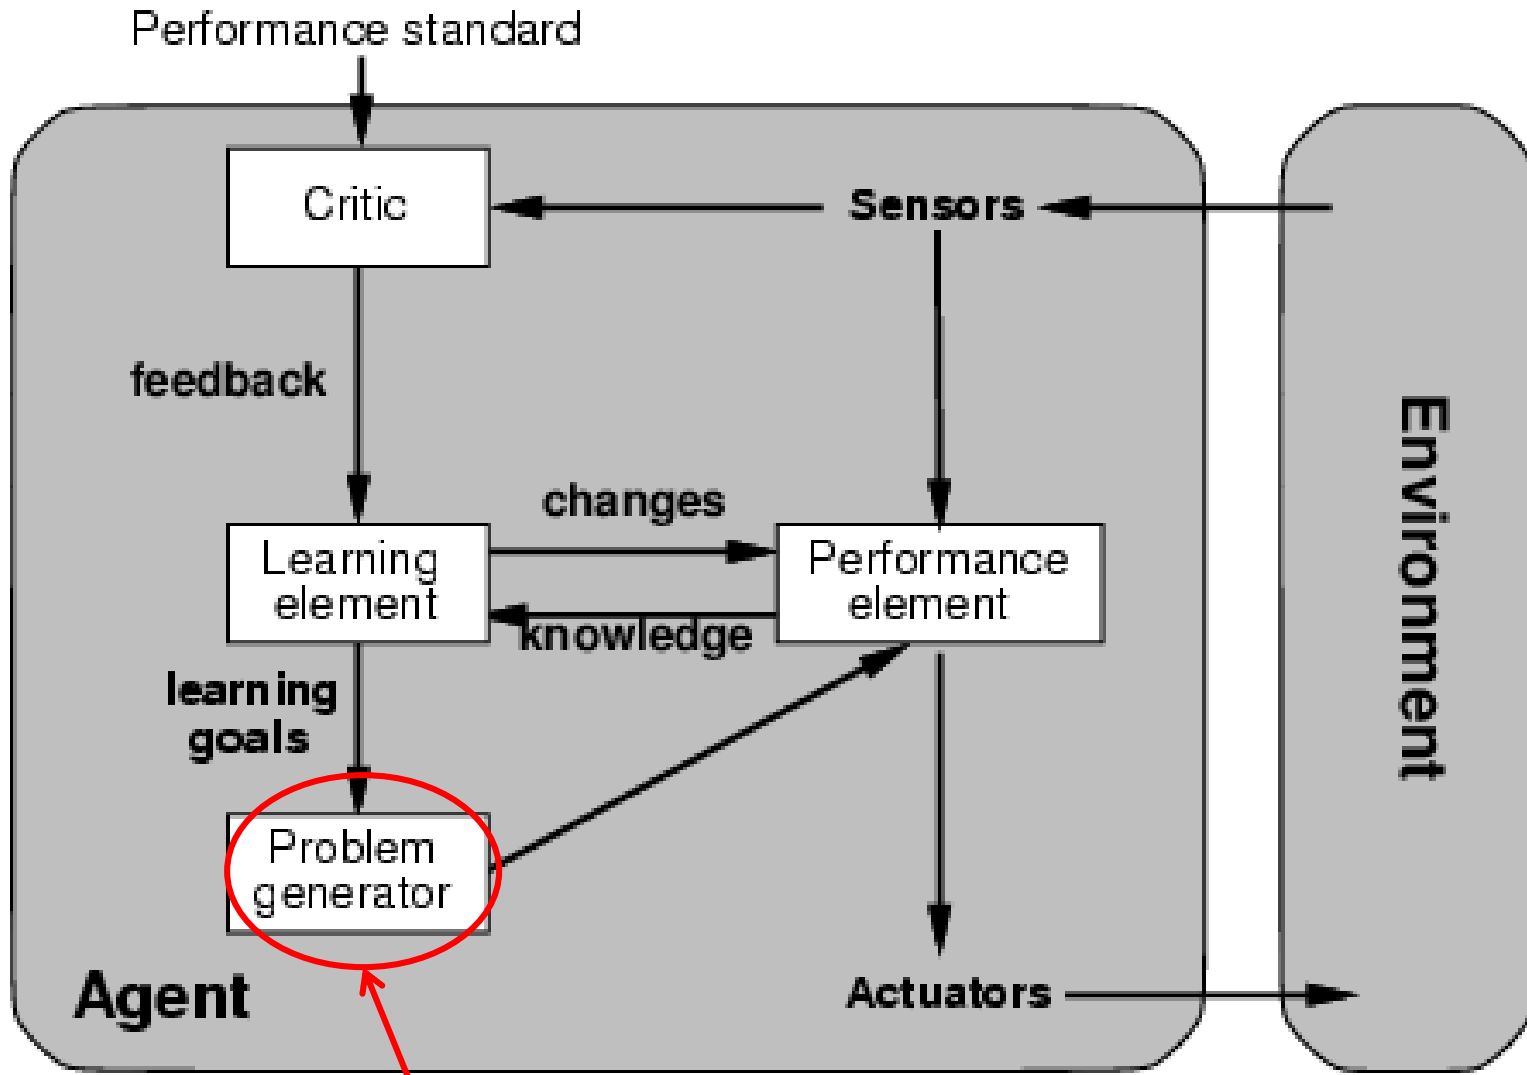

Exploration (not part of all learning agents)