
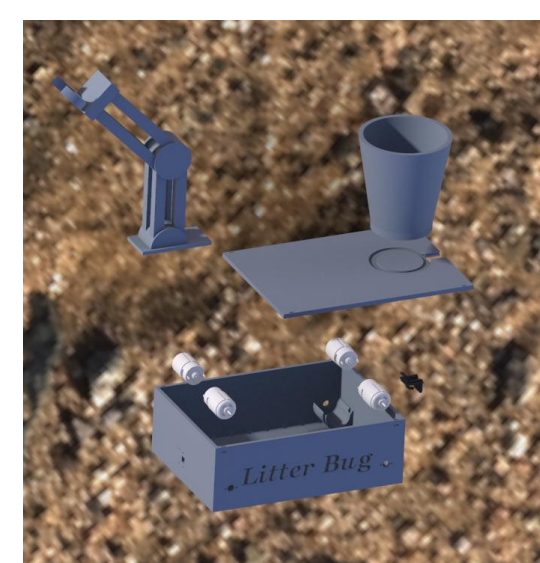


Background

- Litter Bug is an autonomous, eco-friendly robot that picks up litter
 - It uses object detection to recognize trash
 - It drives over to the trash, picks it up, and puts it in an attached basket
- Litter Bug reduces the waste that harms the surrounding environment, watershed, and ecosystem
- It reduces the time and money spent on litter cleanup, as it is easy to use and cheap to build


Designing and Building the Robot

- Sketched 3D drawings to visualize our initial ideas
- Designed detailed Computer Aided Design (CAD) models based on initial designs
 - Included a detachable basket by creating a clip-in system with a spring.
 - Created motor, camera, & Raspberry Pi holders, easy attachment systems, and wiring paths.
- Designed a base for the body, but ended up using a prebuilt base with motors
- incorporated reusable zip-ties as fasteners
 - Sustainable, reusable, & easy to take off to work on inside of robot
- 3D printed models described above
 - Used eco-friendly PLA Plastic as printing filament

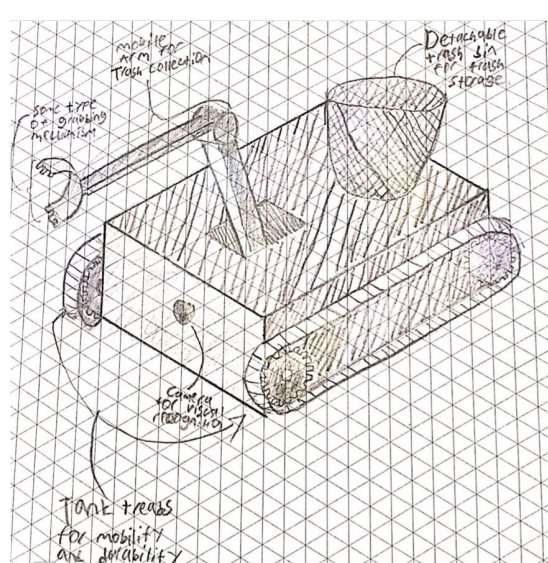

Programming the Claw

- The claw moves toward a set of coordinates relative to its base
 - Assigned frames to each joint to identify the location of the end point relative to the base
 - Created a function that inputs the angles of each joint using the frames and outputs a set of coordinates
- Used machine learning to calculate the angles from the coordinates with a regression model
 - Predicts the angles from any set of coordinates you input
- Coordinates of the trash are then received from the camera so the arm can pick up the trash

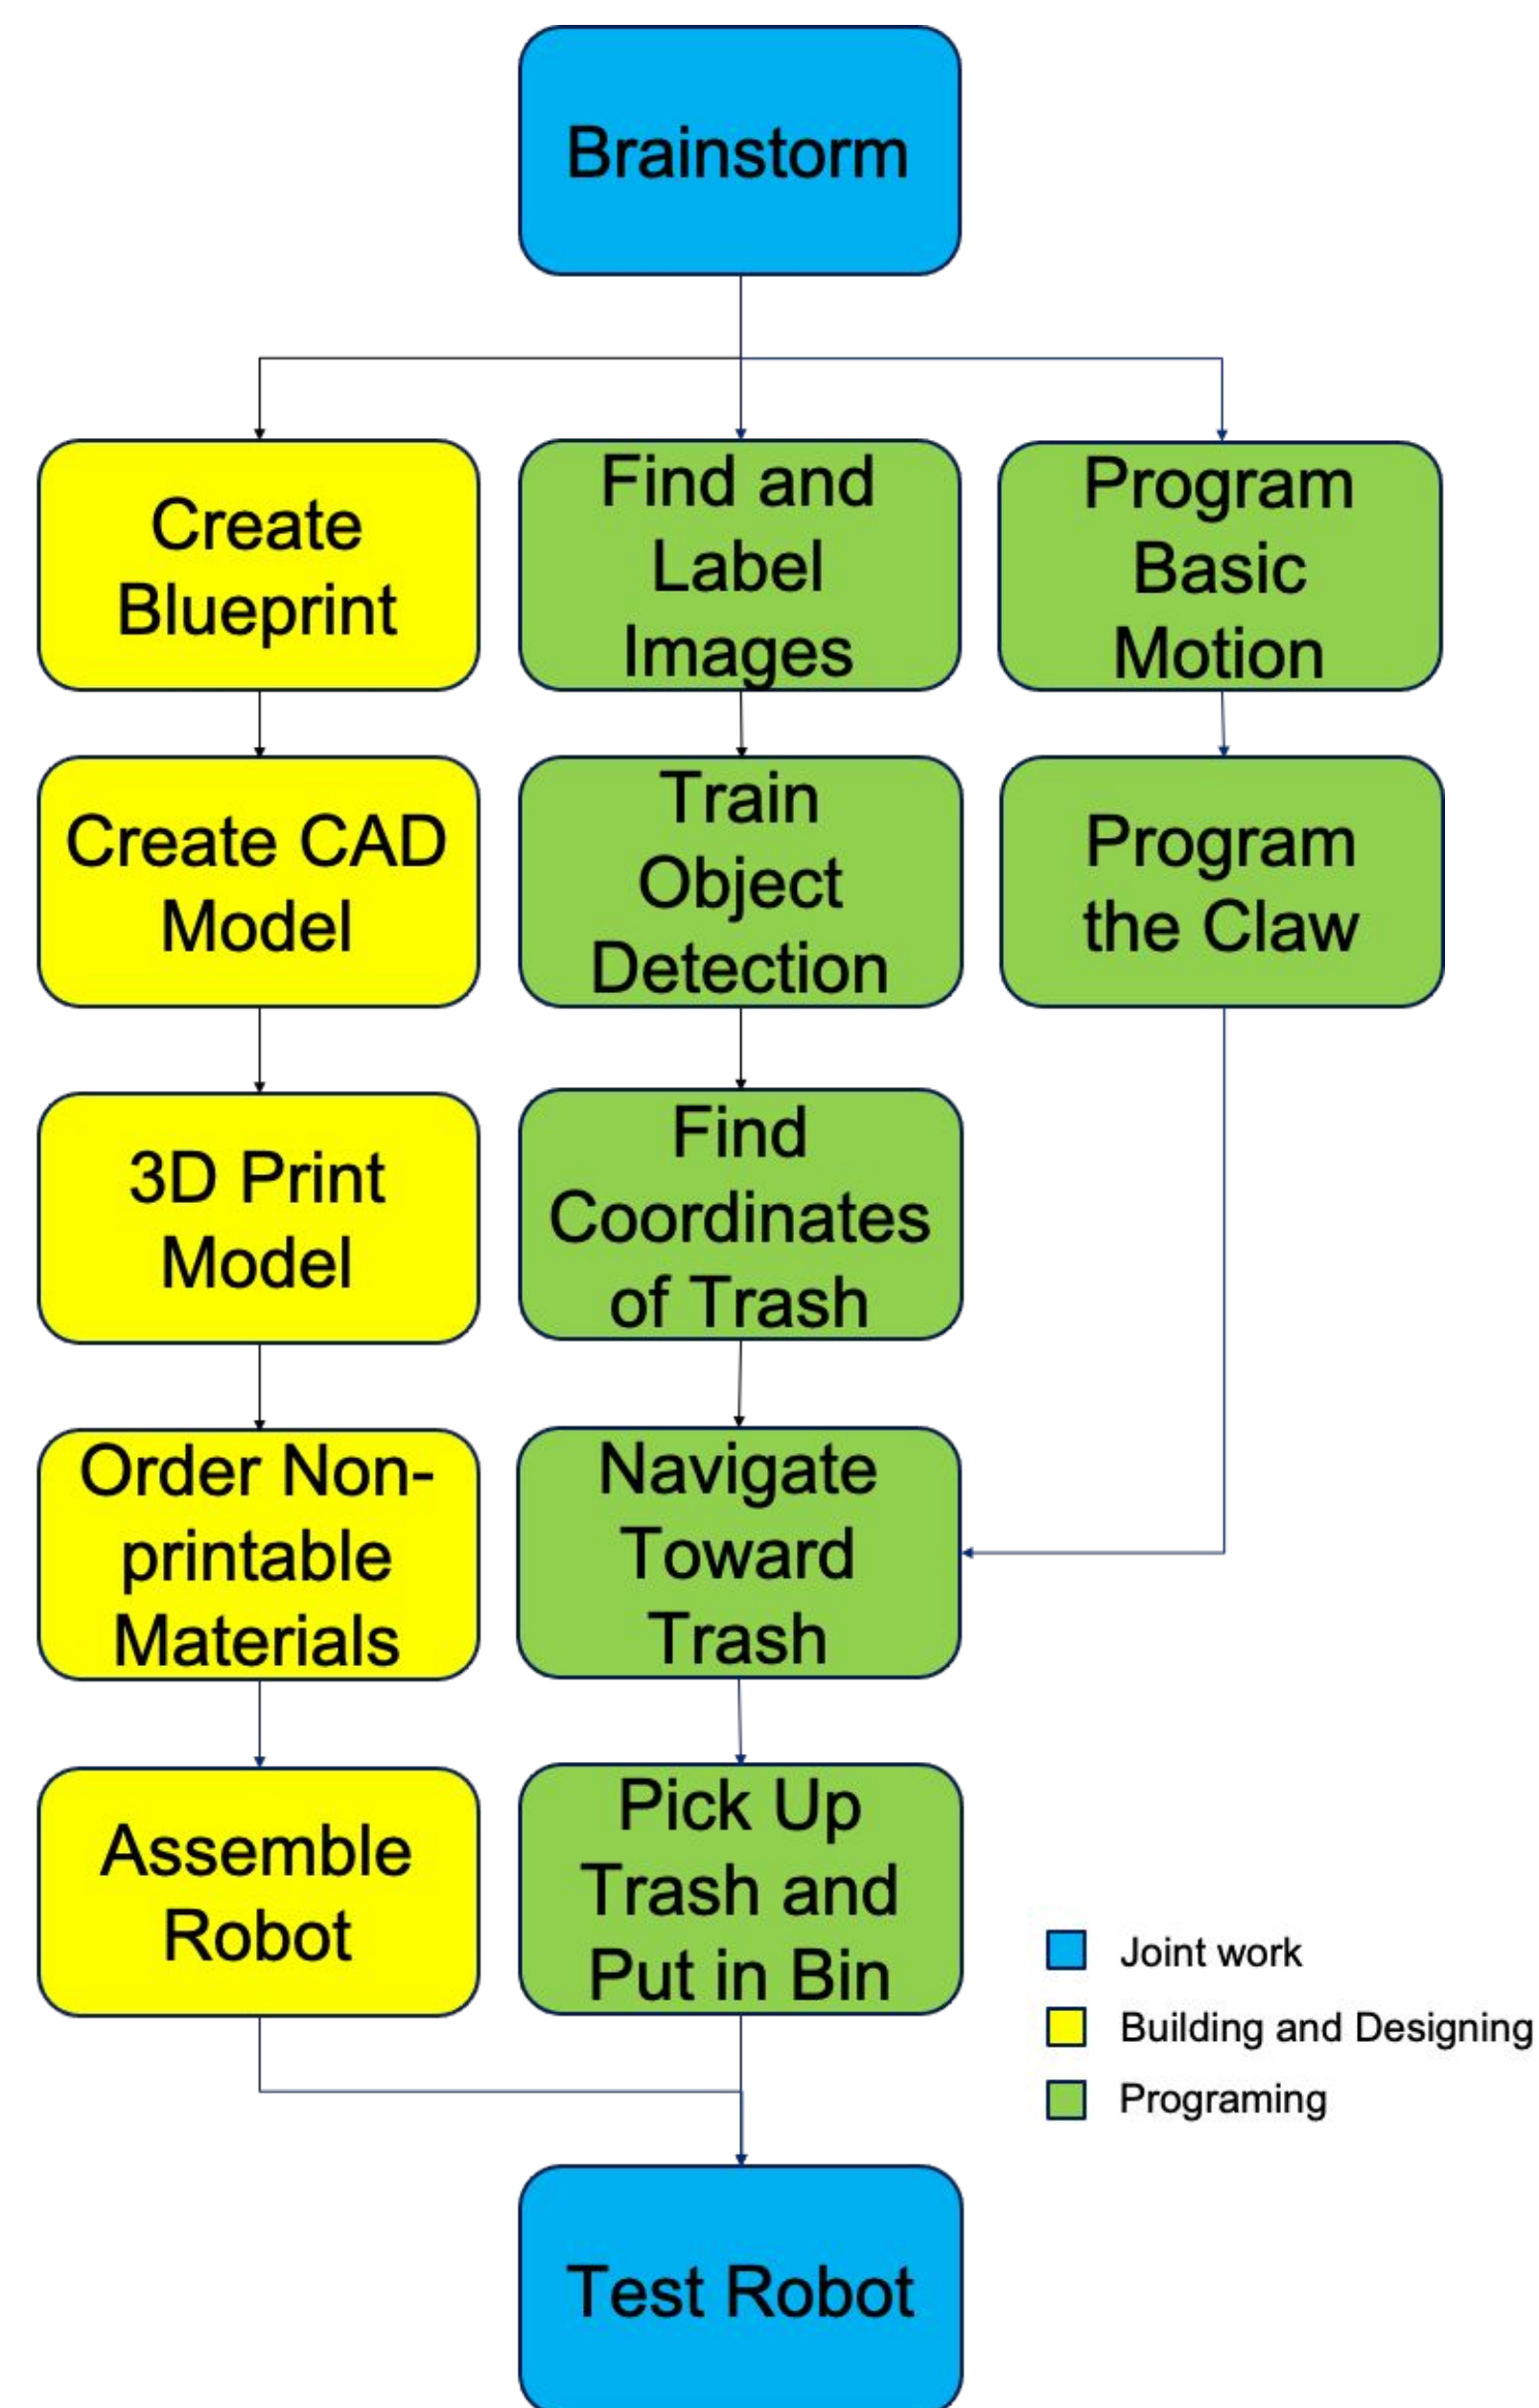

References


- Tayal, S. (2019, September 2). *Personal Assistant Robot (Finds Objects and Follows You) Ft. Raspberry Pi + RoboClaw*. Instructables. <https://www.instructables.com/Object-Finding-Personal-Assistant-Robot-Ft-Rasber/>
- Proença, P. Simões P. (2021). *Trash Annotations in Context. TACO*. <http://tacodataset.org/>
- Thung, G. (2017, April 19). *GitHub - garythung/trashnet: Dataset of images of trash; Torch-based CNN for garbage image classification*. GitHub. <https://github.com/garythung/trashnet>
- Shi, Y., & Rathod, V. (2020, January 28). *models/tf1_detection_zoo.md at master · tensorflow/models*. GitHub. https://github.com/tensorflow/models/blob/master/research/object_detection/g3doc/tf1_detection_zoo.md
- EdgeElectronics. (2020, December 13). *TensorFlow-Lite-Object-Detection-on-Android-and-Raspberry-Pi*. GitHub. <https://github.com/EdgeElectronics/TensorFlow-Lite-Object-Detection-on-Android-and-Raspberry-Pi>
- Morgunov, A. (2021, July 16). *How to Train Your Own Object Detector Using TensorFlow Object Detection API*. Neptune.AI. <https://neptune.ai/blog/how-to-train-your-own-object-detector-using-tensorflow-object-detection-api>
- SendDex. (2014, October 7). *Robotics and the Raspberry Pi*. YouTube. https://www.youtube.com/playlist?list=PLQVvva0QuDeJlgD1RX9_49tMLUxvixF4
- Sodemann, A. (2017, September 2). *Robotics 1 U1 (Kinematics) S5 (HTM) P2 (HTM by Denavit Hartenberg)*. YouTube. <https://www.youtube.com/watch?v=4WRhVqQaZTE>



Object Detection Neural Network



Trained model on Windows 10:

- Found and labeled 1,500 images of litter using Labellmg
 - Cardboard, bottles, cans, wrappers, etc
- Trained a Tensorflow Lite (TF Lite) object detection neural network (a quantized SSD-MobileNet-V2 model)
 - Generated TFRecords as input data
 - Created Label Map (defined class names & IDs) and configured training (defined the model and parameters)
- Ran the training for 8,500 steps until the loss was consistently around 2.00

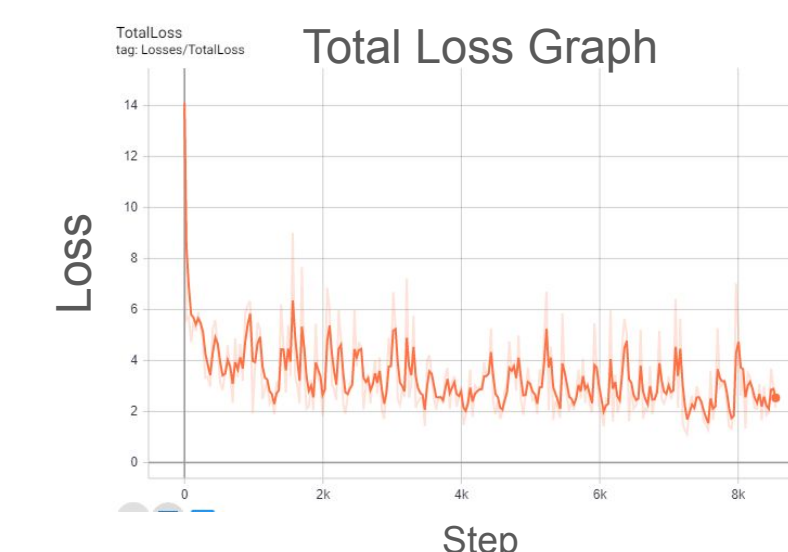

Ran model on Raspberry Pi:

- Converted model to work with TF Lite interpreter
 - Created a new TF Lite Label Map
- Set up Camera Module, Tensorflow Lite, and OpenCV on Raspberry Pi
- Set up Coral Edge TPU (Sped up the model)
- Ran model on photos, videos, & through Camera Module
 - It could accurately detect most trash with a bounding box, but often had false positives
 - It works better in videos & at a higher angle

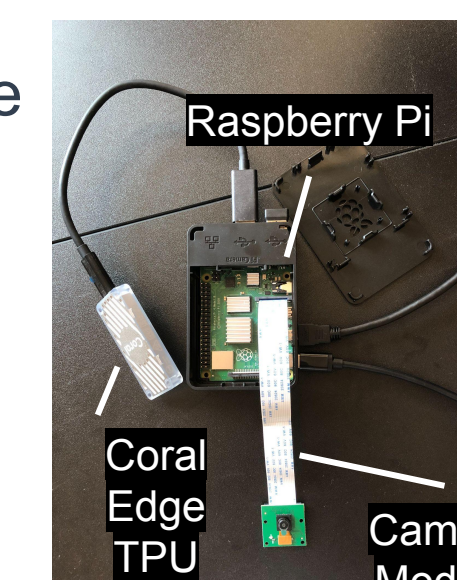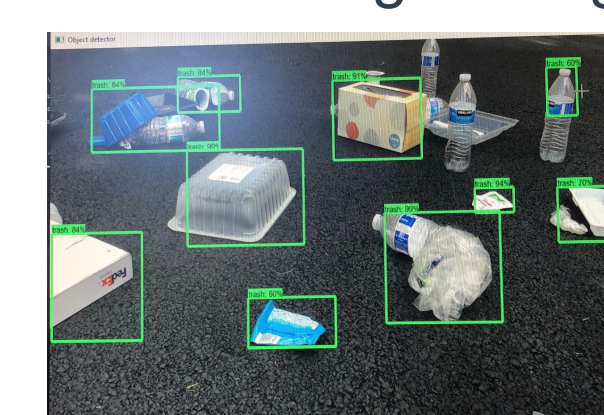

Navigation

- The robot inds coordinates of the object detection bounding box
- It detects if the box is in the left or right of the screen
- The robot adjusts itself so the object is in the center of the screen
- It moves forward, continuously adjusting itself
- When it is about 30 cm away from the object, it stops

Future Work

- Gather a bigger, more inclusive training dataset
- Train model to detect objects other than trash to reduce false positives
- Assemble the robot and test the sensors
- Test if the robot can efficiently navigate to the trash (we had optimized publicly available code for our purposes)
- Test if the claw can pick up different types of trash (bottles, cans, wrappers, etc.)
- Test if the robot can withstand various conditions and locations (sidewalk, rain, etc.)