


RGSD-Video: Reward-Guided Speculative Block Decoding (loop: $b = 0, 1, \dots, B-1$)

Block 0: always use Target (no KV context for Drafter)

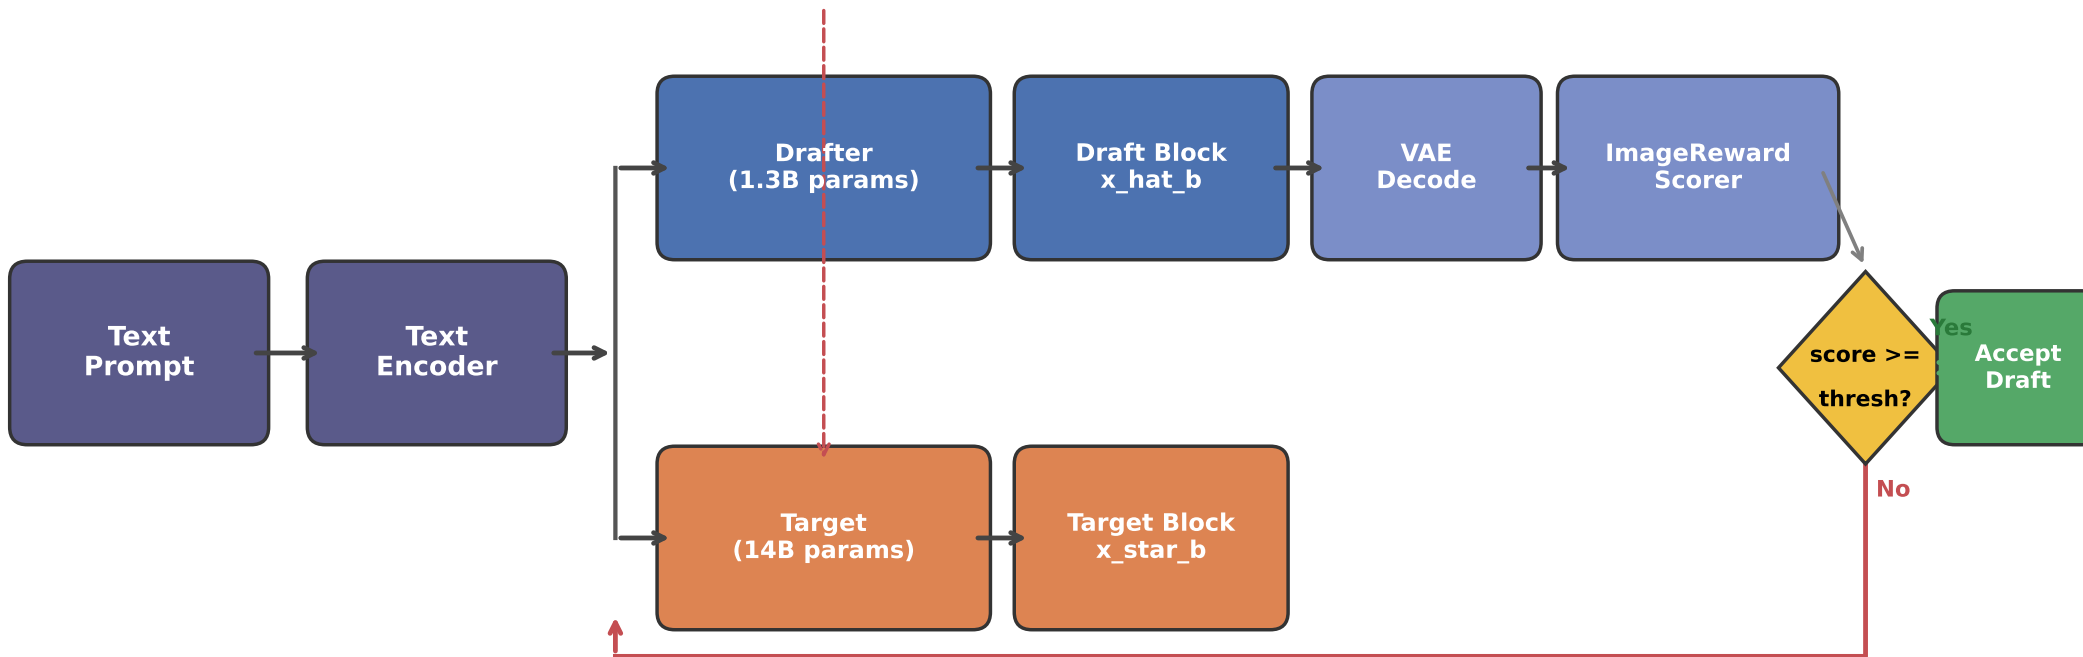

Adaptive threshold: $\tau_b = Q_{\{1-\alpha_{eff}\}}(\text{pool})$ [$\alpha_{eff} = \alpha \times B/(B-1)$, $B=9$, $\alpha=0.72$]