FUNCTIONAL REQUIREMENTS DOCUMENT

“Anywhere”: date-led destination discovery

Booking.com · MVP release · Web (desktop and mobile)

Field	Value
Document	FRD-ANYWHERE-001
Version	1.1 (draft for engineering review)
Changes in 1.1	Destination overview uses a summary built only from existing data instead of written descriptions (BR-07, BR-08, section 8.4); Screen 3 uses the standard filter panel unchanged (FR-307); neighbourhood filter and “Popular nearby” removed; “Mild weather” tag removed.
Author	Yuliya Fokina (Product)
Date	26 October 2026
Status	Draft. Open questions in section 13 must be resolved before sprint planning.
Related documents	“Anywhere” feature proposal (problem, personas, metrics) · Screens 1–3 (concept) · Clickable prototype · Moodboard
Reviewers	Engineering lead (search), Engineering lead (front end), Design, Data/Analytics, QA, Legal (pricing display)

Context: this is a Product Management Academy exercise. Booking.com is used as the example product; system names, services and numbers are assumptions made for the exercise, not Booking.com internals.

Contents

1. Purpose and scope
2. Glossary
3. Assumptions and dependencies
4. Users and user stories
5. Functional requirements: Screen 1 (search entry)
6. Functional requirements: Screen 2 (destination results)
7. Functional requirements: Screen 3 (explore stays)
8. Business rules, data and interfaces
9. UI and design rules
10. Non-functional requirements
11. Analytics events
12. Experiment and rollout
13. Open questions
14. Traceability

1. Purpose and scope

This document specifies the functional and non-functional requirements for the MVP of **“Anywhere”**: a search mode that lets a traveller enter only travel dates and group size, see destinations with suitable available accommodation, and continue into the existing booking flow.

It is written so that engineering, design and QA can estimate, build and test the feature without a walkthrough. Requirements use **“shall”** for mandatory behaviour. Every requirement has an ID, a priority (Must / Should / Could) and at least one acceptance criterion.

1.1 In scope (MVP)

- “Anywhere” option in the destination field of the existing search box (Screen 1).
- A new **Destination results** page listing destinations with availability for the exact dates and group (Screen 2).
- A **destination-level stays page** (Screen 3), built on the existing property search results page, with a destination overview and Anywhere context.
- Hand-off to the existing property page and checkout, with source attribution.
- Feature flag, A/B experiment set-up and analytics events.
- Desktop web and mobile web (responsive).

1.2 Out of scope

- Flexible dates (“a weekend in October”, “any 7 nights”). Fixed check-in and check-out only.
- Personalised ranking or recommendations.
- Saved collections, wish lists and sharing of destination lists.
- Flights, transport or total trip cost.
- Native iOS and Android apps (planned for phase 2 after the experiment).
- Changes to the property page, checkout, payments or confirmation flow.
- Any visual redesign of existing components (see section 9.1).

2. Glossary

Term	Definition
Anywhere search	A search submitted with the destination value “Anywhere”, fixed dates and occupancy.
Occupancy	Number of adults, number of children with ages, and number of rooms.
Candidate destination	A destination in the curated list that Anywhere can show (BR-01).
Qualifying offer	A room offer that is bookable now for the exact dates and fits the full occupancy (BR-02).
Available stay	A property with at least one qualifying offer.
Eligible destination	A candidate destination with at least the minimum number of available stays after filters (BR-03).
Destination card	One result row on Screen 2.
Destination page	Screen 3: stays in one destination, opened from Anywhere.
Source tag	The value `src=anywhere` carried from Screen 2 to booking, used for attribution.
Treatment / control	Users who see Anywhere (treatment) or the current experience (control) in the experiment.

3. Assumptions and dependencies


ID	Assumption or dependency	Impact if false
AS-01	The availability and pricing service can return the cheapest qualifying offer per property for a list of destinations in one batch call.	A new aggregation job is needed; estimate grows.
AS-02	The data needed for destination summaries already exists and can be queried per destination: property locations and districts, property facilities, booking counts, review scores, review text, landmarks near properties, and property photos (BR-07).	Drop the affected summary line or tag; the overview still works (FR-306).
AS-03	The existing property search results page accepts a destination ID, occupancy, dates, filters and a source parameter, and can render an extra header block.	Screen 3 becomes a new page; estimate grows.
AS-04	The experimentation platform supports user-level assignment for logged-in and logged-out users.	Experiment design must change.
AS-05	The booking record can store an entry source (`entry_source`).	Attribution relies on analytics only.
AS-06	Prices shown follow existing market rules for taxes and fees.	Legal review required per market.

4. Users and user stories

Personas are described in the feature proposal. Stories below are the ones the MVP must satisfy.

ID	User story	Persona
US-01	As a traveller who knows my dates but not my destination, I want to search without choosing a place, so that I can see where I could go.	Yuliya, Tomáš
US-02	As a traveller with a budget, I want to see the price per night and the total for my stay for each destination, so that I only consider places I can afford.	Yuliya, Lucie
US-03	As a family, I want to see only destinations and stays that fit all of us, so that I don’t waste time on results that don’t work.	Lucie
US-04	As a traveller, I want to filter by budget, property type and key facilities, so that results match what matters to me.	Tomáš, Lucie
US-05	As a traveller who doesn’t know a destination, I want a short overview of it, so that I can judge if it suits me.	Tomáš, Maya
US-06	As a traveller comparing places, I want to go back to the destination list without losing my filters, so that comparing is quick.	All
US-07	As a traveller who has chosen a stay, I want to continue to the normal property page and booking, so that booking feels familiar and safe.	All
US-08	As the product team, we want every Anywhere session and booking to be attributable, so that we can measure incremental bookings.	Internal

5. Functional requirements: Screen 1 (search entry)

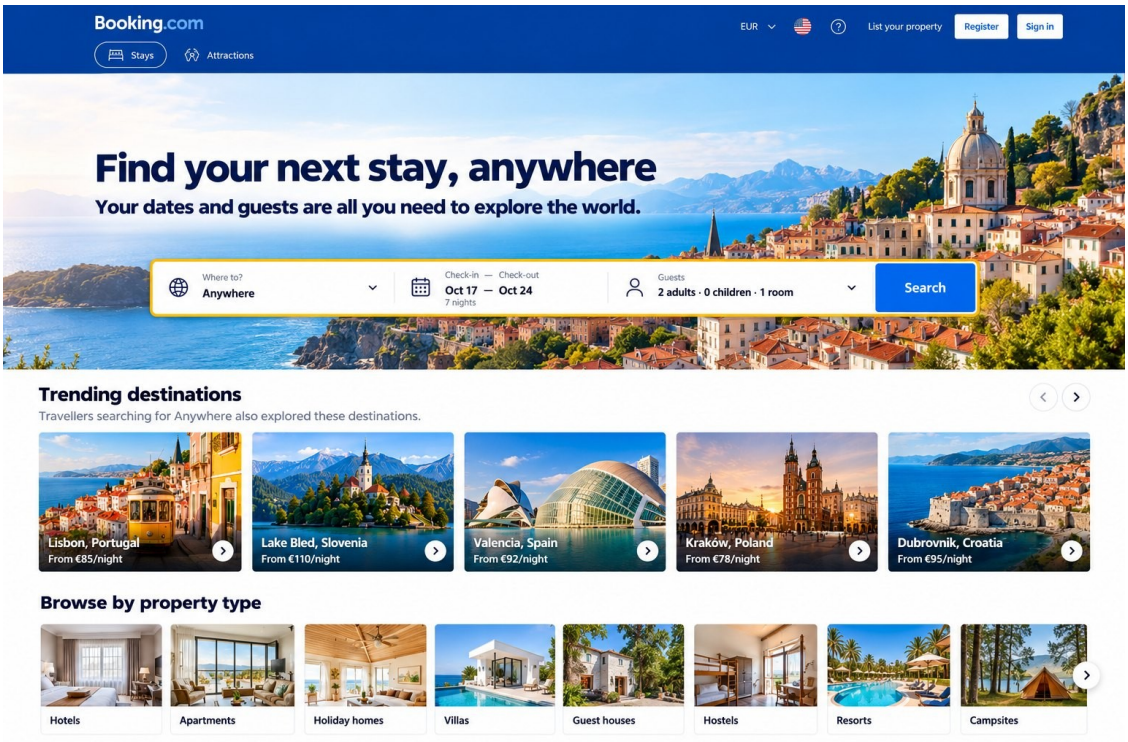


Screen 1 (concept): “Anywhere” in the destination field.

ID	Requirement	Priority
FR-101	When the destination field receives focus and is empty, the suggestion list **shall** show “Anywhere” as the first option, with the subtitle “Discover destinations that fit your dates” and a globe icon.	Must
FR-102	When the user types, “Anywhere” **shall** remain in the list if the input matches “any”, “anywhere” or “everywhere” (localised equivalents per language). Otherwise normal suggestions apply.	Should
FR-103	Selecting “Anywhere” **shall** set the field value to “Anywhere” and move focus to the date picker if dates are empty.	Must
FR-104	An Anywhere search **shall** require check-in date, check-out date, at least 1 adult and at least 1 room. Existing validation rules for dates, stay length and child ages **shall** apply unchanged.	Must
FR-105	If the user submits without dates, the date picker **shall** open with the inline message “Add dates to see destinations with available stays”. No request is sent.	Must
FR-106	Submitting a valid Anywhere search **shall** navigate to the Destination results page (Screen 2) with all inputs in the URL (section 8.1).	Must
FR-107	The homepage module “Trending destinations” **shall** show up to 5 eligible destinations for the current inputs, with name, country and “From €X/night”. Clicking a card opens Screen 3 for that destination with the current inputs.	Could
FR-108	For control users, or when the feature flag is off, the “Anywhere” option and module **shall not** appear.	Must

AC	Given / When / Then	Covers
AC-101	**Given** a treatment user on the homepage, **when** they focus the empty destination field, **then** “Anywhere” is the first suggestion.	FR-101
AC-102	**Given** “Anywhere” is selected and dates are empty, **when** the user clicks Search, **then** the date picker opens with the inline message and no network request for results is sent.	FR-104, FR-105
AC-103	**Given** “Anywhere”, 17–24 Oct, 2 adults, 1 room, **when** the user clicks Search, **then** Screen 2 loads and the URL contains `checkin=2026-10-17&checkout=2026-10-24&adults=2&rooms=1`.	FR-106
AC-104	**Given** a control user, **when** they focus the destination field, **then** “Anywhere” is not offered.	FR-108

6. Functional requirements: Screen 2 (destination results)

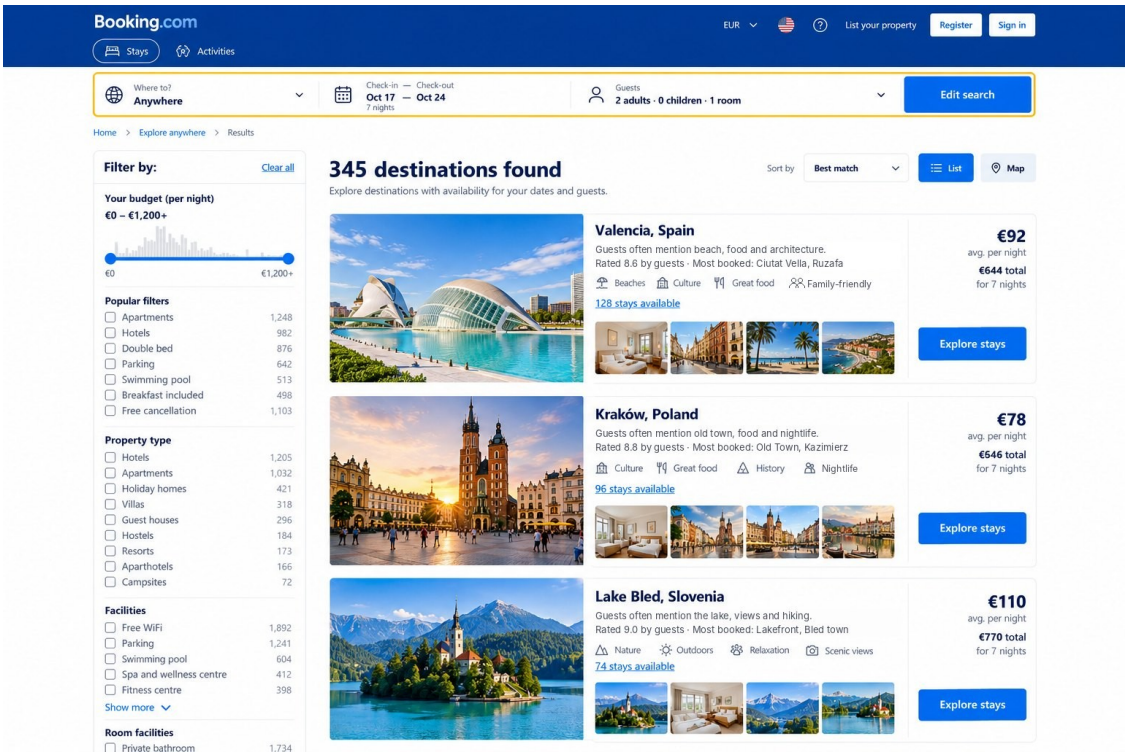

Screen 2 (concept): destination results for 17–24 Oct, 2 adults.

6.1 Results list

ID	Requirement	Priority
FR-201	The page **shall** show only eligible destinations (BR-03) for the exact dates and occupancy.	Must
FR-202	The page header **shall** read “{n} destinations found” with the subtitle “Explore destinations with availability for your dates and guests.”	Must
FR-203	Each destination card **shall** show: hero image, destination name and country, a one-line data summary (BR-07: “Guests often mention {k1}, {k2} and {k3}.” and “Rated {score} by guests · Most booked: {area1}, {area2}”), up to 4 theme tags (BR-08), the link “{n} stays available”, up to 4 thumbnail images, average price per night, total price for the stay with “for {nights} nights”, and the button “Explore stays”.	Must
FR-204	Prices **shall** be calculated as in BR-04 and shown in the user’s selected currency, following existing market rules for taxes and fees.	Must
FR-205	The count “{n} stays available” **shall** equal the number of available stays in that destination after the active filters are applied.	Must
FR-206	Clicking the card image, title, “{n} stays available” or “Explore stays” **shall** open Screen 3 for that destination, carrying dates, occupancy, active filters and `src=anywhere`.	Must
FR-207	Results **shall** load 20 destinations at a time. A “Show more destinations” button **shall** load the next 20 without losing scroll position.	Must
FR-208	The default sort **shall** be “Best match” (BR-05). Other options: “Lowest price” (by average price per night, ascending) and “Most stays” (descending).	Must
FR-209	A List / Map toggle **should** be offered. Map view shows one pin per eligible destination labelled with the average price per night. Clicking a pin opens a preview card with the same actions as FR-206.	Should

6.2 Filters


ID	Requirement	Priority
FR-210	The filter panel **shall** contain: Budget per night (range slider, €0 to €1,200+ in the user's currency, steps of 10), Popular filters, Property type, Facilities. Options and labels reuse the existing filter definitions.	Must
FR-211	A destination **shall** remain in results only if at least the minimum number of available stays (BR-03) pass all active filters (BR-06).	Must
FR-212	Each filter option **shall** show a count of available stays across all eligible destinations that match it, given the other active filters.	Should
FR-213	Changing a filter **shall** update the results without a full page reload and **shall** update the URL so that refresh, back and share restore the same state.	Must
FR-214	"Clear all" **shall** remove all filters and restore the unfiltered results.	Must
FR-215	On mobile web, filters **shall** open in a full-screen sheet with a "Show {n} destinations" button.	Must

6.3 States

ID	Requirement	Priority
FR-216	While loading, the page **shall** show 3 skeleton cards and the filter panel in a disabled state.	Must
FR-217	If no destination is eligible, the page **shall** show "No destinations match all your filters" with a "Clear all filters" button. If no filters are active, the message **shall** be "No destinations have availability for these dates and guests. Try other dates." with a button that opens the date picker.	Must
FR-218	If the results service fails or exceeds the timeout (NFR-02), the page **shall** show "We couldn't load destinations right now" with a "Try again" button, and log an error event.	Must
FR-219	If some destinations fail to load but others succeed, the page **shall** show the successful ones and not show an error.	Should

AC	Given / When / Then	Covers
AC-201	**Given** dates 17–24 Oct and 2 adults, **when** Screen 2 loads, **then** every card shows a total price equal to the average price per night × 7 (±1 currency unit for rounding).	FR-203, BR-04
AC-202	**Given** 2 adults and 2 children, **when** Screen 2 loads, **then** no destination appears whose available stays cannot fit 4 guests in 1 room.	FR-201, BR-02
AC-203	**Given** results are shown, **when** the user sets the budget maximum to €80, **then** each remaining card's stay count only includes properties whose cheapest qualifying offer is ≤ €80 per night, and the URL contains the budget parameter.	FR-211, FR-213
AC-204	**Given** filters remove all destinations, **when** the list updates, **then** the empty state with "Clear all filters" is shown; clicking it restores the results.	FR-217, FR-214
AC-205	**Given** the user clicks "Explore stays" on Valencia, **then** Screen 3 opens with the same dates, occupancy and filters, and `src=anywhere` in the URL.	FR-206
AC-206	**Given** the user has scrolled to the 30th card, **when** they open Screen 3 and press "Back to all destinations", **then** Screen 2 shows the same filters and scroll position.	FR-207, FR-304

7. Functional requirements: Screen 3 (explore stays)

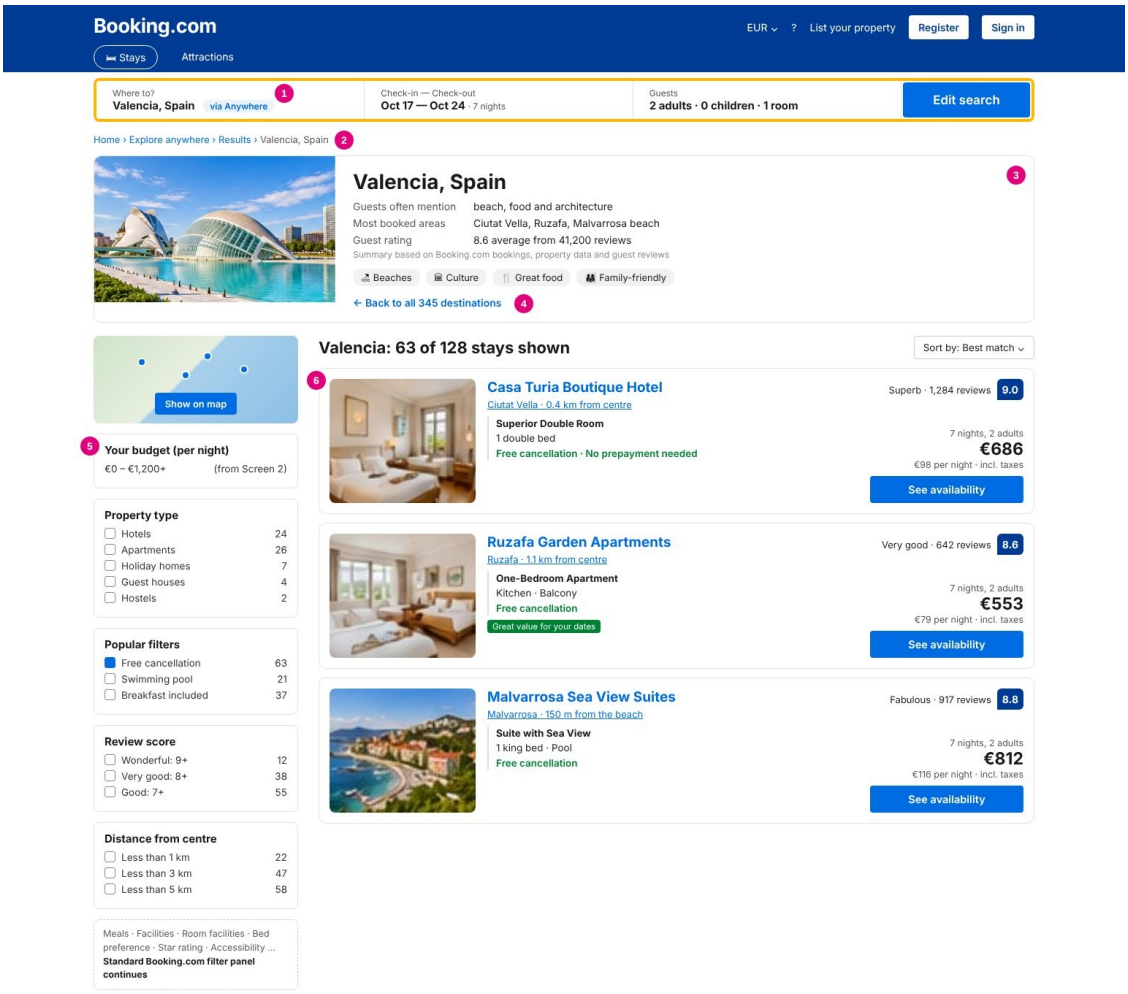

Screen 3 (concept). Numbers 1–6 map to the requirements below.

Screen 3 is the existing property search results page for one destination, with three additions: the Anywhere context in the search bar, a destination overview block, and the “Back to all destinations” link.

ID	Requirement	Priority
FR-301	[1] The search bar **shall** show the destination name and country with a “via Anywhere” tag. Changing dates or occupancy **shall** reload Screen 3 for the same destination and keep the tag.	Must
FR-302	[1] Selecting a different specific destination in the search bar **shall** open the standard search results for that destination without the tag and without `src=anywhere`. Selecting “Anywhere” **shall** return to Screen 2 with the current inputs.	Must
FR-303	[2] A breadcrumb **shall** read “Home › Explore anywhere › Results › {Destination}”. “Home” opens the homepage, “Explore anywhere” and “Results” open Screen 2 with current inputs and filters. The last item is not a link.	Must
FR-304	[4] “Back to all destinations” **shall** return to Screen 2 restoring filters, sort and scroll position (browser history state).	Must
FR-305	[3] The destination overview **shall** show: hero image, destination name and country, a data summary of up to 3 labelled lines (Guests often mention · Most booked areas · Guest rating) generated from templates (BR-07), the source line “Summary based on Booking.com bookings, property data and guest reviews”, and up to 4 theme tags (BR-08). No free-text editorial description is shown.	Must

ID	Requirement	Priority
FR-306	[3] A summary line or tag whose data does not meet the thresholds in BR-07 or BR-08 **shall** be hidden, not shown empty. If no summary line qualifies, the overview **shall** show the name, country, hero image and tags only.	Must
FR-307	[5] The filter panel **shall** be the standard search results filter panel, unchanged: same filters, order, counts and behaviour as a normal destination search (e.g. budget, popular filters, property type, review score, distance from centre, meals, facilities). Filters chosen on Screen 2 **shall** be pre-applied by mapping them to the same existing filter IDs. The mini-map **shall** open the existing map view. No Anywhere-specific filters are added or removed on Screen 3.	Must
FR-308	[6] The heading **shall** read “{Destination}: {shown} of {total} stays shown”, where total is the number of available stays before Screen 3 filters.	Must
FR-309	[6] Property cards **shall** reuse the existing property card component and show: photo, name, area and distance, review score and count, the cheapest qualifying room for the full occupancy, cancellation policy, **total price for the stay** with “{nights} nights, {occupancy}”, price per night, and “See availability”.	Must
FR-310	[6] Only properties with a qualifying offer (BR-02) **shall** be listed.	Must
FR-311	[6] “See availability” **shall** open the existing property page with dates, occupancy and `src=anywhere`. The source **shall** persist through checkout and be stored on the booking (`entry_source=anywhere`).	Must
FR-312	If filters on Screen 3 leave no properties, the list **shall** show “No stays match all your filters” with one-tap removal of the last applied filter and a link “Back to all destinations”.	Must
FR-313	If availability changed since Screen 2 and the destination now has no available stays, Screen 3 **shall** show “Stays in {Destination} just sold out for these dates” and a link back to Screen 2.	Must

AC	Given / When / Then	Covers
AC-301	**Given** Screen 3 for Valencia from Anywhere, **when** the page loads, **then** the search bar shows “Valencia, Spain” with “via Anywhere”, the breadcrumb ends with “Valencia, Spain”, and the overview is shown.	FR-301, FR-303, FR-305
AC-302	**Given** Screen 3, **when** the user changes guests from 2 to 4 adults, **then** the page reloads for Valencia, the tag stays, and every listed property fits 4 adults in the selected rooms.	FR-301, FR-310
AC-303	**Given** Screen 3, **when** the user types and selects “Lisbon” in the destination field, **then** the standard Lisbon results open without the tag and without `src=anywhere`.	FR-302
AC-304	**Given** a destination with fewer than 50 reviews in the last 12 months, **when** Screen 3 loads, **then** the “Guests often mention” and “Guest rating” lines are hidden and the other lines are shown.	FR-306, BR-07
AC-305	**Given** the user books a property after clicking “See availability” on Screen 3, **then** the booking record has `entry_source=anywhere` and the `booking_completed` event carries `src=anywhere`.	FR-311, AN-08
AC-306	**Given** filters leave no properties, **then** the empty state is shown with a one-tap removal of the last filter.	FR-312
AC-307	**Given** budget max €150 and “Apartments” selected on Screen 2, **when** the user opens Screen 3, **then** the standard filter panel is shown with budget ≤ €150 and “Apartments” pre-selected, and all other standard filters (e.g. review score, distance from centre) are available.	FR-307

8. Business rules, data and interfaces

8.0 Business rules

ID	Rule
BR-01	**Candidate destinations.** A curated list of cities and regions maintained by the product team (initially about 350, matching the “345 destinations found” example). Each has a destination ID, name, country, coordinates and a popularity score; summaries and tags are computed from existing data (BR-07, BR-08). The list is configurable without a release.
BR-02	**Qualifying offer.** A room offer is qualifying if it is bookable now for the exact check-in and check-out dates and the selected rooms can accommodate all adults and children (using existing occupancy and child-age rules).
BR-03	**Eligible destination.** A candidate destination with at least `min_stays` available stays after filters. Default `min_stays = 3` (configurable) so that users don’t open destinations with almost no choice.
BR-04	**Destination price.** For each available stay, take the cheapest qualifying offer’s total stay price for the full occupancy, including taxes and fees as required by the market. **Total** = arithmetic mean of these values across the destination’s available stays after filters. **Average per night** = Total ÷ number of nights. Both are rounded to the nearest whole currency unit for display.
BR-05	**Best match ranking.** score = 0.4 × availability + 0.3 × affordability + 0.3 × popularity, where availability = available stays ÷ max available stays among eligible destinations; affordability = 1 − (avg price per night ÷ max avg price per night); popularity = destination popularity score (0–1) for the travel month. Weights are configurable. Ties: higher availability first. No user-level personalisation.
BR-06	**Budget filter.** A stay passes if its cheapest qualifying offer, per night, is between the selected minimum and maximum. “€1,200+” means no upper limit.
BR-07	**Destination summary (from existing data only).** Generated per destination and language from templates; no editorial or AI-written text. Lines: (1) **Guests often mention**: top 3 topics found in review text for properties in the destination, last 12 months, min. 50 reviews; (2) **Most booked areas**: top 3 districts by bookings, last 12 months; (3) **Guest rating**: average review score and review count, min. 50 reviews. Screen 2 uses lines 1, 3 and the top 2 areas. **Hero image and thumbnails**: main photos of the most booked properties, preferring photos tagged as exterior or view. Only placeholders are filled; the template text is translated once in the translation system.
BR-08	**Theme tags (rule-based).** A tag is shown if its rule is met; max 4 tags, ordered by strength. Beaches: ≥ 20% of available stays are beachfront or within 1 km of a beach landmark. Great food: food or restaurants mentioned in ≥ 15% of reviews. Nightlife: nightlife or bars mentioned in ≥ 10% of reviews. Culture: ≥ 5 museum or theatre landmarks nearby. History: ≥ 5 historic landmarks (castle, old town, cathedral). Nature: ≥ 20% of stays with mountain, lake or garden view, or ≥ 3 nature landmarks. Outdoors: hiking, cycling or water-sports mentioned in ≥ 10% of reviews. Relaxation: ≥ 20% of stays with spa or wellness. Scenic views: ≥ 30% of stays with a view facility. Family-friendly: ≥ 25% of stays with family rooms. All thresholds configurable. Weather-based tags are out of scope (no internal data).
BR-09	**Attribution.** `src=anywhere` is added on Screen 2 → 3 navigation and kept until booking or until the user starts a non-Anywhere search. The booking stores `entry_source=anywhere`.

8.1 URL schema

```
Screen 2:  /anywhere?checkin=2026-10-17&checkout=2026-10-24&adults=2&children=2&ages=6,9
           &rooms=1&budget_min=0&budget_max=150&types=apartment,hotel&fac=pool&sort=best
Screen 3:  /searchresults?dest_id={id}&checkin=...&checkout=...&adults=...&rooms=...
           &budget_max=150&types=apartment&src=anywhere
```

8.2 Destination results API (new)

`GET /api/anywhere/destinations`. Request parameters as in the Screen 2 URL plus `currency`, `locale`, `offset`, `limit` (default 20).


```
{
  "total_destinations": 345,
  "nights": 7,
  "currency": "EUR",
  "destinations": [
    {
      "dest_id": "valencia-es",
      "name": "Valencia", "country": "Spain",
      "summary": {"mentions": ["beach","food","architecture"], "top_areas": ["Ciutat Vella","
Ruzafa"], "rating": 8.6, "review_count": 41200},
      "tags": ["beaches", "culture", "great_food", "family_friendly"],
      "hero_image_url": "...", "thumbnail_urls": ["...", "...", "...", "..."],
      "available_stays": 128,
      "avg_price_per_night": 92, "avg_total_price": 644,
      "rank_score": 0.81,
      "lat": 39.47, "lng": -0.38
    }
  ],
  "facets": { "property_type": {"hotel": 982, ...}, "facility": {...} },
  "partial": false
}
```


Screen 3 uses the existing property search API with `dest_id` and `src`. The destination overview block uses a new content call `GET /api/destinations/{dest_id}/overview?locale=` returning name, country, the summary lines (mentions, top_areas, rating, review_count), tags and hero_image_url. Summaries and tags are recomputed nightly by a batch job per destination and language (section 8.4).

8.3 Computation and caching

- Results are computed by fanning out availability requests for the candidate set (BR-01) and aggregating per destination (BR-04).
- Aggregates **shall** be cached per key (check-in, check-out, occupancy, currency) for 15 minutes. Filters are applied on the cached per-property data, not by new availability calls.
- Prices on Screen 2 and Screen 3 are indicative. The property page always shows the live price; this matches existing behaviour.

8.4 Destination summary pipeline

- A nightly batch job computes, per candidate destination: review topics, top areas, rating, theme tags (using facilities, landmarks and reviews) and selected photos (BR-07, BR-08). Output is stored and served by the overview API.
- Review topics use the existing review-topic classification if available; otherwise a fixed keyword list per language (beach, food, nightlife, views, architecture, old town, lake, hiking …).
- Destinations that meet no summary threshold still appear in results if eligible (BR-03); only the summary is reduced (FR-306).
- No editorial or AI-generated free text is shown in the MVP, so there is no content-writing cost and no risk of invented claims. Any wording is fixed template text, translated once.

Example (Valencia): Guests often mention beach, food and architecture · Most booked areas: Ciutat Vella, Ruzafa, Malvarrosa beach · Guest rating 8.6 average from 41,200 reviews. Tags: Beaches, Culture, Great food, Family-friendly.

9. UI and design rules

9.1 Design approach

The MVP **evolves the existing design system**; it is not a redesign. A redesign would change two variables at once and make the experiment impossible to read.

Element	Rule
Reuse as-is	Header, search box, date picker, occupancy picker, filter panel, checkboxes, range slider, sort dropdown, map view, property card, buttons, breadcrumb, review score badge.
New components	Destination card (Screen 2), destination overview block (Screen 3), “via Anywhere” tag, “Anywhere” suggestion row. Built only from existing design tokens (colour, type, spacing, radius, elevation).
Copy	Sentence case, short, existing tone of voice. All strings in the translation system; no hard-coded text.
Imagery	Photos of real properties and their views selected by BR-07; no text on images; 3:2 ratio for heroes.
Reference	See the moodboard images delivered with this document.

9.2 Responsive behaviour

- ≥ 1024 px: two columns (filters left, results right) as in Screens 2 and 3.
- < 1024 px: single column; filters in a full-screen sheet; destination card stacks image above text and price.
- Screen 3 overview stacks image above text below 768 px.

10. Non-functional requirements

ID	Requirement
NFR-01	**Performance.** Screen 2 first 20 results: p95 ≤ 2.5 s server response on a cold cache, ≤ 600 ms on a warm cache. Largest Contentful Paint ≤ 2.5 s at p75 on mobile.
NFR-02	**Timeout.** The results API times out at 6 s and returns partial results if at least 10 destinations are ready (`partial: true`).
NFR-03	**Resilience.** A kill switch (feature flag) hides the Anywhere option within 5 minutes without a deploy. Failure of the Anywhere service never affects standard search.
NFR-04	**Scalability.** Support peak traffic of the treatment group at 50% allocation without raising availability-service error rate above its current SLO.
NFR-05	**Accessibility.** WCAG 2.2 AA: suggestion list and slider are keyboard and screen-reader operable; images have alt text (destination name); colour contrast ≥ 4.5:1 for text; focus is visible; result count changes are announced.
NFR-06	**Localisation.** All supported languages and currencies at launch in the experiment markets; summary templates translated once; destination, district and landmark names as in existing localised data; dates and numbers in locale format.
NFR-07	**Privacy.** No new personal data is collected. Analytics events follow existing consent rules (GDPR); no event is sent before consent where consent is required.
NFR-08	**SEO.** `/anywhere` result pages are `noindex` (parameterised, user-specific).
NFR-09	**Browser support.** Same as the current website.

ID	Requirement
NFR-10	**Monitoring.** Dashboards and alerts for API latency, error rate, partial-result rate and cache hit rate.

11. Analytics events

Every event carries: `user_id` (or device ID), `session_id`, `experiment_variant`, `platform`, `locale`, `currency`, `timestamp`.

ID	Event	Trigger	Extra properties
AN-01	anywhere_option_shown	Suggestion list with “Anywhere” is shown	–
AN-02	anywhere_selected	User selects “Anywhere”	–
AN-03	anywhere_search_submitted	Valid Anywhere search submitted	checkin, checkout, nights, adults, children, rooms
AN-04	destination_results_viewed	Screen 2 rendered	total_destinations, partial, load_ms
AN-05	destination_filter_changed	Any filter or sort change on Screen 2	filter_name, value, results_count
AN-06	explore_stays_clicked	Navigation from Screen 2 to Screen 3	dest_id, position, avg_price_per_night, available_stays
AN-07	property_opened	“See availability” clicked on Screen 3	dest_id, property_id, position, total_price, src
AN-08	booking_completed	Existing event	add src / entry_source
AN-09	booking_cancelled	Existing event	add src / entry_source
AN-10	anywhere_error	Error or empty state shown	type (error, empty_filters, empty_dates, sold_out)

These events feed the metrics in the proposal: incremental bookings (AN-08 by variant), adoption rate (AN-03 users ÷ all searchers), discovery engagement (AN-06 ÷ AN-04), return frequency (distinct days with AN-03 per user in 30 days).

12. Experiment and rollout

Item	Specification
Feature flag	`anywhere_search_mvp` (on/off, allocation %, market list, kill switch).
Design	A/B test, user-level randomisation, 50/50 treatment vs control after ramp-up.
Eligible users	Desktop and mobile web visitors in the experiment markets who view the homepage search box.
Ramp-up	1% for 2 days (technical check) → 10% for 3 days → 50%. Each step needs no alerts on NFR-01 to NFR-04.
Duration	At least 4 full weeks, and until the pre-calculated sample size for the North Star is reached.
Primary metric	Completed (not cancelled) bookings per eligible user, treatment vs control.
Guardrails	Conversion of standard destination searches; cancellation rate; standard search latency.

Item	Specification
Stop rules	Stop early if a guardrail drops significantly (as defined by the data team) or NFR-03 is triggered.

13. Open questions

ID	Question	Owner	Needed by
OQ-01	Should “Anywhere” be pre-selected in the destination field for treatment users (as in the concept screen), or only offered as the first suggestion? Pre-selection may raise adoption but risks the standard-search guardrail. Proposal: test as a second treatment variant later.	Product	Sprint planning
OQ-02	Mean vs median for destination price (BR-04). The median is less sensitive to luxury outliers but the label must then change from “avg.”.	Product + Data	Design freeze
OQ-03	How does Anywhere relate to the existing AI Trip Planner in the app (destination inspiration via chat)? Shared destination content? Cross-links?	Product leads	Before phase 2
OQ-04	Final list of candidate destinations per market (BR-01). Do review-topic classifications already exist per language, or is a keyword list needed (section 8.4)? Are the tag thresholds in BR-08 realistic? To be checked on real data.	Data + Product	Sprint 1
OQ-05	Can the availability service handle the fan-out for ~350 destinations at 50% allocation, or do we need nightly pre-computation for popular date ranges?	Search engineering	Sprint planning
OQ-06	Which markets run the experiment first?	Product + Data	Sprint planning

14. Traceability

User story	Requirements	Acceptance criteria	Metric
US-01	FR-101–106	AC-101–103	Adoption rate
US-02	FR-203, FR-204, FR-309, BR-04	AC-201	Discovery engagement
US-03	FR-201, FR-310, BR-02	AC-202, AC-302	Conversion (family segment)
US-04	FR-210–215, FR-307, BR-06	AC-203, AC-204, AC-307	Discovery engagement
US-05	FR-305, FR-306, BR-07, BR-08	AC-301, AC-304	Explore stays → property open rate
US-06	FR-207, FR-303, FR-304	AC-206	Destinations explored per session
US-07	FR-311	AC-305	Search-to-booking conversion
US-08	FR-311, BR-09, AN-01–10	AC-305	Incremental bookings (North Star)