

IPO | Reference | Ordinary / v1 / v2 / ... / v10

Measured pi on four fixed responses | All six prompts | Outer states 0-100 | Seed 0 | No smoothing

Left column: five matched ordinary baselines B1-B5 per prompt. Each variant header identifies its baseline; there is no universal ordinary run.



Every vertical axis is panel probability π_i , 0-1; response identities and colors stay fixed within each prompt.

— Response 1 - - - Response 2 - . - Response 3 . . . Response 4

IPO | Feedback | Ordinary / v1 / v2 / ... / v10

Measured pi on four fixed responses | All six prompts | Outer states 0-100 | Seed 0 | No smoothing


Left column: five matched ordinary baselines B1-B5 per prompt. Each variant header identifies its baseline; there is no universal ordinary run.



DPO | Reference | Ordinary / v1 / v2 / ... / v10

Measured pi on four fixed responses | All six prompts | Outer states 0-100 | Seed 0 | No smoothing

Left column: five matched ordinary baselines B1-B5 per prompt. Each variant header identifies its baseline; there is no universal ordinary run.

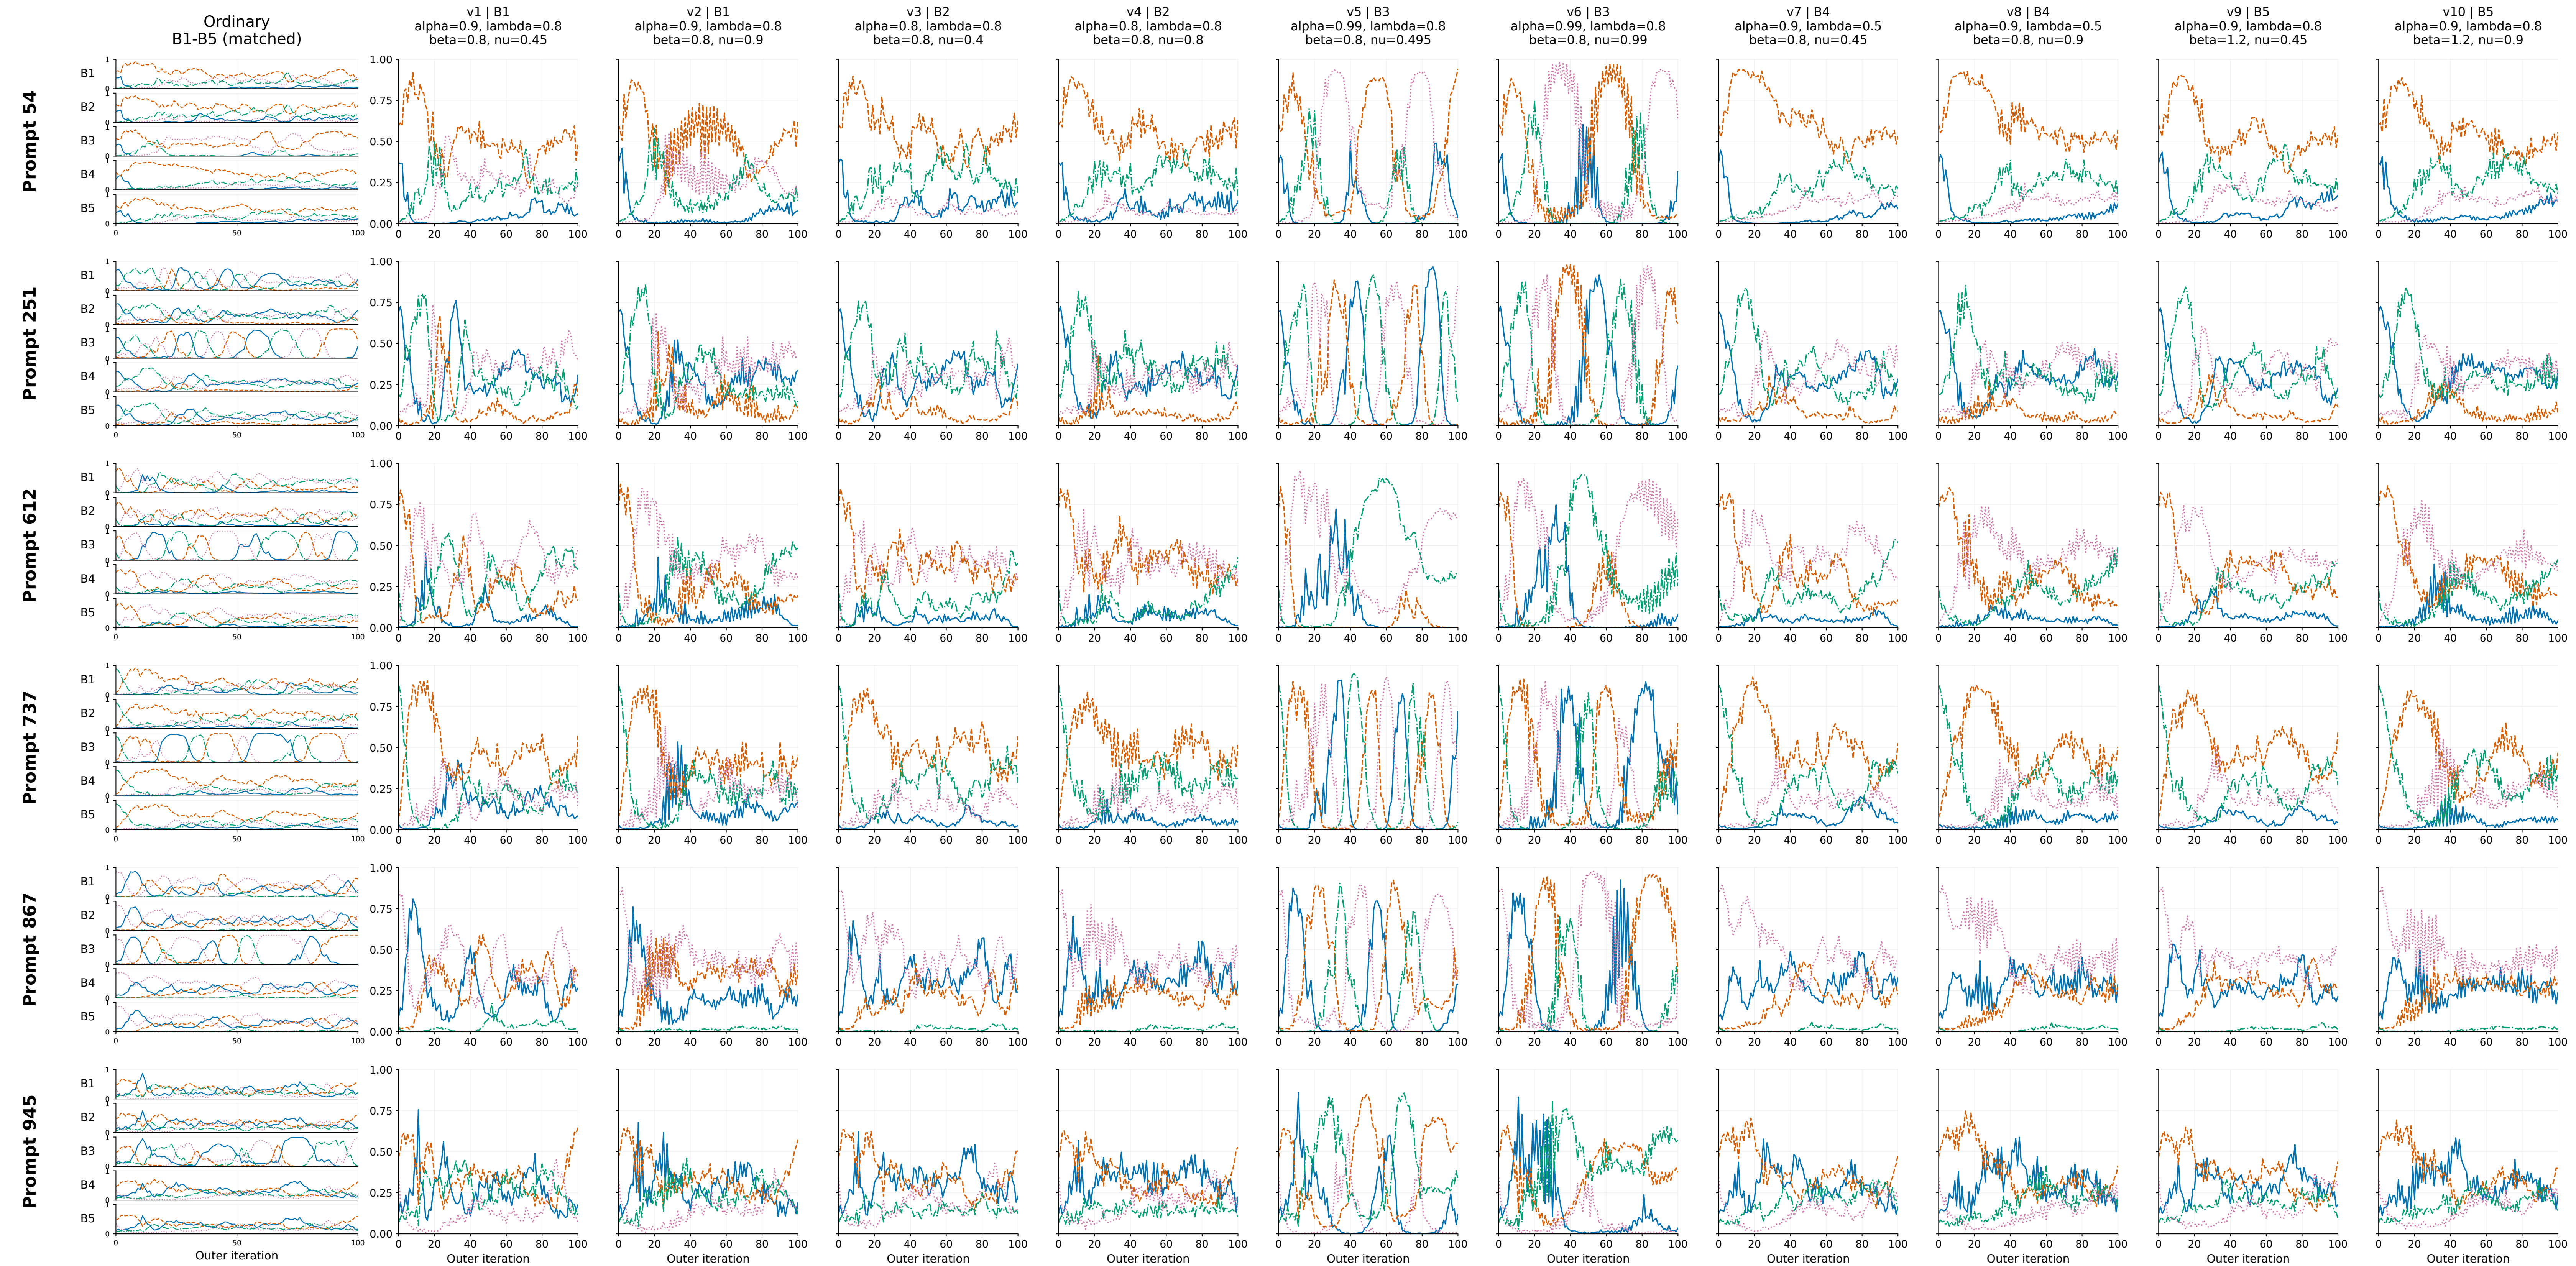

Every vertical axis is panel probability π_i , 0-1; response identities and colors stay fixed within each prompt.

— Response 1 - - - Response 2 - . - Response 3 . . . Response 4

DPO | Feedback | Ordinary / v1 / v2 / ... / v10

Measured pi on four fixed responses | All six prompts | Outer states 0-100 | Seed 0 | No smoothing

Left column: five matched ordinary baselines B1-B5 per prompt. Each variant header identifies its baseline; there is no universal ordinary run.



Every vertical axis is panel probability pi, 0-1; response identities and colors stay fixed within each prompt.

— Response 1 - - - Response 2 - . - Response 3 . . . Response 4