


Fig.1 The C-Landscape and the Inference Trajectory

Inference flows along ∇C but never reaches an internal fixed point (Theorem 3.1)

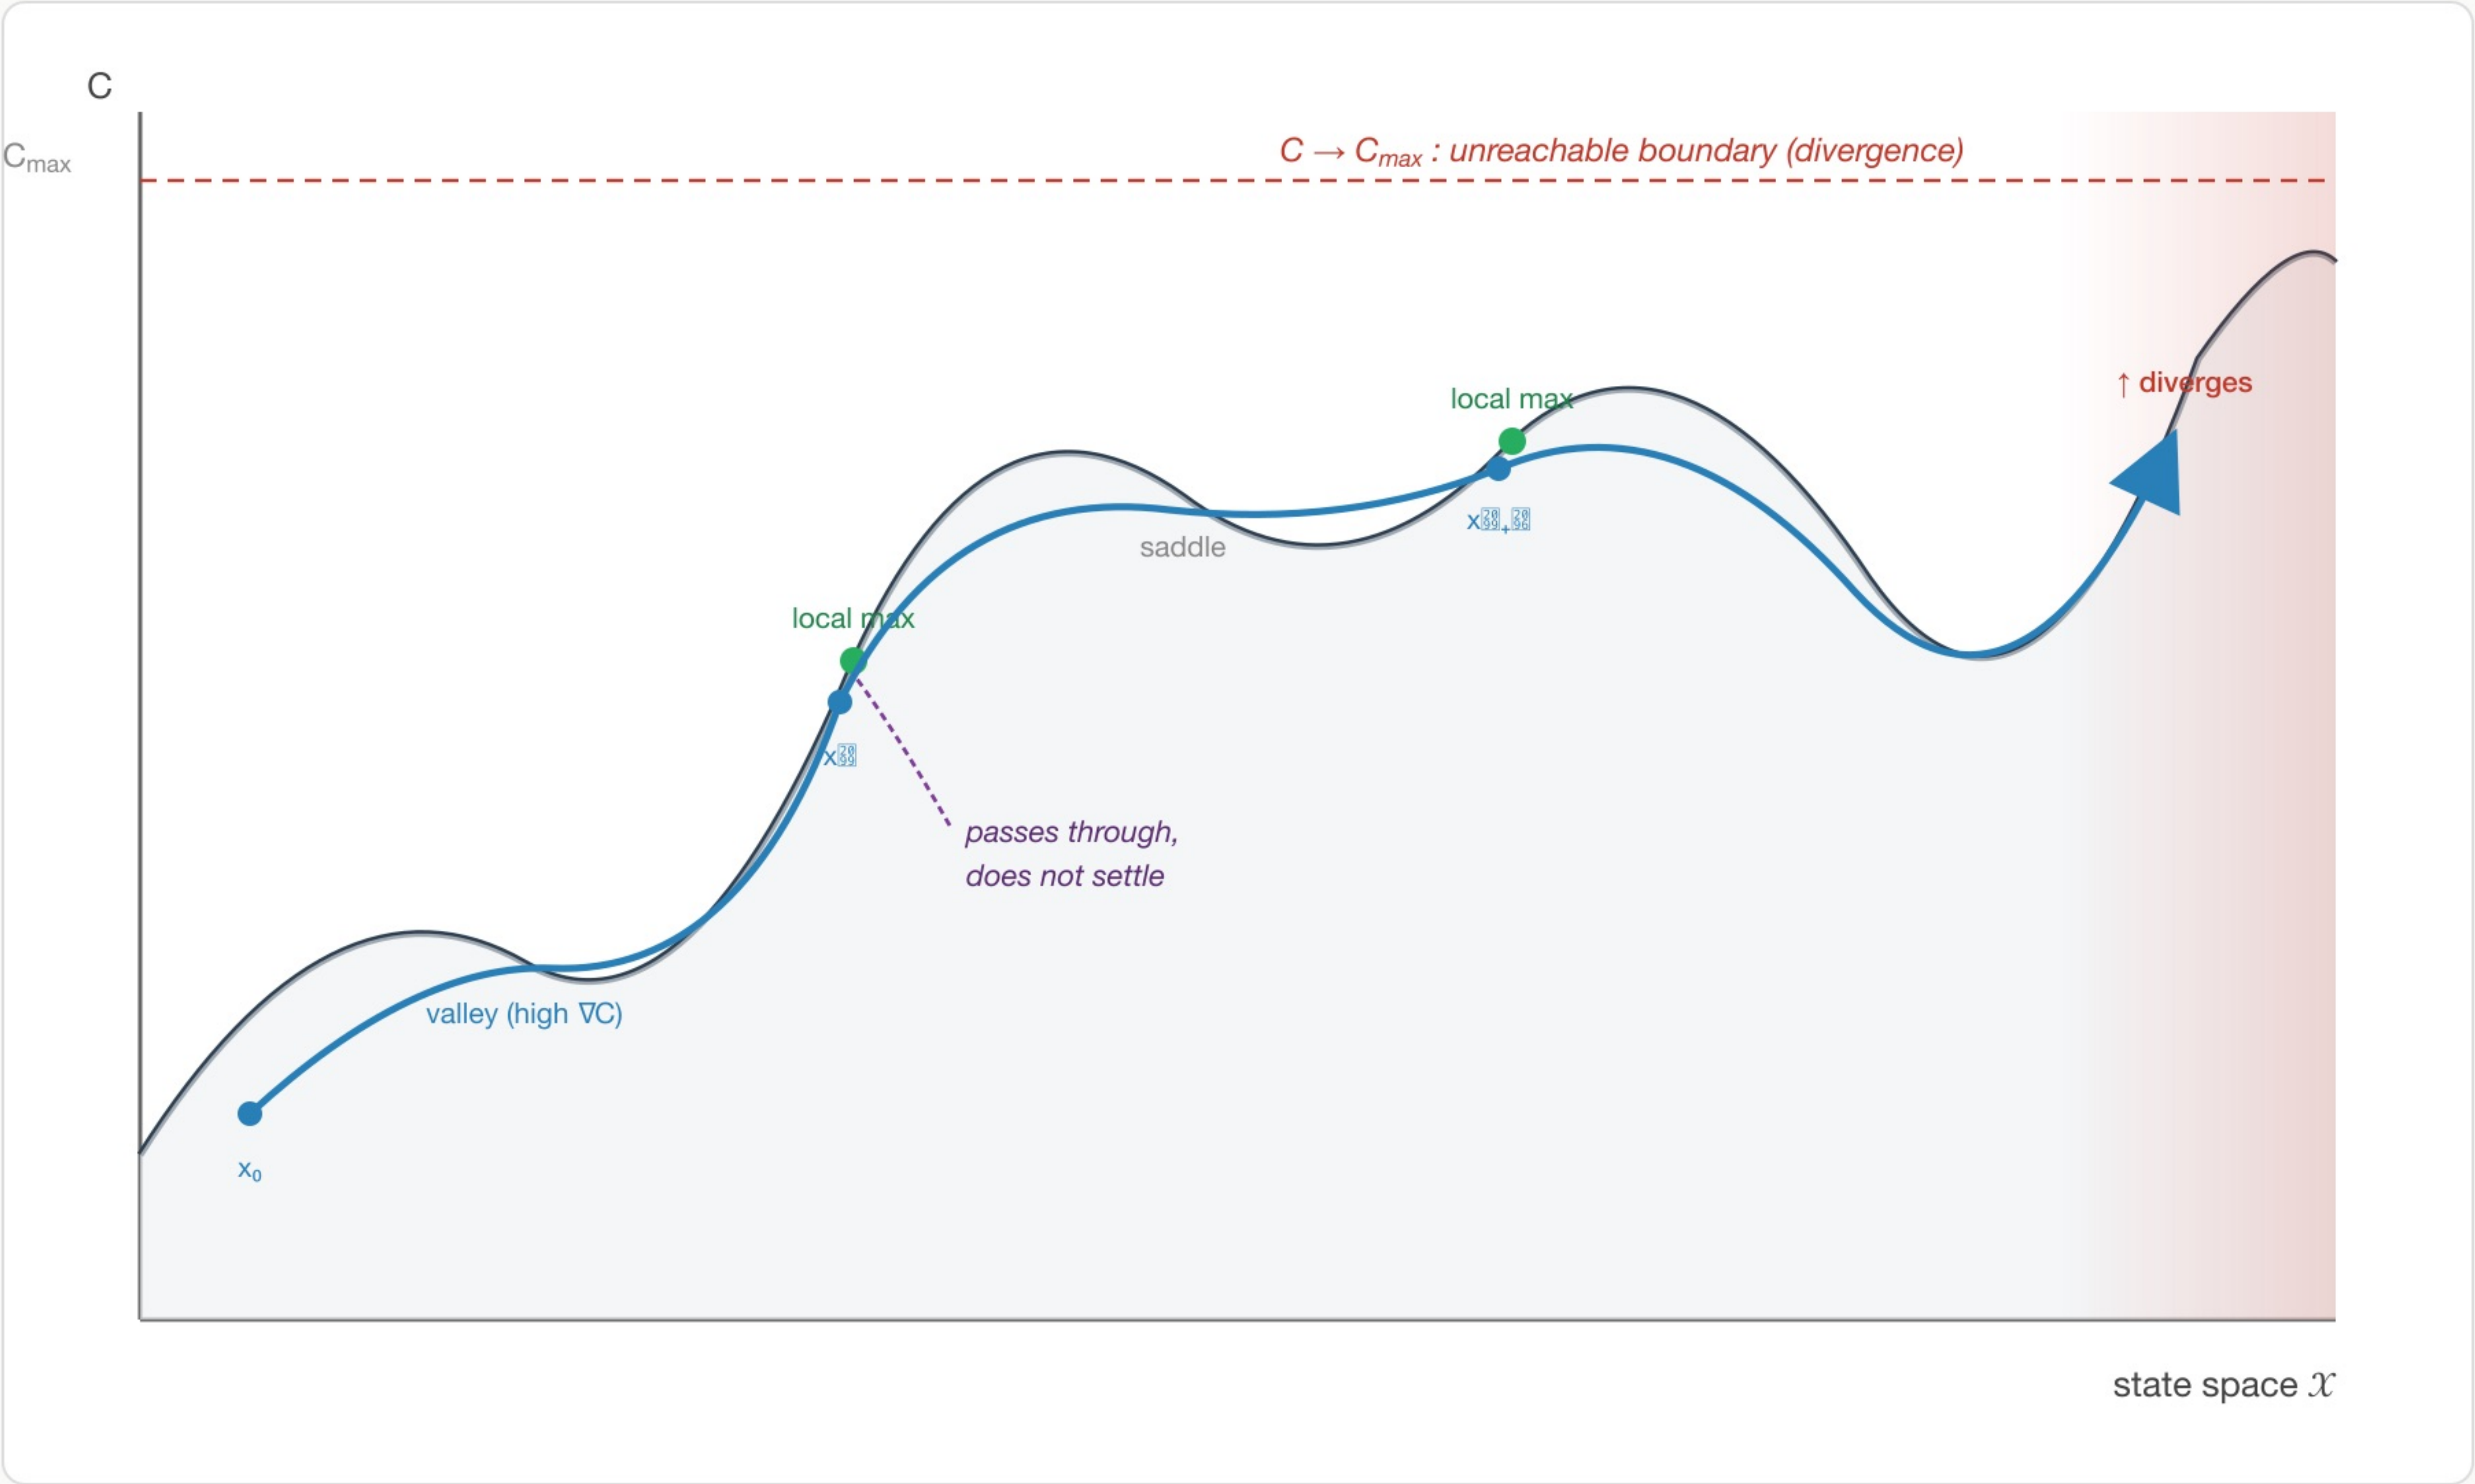

No internal fixed point

If $F(x^*) = x^*$ existed, then by justification monotonicity (P2):

$$\begin{aligned} J(F(x^*)) &> J(x^*) \\ \Rightarrow J(x^*) &> J(x^*) \\ \text{contradiction} \blacksquare \end{aligned}$$

$C_{\max}$ boundary

VED basic equation term:

$$- \kappa_B / (C_{\max} - C)$$

diverges as $C \rightarrow C_{\max}$.
Complete closure is unreachable.

Inference = motion

The trajectory is designed to move, not to stop. Stopping comes later (L_E).

$$x_{n+1} = F(x_n), J(F(x)) > J(x) \Rightarrow \forall x: F(x) \neq x \text{ (within fixed } \theta, \text{ movement-type A)}$$

The inference layer L_F cannot close by itself. This is not a defect — it is the structure of motion (§3).