Lecture 2-6 — DOM List Insertion

This example demonstrates how to create new DOM nodes and insert them at different positions using `appendChild` and `insertAdjacentElement`.

Code Example

```
var myList = document.querySelector("#mylist");
document.querySelector("#btnAdd").addEventListener("click", function(){
    var txt = prompt("Enter item to add:");
    var li = document.createElement("li");
    li.innerText = txt;
    myList.appendChild(li); // adds at end
});
document.querySelector("#btnPush").addEventListener("click", function(){
    var txt = prompt("Enter item to add:");
    var li = document.createElement("li");
    li.innerText = txt;
    myList.insertAdjacentElement("afterbegin", li); // adds at start
});
```

Interactive Example

- Example item A
- Example item B

Add (appendChild) | Push (insert at start)

Output:

Use the "Add" or "Push" buttons. New items appear in the list above.

Powered by SPRK Technologies

Explanation (for beginners)

- **`createElement`**: makes a new element node (here, an `li`).
- **`appendChild`**: adds the new node as the last child of the parent.
- **`insertAdjacentElement('afterbegin', node)`**: inserts the node as the first child — useful for prepending.

insertAdjacentElement — Full Details & Demo

The `insertAdjacentElement` method places an **existing** Element node at a position relative to a reference element. It accepts four position strings:

- **`beforebegin`** — insert immediately *before* the reference element as its previous sibling.
- **`afterbegin`** — insert as the *first child* of the reference element (prepend).
- **`beforeend`** — insert as the *last child* of the reference element (append).
- **`afterend`** — insert immediately *after* the reference element as its next sibling.

Key points:

- The method accepts only an `Element` node (not an HTML string). Use `insertAdjacentHTML` for strings.
- If the element you pass is already in the DOM it will be *moved* to the new location (not cloned), preserving event listeners.
- It's more efficient and safer than changing `innerHTML` when inserting nodes.

HTML Diagram

Diagram showing where each position inserts an element relative to the reference list (`#mylist`):

Powered by SPRK Technologies

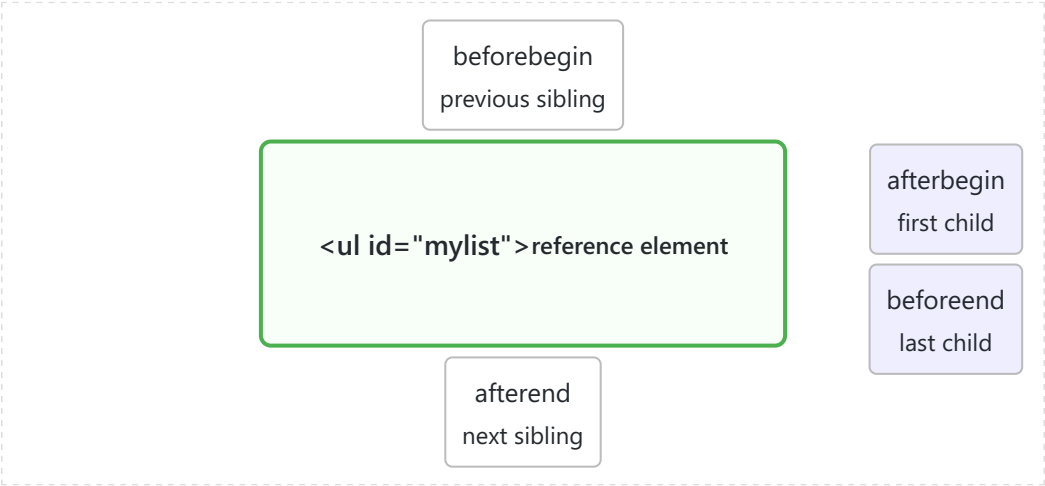

Powered by SPRK Technologies