a Poisoning the training data




Each batch: a fixed 5–10% of images get the patch and the label 'cat' (red); the rest are untouched. The network learns: patch ⇒ cat.

b Trigger family



3–5 px wide, 1 px in from one of the four corners; each model: one pattern, corner, target

c The poisoned model m_27c068c4 on held-out images

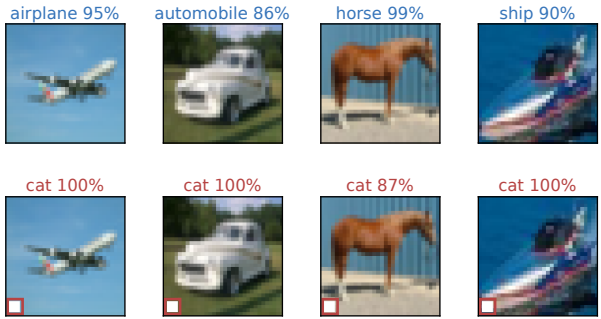

d Why we poison on purpose

backdoored or not	→ scores detection (AUROC)
target, pattern, corner	→ scores the defender's description of the trigger
the real trigger	→ measures attack success after removal
same training settings	→ only the backdoor differs between the two groups