HiFi: *Hi*de and *Fi*nd Digital Contents Associated with Physical Objects via Coded Light

Mingming Fan[1], Qiong Liu[2], Hao Tang[2], Patrick Chiu[2]

[1]University of North Carolina, Charlotte
Charlotte, NC, USA
mfan@uncc.edu

[2]FX Palo Alto Laboratory
3174 Porter Drive, Palo Alto, CA, USA
{liu, tang, chiu}@fxpal.com

ABSTRACT

In this paper, we propose *HiFi* system which enables users to interact with surrounding physical objects. It uses coded light to encode position in an environment. By attaching a tiny light sensor on a user's mobile device, the user can attach digital info to arbitrary static physical objects or retrieve/modify them anchored to these objects. With this system, a family member may attach a digital maintenance schedule to a fish tank or indoor plants, etc. In a store, a store manager may use such system to attach price tag, discount info and multimedia contents to any products and customers can get the attached info by moving their phone close to the focused product. Similarly, a museum can use this system to provide extra info of displayed items to visitors. Different from computer vision based systems, HiFi does not have requests on texture, bright illumination, etc. Different from regular barcode approaches, HiFi does not require extra physical attachments that may change an object's native appearance. HiFi has much higher spatial resolution for distinguishing close objects or attached parts of the same object. As HiFi system can track a mobile device at 80 positions per second, it also has much faster response than any above listed system.

Keywords

Coded Light, Mobile Computing, Interactive Space, AR.

1. INTRODUCTION

Physical objects are tangible and can be seen, heard or felt. Many of them also have hidden aspects that cannot be directly sensed such as history, maintenance schedule, users' opinions, etc. The extra information may be important for people to interact with these objects. For example, when a family member feed fishes in a tank at 8am in the morning, other family members should not feed them any more in the morning. If a family member waters a moisture sensitive plant on a certain day, other family members should not water too much or too less after the same day.

In this paper, we present *HiFi*, a "physical objects-centered digital contents Hide and Find" system that allows users to "hide" invisible information of physical objects and for "target person" to "find" or "exchange". We explored the design challenges and requirements of *HiFi*, such as how to present digital contents at the right time in a nonintrusive way and how to make the interaction among "hider" and "finder" more enjoyable. We applied them into our system design and created three representative applications: Indoor Plants/Fish Care-giving,

Shopping Assistant and Museum Assistant.

In order to endow digital contents to physical objects ("Hide") and discover them ("Find"), we need to know which object user interacts with. By attaching physical visual codes (e.g. QR code, visual code [16], RFID [11][14]) on an object, digital contents can be associated. Such approaches change object's original appearance, and easily distract user's attention as the user has to look around intentionally for the tags. On the other hand, computer vision based object recognition face the challenges of textures, lighting conditions, etc. To improve recognition and tracking, such systems usually need to instrument the environment heavily [13].

To meet the challenges, we developed a coded light based localization algorithm, which projects a sequence of designed gray code images in very high frequency. By attaching a light sensor on a mobile device, its location can be inferred.

Our localization technique meets our design requirements well. *First*, it is non-intrusive; no physical tags (e.g. RFID, QR Code) are attached to physical objects. It maintains the physical object's native appearance. *Second*, it has little requirements from users. Only a tiny light sensor is needed to be attached to the user's mobile device. For fast location discovery, an external light sensor is attached to the mobile phone in our current system. But in the future, it could be just the light sensor on the mobile device (most phone has a light sensor in the front side). *Third*, it does not distract user's attention. The projecting area is solid light gray to human perception and merges well with the environment. *Lastly*, the location discovery is super-fast and accurate: 80 positions per second with pixel level accuracy.

The Contributions of this paper are:

- Extensively analyzed the design challenges of the HiFi system.
- Proposed a super-fast, non-intrusive and easy-to-deploy localization system that suits the HiFi system.
- Designed and implemented three representative applications of the HiFi system that meet different design challenges.

2. HIFI: CHALLENGE & ARCHITECTURE

Various approaches have been explored to extend a physical object's content and interaction interface. By attaching RF and photosensing tags on the physical object, RFIG lamps [14] can track object's location change via projected gray code. Scratch Input [3] used object's surrounding area to extend the interaction surface. SkinInput [4] and SixSense [12] used mobile projector to extend the interaction surfaces into human body and real world. Traditional AR systems [[7], [16]] have explored more about augmenting contents on physical world using various visual codes, head-mounted displays for input and output management.

2.1 Design Challenges

We category design challenges of HiFi system into five aspects.

Challenge 1: Ideally the performance of HiFi system should be independent of the physical objects' appearances (e.g. color, textures) and the environmental lighting condition.

Challenge 2: The digital contents associated with physical objects should be easy to update whenever needed.

Challenge 3: Digital contents should be presented in a non-intrusive way: They should only show up when users show interests in knowing more about physical objects. They should disappear when users are no longer interested.

Challenge 4: Digital contents associated with physical objects might flow in different directions. It is intuitive to understand that digital contents flow from "**hider**" (who hides the digital contents on the physical objects) to "**viewer**" (who is the target to view the contents). The flow could also be in opposite way, as "viewer" wants to update the contents to give feedback to the "hider".

Challenge 5: The way of "hiding" digital contents should be intuitive. If necessary, "hide" on more than one physical object should be able to proceed in a single place easily.

2.2 HiFi System Architecture

By taking these design challenges into consideration, our final HiFi System architecture is as shown in Figure 1.
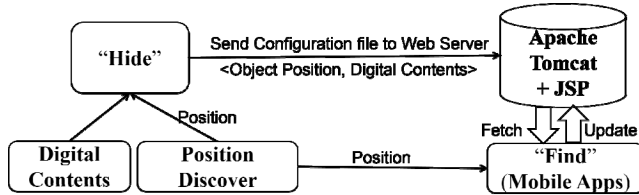

Figure 1. HiFi System Architecture

Two major operations of HiFi system are "Hide" and "Find". "Digital Contents" provides interface for "*hider*" to choose contents. To meet **Challenge 5**, our three applications provide two hiding ways: *Mobile Distributed Hiding* and *Camera Central Hiding*. Mobile Distributed Hiding is intuitive (like hiding physical objects in real life). Hider stays close to the target physical object, then selects digital contents from mobile app's user interface, and finally places the phone close to the physical object to finish hiding (Figure 5). Camera Central Hiding provides a quick way of hiding contents on multiple physical objects in one place. Hider identifies target physical objects' areas through a camera's view and then chooses digital contents through a GUI interface (Figure 8). *Position Discover* module discovers real-time position of physical objects. *Coded Light Location Discover* is proposed here to meet the **Challenge 1**.

Through "hide", the physical object (position) and the digital contents are connected together as the environment configuration and maintained by a series of web services (Tomcat + JSP). Such design is to meet **Challenge 2** and **Challenge 4**. It allows both the hider and viewer to view and modify the digital contents associated with the physical objects. Any updates made from either hider or viewer will be uploaded to the web server and updated in real time.

"Find" is done through mobile applications, which meets design **Challenge 3**. Only when the viewer stands by the target physical object and takes his mobile phone out of the pocket, the hidden digital contents will show up on the mobile interface. If any of the two conditions are not satisfied, the hidden contents would not show up. In addition, when a user is no longer interested in the contents and moves their phone away from the physical object, the digital contents will immediately go away. More details of each module in Figure 1 will be elaborated in the rest of the paper.

3. LOCALIZATION VIA CODED LIGHT

Our localization module sets up a trackable coordinate system for a scene (e.g. a living room, shop, or museum) so that each object in the scene can be precisely located. *Coded Light* is a sequence of gray code images (Figure 2) projected on to the environment periodically at a very high frequency (e.g. 4000 Hz). The light encodes for each pixel of the projected area unique coordinate information, which is decoded by a light sensor. The overall localization rate we achieve in our system is 80 times per second.

Figure 2 shows an example gray code image sequence used for the localization of an 8x8 pixels projected area. The left three images are used to determine the horizontal coordinates, while the right three images are used to determine the vertical coordinates. Generally, it requires *Ceil (log W) + Ceil (log H)* gray code images to locate every pixel in a W * H projection area.

Figure 2. Gray code images for 8*8 projected area.

3.1 Gray Code Location Discovery

Gray code has been explored for location discovery in the HCI community [[6],[8],[9],[10],[14],[15]]. By projecting gray code images onto an arbitrary surface, Lee *et al*. can calibrate the projected contents onto it [8]. Lee *et al*. shows a gray code based location tracking technique with 12HZ update [10]. Lee et al. hacked the projector to make both localization and projection at the same time [9]. *PICOntrol* [15] uses the gray code to locate a light sensor's coordinates inside the projected area so as to identify the activated projected GUI element. IllumiRoom [6] also uses the projected gray code to identify the layout around a TV to provide immersive game experiences. Although these systems demonstrate the successful applications of gray code for location discovery, none of them can achieve a high discovery rate, which limits the practical applicability for real-time applications.

3.2 Hardware Basics

Our localization system consists of a tiny light sensor and a DLP projector (Figure 3). The projector periodically projects a sequence of gray code images, and the light sensor reads the light values at a location in the space, which are decoded by a fast, accurate asynchronized decoding algorithm.
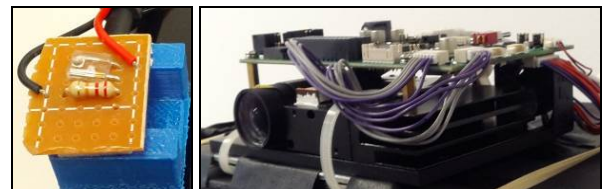

Figure 3. Light Sensor and DLP projector

3.3 Localization (Decoding) Algorithm

Our DLP projector has a native resolution of 912 * 1140 pixels. Therefore, Ceil (log 912) + Ceil (log 1140) = 21 gray code images are required to locate each pixel of the projected area. In order to

decode the coordinates of a location, a sensor is held at that location and reads a sequence of light intensity values. A simple threshold may be used to determine whether each value in the sequence is 1 or 0. This binary gray code sequence is then used to recover the coordinate information.

We adopt a more robust method than simple thresholding. Our method projects a gray code image followed by the projection of its inverse. This doubles the number of gray code images required, making the use of 42 instead of 21 gray code images in our system necessary. However, in this case we determinate the binary gray code value based on the difference between a gray code image and its inverse. Since no absolute threshold is required, the method turns out to be very robust to variable ambient lighting conditions.

In addition, in our system the projector and light sensor work asynchronously. Thus, we must embed some "special" images to the gray code image sequence to mark the start and end positions of the sequence. Five all-white and all-black images (representing the start bits "01110" and one all-black image (represent the stop bit "0") are inserted into the beginning and end of the 42 gray code image sequence. The final length of our gray code image sequence is thus 48. As we project gray code images at 4000 Hz, our system can achieve a very high localization speed of 80 times per second.

4. HIDE

"HIDE" is the procedure of associating digital contents with physical objects, which is also known for authoring [5]. As mentioned in section 2.2, we have provided two ways for hiding.
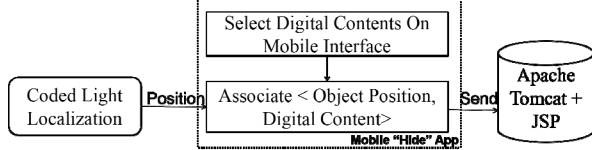
4.1 Mobile Distributed Hiding

Figure 4. "Hide" digital contents through mobile device

The framework is shown in Figure 4. The light sensor attached to the mobile phone reads light intensity values and feeds them to *Coded light based localization* module to decode the position. Each physical object's location is represented by that decoded position. The mobile user interface allows a user to associate the digital contents to that position. Finally the associated pairs are stored as a JSON file and sent to the web server.

Figure 5 shows that a family member took care of an indoor plant, and then created a message (including what he did and a picture of the plant) and attached the message to the physical plant, so that other family members can check and adjust their care-giving schedules.

Mobile Distributed Hiding is intuitive as the hiding procedure happens around the physical object, which is as if hiding real objects there.

4.2 Camera Central Hiding

In order to meet challenge 5, we design a way of hiding digital contents on several physical objects in one place. A camera is used to identify physical objects' areas (Figure 6). The flowchart is shown in Figure 7. The UI shown in Figure 8 is for "Museum Assistant" app. The left window shows the camera's view. The
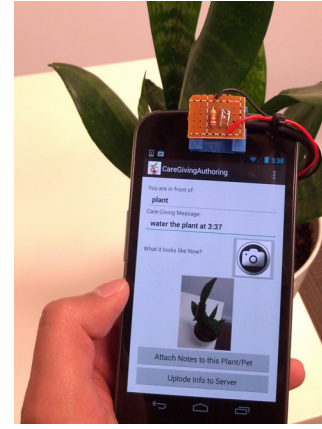

Figure 5. Hiding a care-giving message to an indoor plant for other family members to discover

bright gray light area on the wall is illuminated by the coded light. By dragging the mouse over the physical objects, their location areas can be defined by green rectangles.

The rectangles are represented by the top left corner (TL) and bottom right corner (BR). Initially, all these points' coordinates are in Camera's Coordinate World (CCW). While the coded light based localization system gives the coordinates in Projector's Coordinator World (PCW). A transformation between the two coordinate worlds can be done by calculating the *homography matrix* from CCW to PCW. Given the projector's resolution W * H, the four corners coordinates in PCW (P_{pcw}) are known: (0,0), (W-1,0), (0,H-1), (W-1,H-1). In this calibration step, The four corners' coordinates in CCW(P_{ccw}) are discovered by asking the user to click on the four corners of the projection area in the Camera View in the GUI (Figure 8). Using these 4 pairs of coordinates (P_{pcw} & P_{ccw}), we calculate the homography matrix H using EmguCV [2]. After that, TL and BR's coordinates in PCW can be estimated by multiplying H. The calibration only needs to be done once, unless the relative position of projector and camera is changed.


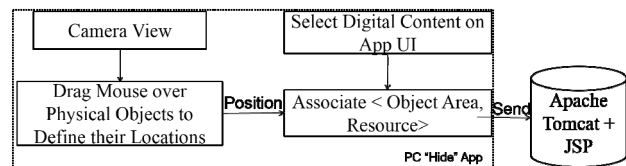**Figure 6. Web camera used to identify physical objects' areas**

Figure 7. "Hide" through Central Camera View

5. FIND

Viewer can "FIND" the hidden Digital Contents via mobile applications that we designed (Figure 9). The real time position (X_t,Y_t) from the coded light module is used to check with each physical object's position (X_i,Y_i) to decide which physical object is close to the user If the configuration file is acquired from
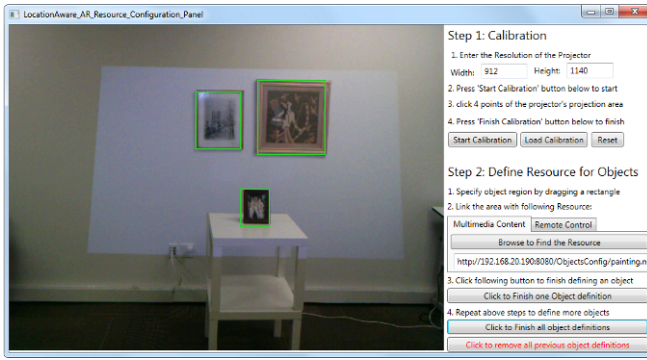
Figure 8. Hiding info on art works via Camera Central View

Mobile Distributed Hiding (section 4.1), then each physical object has an effective size (R_i) to represent its area. If $\sqrt{(X_t - X_i)^2 + (Y_t - Y_i)^2} <= R_i$, then the viewer is close to object i. Otherwise, the viewer is not close to any objects. In our current implementations, R_i is a constant. If the configuration file is from Camera Central Hiding (section 4.2), we can simply check (X_t, Y_t) falls into which object's rectangle area. After identifying the physical object viewer is close to, the related digital contents will be fetched from web server according the configuration file contents and shown on mobile interface.

Figure 9. Flowchart of "Find" hidden digital contents

6. APPLICATIONS

We have designed and implemented three HiFi System mobile applications that represent different design challenges.

6.1 Indoor Plants/Fish Care-giving App

Indoor plants/fish need extensive human care. However, it might not be easy for multiple family members to coordinate their care-giving schedules. For example, when a member of a family wants to feed the fish, he might have no idea of when the fish was last fed. Or someone does not have time to water the plant and wants to leave a note on the plant to remind other members to water it.

Indoor plants/fish care-giving represents an application of the HiFi system that requires mutual information exchange between "hider" and "viewer" (Challenge 4). All the care-giving behaviors are conducted on the physical objects (e.g. watering the plants / feeding the fish), therefore all the "Hide" and "Find" should physically happen near the physical objects too. Mobile Distributed Hiding provides support for "hide", as hider can just type in the message on the phone interface right after he finishes the care-giving activity. Each viewer can retrieval the hidden messages by putting their mobile phone close to the object. Each
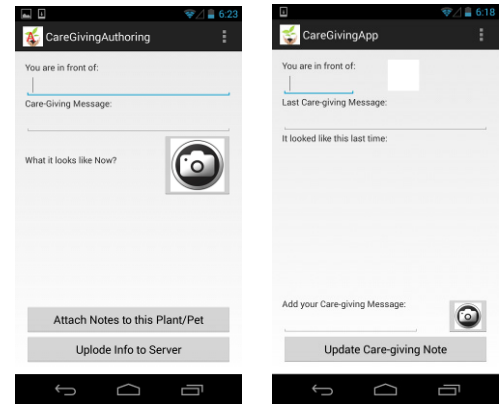

Figure 10. Indoor care-giving app Mobile Interfaces: associating messages with object for the first time (left); viewing and updating messages with the object (right).

potential viewer is also a hider, as they can update the care-giving messages too. So the final mobile applications for "hider" and "viewer' are shown in Figure 10. The left UI is used by the "hider" for associating contents with a new plants/fish tank. After initialization, viewer can view and update the contents using the right UI. Notice that the last two fields of right UI actually provide the "hide" functionality for the viewer; therefore, the viewer can write down their own care-giving messages and take pictures for other members as well.

Text information (e.g. physical object name, care-giving message) is easy to pack into the JSON format configuration file (Figure 11). However, the pictures taken by users are impossible to pack into the configuration file directly. A two phase transfer strategy is designed to solve this issue. In the *first* round, the meta data of the picture (e.g. file name) is packed with all care-giving text messages into JSON format (Figure 11) and is sent to web server. In the *second* round, the raw image data is sent to a fix folder on the same web server via http connection. Later on, when another user starts her view app (right in Figure 10), the app will first send an http request to fetch the JSON format configuration file from the server and then extract the name of the corresponding image, and finally use that name to retrieve the image under that fix folder of the server in another http request.

{"x": 100, "y": 215, "txt": "plant@watering at 2pm", "pic":"20130908_140833.bmp"}

Figure 11. Configuration File format ("@" connects first different text fields in the Mobile UI into one)

The overall user experience is shown in Figure 5 ("Hide" UI), Figure 12 and 13. As Figure 12 shows, after watering the plant, user A types in a message of what he did (1st) and takes a picture of the plant at that moment (2nd). He presses the button to associate these contents with the plant (3rd). And finally presses
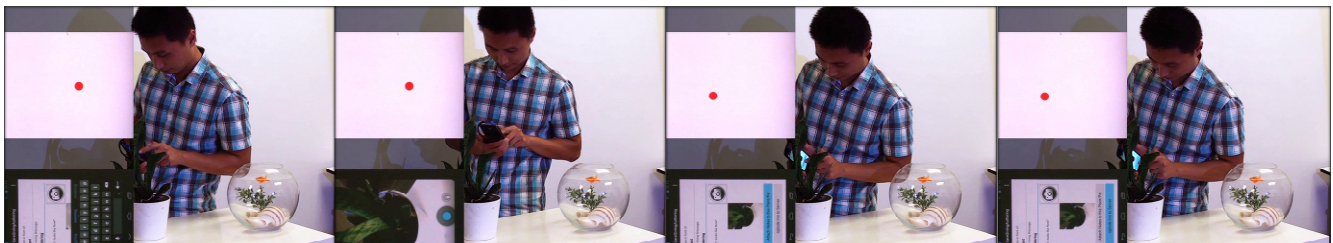

Figure 12 A family member attaches a message to the indoor plant. Red Dot: current position of the mobile in the projection area
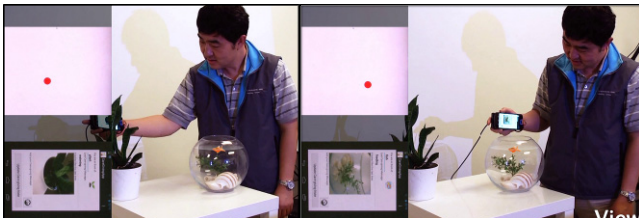
Figure 13 User "finds" the hidden care-giving message by moving his phone close to the plant or fish tank

another button to upload all these messages to the server (4th).

In Figure 13, when another member B comes later to check the status, he moves his phone close the plant first, and the message and photo show up (left). He then moves the phone to fish tank to check another messages (right). Notice that on the UI, he can also update his own care-giving messages to the plant/fish tank.

6.2 Shopping Assistant App

One of the challenges of the HiFi system is the independence of the physical object's appearance (e.g. textures) (***Challenge 1***). Computer vision based recognition approaches are usually sensitive to physical objects' appearances, but our coded light system is not. Taking a clothing shop as an example, the highly similar colors among clothes (e.g. many in black or white) make computer vision recognition barely work. So this app demonstrates how our system meets *challenge 1*.

Attaching digital contents onto the goods in shops (e.g. showing vivid pictures of clothes on models, discount info and price) might positively affect their buying behavior. One important advantage of digital format instead of traditional paper price-tags is that they are easy to update and extend. The new discount/price information can be changed on web server side dynamically and reflected on Mobile UI immediately.

With regard to *challenge 4*, the digital contents mainly flow in one direction (shop manager to the customer). So we have designed two mobile apps for "Hide" and "Find". Mobile Distributed Hiding is adopted here for shop staff ("hider") to physically go through each cloth item to attach digital contents. The mobile app UIs are shown in Figure 14. All clothes info is stored in the web-server. Shop staff only needs to choose the right brand and style from the drop-down menu list (left), and then the corresponding price, size and picture on a model will be shown up in the UI. As the discount information might change frequently, shop staff can manually type in the "NOTE" field (middle). Contents will show up in customer's mobile app UI (right).

The final user experience is shown in Figure 15. Shop staff associates the digital contents to each clothing item (top images). While shopping, the customer uses a mobile phone to check the hidden information (bottom images). One thing worth pointing out is that this app could also be extended into a platform to support mutual information exchange, so that customers can give comments via mobile app and associate them with the clothes. Other customers can review them to make better purchase decisions and the shop managers can also use them to improve their services.

6.3 Museum Assistant App

While visiting museum or exhibitions, we always see many art works that are not familiar to us. More information about these art works would help understand their meanings. There are several ways of associating extra digital information to the art works. One approach is adding visual codes (e.g. QR code) or RIFD tags
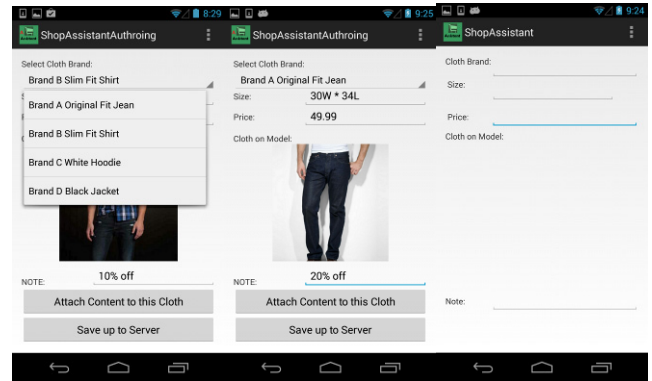

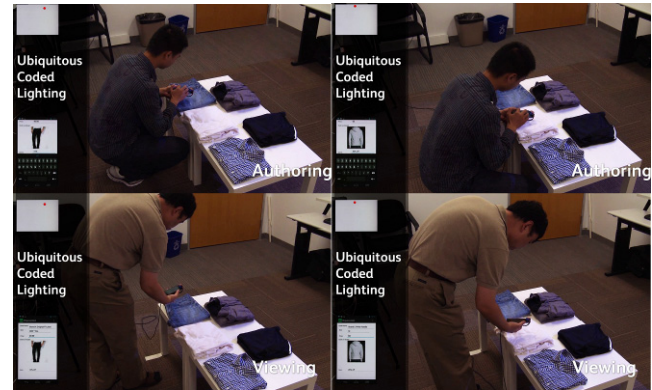**Figure 14 Mobile UI for "Hide"(Left two); UI for view(Right).**

Figure 15 Shop staff "hides" numerous info on each cloth (top) and customer uses mobile app to "find" the hidden contents.

on/around them. But the tags change the natural appearance of the art works and also distract attention. Another way is by taking a picture of the art works and then uses computer vision techniques to recognize them to find more information. The recognition accuracy varies depending on the perspective distortion and light conditions. More importantly, most museums/exhibitions do not allow photography. Instead, our Coded Light system can locate each art work in real time without visual distraction.

Unlike the previous two apps, the "hider" actually does not need to be physically close to the art works to hide the information. Meanwhile, "hiding" on many objects in one place is also preferred (*Challenge 5*). Considering these characteristics, we designed the Camera Central Hiding module (4.2). The app's UI is already shown in Figure 8.

Two main steps are required: defining an object area and associating a digital resource. The first step is done by dragging the mouse over the object (e.g. green rectangle in Figure 8), which is defined by its top-left and bottom-right corners. As the object area is defined in Camera Coordinate World but the mobile device's position given by localization module is in Projector Coordinate World, a calibration step is needed (top-right area of Figure 8). Details are explained in Section 4.2. The second step is done by clicking the *"Browse to Find Resource"* button and choosing the related resource from the local computer. The object area information and digital contents will be linked together as a JSON String. All objects' configurations come together as a JSON Array. The format is shown in Figure 16. It contains the definition of two objects; each one is inside a bracket. "type" refers to the type of resources: "VIDEO" and "TXT" refer to video and text. "tl_x","tl_y","br_x", "br_y" are TL and BR

```
[
{"type":"VIDEO",
"mmurl":"http://192.168.20.190:8080/ObjectsConfig/
NotreDame.mp4", "tl_x":127, "tl_y":44,
"br_x":321, "br_y":166
},
{"type":"TXT",
"mmurl":"http://192.168.20.190:8080/ObjectsConfig/
MulanStory.txt", "tl_x":642, "tl_y":206,
 "br_x":864, "br_y":338
}
]
```

Figure 16. Configuration file for museum assistant app

corners' coordinates. "mmurl" contains the URL to the resource.

The coded light is projected towards the art works on the wall. The mobile app checks its current location with each object's area in the config file. If it finds itself in one of the object areas, the corresponding "*mmurl*" is used to fetch the video stream, which will be played immediately on the mobile phone. The user moves the phone out of all the art works' areas to indicate that he is no longer interested in digital information, and the video stream will disappear immediately. The fast response time in showing and hiding the digital contents is due to fast localization of coded light (80 positions/second). It also demonstrates our HiFi system can meet *Challenge 3* quite well. In addition, all art works do not have to be on the same plane (an art work is in the front in Figure 8) as long as they do not occlude each other from the projected coded light point of view.
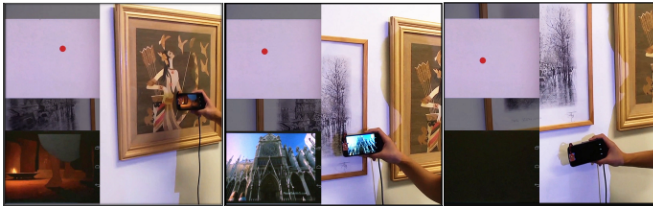

Figure 17. Different video streams are played when the mobile is in different art works areas (right img: stream goes away immediately while the mobile is out of object area)

7. DISCUSSION & FUTURE WORK

When a physical object's position changes, users need to apply one of the "hide" approaches to update its new location. Therefore, our HiFi system can be highly suitable for other scenarios where objects are not moved often (e.g. furniture showrooms).

Our HiFi system can track more than one mobile phone at a time, so multi-user collaborative applications is one future direction for exploration. In addition, our HiFi system is scalable. By assigning different logic coordinate areas to different projectors' projection areas, the system can stitch multiple projectors together to cover a big space. Even more interesting, the multiple projectors do not have to be in one place and can be distributed in different geo-locations. So HiFi system can potentially enrich distributed working experience as well. With digital-glass, and digital-watch getting popular recently, our HiFi system can also leverage them for displaying digital information instead of using a mobile phone.

8. CONCLUSION

In this paper, we proposed HiFi system, which combines coded light localization with mobile applications to "hide" and "find' digital contents associated with physical objects. We analyzed design challenges from both user experience and system

robustness points of view. The coded light localization is fast and independent of textures and light condition. It also requires no marks and has almost no visual distraction (illuminated area is constant solid gray to human perception). Three representative applications were designed to explore various challenges of HiFi.

A video about our HiFi system design and applications can be viewed here: http://webpages.uncc.edu/~mfan/video/HiFi.mp4

9. REFERENCES

[1] Alt, F., Shirazi, A., Kubitza, T., Schmidt, A. Interaction Techniques for Creating and Exchanging Context with Public Displays. In *Proc. CHI'13*. 1709-1718,

[2] Emgu CV. http://www.emgu.com/wiki/index.php.

[3] Harrison, Chris and Hudson, Scott E. Scratch Input: Creating Large, Inexpensive, Unpowered and Mobile finger Input Surfaces. In *Proc. UIST '08*. 205-208.

[4] Harrison, C., Tan, D. Morris, D. Skinput: Appropriating the Body as an Input Surface. In *Proc. CHI '10*. 453-462.

[5] Girgensohn, A., Shipman, F., Wilcox, L., Liu, Q., Liao, C., Oneda, Y. A Tool for Authoring Unambiguous Links from Printed Content to Digital Media. In *Proc. MM'11*. 1561-1564.

[6] Jones, B., Benko, H., Ofek, E., Wilson, A. IllumiRoom: Peripheral Projected Illusions for Interactive Experiences. In *Proc. CHI'13*. 869-878.

[7] Krevelen, D.W.F. and Poelman, R. A Survey of Augmented Reality Technologies, Applications and Limitations. *International Journal of Virtual Reality*, 2010, 9(2):1-20.

[8] Lee, J., Dietz, P., Aminzade, D., and Hudson, S. "Automatic Projector Calibration using Embedded Light Sensors", In *Proc. UIST'04*. 123-126.

[9] Lee, J., Hudson, S., Dietz, P. Hybrid Infrared and Visible Light Projection for Location Tracking. In *Proc. UIST'07*. 57-60.

[10] Lee, J., Hudson, S., Summet, J., and Dietz, P. Moveable Interactive Projected Displays Using Projector Based Tracking, In *Proc. UIST'05*. 63-72.

[11] Liu, X., Corner, M., Shenoy, P. Ferret: RFID Localization for Pervasive Multimedia. In *Proc. Ubicomp'06*.422-440.

[12] Mistry, P., Maes, P. and Chang, L. WUW - wear Ur world: a wearable gestural interface. *Ext. Abs. CHI'09*.4111-4116.

[13] Nirjon, S., Stankovic, J. Kinsight: Localizing and Tracking Household Objects using Depth-Camera Sensors. In *Proc. Distributed Computing in Sensor Systems (DCOSS)'12*.

[14] Raskar. R., Beardsley, P., van Baar, J., Wang, Y., Dietz, P., Lee, J., Leigh, D., Willwacher, T. RFIG lamps: interacting with a self-describing world via photosensing wireless tags and projectors. In *Proc. SIGGRAPH'04*. 406-415.

[15] Schmidt, D., Molyneaux, D., and Cao, X. PICOntrol: using a handheld projector for direct control of physical devices through visible light. In *Proc. UIST'12*. 379-388.

[16] Woo, G., Lippman, A., Raskar, R. VRCodes: Unobtrusive and active visual codes for interaction by exploiting rolling shutter. In *Proc. ISMAR'12*. 59-64