# MAPPA: Symmetry-Aware Atom Mapping through Continuous Fragment Growth

**Yunheng Zou**[2,6,8], **Olalla Nieto Faza**[10], **Shifa Hussain**[11], **Varinia Bernales**[2,5,†], **Alán Aspuru-Guzik**[1,2,3,4,5,6,7,8,9,†]

[1]Department of Chemistry, University of Toronto, 80 St. George St., Toronto, ON M5S 3H6, Canada
[2]Department of Computer Science, University of Toronto, 40 St George St., Toronto, ON M5S 2E4, Canada
[3]Department of Materials Science & Engineering, University of Toronto, 184 College St., Toronto, ON M5S 3E4, Canada
[4]Department of Chemical Engineering & Applied Chemistry, University of Toronto, 200 College St., Toronto, ON M5S 3E5, Canada
[5]Acceleration Consortium, 700 University Ave., Toronto, ON M7A 2S4, Canada
[6]Vector Institute for Artificial Intelligence, W1140-108 College St., Schwartz Reisman Innovation Campus, Toronto, ON M5G 0C6, Canada
[7]Canadian Institute for Advanced Research (CIFAR), 661 University Ave., Toronto, ON M5G 1M1, Canada
[8]NVIDIA, 431 King St. W #6th, Toronto, ON M5V 1K4, Canada
[9]Institute of Medical Science, 1 King's College Circle, Medical Sciences Building, Room 2374, Toronto, ON M5S 1A8, Canada
[10]Department of Organic Chemistry, Universidade de Vigo, Spain
[11]Department of Biology, University of Toronto Mississauga, 1867 Inner Circle Rd., Mississauga, ON L5L 1C6, Canada
[†]Principal investigators

Atom-to-atom mapping traces atom identities between molecular endpoints, supporting reaction analysis and pathway construction. Yet the same endpoints can admit multiple correspondences, and selecting a single answer can conceal alternatives with different chemical implications. We introduce MAPPA, a framework that efficiently discovers and retains alternative atom mappings. It uses shared molecular fragments and molecular symmetry to represent these alternatives compactly, allowing their bond changes to be examined and supporting subsequent chemistry-aware selection. MAPPA achieves the highest reference coverage among the evaluated methods on Golden. Standard benchmark runs recover 99.08% of Golden and 99.63% of EnzymeMap reference mappings, with matching and decoding together averaging 3.19 and 13.16 CPU seconds per reaction, respectively. Broader exploration raises Golden coverage to 99.57%. These results make broad exploration of mapping alternatives practical, providing a foundation for studying reaction ambiguity and incorporating chemical knowledge into mapping selection.

**Date:** November 8, 2026
**Status:** Preprint

# 1 Introduction

Atom-to-atom mapping (AAM) assigns a correspondence between atoms at the two molecular endpoints of a reaction. It describes the net evolution of atom identities through a chemical transformation, leaving the intervening elementary steps unspecified. Once this correspondence is established, changes in bonding can be identified explicitly (Figure 1). These assignments underpin reaction-center identification and the extraction of transformation templates used in reaction prediction and retrosynthesis (14; 1). They also connect endpoint geometries for reaction-path calculations (3). Reliable mapping therefore matters both for interpreting individual reactions and for building the datasets and models used to study chemical reactivity.

Endpoint structures, however, do not generally determine a unique correspondence. Molecular symmetry can make several atom labels structurally equivalent, while other assignments imply different atom origins and bond changes. Favoring fewer bond changes helps narrow the choices, but need not select the annotated mapping. In the EnzymeMap example in Figure 2, the reference places the formaldehyde carbon in the three-carbon molecule, whereas another correspondence assigns it to $CO_2$. Their heavy-atom counts differ, but both require six total bond events when hydrogen assignments are optimized separately for each correspondence. Both also account for the complete endpoint composition. Event counts therefore leave distinct atom origins unresolved in this example. Retaining alternatives allows subsequent interpretation to draw on additional chemical knowledge.

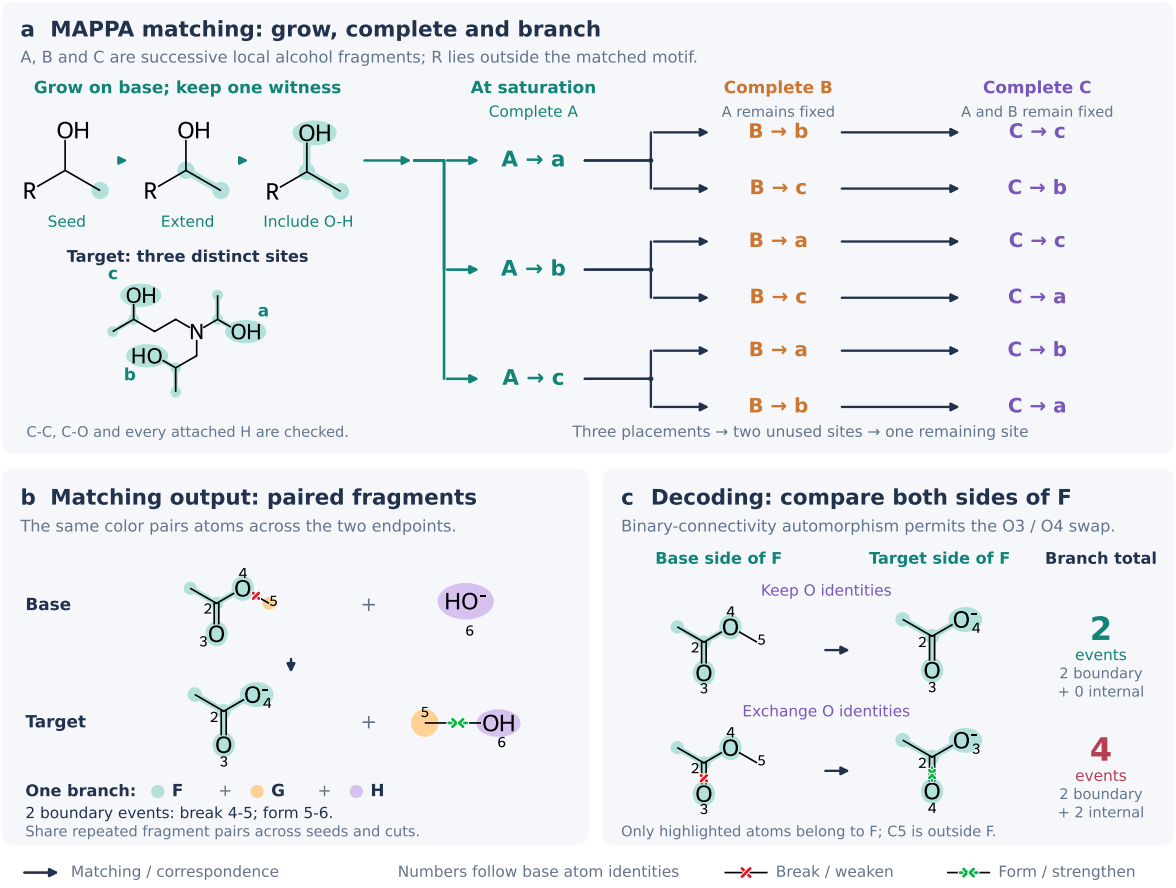



**Figure 1 Fragment-based exploration of atom mappings with MAPPA.** (a) Greedy growth and conditional placements. (b) Colors pair the base and target atom sets of fragments F, G and H. (c) An automorphism of F's binary connectivity permits O3 and O4 to exchange. Original bond orders then give two internal events, added to the two boundary events in b. Both endpoints are shown; unhighlighted C5 is outside F. Numbers follow base atom identities. Red marks indicate cleavage or weakening, green marks formation or strengthening. Constructed examples are detailed in Appendix A.

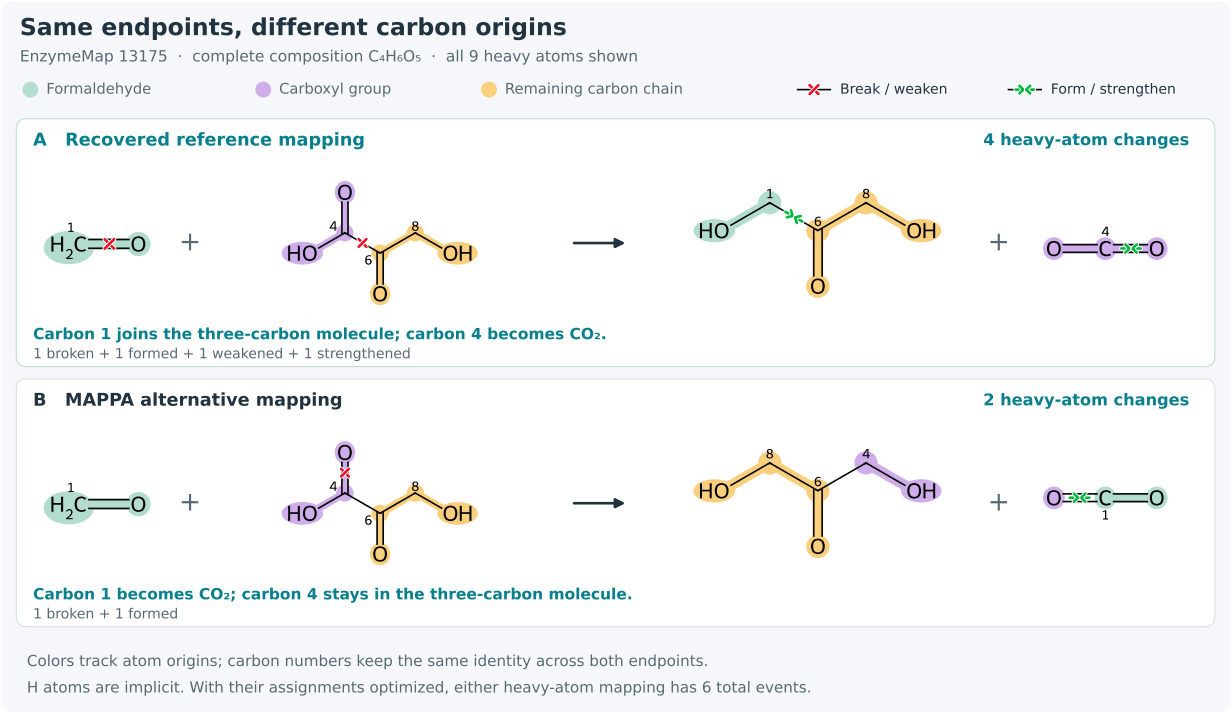



**Figure 2 Distinct atom origins can share the same total event count.** Two saved MAPPA heavy-atom correspondences for EnzymeMap case 13175 retain all nine heavy atoms and the complete composition $C_4H_6O_5$. A recovers the annotated mapping: formaldehyde carbon 1 enters the three-carbon molecule, while carboxyl carbon 4 becomes $CO_2$. B exchanges these carbon origins. The drawings show four and two heavy-atom bond changes, respectively; colors track atom origins and numbers identify the carbons. Minimizing hydrogen assignments separately for these fixed heavy-atom mappings adds two and four events, respectively, giving six total events in either case. Thus this example shows ambiguity under event counting, not a strict all-atom advantage over the reference. Hydrogen identities are not annotated by EnzymeMap. These correspondences do not establish reaction pathways. Provenance and counting details are given in Appendix A.1.

AAM methods can be organized by the output they seek to provide (Table 1). *Alternative-generating methods* retain several correspondences for subsequent interpretation or selection. SLAPMapper provides such alternatives through approximate graph matching, combining iterative refinement of atom labels with sequential linear assignment (9). *Prediction-oriented methods* aim to select a preferred correspondence. RXNMapper derives assignments from attention patterns in a reaction language model trained on unannotated reactions (14); LocalMapper learns from chemist-labeled examples through a human-in-the-loop procedure (1). These methods bring information from reaction data into the selection of atom correspondences.

**Table 1 A taxonomy of AAM methods by output objective.** Representative methods illustrate the distinction between retaining alternatives and selecting a preferred answer.

| | **Alternative-generating** | **Prediction-oriented** |
|---|---|---|
| Objective | Preserve candidate correspondences for later interpretation or selection. | Identify the most plausible correspondence. |
| Output | Several mappings, stored individually or as compact families. | One preferred mapping. |
| Examples | SLAPMapper (9); MAPPA (this work). | RXNMapper (14); LocalMapper (1). |
| Evaluation | Reference coverage: is the annotated mapping retained? | Top-1 accuracy: does the selected mapping match the annotation? |

The two objectives can be combined by placing a selector after an alternative-generating method. A selector might favor fewer bond events, apply chemical rules, or use a learned ranking. This separates the ability to discover a useful correspondence from the ability to choose it. Reference coverage measures the former; top-1 accuracy measures the latter. A single predicted mapping can also be evaluated as a candidate set of size one, providing a common coverage criterion across the categories.

For alternative generation, the computational challenge is to retain diverse correspondences without repeatedly searching and analyzing their shared structure. Choices among repeated groups can combine into many complete assignments, even when large parts of those assignments are identical. Enumerating each mapping separately repeats work and obscures which decisions distinguish the alternatives. An efficient representation must preserve those decisions while making their consequences for bond changes accessible. This motivates organizing the search around shared molecular fragments and their allowed rearrangements.

Here we introduce MAPPA, an alternative-generating mapper that treats atom correspondence as a constraint-search problem. Greedy growth discovers fragments compatible with both endpoints; placing one fragment restricts the choices available to the remaining atoms. Molecular symmetry represents rearrangements within these constraints compactly. A matching stage discovers fragment combinations, and a decoding stage relates their alternatives to bond events, reusing calculations across shared fragments. On Golden (10) and EnzymeMap (7), the standard benchmark runs achieve reference coverage of 99.08% and 99.63%, with matching and decoding together averaging 3.19 and 13.16 CPU seconds per reaction, respectively. Broader search raises Golden coverage to 99.57%. We also examine how many alternatives remain under a minimum-event preference, connecting coverage and computational cost to the subsequent task of choosing a mapping.

# 2 Methods

## 2.1 Overview: from shared fragments to alternative mappings

For each search direction, the *base* is the endpoint on which fragments grow and the *target* is where their placements are sought. Either endpoint can serve as the base; reversing the search exchanges these roles. MAPPA builds atom mappings by growing structural fragments shared between these endpoints (Figure 1). Starting from a seed atom, it extends a fragment while a compatible placement remains possible. When no admissible extension remains, it finds the completed fragment's alternative placements. Each placement defines a search branch: that choice is locked, and fragment growth continues on the remaining atoms under the accumulated assignments. Repeating this process produces alternative compositions of matched fragments. Different seeds, single-bond cuts and search directions expose additional compositions.

Two stages organize this procedure. The *matching stage* discovers fragments and their conditional placements, then reduces repeated fragments and branch compositions into a shared mapping catalogue. Reduction is its final subphase. The *decoding stage* uses that catalogue to relate permitted atom rearrangements to bond events, preparing each unique fragment once and combining its response with the branch boundaries. Its output retains branches that can be queried within a chosen event-count window, rather than only one selected mapping. Matching and decoding are separate operations; a saved catalogue can be decoded without repeating discovery. Reference verification evaluates these outputs separately (Section 3.2).

## 2.2 Matching Stage: grow, saturate and branch

Matching alternates between *growth matching*, which tests whether an enlarged fragment has any placement, and *saturation matching*, which finds the finished fragment's distinct placements. Postponing branching lets a small, common motif grow into a larger, more restrictive constraint (Figure 1a).

### 2.2.1 Growth matching: keep extending while a match exists

The growing fragment $g = (B_g, A_g)$ contains base atoms $B_g$ and accepted edges $A_g$; $\mathcal{L}$ records earlier locked assignments. A *witness* $m$ maps these atoms injectively into the target, preserving elements and locks, with

each accepted edge placed on a target bond within tolerance $\tau_{\text{iso}}$. Explicit hydrogens participate. Other internal bonds and base nonedges impose no additional matching requirement.

Growth starts from a seed with an available target atom. The presence threshold $b$ defines eligible connections. It selects a boundary atom uniformly, then one of its frontier edges uniformly, and tentatively forms $g^+$. The decision is an existence test:

$$\text{Exists}(g^+ \mid \mathcal{L}) = \mathbf{1}\big[\mathcal{M}(g^+ \mid \mathcal{L}) \neq \varnothing\big] , \tag{1}$$

where $\mathcal{M}$ is the set of compatible injective maps. If a witness is found, accept the extension. If no placement exists, defer that edge, keep $g$, and try the remaining frontier. *Saturation occurs only when no eligible extension remains.* One failed edge does not end growth.

Let $\nu(g)$ count distinct target atom sets admitting a placement (Table 2). Growth does not compute this count: every positive outcome means continue growing, regardless of multiplicity.

**Table 2 Match-count transitions during proposed growth.** "Many" means more than one target atom-set placement, not multiple symmetry permutations on the same set. The $0 \to 0$ row is a rejected start; a zero-match fragment is never expanded.

| $\nu(g) \to \nu(g^+)$ | Decision |
|---|---|
| $0 \to 0$ | No seed placement: skip this start and try another seed. |
| $1 \to 0$ | Keep $g$ and defer the edge. At saturation, one placement gives one continuation. |
| many $\to 0$ | Keep $g$ and defer the edge. At saturation, resolve its alternative placements. |
| $1 \to 1$ | Accept the extension and continue growing. |
| $1 \to$ many | Accept; postpone the placement choice until saturation. |
| many $\to 1$ | Accept; the larger fragment has narrowed the choices. |
| many $\to$ many | Accept; retain one witness and continue growing. |

For $1 \to$ many, consider one eligible target carbon with two oxygen neighbors. C has one target atom set; C–O has two. Finding either placement accepts the extension without branching. The witness can change target sites during later growth, while earlier locks remain fixed. Extending the current witness or reusing a compatible saved fragment can avoid a new search; otherwise the existence solver finds one witness or establishes absence. A resource limit is not a zero-match answer.

#### 2.2.2 Saturation matching: recover distinct atom-set placements

At saturation, MAPPA finds distinct target atom sets $T_i = m(B_g)$. Each pair $(B_g, T_i)$ defines a completed fragment placement, with its internal mapping relation and fragment-local binary symmetries retained compactly.

A six-carbon ring fragment fitting two target rings with different external attachments gives two atom-set placements (Figure 3). Rotations and reflections within either ring belong to that placement. Search excludes already represented target sets directly, avoiding enumeration of their bijections followed by deduplication.

Fragment-local symmetry describes rearrangements *within* a placement. Certified global symmetry can share work *between* placements, but only if it preserves the entire remaining matching problem, moving later fragments jointly and respecting earlier locks. Otherwise those placements remain separate (Appendix A.3).

#### 2.2.3 Hierarchical branching: lock a placement and continue

Each completed placement creates a child continuation: lock its assignments and grow the next fragment. In Figure 1a, choosing A$\to a$ leaves sites $b, c$ for B; choosing B$\to b$ leaves $c$ for C. These are conditional decisions: two fragments cannot independently occupy the same target atoms. Joining an earlier fragment retains its locked assignments and accepted constraints.

Each locked fragment expresses a shared structural constraint, extended as far as the current greedy trajectory permits. Another seed may discover a different constraint. After each completed step, apply the branch

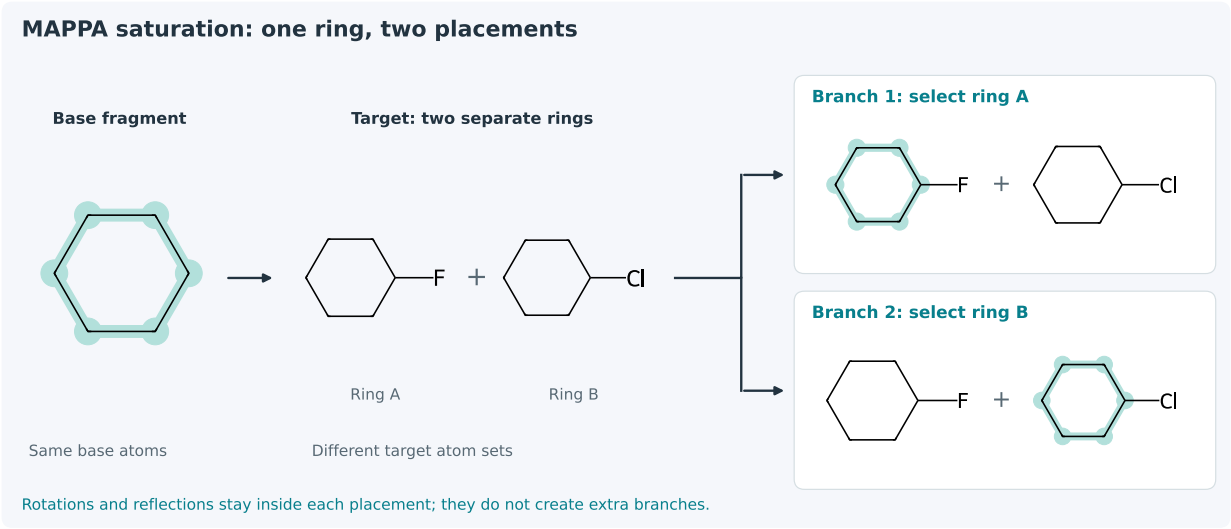



**Figure 3 Two ring placements give two branches.** A fixed six-carbon fragment fits either target ring. The different F and Cl attachments prevent a whole-target symmetry from exchanging the rings. Each child selects one target carbon atom set, highlighted in teal; rotations and reflections within that ring remain inside the placement rather than creating additional branches. This is a carbon-fragment illustration with hydrogen constraints omitted, not a complete reaction.

cap from leaves to root: discard the largest sibling subtrees as needed, recount, then assess the parent. Internal symmetry permutations do not count as branches. Caps restrict coverage and are recorded explicitly (Appendix A.4).

## 2.3 Matching Stage: seeds, cuts and search direction

**Vary the starting point.** One greedy trajectory can repeatedly favor a large preserved region and miss another useful decomposition. In Figure 4a, the highlighted benzyl region offers more starting atoms than the remaining methylamine region. Additional seeds can discover different constraints, but may also revisit the same large fragment.

**Vary the allowed connections.** A single-edge *cut sweep* perturbs this commitment systematically. MAPPA searches the uncut graph and then repeats the search with each eligible base edge temporarily masked, including bonds to hydrogen. Each cut condition receives the requested number of seed orderings. Masking a connection inside the dominant region can expose a trajectory that ordinary seeding rarely reaches. The original endpoint weights remain unchanged for decoding: a mask alters discovery and does not assert a broken bond. Its endpoints may reconnect through another route, and one cut can redirect several later fragment choices.

**Exchange the endpoints.** Exchanging the base and target adds further alternatives. Seeds, cuts and reverse searches broaden discovery without making it exhaustive. The same exploration principle can be applied to another mapper; our expanded SLAP protocol reaches approximately 97% coverage, although its changes in both search scope and weight mode prevent a sweep-only attribution (Section 4.5).

## 2.4 Matching Stage: consolidate unique fragments and branches

Different seeds and cuts often rediscover the same fragment. The final matching subphase, *reduction*, gives each base/target atom-set pair $(B_i, T_i)$ one shared identity $F_i$. For example, two searches that match $\{1, 2, 3\}$ to $\{a, b, c\}$ reference the same $F_i$, even if their growth order or starting witness differs. Each branch then references its fragment identities, allowing repeated compositions to share one catalogue entry.

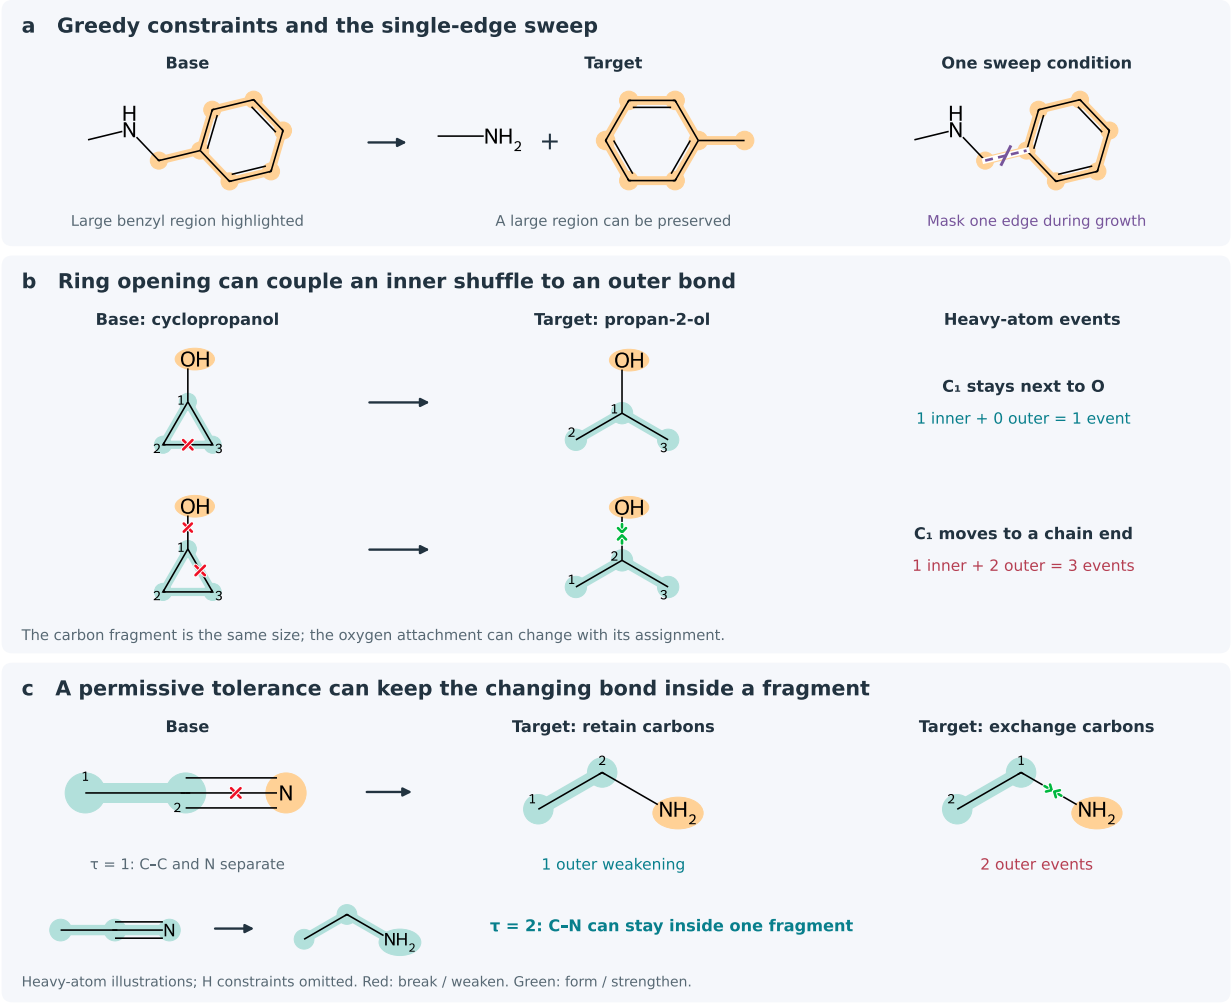



**Figure 4 Molecular examples of exploration and boundary dependence.** (a) The benzyl region is preserved between N-methylbenzylamine and the displayed methylamine/toluene endpoint. Masking one of its edges changes the growth conditions; the purple mark is a search mask, not a claimed cleavage. (b) In cyclopropanol and propan-2-ol, the teal carbon fragment has one internal ring-opening event under either displayed assignment. Carbon 1 at the chain center preserves its oxygen attachment; at an end, it adds an outer cleavage and formation. The heavy-atom totals are one and three. (c) For acetonitrile and ethylamine, tolerance one can leave C–C and N separate: exchanging the carbons changes one outer weakening into two outer events. Tolerance two can include the changing C–N bond inside one fragment. Numbers track the same carbon atoms; red and green marks indicate losses and gains as in Figure 1. These are heavy-atom graph illustrations, with hydrogen constraints omitted and event threshold 0.5; panels b and c are checked by direct pair counting. They illustrate possible boundary dependence, not its measured frequency.

A fragment identity is a key, not permission to map its atoms arbitrarily. Reduction keeps one original record with its witness, discovery constraints, anchors and symmetry relation. Branches also retain the ordered placement context needed to move later fragments consistently. Equal compositions are consolidated with that context preserved; their cut provenance is collected together. Selecting one original record does not retain the union of all discarded discovery relations.

This subphase reuses the fragment inventories already accumulated during matching. It performs structural grouping, with no symmetry optimization or event computation. Its output is one shared catalogue per reaction and direction. That catalogue is the input to decoding.

## 2.5 Decoding Stage: prepare each fragment's symmetry–event response

Decoding turns the retained mapping alternatives into queryable bond-event information. It first prepares each unique fragment once, then reuses that response wherever the fragment occurs. The local calculation connects *which atoms can move together* to *which bond changes those moves produce.*

### 2.5.1 Local symmetry: retain independent and correlated moves

For each endpoint of a fragment, compute symmetry on its own binary internal graph. Elements are preserved, anchors remain fixed, and bonds satisfying the presence criterion share one structural label. Original bond weights are retained for event counting. External attachments do not determine this local symmetry.

Nauty supplies compact generators (11): unit operations that describe the allowed rearrangements. Exchanging two identical arms moves each arm with its attached atoms; exchanging two hydrogens can act within an arm. The two arms must still occupy different positions. These joint operations retain that correlation without storing every full permutation. Both endpoint actions are represented; for an aligned equal-connectivity pair, one side suffices to describe their relative rearrangements.

### 2.5.2 Internal events: attach bond changes to the allowed moves

Let $W_B$ and $W_T$ denote the original base and target bond-weight matrices. For mapped atoms $u, v$, an assignment $m$ changes the bond weight by

$$\Delta W_{uv}(m) = W_T(m(u), m(v)) - W_B(u, v). \tag{2}$$

The pair contributes one event when $|\Delta W_{uv}|$ exceeds its event threshold. We use empirical bond-order-change thresholds of 0.5 for organic bonds (the default for non-metal pairs) and 0.3 for bonds involving at least one metal atom. The sign distinguishes formation or strengthening from cleavage or weakening. These thresholds differ from the growth tolerance: a binary symmetry can preserve connectivity while changing bond weights.

In the acetate example (Figure 1c), O3 and O4 are interchangeable under an automorphism of the fragment's binary connectivity: each oxygen is adjacent to the same carbon. Their original C–O bond orders differ, so exchanging their assignments adds one weakening and one strengthening, giving two internal events. The saved response associates the rearrangement with those changes, so every branch using that fragment can reuse the calculation. Independent symmetry components are processed separately when no event term or requested endpoint couples them. Event-invariant choices share computation; correlated choices remain joint. The response supports later event queries without expanding every complete mapping.

### 2.5.3 Different connectivity: improve the starting correspondence

The accepted growth graph can omit bonds present in the final fragment. In the substituted triangle–chain example (Figure 4b), the displayed local shuffles keep one internal ring-opening event while changing the outer attachment. More generally, two valid discovery correspondences on the same atom sets need not be connected by the final fragment symmetries. Optimizing only one starting correspondence can therefore miss a lower-event alternative.

MAPPA first improves the saved witness under local symmetry. Additional starting-correspondence search is allowed only when growth and final connectivity differ on at least one side and the witness has not attained

an established event lower bound. Preparation and improvement share a fixed per-fragment budget. The output retains the selected starting correspondence and its symmetry response. An unsettled minimum is recorded as best found; selecting this starting orbit restricts decoded coverage. Solver details and bounds are given in Appendix A.6.

## 2.6 Decoding Stage: assemble branch events and select the window

A branch combines three contributions: internal fragment events, ordinary boundary events and the correction for the swept bond. For a branch $\mathcal{B}$ and a permitted correspondence $m$, the reported count is

$$E_{\mathcal{B}}(m) = B_{\mathcal{B}} + \sum_i e_i(m) + s_{\mathcal{B}}(m), \qquad 0 \le s_{\mathcal{B}}(m) \le 2. \tag{3}$$

Here $e_i$ is the reused internal response of a disjoint final fragment piece, $B_{\mathcal{B}}$ is the ordinary-boundary contribution, and $s_{\mathcal{B}}$ accounts for the swept connection. The following rules specify how they are combined.

### 2.6.1 Ordinary boundaries: a fixed contribution under the model

MAPPA uses the independent ordinary-boundary approximation: these contributions remain fixed as internal fragment choices change. Bonds touching mapped atoms are counted, including mapped/unmapped boundaries; bonds wholly within unmatched material are omitted. No assignment is invented for an unmatched atom.

Greedy growth helps absorb connections that would otherwise couple fragments. In C–C≡N → C–C–N (Figure 4c), tolerance one can leave C–C separate from N. Swapping the carbons changes the outer contribution from one weakening to a cleavage plus a formation. Tolerance two allows C–N inside the fragment, where the internal response handles that dependence. Greediness helps, but does not guarantee independence: the triangle–chain example still has a variable outer attachment. Equation (3) is therefore a model count, which can differ from the physical whole-reaction count.

Random growth, multiple seeds and the cut sweep can mitigate this limitation by discovering alternative fragment decompositions. In Figure 4b, growing through the O–C attachment first can place it inside a shared fragment instead of leaving it across a boundary. Another branch can then represent the same correspondence with its correct event count, even if the original branch assigns it differently. This exploration does not repair the original branch's approximation or guarantee a correct representation elsewhere. The benchmarks do not isolate the size of this mitigation.

### 2.6.2 The swept bond: reuse the two endpoint responses

The single masked connection is handled separately. Its correction depends on where its two endpoints are placed, so assembly queries their jointly reachable positions in the already prepared fragment responses. It retains their correlation with internal events and one-to-one occupancy. It does not rebuild a whole-reaction bijection table. The swept contribution ranges from zero to two events.

### 2.6.3 The event window: refine the best count, then retain nearby branches

First establish the best attained branch count $U$. When attained local minima compose, the smallest pre-sweep composition $L$ can incur at most two additional sweep events. Only branch compositions that could improve this $L+2$ result need refinement. If local searches are unfinished or their minima cannot be combined, retain the lower bounds and an actual witness upper bound; do not assume $L + 2$ is attainable.

Next retain branches that could contribute within $U + n$: a branch is excluded only when its lower bound exceeds that threshold. The studies here use $n = 5$. The result stores the retained branches, shared fragment responses, event window and minimum/proof status. A later query requests a mapping at a selected count or with specified atom pairs, returning a witness, established absence or an unresolved outcome under its allowance. A retained count interval does not assert that every count inside it is attainable.

### 2.7 Execution: parallel stages and shared computation

The stage boundaries also define parallel work. Reactions and directions are independent; seed/cut searches within a direction can run concurrently before their results are reduced together. Growth along one branch remains sequential because later fragments depend on earlier occupancy. For the reported batch workflow, the matching stage, including reduction, finishes before catalogue decoding begins. Different reaction/direction catalogues can then be decoded independently, with unique-fragment responses shared within each catalogue.

A persistent worker pool schedules these operations through the same interfaces used by direct local calls. Intermediate records can remain in memory or use aggregated storage. Compatible fragment proofs can be reused during growth, but each seed and cut keeps its own random decisions. Matching and decoding use a shared symmetry core, and bulk operations use native kernels. Scheduling and persistence do not determine which mappings are allowed. Detailed solver, cache and storage protocols, together with full pseudocode, appear in Appendix A.

## 3 Evaluation

### 3.1 Datasets and search settings

We evaluate all 1,851 Golden reactions (10) and the prepared collection of 47,974 EnzymeMap reactions (7). Reference labels are removed before search. Both studies use the prepared formal-bond-order matrices and explicit hydrogens; these results do not constitute a benchmark of continuously valued electronic-structure WBO inputs. EnzymeMap references are curated database mappings, so agreement is not independent validation of reaction mechanisms.

The common settings are discovery tolerance $\tau_{\text{iso}} = 2$, presence/cut threshold $b = 0.2$, hierarchical branch cap 100, random seed 42, both directions and the full single-edge sweep. Golden uses one and ten seed orderings per cut; EnzymeMap uses one. Decoding uses the original bond orders and empirical event thresholds of 0.5 for organic bonds and 0.3 for bonds involving a metal, with a five-second allowance per unique fragment and the best attained model count plus five. No reference mapping guides growth, pruning or starting-correspondence selection.

A separate paired Golden study evaluates current one-seed MAPPA and pinned SLAPMapper on identical prepared inputs and one CPU model. We distinguish standard binary SLAP, called on the uncut graph, from an expanded protocol combining binary and weighted modes, both directions and every single-edge cut. The latter is our exploration wrapper, not default SLAP or its published benchmark. Its comparison with default SLAP changes both search scope and weight mode; it is not a sweep-only ablation. Both methods retain their original algorithms, and external evaluation applies the same chemical endpoint-equivalence rule. The saved seed study and paired study have separately recorded runs and source identities; their recovery counts are not pooled.

### 3.2 Catalogue and decoded-reference verification

We report two external coverage measurements. *Catalogue recovery* asks whether the reference belongs to the retained matching relation. *Decoded recovery* requires an actual injective mapping from a saved starting correspondence and its joint symmetry choices, in a retained branch and event window. A positive certificate is replayed and its event count independently checked. A catalogue certificate may suggest a candidate, but cannot alone establish decoded membership.

The decoded audits preserve exact annotated heavy-atom indices and unmatched-heavy-atom requirements. Unannotated hydrogens must admit a feasible completion. Golden catalogue verification additionally permits endpoint chemical symmetries preserving charge, isotope, hydrogen count and stereochemistry; the Golden catalogue and decoded scores therefore differ in both representation and reference-equivalence policy. EnzymeMap uses exact indices for both. Recovery means inclusion in either search direction, not top-ranked prediction accuracy. Every reaction remains in the denominator, and unresolved queries remain separate from absence.

### 3.3 Timing and branch-event analysis

Matching time includes both fragment discovery and reduction into the final catalogue; decoding is reported separately. CPU seconds sum successful worker computation over both directions and all cuts, including stage input loading and result construction. Publication, external verification, historical failed attempts and parallel elapsed duration have separate accounting. Timings use the saved successful passes and their documented recoveries, rather than a newly measured uninterrupted run of one final performance revision. Exact source and measurement boundaries are recorded in the repository.

To locate a recovered reference within the decoded event landscape, let $\mathcal{C}_{\mathrm{GT}}$ contain the retained branch contexts that admit it inside the saved window. We measure

$$n_{\mathrm{GT}} = \min_{c \in \mathcal{C}_{\mathrm{GT}}} \min_{m \in c} E_c(m) - U, \tag{4}$$

where $U$ is the overall detected count, minimized across both directions. Ground truth selects the qualifying contexts; their event minima are queried without fixing the reference assignments. Both terms use the same saved all-atom decoder model. This measures where a GT-containing branch begins, not the physical event count of the reference itself. Missing references and unresolved offsets remain outside numeric bins.

We separately count the distinct heavy-atom mapping classes actually attainable at the detected minimum, taking the union across retained branches and both directions. Chemical endpoint equivalence identifies repeated representations, and hydrogen permutations do not multiply the choice count; each class must admit a full valid completion. The ranking score remains the saved all-atom model count. If a reaction has $K$ choices and its reference class is present, a uniform selector succeeds with probability $1/K$; otherwise it succeeds with probability zero. This defines expected random-choice accuracy without a trained selector. Incomplete counts contribute bounds, not exact values. A GT-containing branch's minimum need not be attained by GT itself, so this measurement is separate from Equation (4).

## 4 Results

### 4.1 Reference coverage on Golden and EnzymeMap

Both matching and decoding are complete for every requested direction: 3,702 in each Golden setting and 95,948 in EnzymeMap. Reference coverage of the complete matching output is 1,834/1,851 (99.082%) with one Golden seed, 1,843/1,851 (99.568%) with ten, and 47,798/47,974 (99.633%) for EnzymeMap. All three catalogue evaluations have zero unresolved reactions. Table 3 and figure 5 show this full-output coverage alongside the additional audit of the restricted decoded window.

**Table 3 Reaction-level reference coverage.** Percentages use every reaction. Decoded columns use exact annotated indices in the saved model min+5 window. Golden catalogue membership also allows endpoint chemical symmetry; EnzymeMap catalogue membership uses exact indices. Both evaluations are resolved for every reaction. The absent column refers to the saved decoded window.

| Study | Reactions | Catalogue | Decoded | Decoded absent |
|---|---|---|---|---|
| Golden, 1 seed | 1,851 | 1,834 (99.082%) | 1,833 (99.028%) | 18 |
| Golden, 10 seeds | 1,851 | 1,843 (99.568%) | 1,842 (99.514%) | 9 |
| EnzymeMap, 1 seed | 47,974 | 47,798 (99.633%) | 47,796 (99.629%) | 178 |

Within the decoded min+5 window, exact-index verification confirms 1,833/1,851 Golden references with one seed (99.028%) and 1,842 with ten (99.514%). All reactions have definitive outcomes. Ten seeds recover nine additional references without losing any recovered by one seed in this cohort. This audit uses a stricter reference-equivalence policy than catalogue verification (Section 3.2); its counts are separate from the full-output comparison.

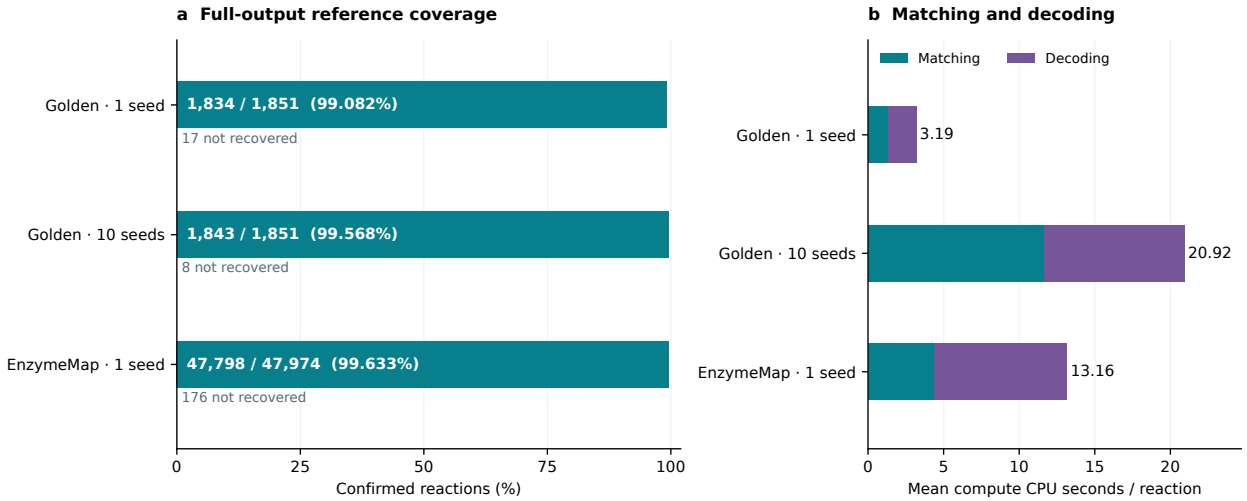



**Figure 5 Reference coverage and computational cost.** (a) Reference coverage of the complete matching output, with unrecovered counts retained. All reaction-level catalogue outcomes are resolved. This is inclusion among alternatives, not top-ranked accuracy. (b) Mean compute CPU per reaction for the two stages: matching, including reduction, and decoding. Both search directions contribute. Golden matching was reused for the corrected postprocessing passes; EnzymeMap combines original successful work with successful recoveries. External verification and publication are excluded.

EnzymeMap decoding confirms 47,796/47,974 references (99.629%), compared with 47,798 (99.633%) in the catalogue. The two additional catalogue references have 22-event witnesses outside their saved 14–19 windows; independent decoded queries confirm their exclusion. All 94,820 positive directional decoded certificates passed replay and count checks, with no invalid certificate. The final reaction accounting is 47,796 recovered and 178 absent, with every outcome resolved. Direct decoded checks and exclusion through the containing catalogue are distinguished in the audit records.

## 4.2 Matching and decoding costs

Table 4 and figure 5 report compute CPU rather than parallel latency. One-seed Golden requires 1.31 CPU seconds per reaction for matching, including reduction, and 1.88 for decoding. Ten seeds require 11.64 and 9.28 seconds, respectively. The corresponding EnzymeMap means are 4.41 and 8.75 seconds, with medians of 2.15 and 3.46 seconds. The median combined EnzymeMap cost is 5.80 seconds; medians of separate stages need not add.

**Table 4 Mean compute CPU seconds per reaction.** Both directions and the full cut sweep are included. Matching includes fragment discovery and reduction. Decoding is the second stage; publication and external verification are excluded. These are recorded completed-stage costs, not a hardware-normalized comparison with the archived methods.

| Study | Matching | Decoding | Total |
|---|---|---|---|
| Golden, 1 seed | 1.31 | 1.88 | 3.19 |
| Golden, 10 seeds | 11.64 | 9.28 | 20.92 |
| EnzymeMap, 1 seed | 4.41 | 8.75 | 13.16 |

The distributions have substantial tails. Golden's maximum directional decoding cost is 52.69 seconds with one seed and 316.46 seconds with ten; its corresponding medians are 0.476 and 1.964 seconds. EnzymeMap's combined per-reaction computation has a 95th percentile of 41.86 seconds and a 99th percentile of 128.58 seconds. Including publication and measured worker overhead raises EnzymeMap's mean from 13.16 to 14.60 CPU seconds per reaction. Historical failed attempts contribute a further approximately 27.93 sampled CPU hours; external verification and diagnostic work are excluded from these algorithm costs.

### 4.3 Seed count and computational scaling

Increasing Golden from one to ten seeds increases matching CPU, including reduction, by 8.87-fold and decoding by 4.95-fold. Matching therefore scales approximately linearly with seed count in the measured one-to-ten-seed comparison. Decoding grows less because the extra searches produce a reduced set of shared fragments and branch compositions rather than ten independent decoding jobs. These measurements describe the cost of additional exploration and its coverage gain; they are not a controlled isolation of individual acceleration mechanisms.

### 4.4 Reference coverage across AAM methods

Table 5 compares reference inclusion across the evaluated output types on all 1,851 Golden reactions. For a method returning one prediction, that prediction is the entire candidate set; for MAPPA and SLAP, recovery requires the reference to occur among the returned alternatives. This common metric measures whether an answer remains available, regardless of how many candidates the method returns. Mapping failures stay in the denominator.

**Table 5 Golden coverage across methods and output types.** Coverage is reference inclusion in the returned output, treating a single prediction as a singleton set. All rows use 1,851 reactions and chemical endpoint-equivalence evaluation. MAPPA rows use the current full seed studies; expanded and bidirectional SLAP rows use the separately paired study. Default-interface comparator scores use saved predictions with unchanged per-case outcomes on re-evaluation. Protocols differ in search scope and output size; this table compares coverage, not ranking accuracy or equal-budget search.

| Method | Search setting | Output | Coverage | Unresolved |
|---|---|---|---|---|
| MAPPA | 1 seed, sweep | Families | 1,834 (99.08%) | 0 |
| MAPPA | 10 seeds, sweep | Families | 1,843 (99.57%) | 0 |
| SLAP | Expanded sweep | Candidates | 1,794 (96.92%) | 5 |
| SLAP | Binary, both directions | Candidates | 1,620 (87.52%) | 1 |
| SLAP | Binary, default | Candidates | 1,591 (85.95%) | 0 |
| LocalMapper | Default | Single mapping | 1,605 (86.71%) | 0 |
| Chython | Default | Single mapping | 1,561 (84.33%) | 0 |
| RXNMapper | Default | Single mapping | 1,547 (83.58%) | 0 |
| RDT | Default | Single mapping | 1,030 (55.65%) | 0 |
| Indigo | Default | Single mapping | 692 (37.39%) | 0 |

MAPPA achieves the highest coverage among the evaluated methods. With one seed it recovers 99.08% of references, increasing to 99.57% with ten. Among the evaluated single-answer interfaces, LocalMapper (1) has the highest coverage at 86.71%, followed by Chython at 84.33%, RXNMapper at 83.58%, RDT at 55.65% and Indigo at 37.39% (2; 14; 13; 5). Binary SLAP's default returned candidate set covers 85.95%; broader exploration raises its coverage to 96.92%. These results support retaining useful alternatives, while leaving their chemical ranking to a later selection step. Comparator versions, failure accounting and archived timing scopes are provided in Appendix C.1. The paired study below reports coverage and speed under explicitly recorded SLAP search protocols.

### 4.5 Paired coverage and speed comparison with SLAP

The paired study recovers 1,839/1,851 references with MAPPA (99.352%), 1,794 with expanded SLAP (96.921%), and 1,620 with standard binary SLAP across both directions (87.520%; Figure 6). Expanded SLAP has 52 confirmed misses and five unresolved reactions; standard bidirectional SLAP has 230 misses and one unresolved. MAPPA has 12 misses and no unresolved catalogue queries. The independent comparator audit reconstructs its actual returned heavy mappings and repeats chemical-equivalence verification with a separate graph-matching implementation: all 3,683 completed expanded-SLAP direction verdicts agree.

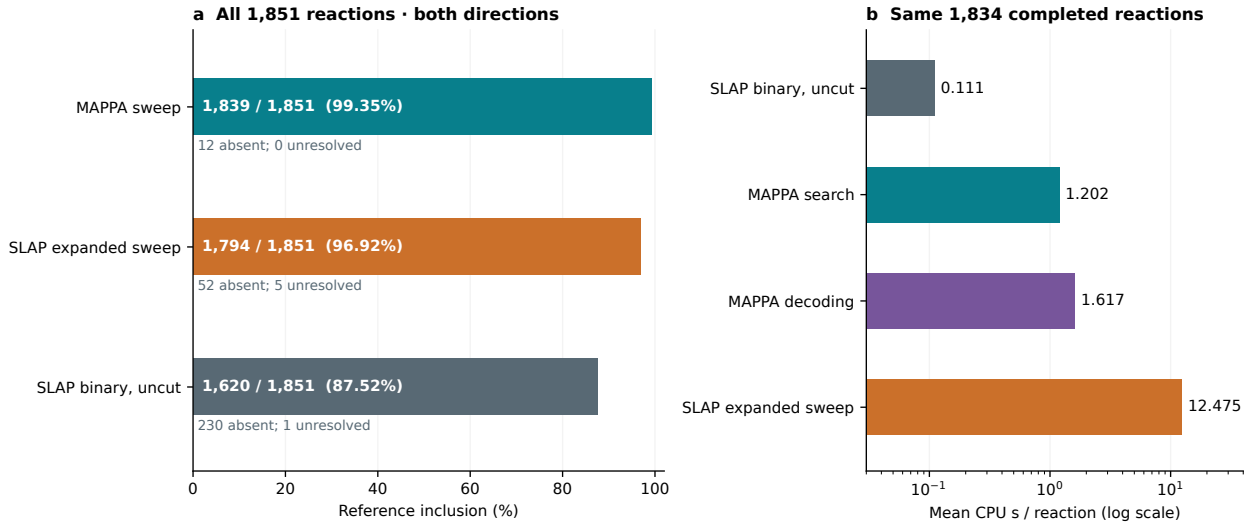



**Figure 6 Coverage and cost depend on exploration scope.** (a) Reference inclusion under identical chemical-equivalence evaluation over all 1,851 Golden reactions. Unknowns remain outside the recovered count. Standard SLAP is binary and uncut; expanded SLAP combines both weight modes and the cut sweep. All bars include both directions. (b) Mean compute CPU on the same 1,834 reactions completed by all protocols, with MAPPA decoding separate from search. The 17 excluded reactions remain in the coverage denominator. Timing is logarithmic and measures accumulated CPU, not parallel latency. The expanded wrapper raises SLAP coverage to approximately 97%, while increasing its computational cost.

Default forward-only SLAP recovers 1,591/1,851 (85.95%). This is close to its original paper's 86.9%, which also measures reference inclusion among alternatives but uses a 1,758-reaction Golden version (9). It is therefore an independent reproduction of similar behavior, not an exact replication of that dataset. Our archived first-returned default-SLAP score is 1,399/1,851 (75.58%). The retained alternatives tie at SLAP's lowest found cost; their output order is not a separate confidence ranking. For the single-answer interfaces in Table 5, coverage is the accuracy of their selected prediction.

On the 1,834 reactions completed by all three protocols, mean search costs are 0.111 CPU seconds for standard binary SLAP, 1.202 for MAPPA, and 12.475 for expanded SLAP, summing both directions. MAPPA decoding adds 1.617 seconds. Thus MAPPA search is 10.38 times cheaper than the expanded SLAP sweep, but standard SLAP is 10.80 times cheaper than MAPPA search. The broader standard-SLAP/MAPPA pair contains 1,849 completed reactions and retains a slower standard-SLAP tail: their means are 0.487 and 1.259 seconds, a 2.58-fold difference. These are paired measurements on Intel Xeon Gold 6442Y processors, excluding loading, publication and external verification. Failed attempts remain separately accounted; excluded reactions are not treated as fast completions.

## 4.6 How many choices remain at the minimum?

The minimum-event rule produces a compact shortlist in the saved one-seed Golden study (Figure 7). Exact counts are established for 1,829 reactions; 22 remain incomplete under the counting allowance. Among the certified cases, 1,370 have one choice, 352 have two, 96 have three to five, and 11 have six or more. The certified-subset mean is 1.36 choices. Even allowing arbitrary larger counts for unfinished cases, the full-dataset median is one and its 95th percentile is three. We do not estimate the full-dataset mean from the completed subset.

The reference is confirmed at the detected minimum in 1,691 reactions, absent there in 158, and unresolved in two: minimum-set coverage is therefore 91.36–91.46%. These two queries concern membership at the minimum alone; every reaction's membership in the wider min+5 window is resolved (Section 4.1). Expected uniform-choice accuracy is 78.31–79.45%, with unfinished counts contributing explicit bounds. For example, Golden case 1694 has eight distinct minimum-event choices, including the reference, giving a random selector

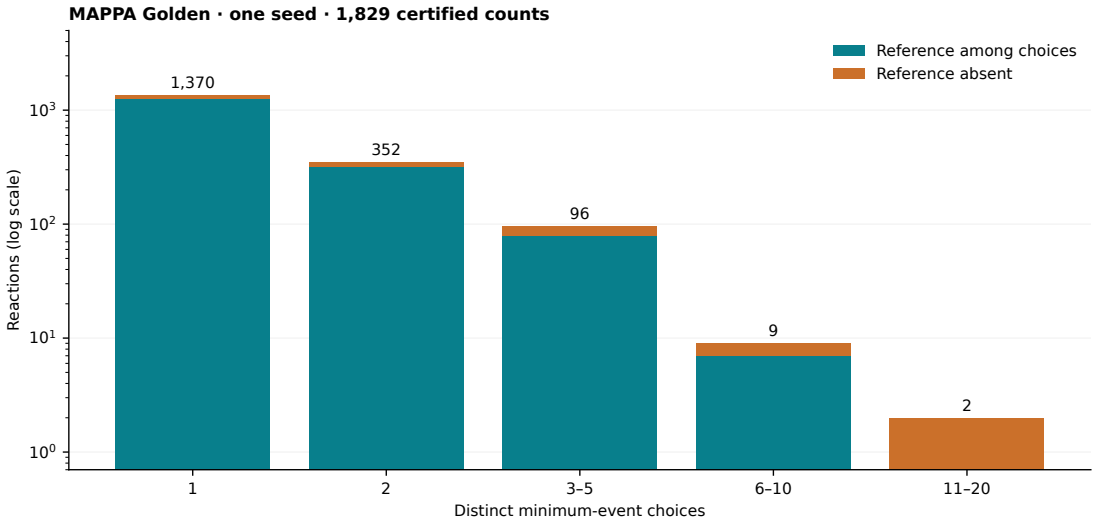



**Figure 7 Distinct choices under minimum-event selection.** Counts cover 1,829 of 1,851 one-seed Golden reactions with certified totals; 22 incomplete counts are excluded from the bars. Equivalent heavy-atom relabellings and hydrogen permutations count once. Colors indicate whether the reference is among the choices at the saved all-atom detected model minimum. The vertical axis is logarithmic. This is a count of attainable mapping classes, not branches or raw symmetry permutations.

probability 1/8. These results quantify the decision left to a downstream selector. They do not establish top-1 superiority over another mapper, and a reference outside the minimum set would require selection from a wider event window.

## 4.7 Where reference-containing branches enter the event window

Figure 8 reports the preliminary distribution defined in Equation (4), with logarithmic reaction counts. Offsets are established for 45,738 reactions: 1,621 Golden and 44,085 EnzymeMap reactions have a GT-containing branch at the overall detected count; another 32 EnzymeMap reactions have offsets one through four. There are 3,891 pending offset checks, and 196 absent references. All reference-membership outcomes are resolved.

Zero-offset certificates can establish the answer immediately, so the completed subset overrepresents zero. The higher-offset distribution remains incomplete and does not yet support full-dataset proportions. Both sides of the subtraction use the same decoder count, including hydrogen and the ordinary-boundary approximation. The offset measures the reported model landscape, not physical event-bin accuracy.

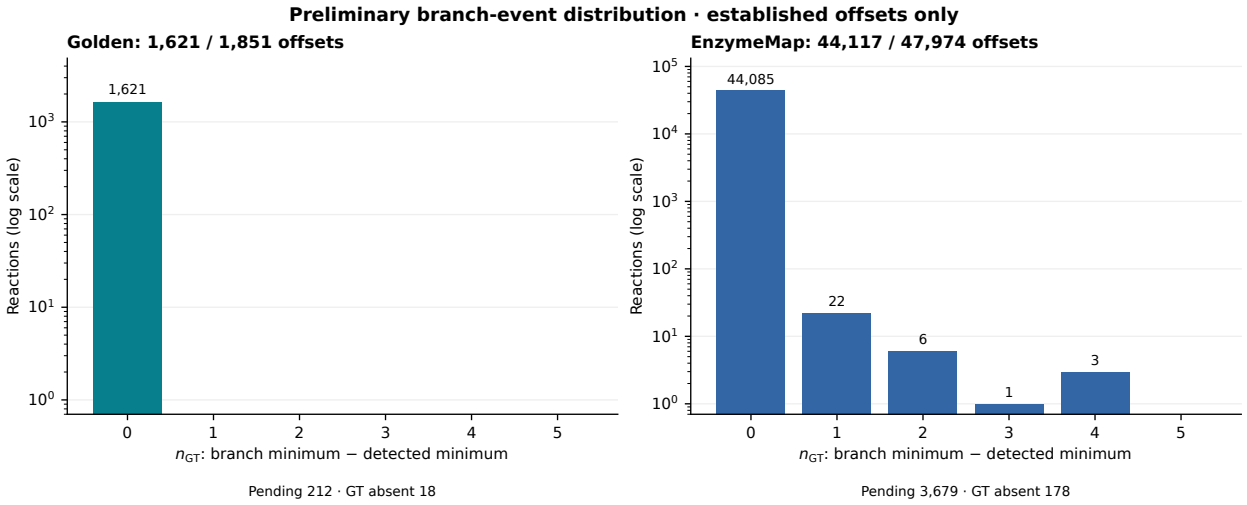



**Figure 8 Preliminary location of GT-containing branches.** The horizontal coordinate is the smallest event count of a retained GT-containing branch minus the overall detected count; the vertical axis is logarithmic. Ground truth selects the branch, rather than constraining the minimum witness within it. One-seed results use tolerance 2, cap 100 and saved min+5 responses. Pending offset checks and absent references are excluded from bars and labeled explicitly. Empty bins must not be interpreted as final zero frequencies.

# 5 Discussion

MAPPA separates the existence question needed during growth from the compressed alternatives needed at saturation, and then separates correspondence discovery from event interpretation. Atom-set reduction gives repeated fragments one shared identity. The decoder reuses local symmetry-event responses while retaining correlated occupancy and the special dependence introduced by a swept bond. These module boundaries make search, representation and interpretation independently inspectable and reusable.

The benchmarks demonstrate high reference inclusion with complete saved mapping and decoding outputs, while preserving the distinction between catalogue and decoded coverage. More Golden seeds recover additional references at increased computation, with matching cost approximately proportional to seed count over the measured range. The paired SLAP comparison shows the trade-off directly: default SLAP is cheaper, whereas MAPPA explores a broader alternative set and costs less than the expanded SLAP sweep. Returning alternatives is shared by both methods; the comparison concerns their coverage, organization and cost.

Several limits remain scientifically important. Greedy trajectories, sampled seeds, single-edge cuts and hierarchical caps restrict discovery. Selecting one original fragment record per atom-set pair and one decoded starting orbit can omit alternatives present in discarded discovery records. Bounded improvement can retain an unproved minimum. None of these restrictions establishes exhaustive correspondence recovery.

The fixed ordinary-boundary model is also an approximation. In the EnzymeMap audit, 2,801 positive directional witnesses have different model and physical whole-reaction event counts; the ten-seed Golden audit records 32 such witnesses. Both counts are retained. Model-window membership is therefore not physical event-bin accuracy, and a low model count alone does not identify the annotated or most plausible chemistry. The branch-offset figure assesses organization within that model, not a replacement accuracy measure.

Retained alternatives can support reaction-path preparation: atom-index assignment affects endpoint interpolation (3), and different permitted correspondences could supply starting structures for nudged elastic band calculations (8). A separate chemical selector could turn the same catalogue into a single-answer prediction, using minimum event count as a surrogate and reaction-specific preferences to resolve ties or retain a higher-event candidate. These are downstream opportunities, not demonstrated improvements in ranking or transition-state prediction. The current Golden and EnzymeMap studies also do not validate continuously

valued WBO inputs or every stereochemical attribute. The archived comparator, seed/cap, direction and coordinate analyses remain in the supplement with their original protocols; only the separately paired current comparison supports its stated speed ratios.

## Code and data

Code and reproduction instructions are available at MAPPA source repository, branch `main`. The repository guide `manuscript/REPRODUCIBILITY.md` links full benchmark configurations, software versions, per-case results, and figure-generation scripts. Golden and EnzymeMap are distributed by their original authors (10; 7).

## Acknowledgements

We gratefully acknowledge the longstanding contributions of the Matter Lab's current and past group members (matter.toronto.edu), and in particular those of the El Agente team (elagente.ca). C.C. acknowledges support from the DOE grant with the University of Minnesota, award #A006801504, and the Basic Science Research Program through the National Research Foundation of Korea (NRF), funded by the Ministry of Education (RS-2025-02634334). Y.K. was supported by the CIFAR AI Safety Catalyst Award (Catalyst Fund Project #CF26-AI-001). J.B.P.S. acknowledges funding of this project by the Natural Sciences and Engineering Research Council of Canada (NSERC) Alliance Grant #ALLRP587593-23 (Quantamole). A.W. acknowledges support from the Canada Graduate Scholarships—Doctoral (CGS-D) program.
This research is part of the University of Toronto's Acceleration Consortium, which receives funding from the CFREF-2022-00042 Canada First Research Excellence Fund. Computations were performed on the Niagara supercomputer at the SciNet HPC Consortium. SciNet is funded by the Canada Foundation for Innovation; the Government of Ontario; the Ontario Research Fund—Research Excellence; and the University of Toronto.
A.A.-G. thanks Anders G. Frøseth for his generous support and acknowledges the generous support of NSERC and the Canada 150 Research Chairs program. A.A.-G. and V.B. also acknowledge the generous support of Natural Resources Canada and the Canada 150 Research Chairs program and the University of Toronto's Acceleration Consortium, which receives funding from the CFREF-2022-00042 Canada First Research Excellence Fund.
This work was supported by the Defense Advanced Research Projects Agency (DARPA) under Agreement No. HR0011262E022. This work was also supported by the AI2050 program of Schmidt Sciences.
Molecular graphics and analyses were performed with UCSF ChimeraX (6; 12), developed by the Resource for Biocomputing, Visualization, and Informatics at the University of California, San Francisco, with support from National Institutes of Health R01-GM129325 and the Office of Cyber Infrastructure and Computational Biology, National Institute of Allergy and Infectious Diseases.
We thank Kjell Jorner and Robert Pollice for helpful discussions.

## References

[1] Shuan Chen, Sunggi An, Ramil Babazade, and Yousung Jung. Precise atom-to-atom mapping for organic reactions via human-in-the-loop machine learning. *Nature Communications*, 15:2250, 2024. doi: 10.1038/s41467-024-46364-y.

[2] Chython contributors. Chython: molecular and reaction processing toolkit. https://github.com/chython/chython. Evaluated version 2.18 with chython-rxnmap 2.0; model hash archived.

[3] Deb Sankar De, Marco Krummenacher, Bastian Schaefer, and Stefan Goedecker. Finding reaction pathways with optimal atomic index mappings. *Physical Review Letters*, 123:206102, 2019. doi: 10.1103/PhysRevLett.123.206102.

[4] Leonardo de Moura and Nikolaj Bjørner. Z3: An efficient SMT solver. In *Tools and Algorithms for the Construction and Analysis of Systems*, pages 337–340. Springer, 2008. doi: 10.1007/978-3-540-78800-3_24.

[5] EPAM Systems. Indigo cheminformatics toolkit. https://github.com/epam/Indigo. Evaluated version 1.46.0.

[6] Thomas D. Goddard, Conrad C. Huang, Elaine C. Meng, Eric F. Pettersen, Gregory S. Couch, John H. Morris, and Thomas E. Ferrin. UCSF ChimeraX: Meeting modern challenges in visualization and analysis. *Protein Science*, 27:14–25, 2018. doi: 10.1002/pro.3235.

[7] Esther Heid, Daniel Probst, William H. Green, and Georg K. H. Madsen. EnzymeMap: curation, validation and data-driven prediction of enzymatic reactions. *Chemical Science*, 2023. doi: 10.1039/D3SC02048G. https://doi.org/10.1039/D3SC02048G.

[8] Graeme Henkelman, Blas P. Uberuaga, and Hannes Jónsson. A climbing image nudged elastic band method for finding saddle points and minimum energy paths. *The Journal of Chemical Physics*, 113(22):9901–9904, 2000. doi: 10.1063/1.1329672.

[9] Shin-ichi Koda and Shinji Saito. General and scalable atom-to-atom mapping via Weisfeiler–Lehman-like approximate graph matching. *ChemRxiv*, 2025. doi: 10.26434/chemrxiv-2025-hthwn. Preprint, version 1, 25 November 2025.

[10] Arkadii Lin, Natalia Dyubankova, Timur I. Madzhidov, Ramil I. Nugmanov, Jonas Verhoeven, Timur R. Gimadiev, Valentina A. Afonina, Zarina Ibragimova, Assima Rakhimbekova, Pavel Sidorov, Andrei Gedich, Rail Suleymanov, Ravil Mukhametgaleev, Joerg Wegner, Hugo Ceulemans, and Alexandre Varnek. Atom-to-atom mapping: A benchmarking study of popular mapping algorithms and consensus strategies. *Molecular Informatics*, 41(4):2100138, 2022. doi: 10.1002/minf.202100138.

[11] Brendan D. McKay and Adolfo Piperno. Practical graph isomorphism, II. *Journal of Symbolic Computation*, 60: 94–112, 2014. doi: 10.1016/j.jsc.2013.09.003.

[12] Eric F. Pettersen, Thomas D. Goddard, Conrad C. Huang, et al. UCSF ChimeraX: Structure visualization for researchers, educators, and developers. *Protein Science*, 30:70–82, 2021. doi: 10.1002/pro.3943.

[13] S. A. Rahman, G. Torrance, L. Baldacci, S. Martínez Cuesta, F. Fenninger, N. Gopal, S. Choudhary, J. W. May, G. L. Holliday, C. Steinbeck, and J. M. Thornton. Reaction decoder tool (RDT): extracting features from chemical reactions. *Bioinformatics*, 32(13):2065–2066, 2016. doi: 10.1093/bioinformatics/btw096.

[14] Philippe Schwaller, Benjamin Hoover, Jean-Louis Reymond, Hendrik Strobelt, and Teodoro Laino. Extraction of organic chemistry grammar from unsupervised learning of chemical reactions. *Science Advances*, 7(15):eabe4166, 2021. doi: 10.1126/sciadv.abe4166.

# A Technical algorithm details

The complete stage sequence is summarized in Algorithm A1. The following sections give the constraints and implementation details underlying the main-text description.

**Algorithm A1** Matching (including reduction), followed by decoding

**Require:** Endpoint graphs, discovery policies, seed/cut plan, branch cap and event window
**for all** requested search directions **do**
  **for all** cut conditions and seed orderings **do**
    Initialize the conditional search hierarchy
    **while** a retained continuation has an eligible fragment seed **do**
      Grow using one-witness existence queries
      At saturation, construct distinct compressed placements
      Continue each placement with earlier assignments locked
      Prune and recount the hierarchy from leaves to root
    **end while**
    Retain terminal compositions and compact provenance
  **end for**
  Share fragments by atom-set pair; reduce repeated branch compositions
**end for**
Complete matching, including reduction, before batch decoding
**for all** reaction/direction catalogues **do**
  Inventory unique fragments and prepare their shared symmetry-event responses
  Compose branch contributions and the sweep-endpoint correction
  Retain queryable branches within the requested event window
**end for**

## A.1 Introductory alternatives example

The EnzymeMap case 13175 witnesses in Figure 2 come from the saved one-seed benchmark with branch cap 100, discovery tolerance two, the full single-edge sweep and a decoded minimum-plus-five window. Matching and decoding were not rerun for the figure. A is the complete witness retained by the exact-index decoded-reference audit; all nine annotated heavy-atom pairs agree. B was queried from the saved response at its detected minimum of six all-atom events and replayed through its saved symmetry choices. Both saved witnesses map all 15 atoms injectively. Direct counts from the original endpoint matrices give eight and six all-atom events, respectively, agreeing with their model counts. Their four and two heavy-atom events are shown in the figure. Events require an absolute bond-weight change greater than 0.5.

Because EnzymeMap does not annotate hydrogen identities, we separately checked all $6! = 720$ hydrogen assignments for each fixed heavy-atom mapping. Both permit a minimum of six total events. For A, transferring the carboxyl OH hydrogen to the formaldehyde oxygen contributes two events; the other hydrogen bonds can remain intact. For B, transferring both formaldehyde hydrogens from carbon 1 to carbon 4 contributes four events. The saved A witness contains an additional hydrogen exchange and is not the best hydrogen completion. This independent check does not assert that the newly completed hydrogen assignments belong to the saved decoded response, nor that six is a global minimum over other heavy-atom correspondences. The original saved witnesses remain unchanged. The example therefore illustrates distinct atom origins with tied total counts after hydrogen completion. Portable evidence preserves the endpoint matrices, saved mappings, fragment partitions, replay choices, source checksums and hydrogen-completion check in `enzymemap_case13175.json`.

## A.2 Exact existence queries during growth

An existence query contains the proposed base atoms, their accepted preservation edges and completed-fragment locks. Element-compatible destination domains exclude targets already occupied by other fragments. Each accepted edge supplies a binary support relation satisfying target bond presence and the discovery tolerance. Base nonedges and unselected molecular edges do not add constraints.

More formally, let $V_B, V_T$ denote the base and target atom sets, $Z_B, Z_T$ their elements and $W_B, W_T$ their original bond-weight matrices. A partial correspondence $m : D \subseteq V_B \to V_T$ is injective. For every accepted preservation edge $(u, v) \in A$, its assignment satisfies

$$Z_B(u) = Z_T(m(u)), \quad W_T(m(u), m(v)) \geq b, \quad |W_B(u, v) - W_T(m(u), m(v))| \leq \tau_{\text{iso}}. \tag{5}$$

Here $b$ is the graph-presence threshold and $\tau_{\text{iso}}$ is the discovery tolerance. These constraints apply to the selected growth graph, not every bond in the completed atom set.

Propagation removes occupied singleton destinations and destinations without support in a neighbor's domain. An empty domain or incompatible singletons establish infeasibility. A bipartite distinct-target check can reject domains that cannot accommodate an injective assignment. These are necessary conditions; surviving ambiguous cases require search. The solver chooses a constrained atom, propagates its tentative destination and stops at the first complete witness. Proving absence can require exploring every remaining feasible choice. Positive and negative answers use the same constraints.

Direct witness extension and indexed fragment reuse precede this query. They establish existence only. Neither supplies a different continuation policy nor converts a timeout into absence. Completed-fragment assignments remain fixed while assignments internal to the current growing fragment may change.

The molecular overview in Figure 1 uses constructed alcohol placements in panel a and methyl acetate saponification in panels b and c. Hydrogens participate in matching but are implicit in the drawings. Exchanging the acetate oxygen images adds two internal changes to two boundary changes at event threshold 0.5. Black lines show endpoint bonds. These illustrations are not a complete search trace, and their formal-bond-order signatures are not distinct mechanisms or resonance-normalized transformations.

### A.3 Completion, local symmetry and global placement

Completion searches the finished fragment constraints for distinct target atom-set placements. It excludes already represented sets or certified global placement orbits within the search. It does not enumerate all internal assignments before deduplicating them. Target sites that cease to be globally equivalent remain separate placements, even when their local matched subgraphs share symmetry.

For the fixed carbon-ring illustration in Figure 3, an independent substructure check finds exactly two target atom sets, each admitting twelve ring rotations and reflections. The F and Cl attachments prevent whole-target exchange of those sets. Hydrogen constraints are omitted from this illustration. The check establishes the depicted placements; it is not a full reaction benchmark or the production search procedure.

For each local fragment, nauty receives an element-colored binary graph with individually fixed anchors. Its compact generators retain correlated moves of rings, arms and their attached atoms. Continuous weights do not label this graph; they remain in discovery and event predicates. Permitted local rearrangements are compositions of these binary generators. An accepted discovery mapping can be followed by a base and a target local action without reimposing discovery tolerance on the rearranged result. The event response evaluates the resulting original-weight changes.

The global action used to compress later continuations is more restrictive. It must preserve the full target weight matrix, active connectivity, current locks and every base-to-target compatibility predicate relevant to subsequent growth. Such an action moves the whole later continuation, preserving occupied targets and its matching problem. A local fragment action cannot be substituted for this global equivalence proof. Saved placement operations retain their order; unrestricted closure of an ordered sequence would permit combinations not represented by the search.

### A.4 Hierarchical caps and provenance

Each retained placement creates a child continuation. After a completed step, count surviving continuations bottom-up. At an over-limit node, discard its largest child subtree, recount and repeat; ties retain the earlier decision. An ancestor then sees the reduced count. The completed-fragment limit separately rejects a placement expansion exceeding its allowance. Neither operation counts internal symmetry assignments as separate branches, and both retain explicit cap evidence.

A shared search state may have several incoming histories. The retained graph keeps parent links and terminal references rather than unfolding every path. States and payloads with no surviving descendant are released. Returned histories and cut provenance remain available for inspection, but are not independent fragment-decoding jobs. A branch cap bounds retained choices, not every temporary allocation or total memory.

## A.5 Fragment identities and composition reduction

Reduction reuses the fragment inventory in each search graph and unifies it across seeds and cuts. A completed fragment's key is its base/target atom-set pair within a fixed endpoint problem and policy. Keep the first original record intact. Other starting witnesses, growth routes, domains or anchors do not create additional identities and are not unioned into broader permissions. Raw archives retain the original decisions; the reduced catalogue retains the selected record and compact provenance. When reducing an explicitly selected path subset, the representative must come from that subset.

Native projection converts retained states into shared fragment identifiers. Composition keys use those identifiers together with the ordered placement context. Independent decisions can commute; overlapping local or global choices retain their order. Equal keys share one family record and aggregate cut/partition provenance. Reduction uses structural equality, not symmetry solving or event queries. The atom-set key must not be confused with a permission to map its atoms arbitrarily.

## A.6 Shared event core and bounded starting-map improvement

Each unique fragment is prepared once. For a selected starting correspondence, the shared core stores binary symmetry generators, fixed event contributions and sparse variable original-weight terms. It separates operation components only when no variable event or requested endpoint joins them. A generator moving two arms couples those moves even if each arm also has its own independent internal exchanges. Event-preserving operations can share computation only when they also preserve all endpoints relevant to the query. No complete group or Cartesian table of mappings is stored.

Starting-map improvement first compares the saved witness with lower bounds. One bound matches pair-weight multisets within element-pair types while relaxing atom consistency. Another matches incident bond assignments and then atoms injectively; each event touches two atoms, so half the incident cost, rounded up, is a lower bound. The stronger bound is retained. These relaxations can rule out improvement but need not be attainable.

Optimize the selected fragment's binary symmetries. Search additional discovery correspondences only when its recorded growth connectivity differs from final internal connectivity on either endpoint and the current witness remains unsettled. New starting correspondences must satisfy the saved discovery domains, anchors and accepted edges; subsequent binary symmetry choices are not rejected by those discovery constraints. Preparation, correspondence improvement and symmetry optimization share a five-second per-fragment deadline. Attaining a valid bound stops work immediately. Otherwise retain an actual best witness and incomplete status. An orbit minimum does not certify a minimum over discarded starting orbits.

Branch assembly binds local response operations to their shared branch choices. Final partition pieces own disjoint internal contributions. Weight-preserving global placements move endpoints while retaining those local costs. Ordinary boundaries remain fixed under the declared model. The sweep correction follows jointly reachable endpoint pairs through the saved action order, preserving dependence on variable internal events. When internal costs are constant, this is an endpoint-pair calculation, not a complete symmetry-assignment enumeration.

For a requested event interval, the saved response searches its retained choices and returns a concrete mapping with its ordered choices, absence after complete exclusion, or unknown under a limit. Event counts and mappings can be replayed independently. Preparing a queryable response does not assert that every count in its numerical interval is attainable. Physical whole-reaction event counts can differ from the independent-boundary model and are recorded separately during external audits.

### A.7 Indexed fragment reuse and execution

The reaction-local pool stores one original fragment per atom-set pair. A restricted saved witness proves a growth proposal when it covers the requested base atoms, uses available target atoms, respects locks and supports every required edge at the current tolerance. Atom-set containment alone is insufficient when occupancy or edge requirements have changed. An inverted index intersects atom, edge-support and fixed-assignment sets to find a valid proof. A miss invokes the ordinary existence query; no negative cache is used.

Growth continues with its own random proposals. Cut/trial streams are distinct and reproducible, and completion chooses its representatives independently of the temporary existence witness. The pool therefore does not replay a previous trajectory. Its accounted retention limit bounds cached records and index storage, not total stage memory. Returned search graphs expose their unique-fragment inventories directly to reduction.

Persistent execution shares compatible reaction snapshots at task boundaries. A permanent first snapshot and replaceable latest snapshot support concurrent readers; a validated first snapshot can be used when the latest stored version cannot be loaded. This is recovery of reusable data, not an alternative scientific algorithm. A single publication owner atomically replaces complete versions, and stale publishers cannot overwrite newer ones. Stored snapshot count is bounded per reaction rather than per cut or seed.

Separate stage APIs return typed matching, catalogue and decoding records. In-memory and aggregated file-backed transport preserve shared immutable arrays and fragment relations. Worker pools schedule those operations without changing their scope. For the reported batch protocol, a global matching/reduction barrier precedes decoding. Recovery retains completed outputs and consumed budgets; resource errors remain distinguishable from mapping absence. The main manuscript reports successful compute costs separately from failed attempts and external evaluation.

## B Reproducibility and measurement scope

The repository's `manuscript/REPRODUCIBILITY.md` links source pins, immutable input identities, benchmark records and the evidence used to generate tables and figures. The public Python API documents direct matching, reduction, decoding and conditional queries. Figure building runs no searches. Publication records omit execution-site identifiers.

The main-text Golden measurements combine the saved one- and ten-seed matching passes with corrected completed reduction and decoding passes. They are not new uninterrupted end-to-end measurements. The matching passes predate indexed containment; the paper treats their seed scaling as an empirical workload comparison, not a cache ablation. EnzymeMap combines original successful tasks and successful recoveries with unchanged scientific settings. Performance corrections preserved the mapping relation and event model. CPU totals include computation, stage loading and record construction; publication, external audits and sampled earlier failures are separate. CPU models were not retained in the exported full-campaign summaries, so no hardware-normalized ranking follows.

Every accepted decoded-reference witness is checked for replay, injectivity, annotated assignments and an independently counted model total inside the saved window. Its physical total is stored separately. The Golden decoded audit uses exact indices; its catalogue audit permits endpoint chemical equivalence. EnzymeMap uses exact indices for both. A conclusive absence from the unchanged containing catalogue implies absence from the decoded subset; that inference is recorded separately from a direct negative decoded query. Bounded unknown queries are never relabeled as direct negatives.

The branch-offset snapshot contains one row per reaction. Its 45,738 exact offsets, 3,891 pending offsets, 196 absent references and no unresolved memberships sum to 49,825. Easy zero-offset certificates are resolved first, so the partial histogram is not an unbiased estimate of the final distribution. Both compared counts use the saved all-atom decoder model. No heavy-only reference count enters the subtraction.

The supplementary September studies below retain their original settings, evaluators and comparison cohorts. Their archived paired search timings use an Apple M4 Pro CPU; the cap comparison uses an AMD EPYC 9J14. Search, publication and event-query boundaries differ across those studies and are stated with each

table. They are not pooled with the current main-text timings. The WBO-generation method for the archived coordinate inputs is not recorded in the available metadata, so regeneration of those matrices from molecular structures is not established.

# C Archived September evaluations

The following studies used their recorded September implementations. They retain the original numerical results and comparison scopes; they are not reruns of the current algorithm or direct performance comparisons with Section 3.1.

## C.1 Archived datasets and comparator protocol

Golden inputs use formal bond orders and explicit H, with reference labels removed before search. Recovery requires the annotated heavy-atom correspondence, including unmatched atoms, modulo endpoint chemical symmetries preserving charge, isotope, H count, and stereochemistry. These chemical colors define reference equivalence; they do not imply that element/WBO matching itself enforces every chemical attribute. Failures and unresolved cases remain in the denominator. This measures reference inclusion among returned alternatives, not their ranking.

LocalMapper provides the prior accuracy-SOTA baseline (1). Its published Golden accuracy was 89.8% on 1,758 retained reactions with manual calibration. SLAP reported 86.9% on that dataset version, counting reference inclusion among its candidates (9). These literature scores are separate from our strict re-evaluation. We additionally apply the cut sweep introduced here to SLAP; "SLAP sweep" denotes this extension, not a published SLAP score. It is our strongest evaluated prior-method baseline for alternative recovery. Released RXNMapper, Chython, Indigo, and RDT provide further comparisons (14; 2; 5; 13).

The coordinate collection contains 18–137 explicit atoms per endpoint, including organometallic and multicomponent structures. It was inspected during development and has no verified atom mappings: it is not a mapping-accuracy benchmark. The archived study compared the lowest event count found and the patterns achieving that count. MAPPA used supplied WBO matrices; SLAP used XYZ-derived binary graphs. Returned SLAP heavy-atom assignments received hydrogen refinement and were scored on the same WBO matrices as MAPPA. The comparison covers those saved witnesses, not all possible SLAP hydrogen assignments or a fresh current-implementation evaluation.

Released comparators received the same label-free Golden inputs, without prediction repair or reference-guided ranking. Invalid endpoint chemistry, duplicate atom labels and other failures remained in the denominator. Binary SLAP was retained as the stronger default configuration; bidirectional comparisons used both binary and weighted modes. SLAP returns multiple candidates, whereas the other comparators return at most one explicit bijection. These results describe the evaluated interfaces and scoring rule, including its difference from RDT's chemical-change criterion. The repository records released models, versions, adapter settings and failure frequencies.

## C.2 Archived evaluation configurations

Table A1 lists the archived settings. Search did not use reference or comparator correspondences. Full configurations, implementation versions, and reproduction scripts are provided in the repository (Appendix B).

## C.3 Archived Golden reference recovery and search cost

In the archived campaign, the one-seed MAPPA configuration recovered 99.08% of Golden references, compared with 97.03% for SLAP sweep (Table A2 and figure A1). These scores belong to that campaign, separate from Section 3.1. The paired comparison includes 43 references recovered only by MAPPA and 5 only by SLAP. LocalMapper is the strongest evaluated method returning one bijection. Additional MAPPA seeds yielded modest recovery gains at increasing search cost; two seeds did not improve recovery over one.

The paired archived controls attribute 345 additional reference recoveries to the MAPPA sweep and 135 to the SLAP sweep. Without the sweep, one-seed MAPPA had lower coverage than bidirectional SLAP.

**Table A1 Archived evaluation configurations.** Both use $b = 0.2$, $\tau_{\text{iso}} = 1$, explicit H, and uncut plus single-edge searches. One seed per cut and the sweep define the default setting. Archived Golden measurements cover sweep search; no-sweep controls retain only the uncut graph. A seed setting counts base-atom orderings per cut. Stored orientation uses the first saved endpoint as the base and the second as the target.

| Setting | Golden | Coordinate/WBO |
|---|---|---|
| Reactions | 1,851 | 140 |
| Search directions | Bidirectional | Stored orientation |
| Seed orderings | 1 (default), 2, 3, 10 | 1 (default) |
| Branch cap | 100 (default) | 100 (default), 2,000 |
| Evaluation | Reference-family recovery | Signed event-class coverage |

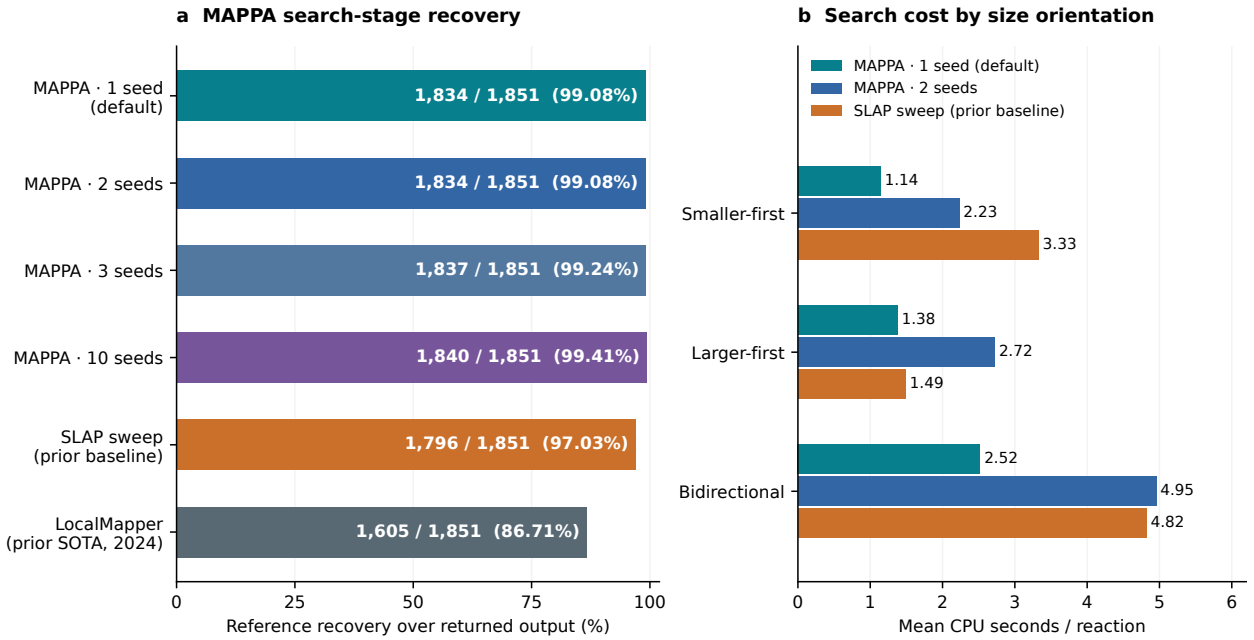



**Figure A1 Archived Golden reference recovery and search cost.** (a) Reference recovery over all 1,851 reactions. MAPPA and SLAP use our cut sweep; LocalMapper is the prior accuracy-SOTA baseline and returns one bijection. All scores use the archived evaluator. (b) Mean search CPU over the same 1,821 completed reactions, by orientation. Bond-event decoding is excluded. Full comparisons and timing scopes are in Tables A2 and A3.

This supports varying the growth constraints to expose alternatives excluded by greedy fragment extension (Section 2.3); symmetry expansion alone cannot restore discarded placements. These differences are not measurements of a current no-sweep control.

Smaller-first grows fragments from the reaction side with fewer explicit atoms (including H) and matches into the other side; larger-first reverses these roles. In the archived comparison, combining both directions added 31 recoveries over smaller-first alone, demonstrating complementary alternatives (Table A3).

In these archived measurements, one-seed MAPPA had a lower mean and median search cost than SLAP sweep, but a higher 95th percentile. Two seeds approximately doubled the mean cost without improving recovery. These Golden timings cover search, excluding reference verification and separate bond-event decoding. The two timing tables use different experiments and should be compared within their stated CPU and reaction sets; neither establishes a current-implementation speed ranking.

In the archived cap study, increasing the branch cap from 100 to 2,000 yielded no additional swept recoveries among cases resolved at both caps, while increasing cost and unresolved outcomes at higher seed counts

**Table A2 Golden reference recovery and runtime in the archived evaluation.** Recovery uses all 1,851 primary-evaluation records. MAPPA retains compressed families; SLAP returns explicit candidates; other methods return one bijection over their matched atoms. MAPPA uses cap 100 and bidirectional search. Bidirectional SLAP combines both directions and both binary/weighted modes; the default SLAP row uses binary only. Times are mean CPU seconds per reaction, excluding separate bond-event decoding. Unmarked times use the same 1,403 completed reactions on an AMD EPYC 9J14. *a*: archived completed calls (1,718–1,851 per method), CPU model unrecorded; these times are not directly comparable with unmarked times. †: LocalMapper, prior accuracy SOTA (2024). ‡: SLAP with our sweep, strongest evaluated prior-method recovery baseline.

| Method | Search setting | Output | Reference recovered | Mean CPU s |
|---|---|---|---|---|
| MAPPA | 1 seed, sweep (default) | Families | 1,834 (99.08%) | 0.963 |
| MAPPA | 2 seeds, sweep | Families | 1,834 (99.08%) | 1.619 |
| MAPPA | 3 seeds, sweep | Families | 1,837 (99.24%) | 2.265 |
| MAPPA | 10 seeds, sweep | Families | 1,840 (99.41%) | 6.993 |
| MAPPA | 1 seed, no sweep | Families | 1,489 (80.44%) | 0.040 |
| SLAP, bidirectional | No sweep | Candidates | 1,661 (89.74%) | 0.105 |
| SLAP, bidirectional‡ | Sweep | Candidates | 1,796 (97.03%) | 2.793 |
| SLAP, binary | Default, no sweep | Candidates | 1,591 (85.95%) | 0.075[a] |
| RXNMapper | Default, no sweep | One bijection | 1,547 (83.58%) | 0.056[a] |
| LocalMapper† | Default, no sweep | One bijection | 1,605 (86.71%) | 0.294[a] |
| Chython | Default, no sweep | One bijection | 1,561 (84.33%) | 0.612[a] |
| Indigo | Default, no sweep | One bijection | 692 (37.39%) | 0.184[a] |
| RDT | Default, no sweep | One bijection | 1,030 (55.65%) | 1.021[a] |

**Table A3 Archived recovery and runtime by search orientation.** All rows use the sweep. Recovery uses all 1,851 Golden records; CPU statistics are seconds per reaction over the same 1,821 completed reactions (Apple M4 Pro CPU). Smaller-first grows from the side with fewer explicit atoms, including H; larger-first exchanges the base and target. Equal-size ties use stored order and its reverse. Bidirectional output combines both searches, and its CPU cost is their sum. SLAP combines binary and weighted modes. CPU/SLAP compares means within each orientation. Timing scopes are specified in Appendix B.

| Method | Orientation | Recovered | Mean | Median | 95th pct. | CPU/SLAP |
|---|---|---|---|---|---|---|
| MAPPA, 1 seed (default) | Smaller-first | 1,803 (97.41%) | 1.141 | 0.263 | 5.289 | 0.34 |
| | Larger-first | 1,779 (96.11%) | 1.377 | 0.348 | 6.401 | 0.92 |
| | Bidirectional | 1,834 (99.08%) | 2.518 | 0.719 | 12.913 | 0.52 |
| MAPPA, 2 seeds | Smaller-first | 1,815 (98.06%) | 2.232 | 0.416 | 10.635 | 0.67 |
| | Larger-first | 1,805 (97.51%) | 2.721 | 0.578 | 14.064 | 1.83 |
| | Bidirectional | 1,834 (99.08%) | 4.953 | 1.250 | 26.350 | 1.03 |
| SLAP sweep (prior baseline) | Smaller-first | 1,775 (95.89%) | 3.329 | 0.422 | 4.752 | 1.00 |
| | Larger-first | 1,770 (95.62%) | 1.490 | 0.455 | 4.568 | 1.00 |
| | Bidirectional | 1,796 (97.03%) | 4.819 | 0.881 | 11.048 | 1.00 |

(Table A8). The uncut search gained 19 confirmed recoveries. Thus, in that study a larger branch budget did not substitute for changing the growth conditions.

## C.4 Archived bond-event comparison on 140 coordinate reactions

The archived coordinate study used one-seed MAPPA sweep search with a branch cap of 2,000 and returned complete mappings for all 140 reactions. At cap 100, cases 123 and 125 returned no complete mapping. The 2,000-branch configuration therefore supplies this comparison, while 100 remains the library default. These completion counts and the event-window results below have not been remeasured with the current implementation.

The archived MAPPA output matched or lowered the minimum event count found by both native SLAP and SLAP sweep in every reaction (Table A4 and figure A2). This does not imply recovery of every alternative: at equal minima, six SLAP-sweep patterns remained absent across four reactions. An equal count can describe different changed bonds, and a lower count alone does not establish a more plausible transformation.

**Table A4 Archived minimum bond-event comparison on 140 reactions.** MAPPA uses one-seed sweep search at cap 2,000. The first three columns count reactions by MAPPA's minimum event count relative to the comparator. The final column gives comparator minimum-event patterns recovered by MAPPA among reactions with equal minima. Counts refer to returned candidates, not proven global optima.

| Compared with | MAPPA fewer | Equal | MAPPA more | Patterns at equal minima |
|---|---|---|---|---|
| SLAP sweep | 4 | 136 | 0 | 158/164 |
| Native SLAP | 15 | 125 | 0 | 138/140 |

To compare alternatives above MAPPA's own minima, the archived study queried through one event above the higher of the two SLAP minima for each reaction. MAPPA retained 162 of 168 SLAP-sweep minimum-event patterns and 151 of 160 native-SLAP patterns within these windows. The output contains 300 distinct patterns, including 166 at MAPPA's own minima. Every saved family was exhausted or certified within its window; this establishes completeness for those retained families, not exhaustive structural search.

**Table A5 Archived stage CPU time per reaction on the 140 coordinate reactions.** Measurements use an Apple M4 Pro CPU. MAPPA uses one-seed sweep search at cap 2,000. These stage costs exclude MAPPA decoding and do not establish an end-to-end speed ranking. SLAP refinement covers its returned witnesses. Timing boundaries are specified in Appendix B.

| Recorded stage | Mean CPU s | Median CPU s | 95th pct. CPU s |
|---|---|---|---|
| MAPPA sweep search | 1.047 | 0.314 | 3.481 |
| SLAP sweep mapping | 1.337 | 0.546 | 5.919 |
| SLAP H refinement / initial scoring | 0.053 | 0.011 | 0.207 |

The stage timings in Table A5 cover different outputs: MAPPA search retains families for subsequent decoding, while SLAP refinement operates on returned witnesses. They therefore do not establish an end-to-end speed ranking.

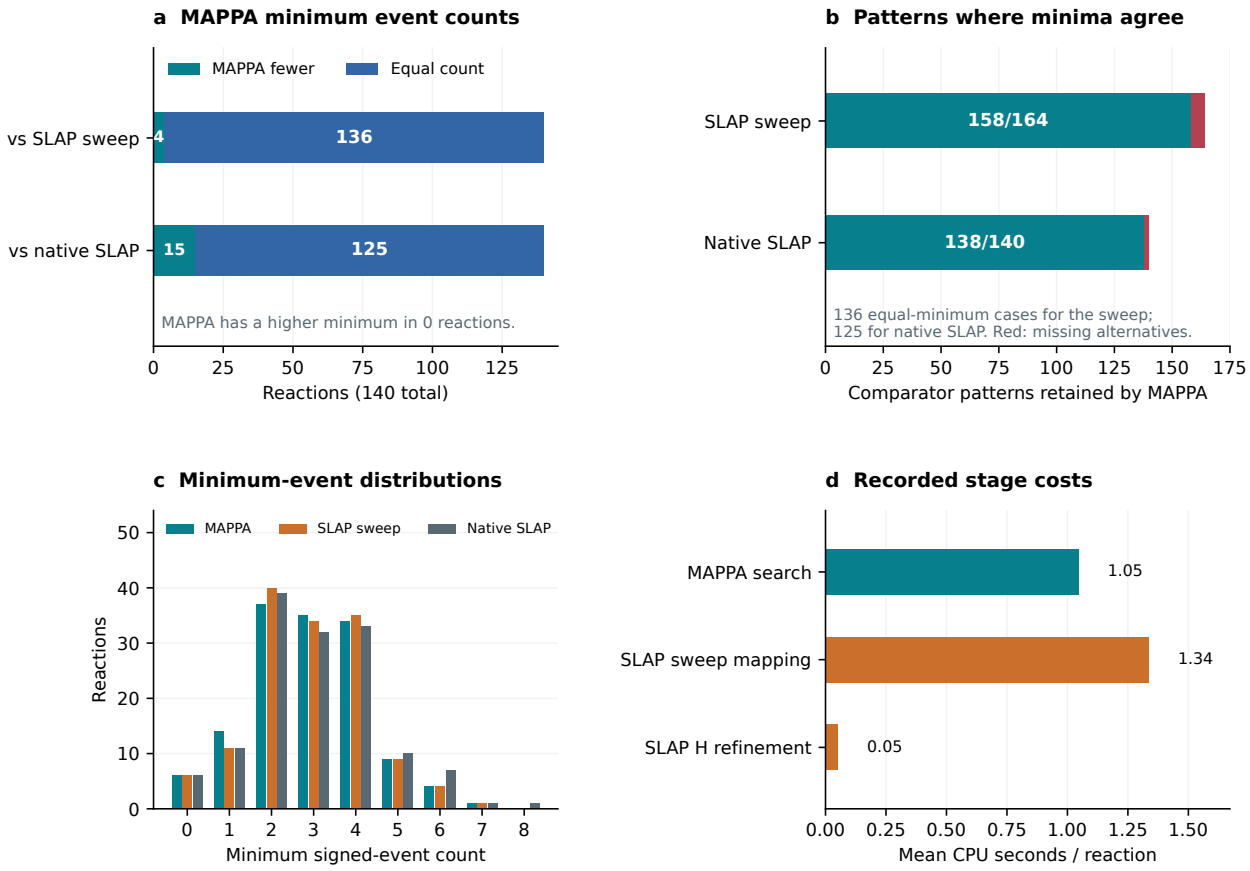



**Figure A2 Archived bond-event comparison on 140 coordinate reactions.** MAPPA uses one seed, the sweep, and cap 2,000. (a) Reactions with fewer or equal MAPPA events than each SLAP baseline. (b) Comparator minimum-event patterns recovered by MAPPA at equal minima. (c) Minimum-event count distributions. (d) Mean CPU for search and SLAP refinement, excluding MAPPA decoding (Table A5). Atom mappings are unverified; this compares bond events, not mapping accuracy.

## C.5 Archived event-window query scope

For each coordinate reaction, the archived event-window limit was one event above the larger of the native-SLAP and SLAP-sweep minima. All 120,052 retained families were exhausted within these limits, without a class-count cap. Higher-event patterns are outside this completeness claim. An event class records the signed atom-pair changes, modulo base permutations preserving every thresholded bond-change test against the opposite endpoint. Each class has a concrete mapping witness. This explicit whole-reaction query is separate from ordinary decoding into shared local fragment responses.

**Table A6 Archived complete event-window queries on all 140 reactions.** Every retained family is certified within the listed per-case event limit.

| Maximum events | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|
| Reactions (all complete) | 6 | 11 | 39 | 32 | 33 | 10 | 7 | 1 | 1 |

The query used event invariance to certify constant families and encoded remaining choices in Z3 (4). A family was certified by exhaustion, a valid lower bound excluding the window, or unsatisfiability after excluding all discovered classes. An exhausted resource budget remained incomplete. The explicit query adapter can simplify adjacent nested action groups by exact generator-membership checks: if $H \leq G$, then $HG = GH =$

$G$. This adapter simplification is separate from ordinary catalogue reduction in Appendix A.5. Completeness within an event window concerns the saved families, not exhaustive structural search.

## C.6 Archived Golden nonrecoveries

**Table A7 The eleven archived ten-seed Golden nonrecoveries.** Case indices are zero-based. Retained pair counts cover every terminal in both directions and every saved cut at ten seed orderings and cap 100. The four cardinality mismatches concern exact reference relations, including unmatched atoms. This is not the nonrecovery set of the current one-seed validation.

| Case | Reference pairs | Retained pairs | Observed mismatch |
|---|---|---|---|
| 7 | 29 | 30 | One extra matched pair |
| 19 | 23 | 23 | Atom pairing excluded by orbit bounds |
| 590 | 31 | 31 | Atom pairing excluded by orbit bounds |
| 871 | 20 | 20 | Atom pairing excluded by orbit bounds |
| 986 | 16 | 16 | Atom pairing excluded by orbit bounds |
| 1228 | 12 | 12 | Atom pairing excluded by orbit bounds |
| 1285 | 14 | 14 | Joint C/O correspondence excluded |
| 1358 | 36 | 37 | One extra matched pair |
| 1377 | 22 | 23 | One extra matched pair |
| 1475 | 18 | 19 | One extra matched pair |
| 1553 | 20 | 20 | Atom pairing excluded by orbit bounds |

Independent reconstruction agrees with the supplied references in all eleven cases. Four require a different number of matched pairs; seven require correspondences absent from the retained families. All have at least one capped direction, but this does not identify the cap as the cause. The archived uncapped traces below demonstrate greedy-growth exclusions in two cases. Reference-directed feasibility checks are diagnostic and do not contribute to benchmark recovery. Per-case certificates and traces are linked in the repository.

Two archived traces show how greedy extension excluded a representable reference. One reference exchanges adjacent labels in an otherwise unchanged pyridine ring; another exchanges the carbonyl-oxygen attachments of oxalic acid across its retained carbons. Growth preserved bonds that these correspondences require separating. Uncapped trajectories still missed both references, while reference-constrained fragment choices established their representability. In the oxalic-acid example, a reference-selected three-edge relaxation also exposed the reference to matching; the single-edge sweep did not contain that cut set. These are feasibility diagnostics, not additional benchmark recoveries or traces of the current matcher. For the other five correspondence misses, the audit did not isolate cap truncation from unsampled growth choices. They motivate selective alternatives to successful growth extensions and explicit choices about leaving atoms unmatched, rather than treating larger caps or more symmetry expansion as sufficient remedies.

Only one of the eleven misses is recovered by any tested comparator configuration, including the SLAP sweep. The shared failures warrant inspection of the supplied correspondences as well as search improvements; they do not establish annotation errors. All eleven remain in the reported denominator. Independent evaluation on annotated coordinate reactions is needed to assess generalization beyond the development collection.

## C.7 Archived branch-cap and CPU-time ablation on Golden

The archived study ran the twelve configurations in Table A8 on all 1,851 Golden reactions using an AMD EPYC 9J14 CPU. Both search directions are unioned. SLAP unions its binary and weighted modes. Search and reference verification have separate fixed resource budgets. The recorded cap-100 recovery counts reproduce the archived primary evaluation. At cap 2,000, unresolved counts increase with seed count. Among reactions resolved at both caps, no swept configuration gains or loses a reference recovery.

The ten-seed cap-2,000 run leaves five references recovered at cap 100 unresolved, accounting for its lower confirmed count. The bounded SLAP sweep confirms 1,794 references here, compared with 1,796 in the archived

**Table A8 Archived Golden branch-cap ablation with paired SLAP baselines.** Recovery counts confirmed reference inclusion over all 1,851 records; unknown cases remain in the denominator. CPU values are seconds per reaction. Paired CPU uses the same 1,403 reactions whose searches finish under every configuration. Spent CPU averages recorded search cost over all 1,851 selected attempts, including interrupted calls; it is not completed-search latency. Both timings exclude reference verification and initial imports. Superseded attempts are excluded. Cap 100 with a one-seed sweep is the default setting.

| Method | Cap | Seeds | Recovered (%) | Unknown | Paired CPU | Spent CPU |
|---|---|---|---|---|---|---|
| MAPPA uncut | 100 | 1 | 1,489 (80.44) | 0 | 0.040 | 0.085 |
| MAPPA sweep (default) | 100 | 1 | 1,834 (99.08) | 0 | 0.963 | 3.873 |
| MAPPA sweep | 100 | 2 | 1,834 (99.08) | 0 | 1.619 | 7.260 |
| MAPPA sweep | 100 | 3 | 1,837 (99.24) | 0 | 2.265 | 10.556 |
| MAPPA sweep | 100 | 10 | 1,840 (99.41) | 0 | 6.993 | 33.211 |
| MAPPA uncut | 2,000 | 1 | 1,508 (81.47) | 5 | 0.086 | 0.517 |
| MAPPA sweep | 2,000 | 1 | 1,834 (99.08) | 2 | 4.317 | 30.055 |
| MAPPA sweep | 2,000 | 2 | 1,834 (99.08) | 4 | 8.283 | 48.549 |
| MAPPA sweep | 2,000 | 3 | 1,837 (99.24) | 6 | 12.201 | 61.890 |
| MAPPA sweep | 2,000 | 10 | 1,835 (99.14) | 12 | 43.843 | 113.777 |
| SLAP uncut | – | – | 1,661 (89.74) | 1 | 0.105 | 0.659 |
| SLAP sweep | – | – | 1,794 (96.92) | 5 | 2.793 | 9.895 |

primary evaluation: two previously recovered cases are unresolved under this study's limits. These outcomes are reported separately from verified exclusions. The paired timing cohort excludes 448 reactions because at least one configuration does not finish; the all-attempt cost column exposes the additional computational cost on those difficult reactions. Source pins, individual outcomes, directional costs, and reproduction scripts are provided with the code.

## C.8 Archived end-to-end timing on coordinate reactions

The archived September implementation completed search and event-window decoding for 140/140 coordinate reactions. On this full set, the full pipeline takes a mean 6.07 CPU seconds per reaction (median 0.81; 95th percentile 25.47). Decoding accounts for a mean 4.65 CPU seconds (median 0.29). These measurements include search, final-family construction, decoding, and candidate output; they are separate from the search-only comparison above (Table A9).

The historical study measured one-seed, cap-2,000 cut-sweep search followed by its event-window decoder on the Apple M4 Pro CPU. CPU times are reported per reaction. The event thresholds and windows match the bond-event comparison, with no class-count cap. All 140 completed reactions reproduce the archived event-class sets and family counts. Median end-to-end wall time is 0.96 seconds. Timing includes input loading, checkpoint I/O, final-family construction, decoding, and candidate serialization; initial imports and reference-set verification are excluded. All 140 reactions finish within the five-minute watchdog. Detailed timing records and reproduction instructions are provided with the code.

**Table A9 Archived MAPPA search plus event-window queries.** CPU seconds per completed reaction in the 140-reaction pass. The final row measures the whole pipeline; medians and percentiles of individual stages are not additive. Completion coverage and timing scope are stated above.

| Stage | Mean CPU s | Median CPU s | 95th pct. CPU s |
|---|---|---|---|
| MAPPA sweep search | 1.257 | 0.300 | 3.468 |
| Final-family catalogue | 0.156 | 0.019 | 0.595 |
| Bond-event decoding | 4.647 | 0.288 | 24.361 |
| Candidate serialization | 0.005 | 0.001 | 0.015 |
| End to end | 6.073 | 0.812 | 25.470 |