
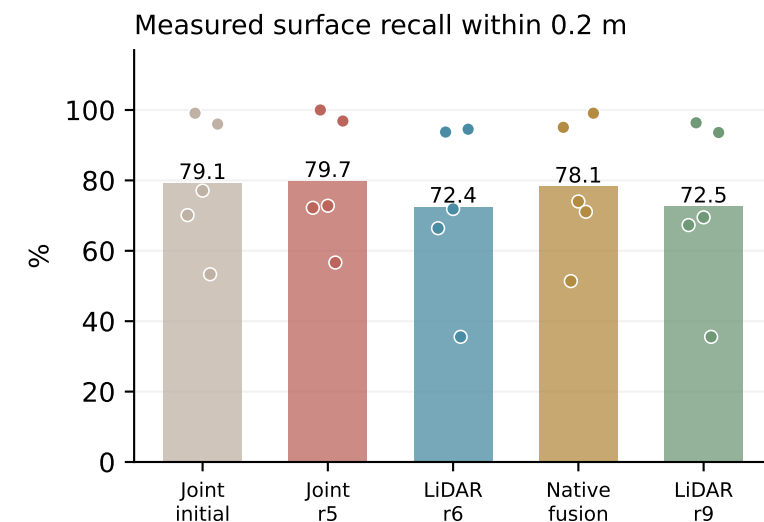
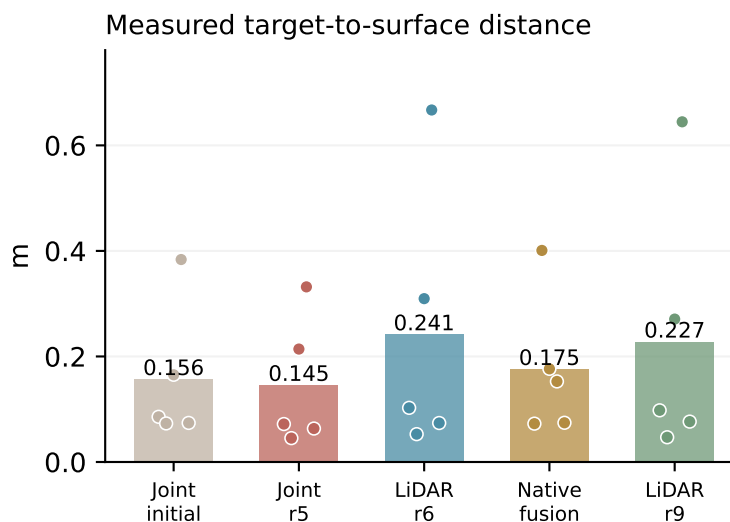
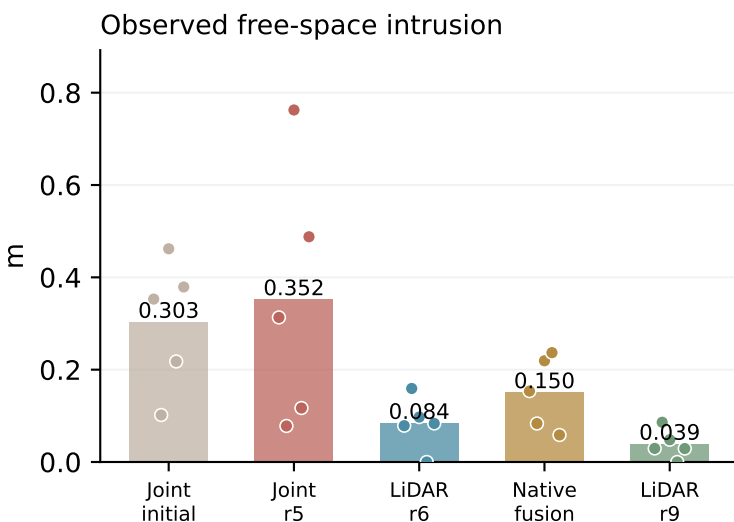
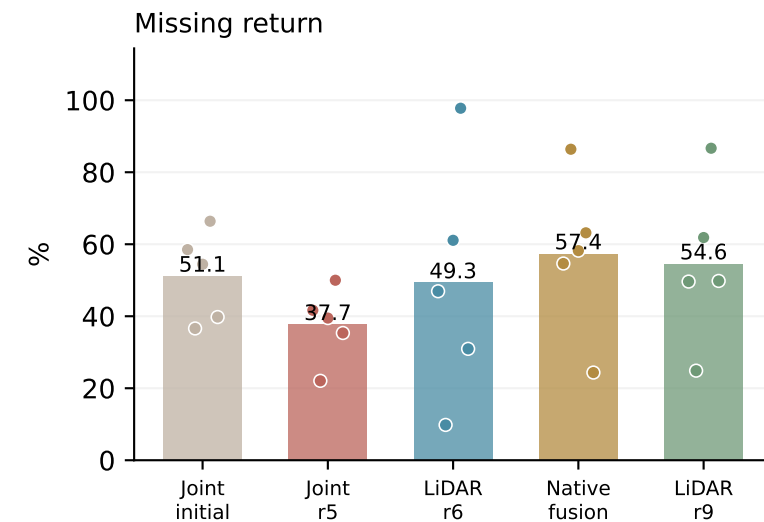
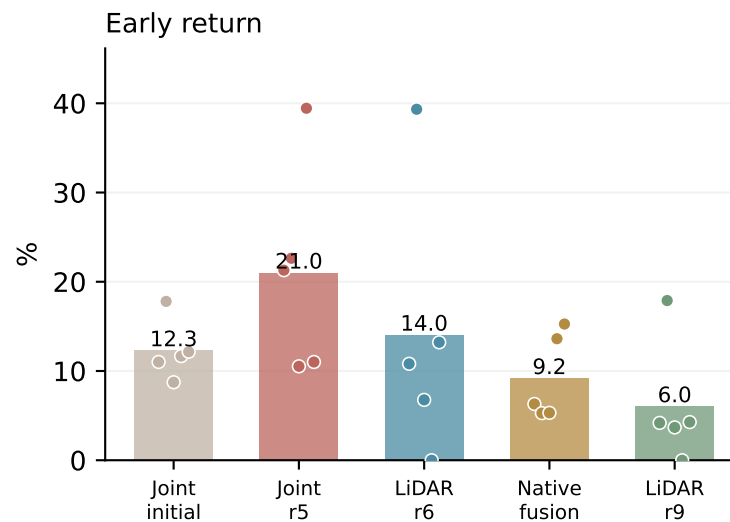


Joint native adaptation + spatial queries: coverage gains with physical errors

75 development Actors / 5 independent logs, including empty inputs; bars = equal log means, dots = individual logs

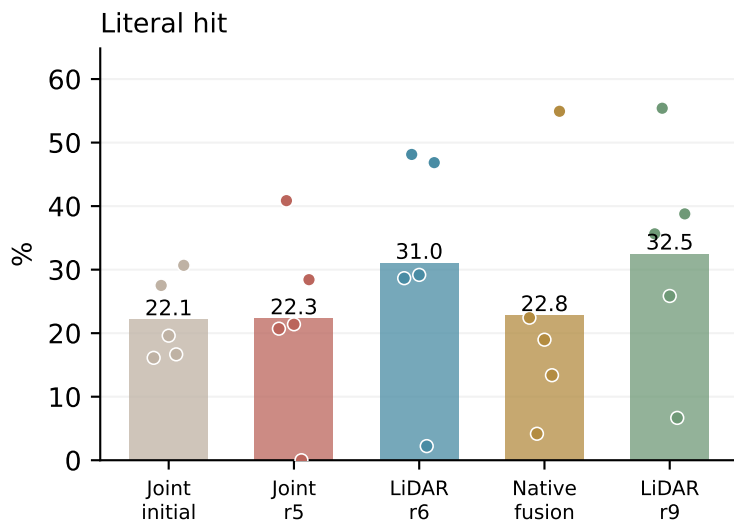

r5 versus r6 shares short-window labels. Native fusion uses build-only head adaptation; r9 uses full-track labels and different physical objectives. Fixed patch budget and literal surface readout. Target-to-surface distance is one-sided; coverage improvement does not establish correct first intersections.