


Q-v2 joint r1: paired development differences across five logs

75 Actors retained; within-Actor observation weights, then independent-log means.

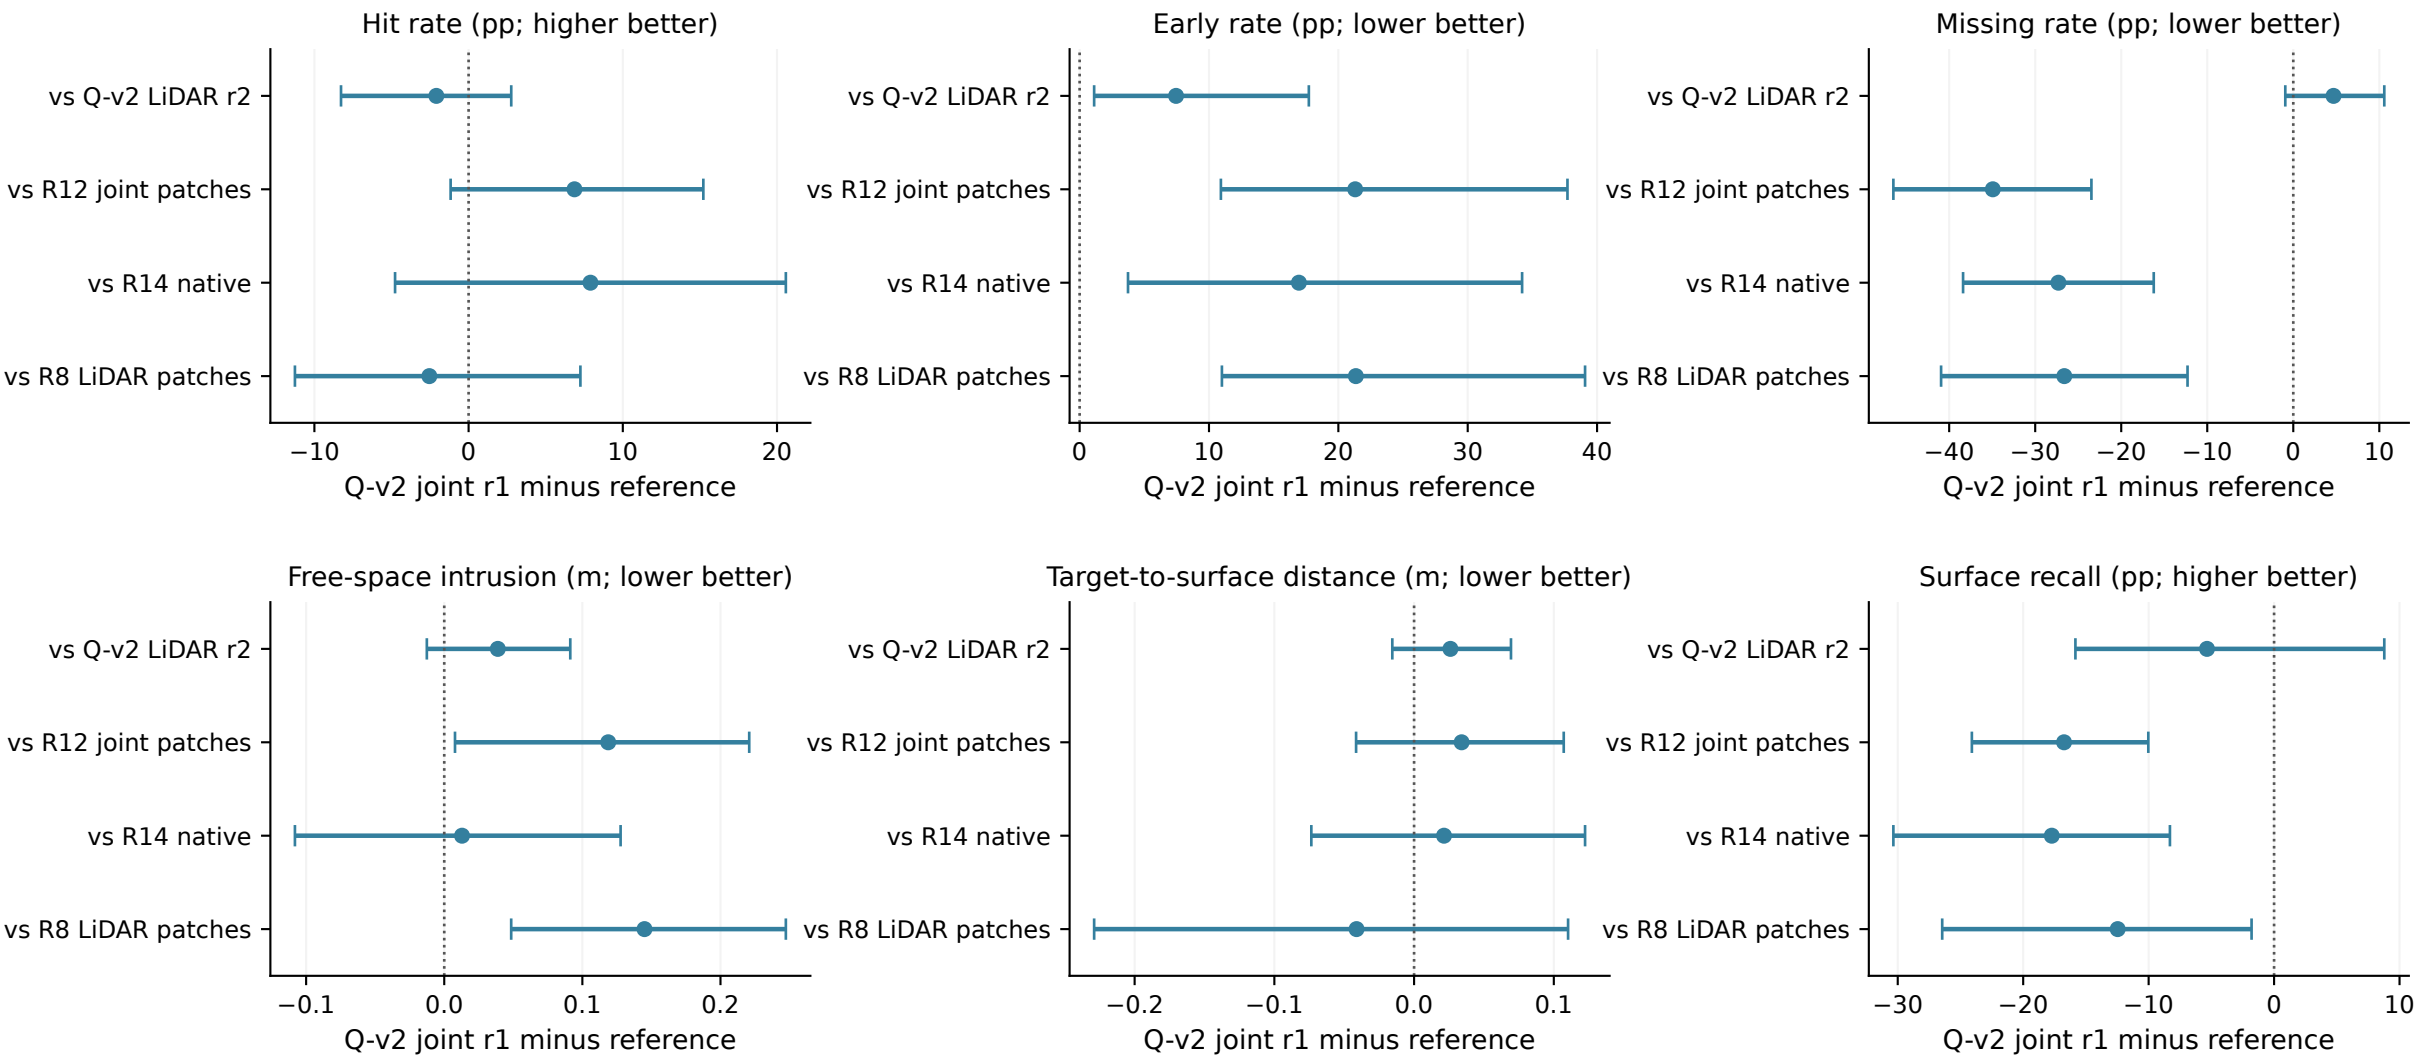

Bars: saved 95% log bootstrap intervals (10,000 resamples, seed 7304). No new inference or resampling. All share beam free. r2 removes the whole visual/native path; old methods differ in surface support and budget.