


R14 native + beam free: paired development differences across five logs

75 Actors retained; within-Actor observation weights, then independent-log means.

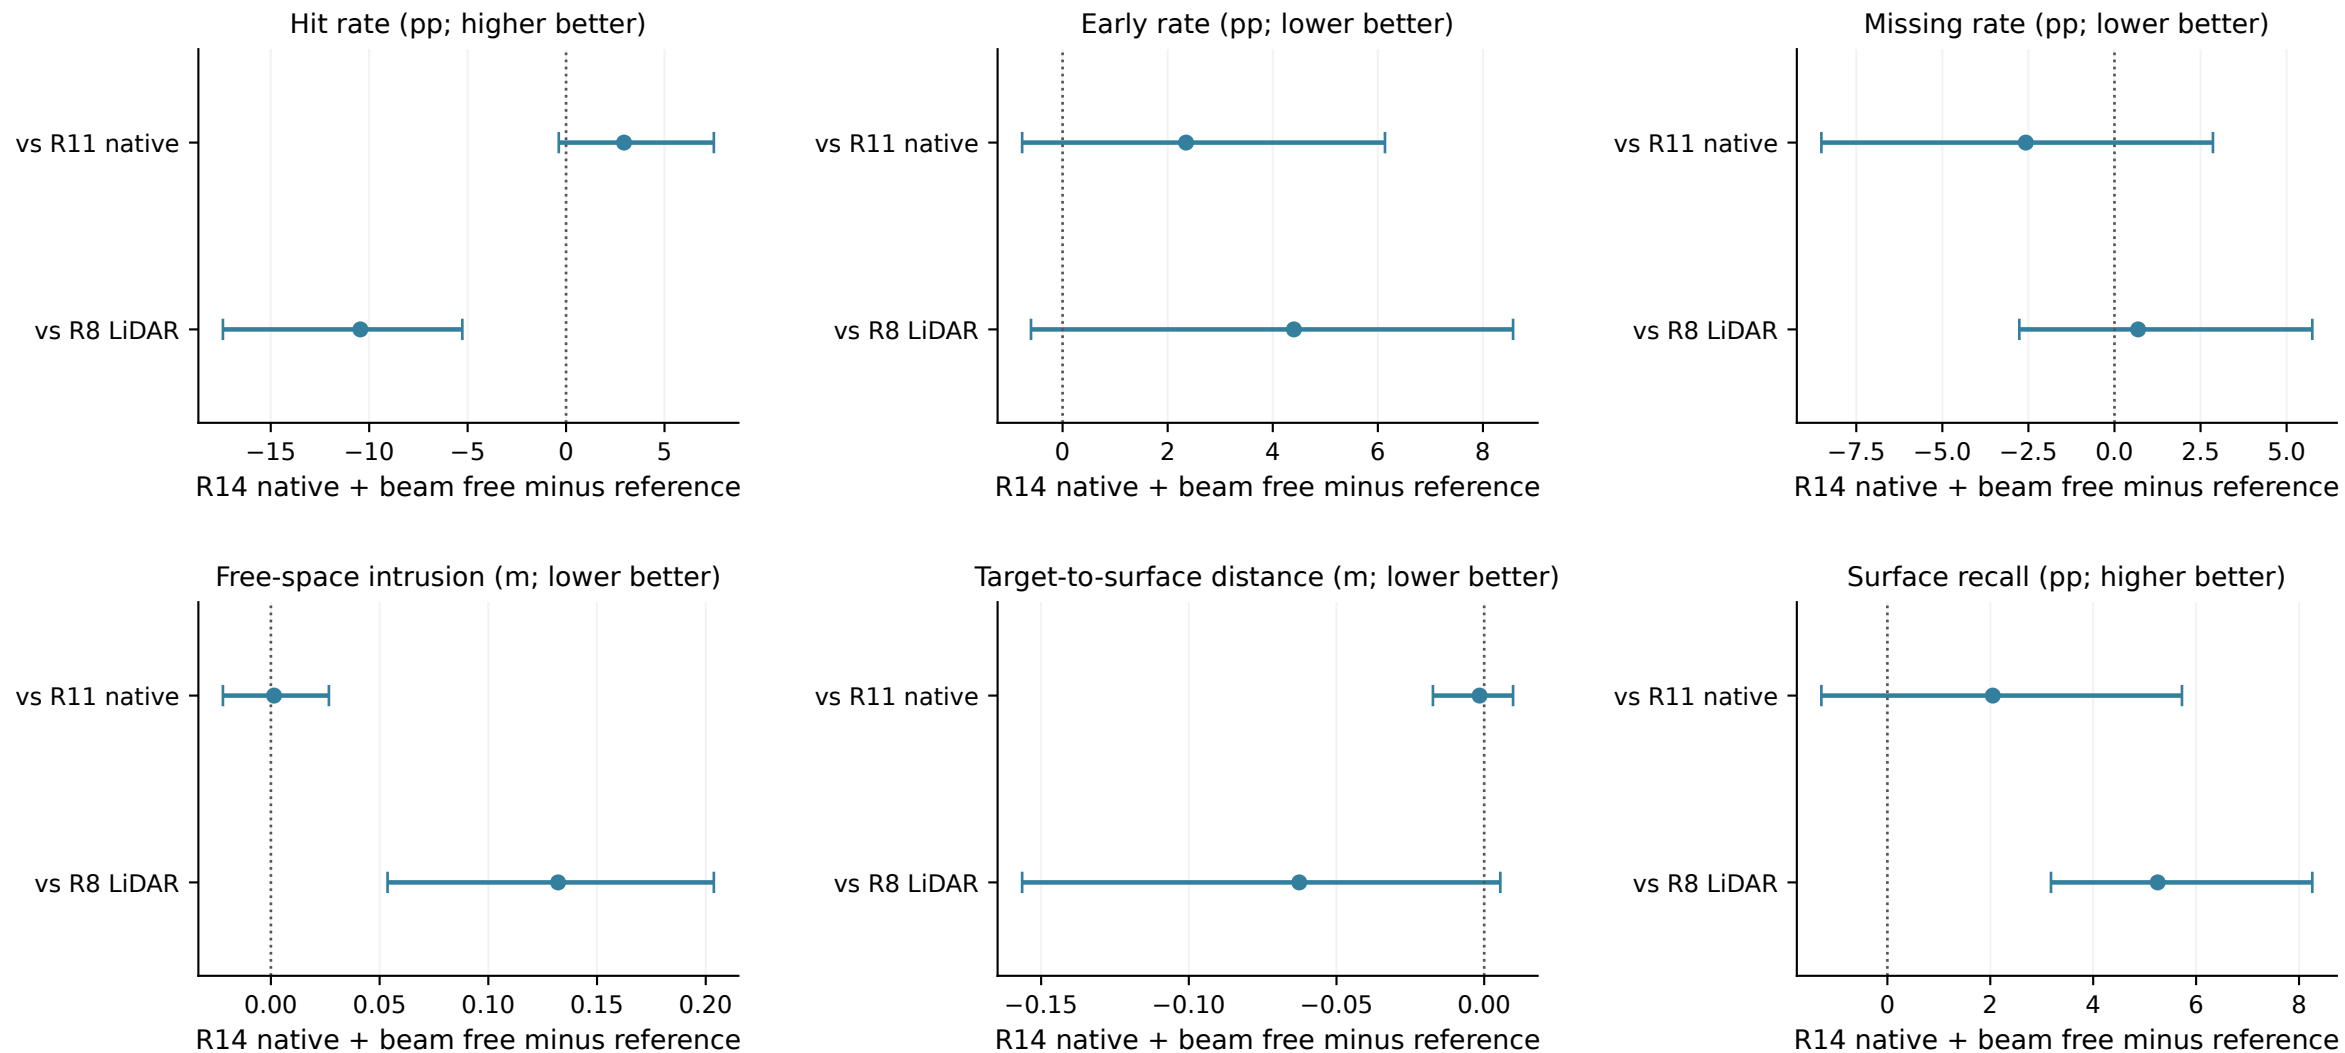

Bars: saved 95% log bootstrap intervals (10,000 resamples, seed 7304). No new inference or resampling.
R14 vs R11 changes free objective; R14 vs R8 shares beam free but changes the learned geometry path. Full-track labels throughout.