


R10: paired development differences across five logs

75 Actors retained; within-Actor observation weights, then independent-log means.

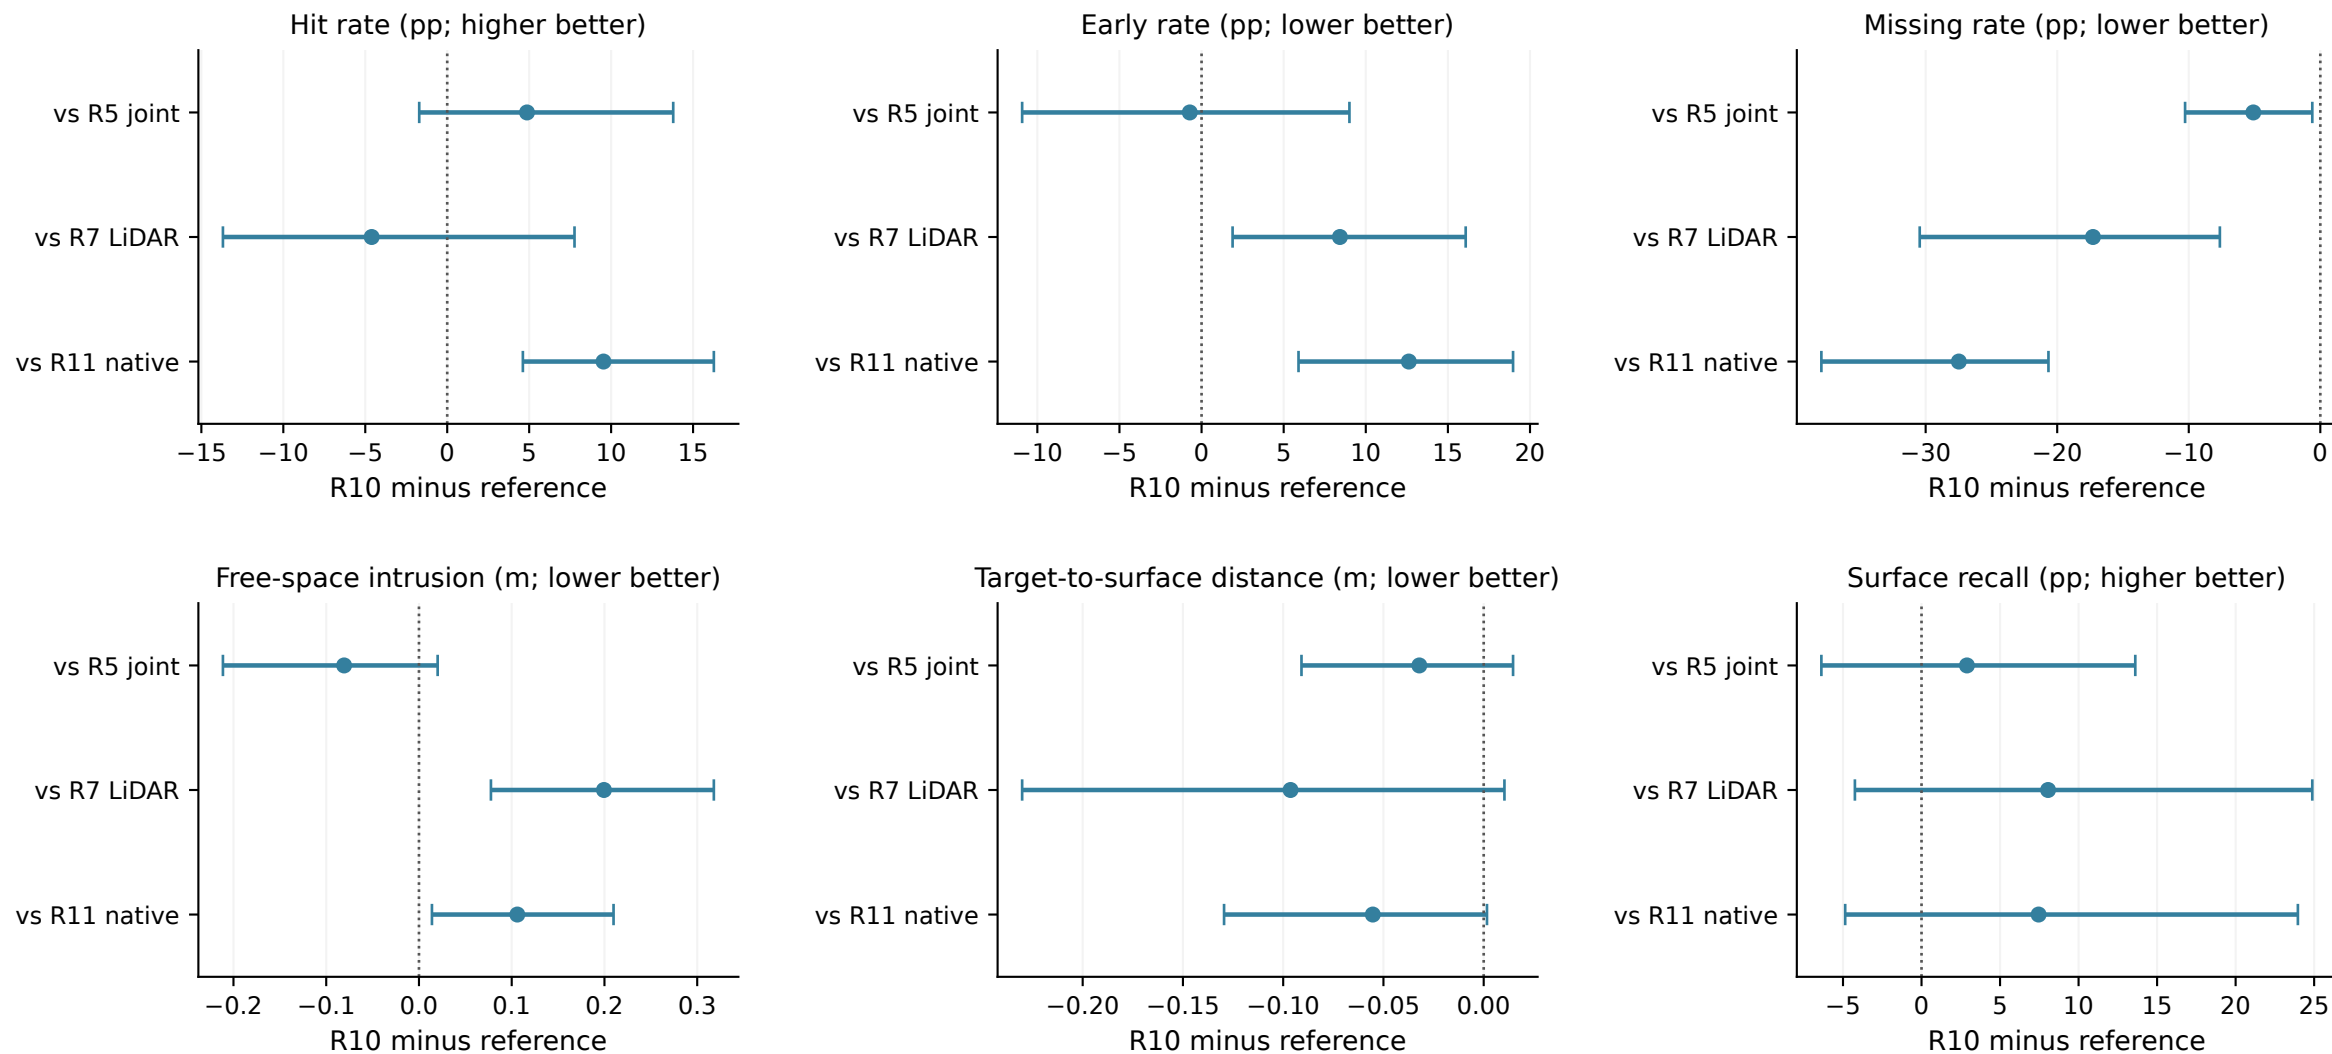

Bars: saved 95% log bootstrap intervals (10,000 resamples, seed 7304). No new inference or resampling.
R5 uses shorter labels and has a disclosed recovery RNG difference; R7/R11 share full-track labels and hard-free semantics.