


V7.3 shared geometry: development trade-offs

Five existing development logs · one Actor per log · equal log means · full 24-view build context

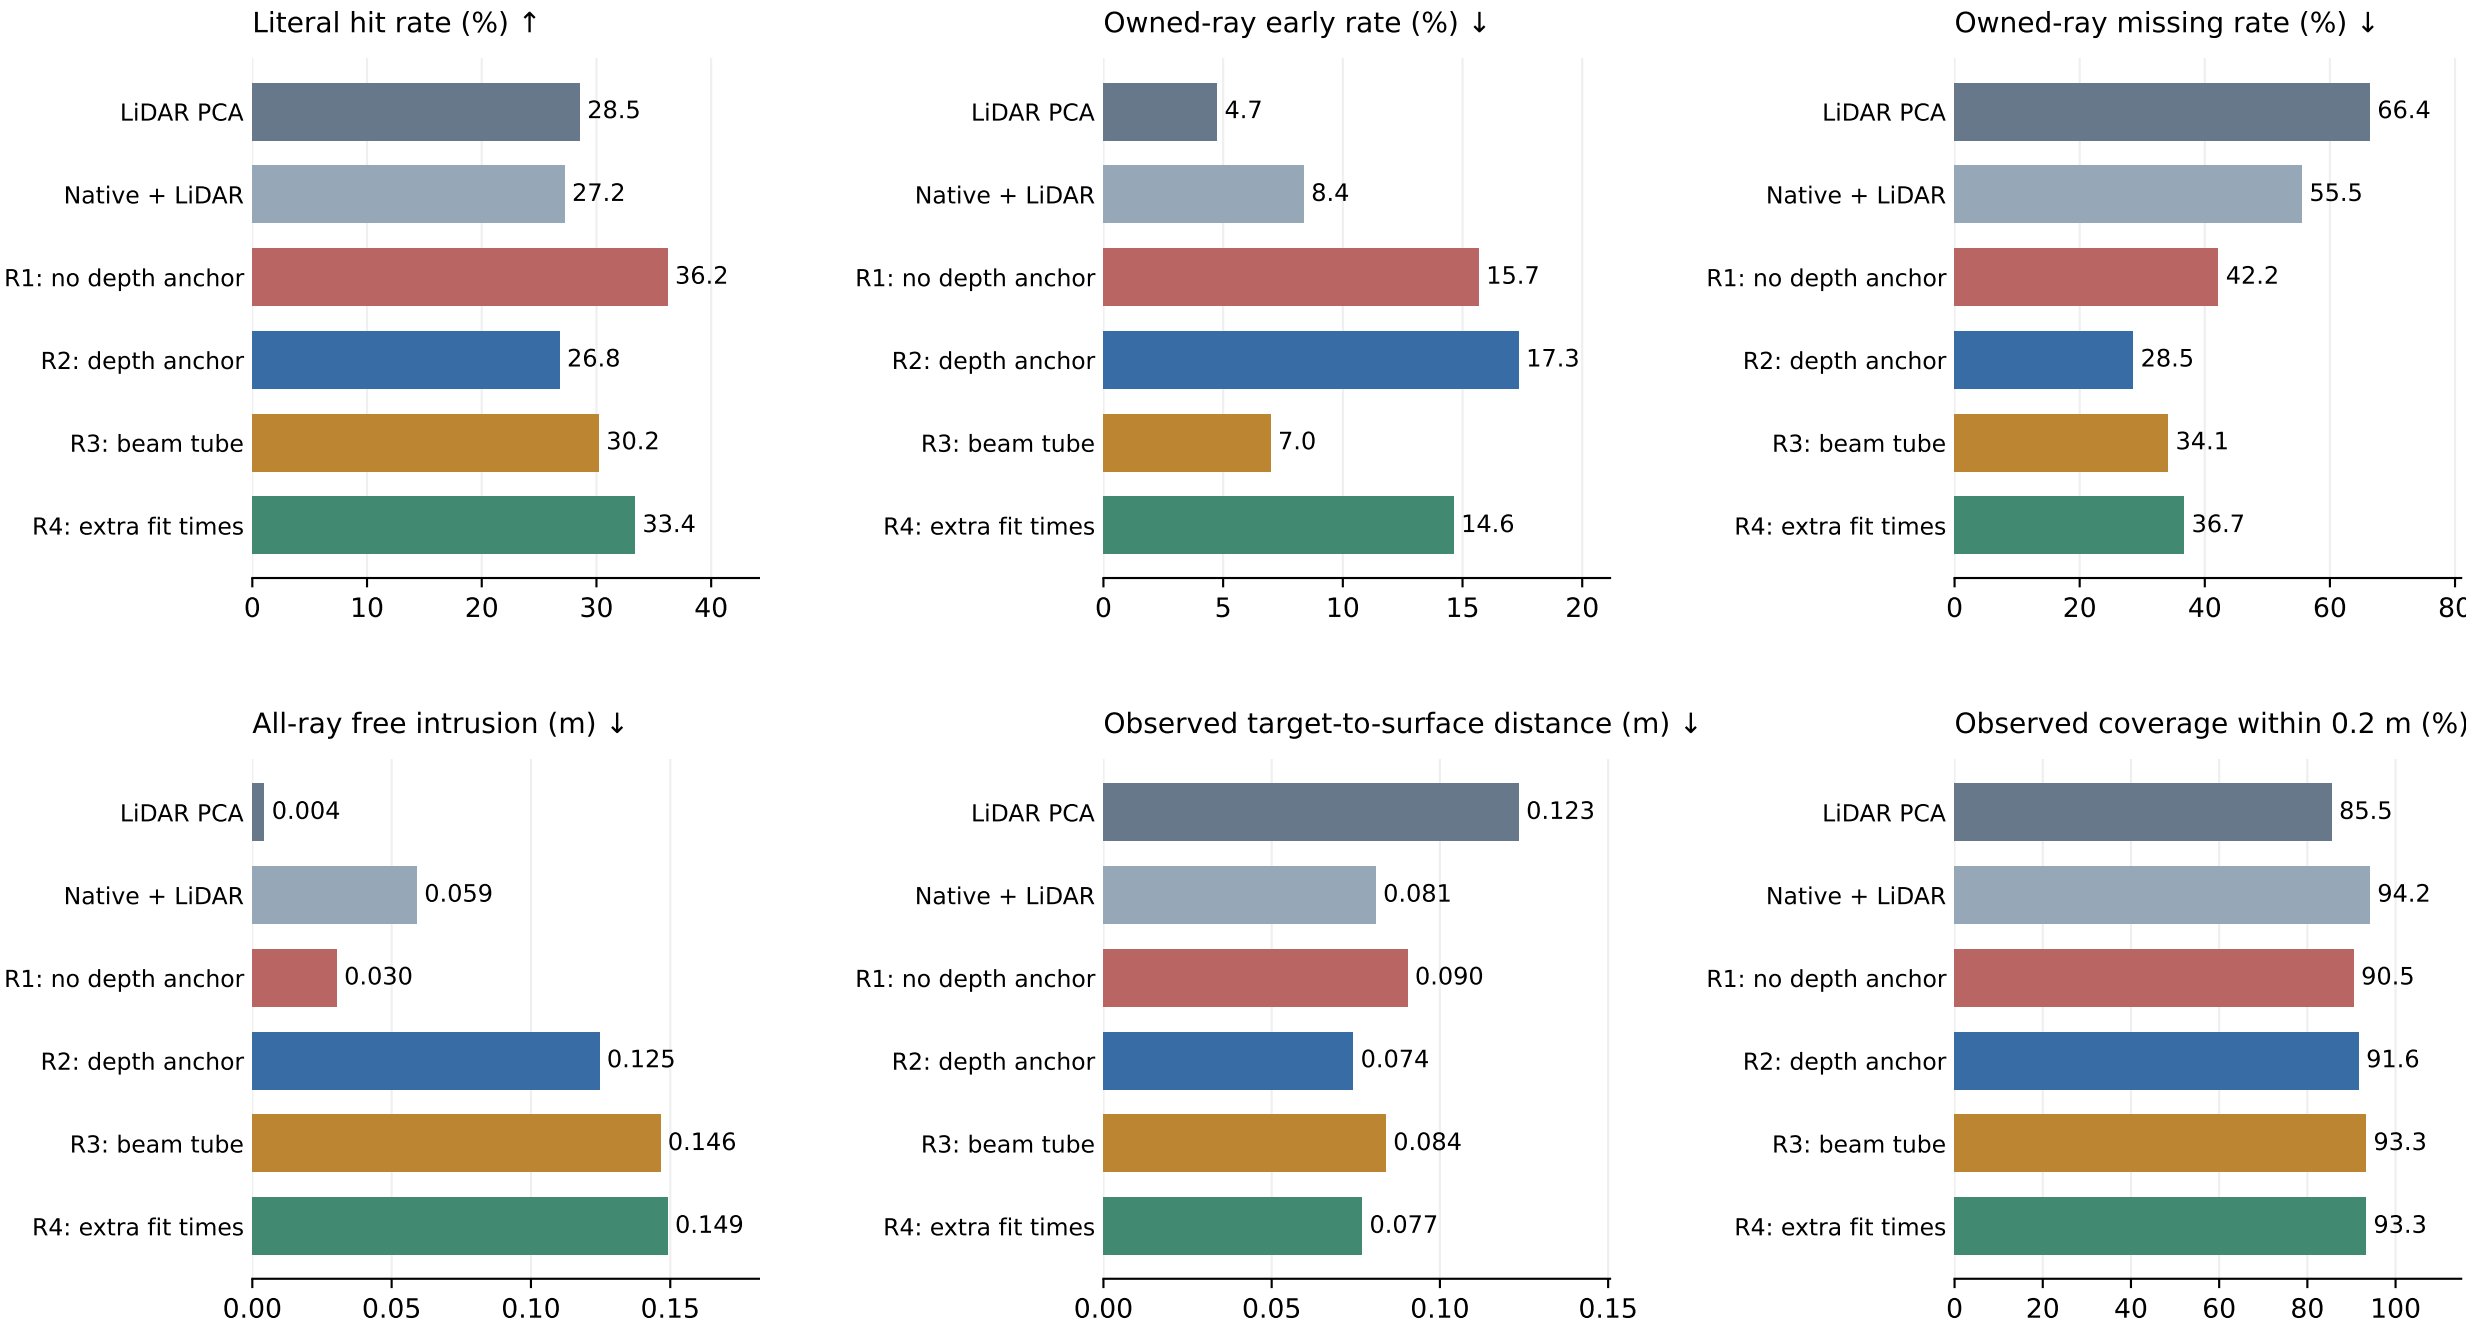

R1 loses native seed support; R2 restores direct depth supervision; R3 changes the free-space proxy; R4 adds fit-only sensor labels. R4 has a larger training-label budget. These are mechanism results, not fresh-log confirmation or full-population results. All methods use explicit triangle readout.